





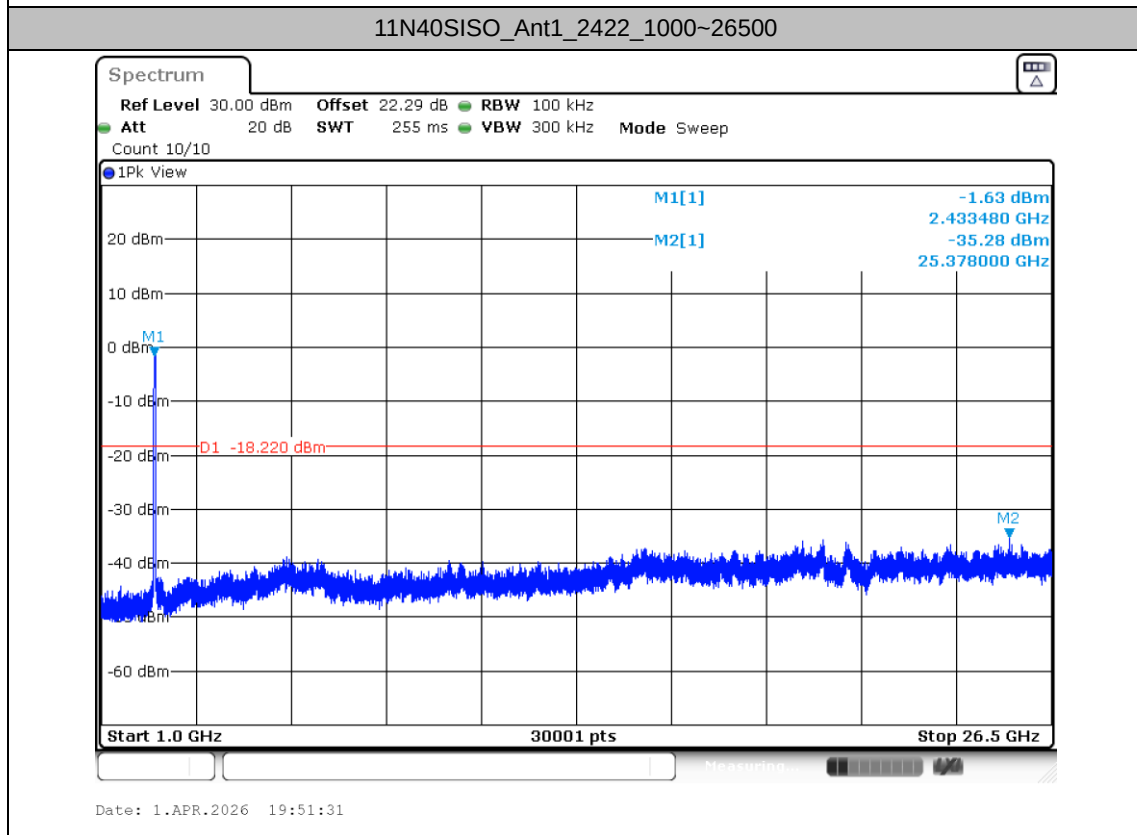

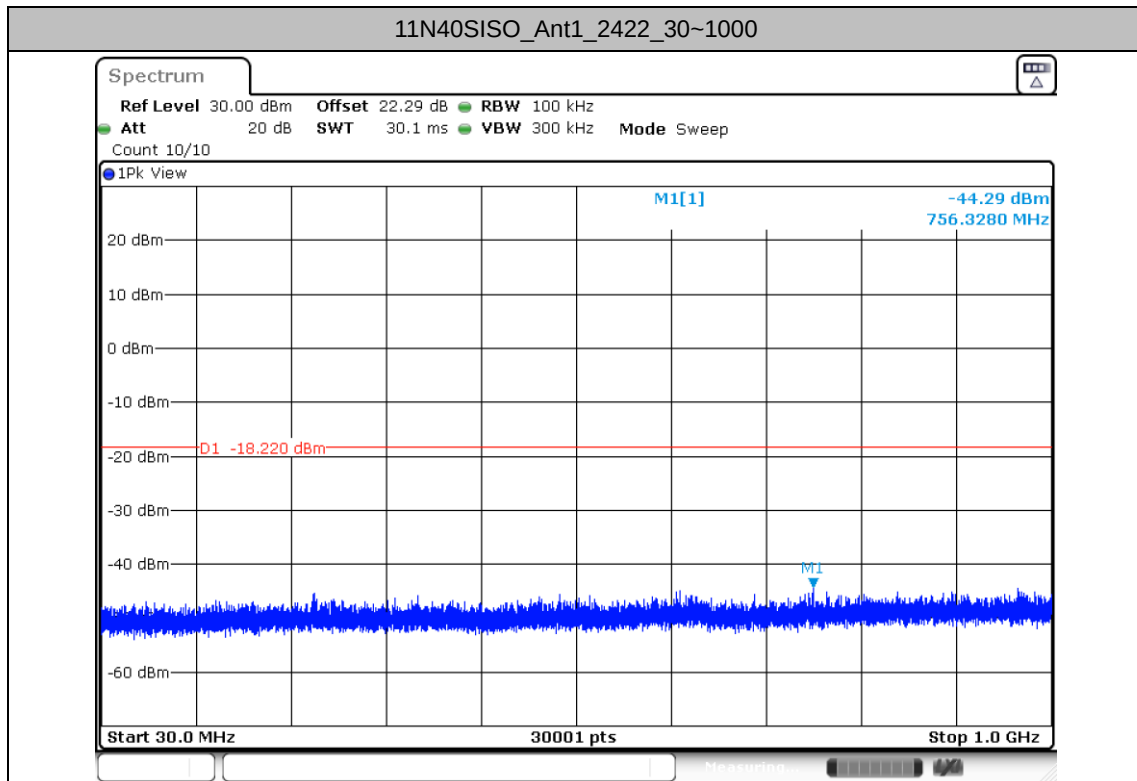


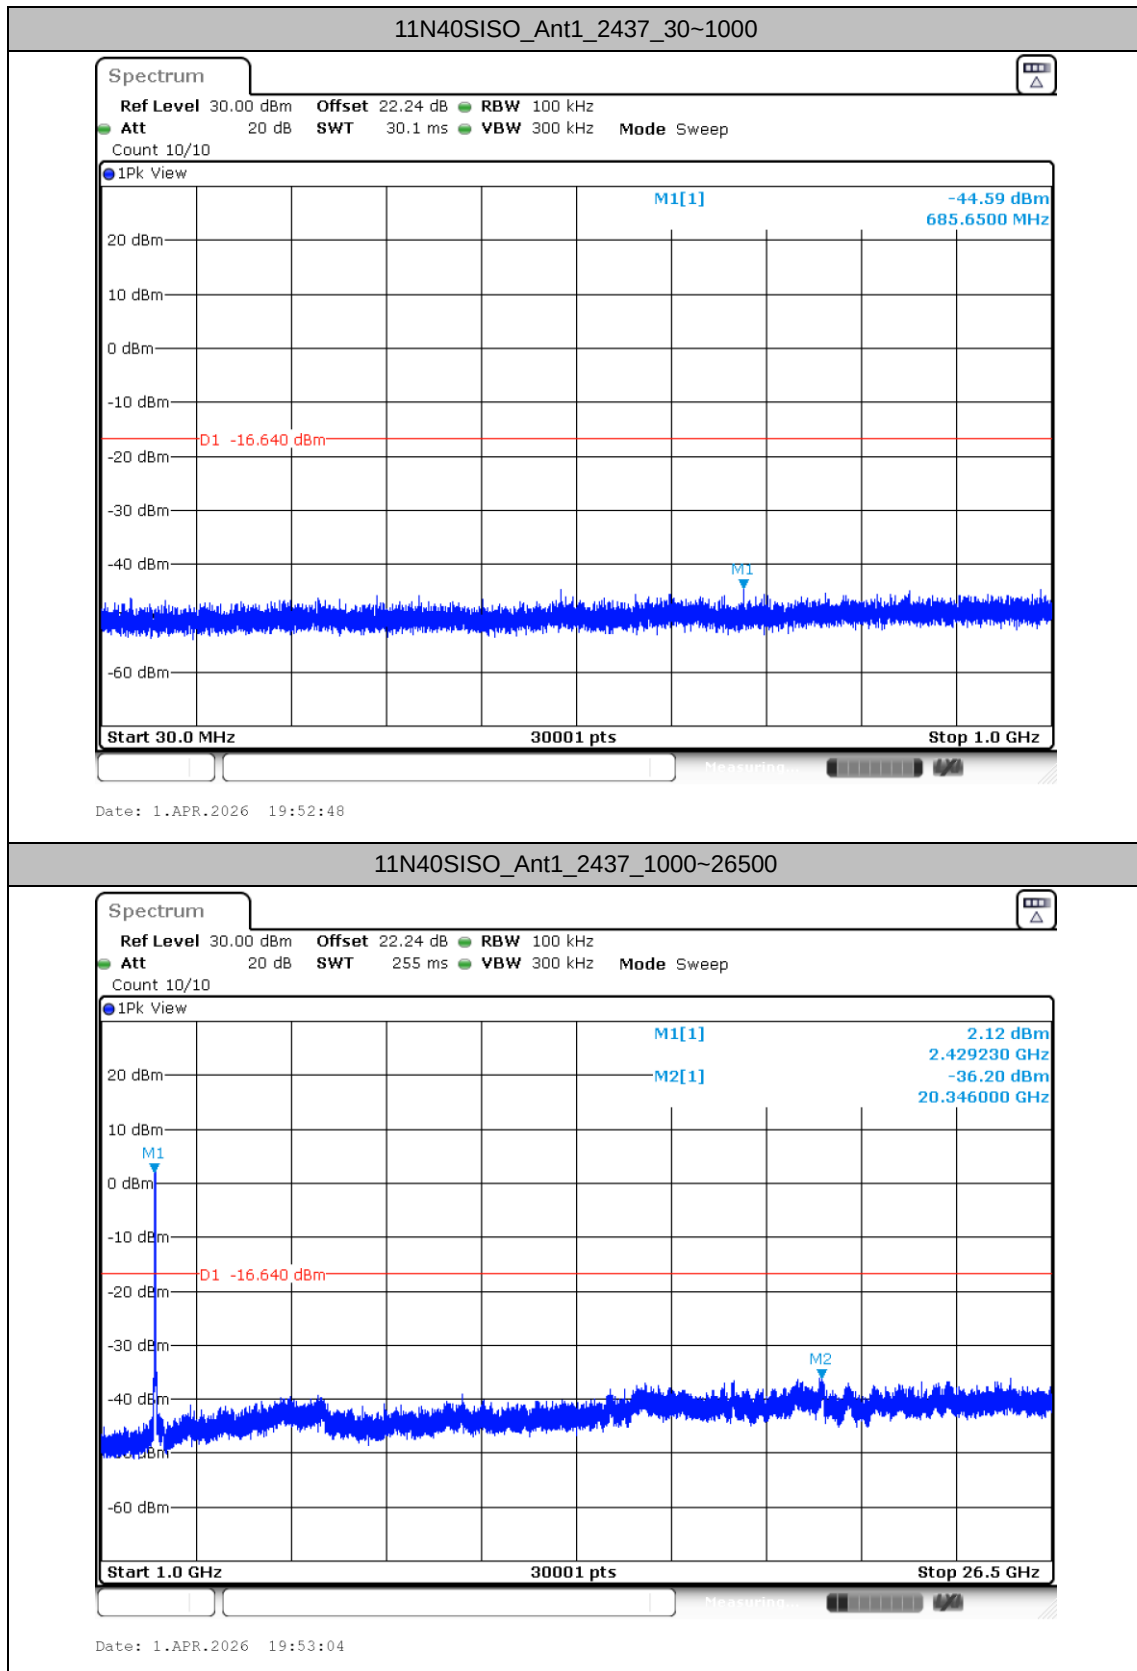

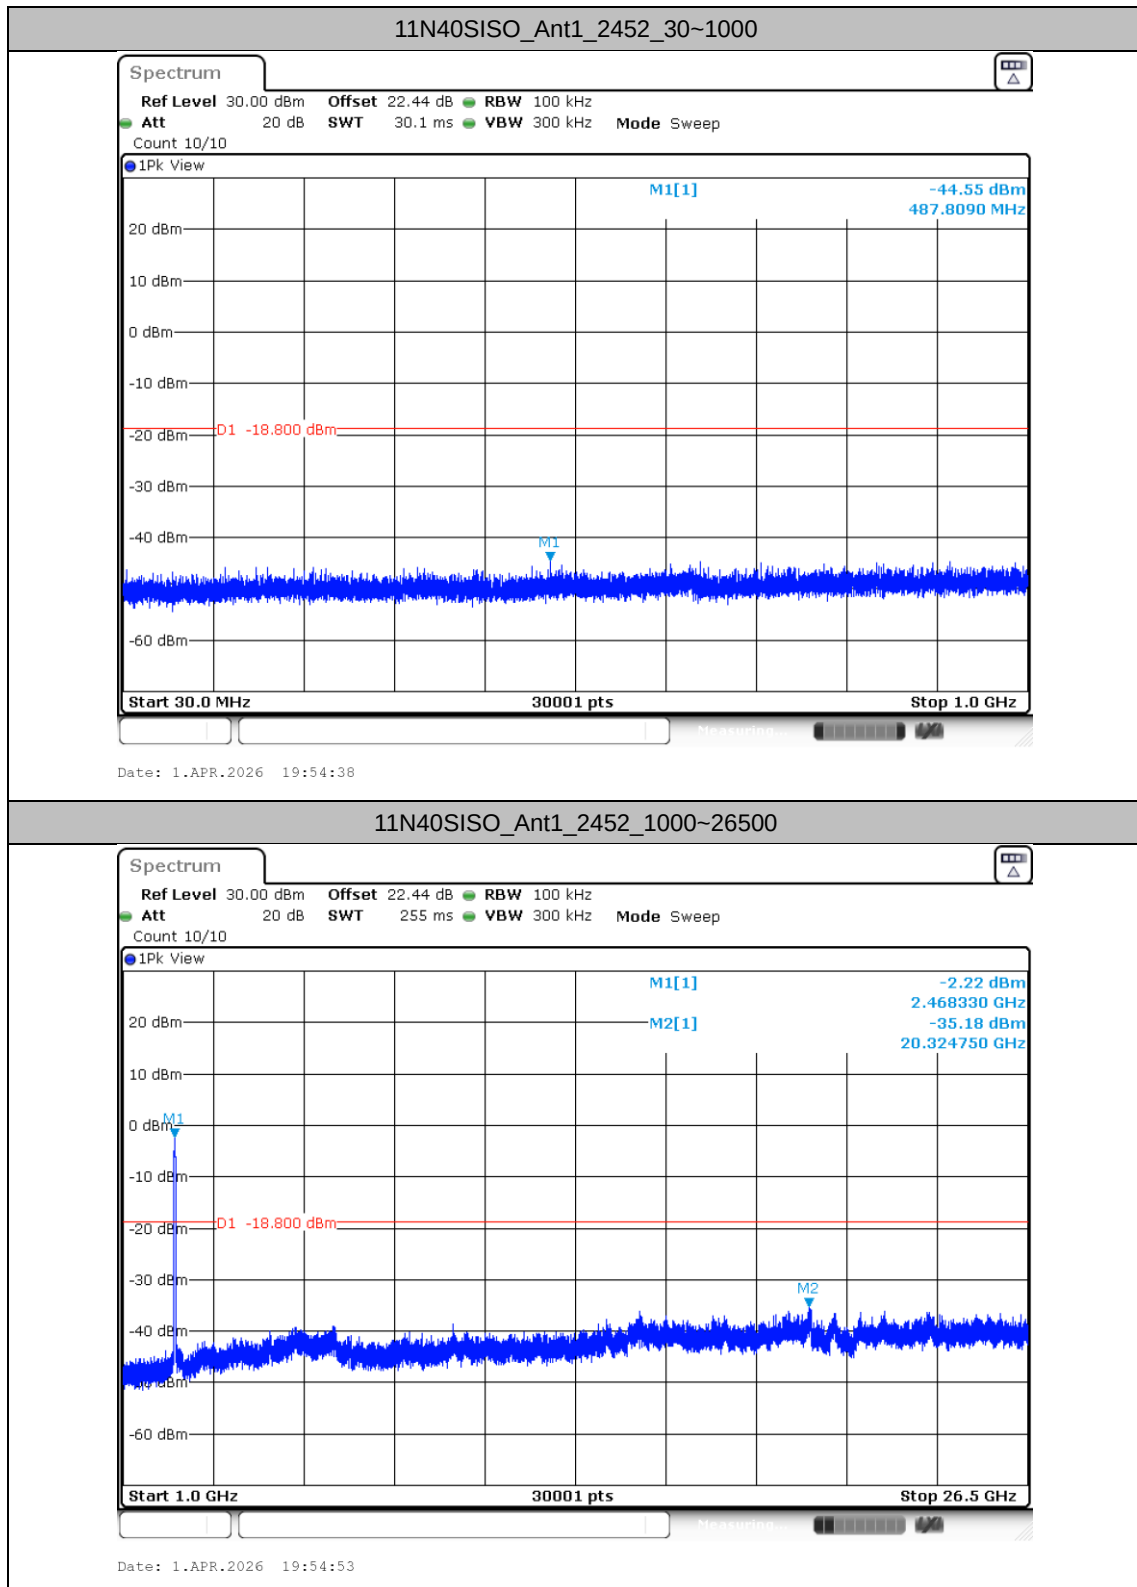

Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

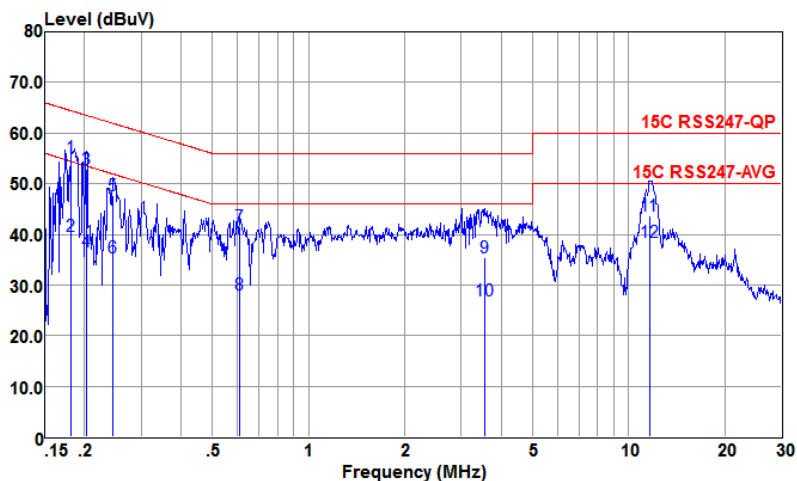


Site : CO01-KS

Condition : 15C RSS247-QP LISN-100334-L 2025 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1 *	0.182	55.21	-9.21	64.42	35.20	9.55	10.46	QP
2	0.182	39.61	-14.81	54.42	19.60	9.55	10.46	Average
3	0.203	52.92	-10.57	63.49	32.90	9.56	10.46	QP
4	0.203	36.62	-16.87	53.49	16.60	9.56	10.46	Average
5	0.246	47.69	-14.22	61.91	27.60	9.62	10.47	QP
6	0.246	35.29	-16.62	51.91	15.20	9.62	10.47	Average
7	0.611	41.46	-14.54	56.00	21.50	9.59	10.37	QP
8	0.611	28.16	-17.84	46.00	8.20	9.59	10.37	Average
9	3.547	35.32	-20.68	56.00	15.50	9.61	10.21	QP
10	3.547	26.92	-19.08	46.00	7.10	9.61	10.21	Average
11	11.621	43.71	-16.29	60.00	23.61	9.85	10.25	QP
12	11.621	38.41	-11.59	50.00	18.31	9.85	10.25	Average



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

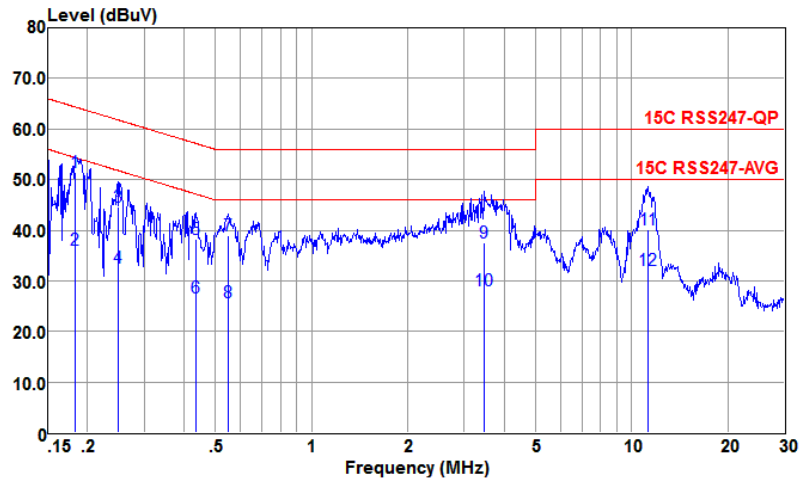

Site : CO01-KS

Condition : 15C RSS247-QP LISN-100334-N 2025 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.183	51.53	-12.80	64.33	31.50	9.57	10.46	QP
2	0.183	36.23	-18.10	54.33	16.20	9.57	10.46	Average
3	0.248	44.73	-17.09	61.82	24.60	9.66	10.47	QP
4	0.248	32.63	-19.19	51.82	12.50	9.66	10.47	Average
5	0.435	38.33	-18.82	57.15	18.20	9.67	10.46	QP
6	0.435	26.73	-20.42	47.15	6.60	9.67	10.46	Average
7	0.549	38.96	-17.04	56.00	18.80	9.77	10.39	QP
8	0.549	25.76	-20.24	46.00	5.60	9.77	10.39	Average
9	3.472	37.47	-18.53	56.00	17.60	9.65	10.22	QP
10	3.472	28.07	-17.93	46.00	8.20	9.65	10.22	Average
11	11.257	40.15	-19.85	60.00	20.20	9.70	10.25	QP
12	11.257	32.15	-17.85	50.00	12.20	9.70	10.25	Average

Note:

1. $\text{Level(dB}\mu\text{V)} = \text{Read Level(dB}\mu\text{V)} + \text{LISN Factor(dB)} + \text{Cable Loss(dB)}$
2. $\text{Over Limit(dB)} = \text{Level(dB}\mu\text{V)} - \text{Limit Line(dB}\mu\text{V)}$



Appendix C Radiated Spurious Emission Test Data

Test Engineer :	Maven	Relative Humidity :	52~56%
		Temperature :	22~ 25℃





Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	802.11b	01	2412	1Mbps	-	-
Mode 2	2400-2483.5	1	802.11b	06	2437	1Mbps	-	-
Mode 3	2400-2483.5	1	802.11b	11	2462	1Mbps	-	-
Mode 4	2400-2483.5	1	802.11g	01	2412	6Mbps	-	-
Mode 5	2400-2483.5	1	802.11g	06	2437	6Mbps	-	-
Mode 6	2400-2483.5	1	802.11g	11	2462	6Mbps	-	-
Mode 7	2400-2483.5	1	802.11n HT20	01	2412	MCS0	-	-
Mode 8	2400-2483.5	1	802.11n HT20	06	2437	MCS0	-	-
Mode 9	2400-2483.5	1	802.11n HT20	11	2462	MCS0	-	-
Mode 10	2400-2483.5	1	802.11n HT40	3	2422	MCS0	-	-
Mode 11	2400-2483.5	1	802.11n HT40	6	2437	MCS0	-	-
Mode 12	2400-2483.5	1	802.11n HT40	9	2452	MCS0	-	-





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11b	01	2385.40	48.54	54.00	-5.46	H	AVERAGE	Pass	Band Edge
1	802.11b	01	4824.00	49.43	54.00	-4.57	V	AVERAGE	Pass	Harmonic
2	802.11b	06	-	-	-	-	-	-	-	Band Edge
2	802.11b	06	4874.00	50.76	54.00	-3.24	V	AVERAGE	Pass	Harmonic
3	802.11b	11	2488.54	48.66	54.00	-5.34	H	AVERAGE	Pass	Band Edge
3	802.11b	11	4924.00	50.86	54.00	-3.14	V	AVERAGE	Pass	Harmonic
4	802.11g	01	2389.95	52.83	54.00	-1.17	H	AVERAGE	Pass	Band Edge
4	802.11g	01	4824.00	46.02	54.00	-7.98	V	AVERAGE	Pass	Harmonic
5	802.11g	06	-	-	-	-	-	-	-	Band Edge
5	802.11g	06	4874.00	49.03	54.00	-4.97	V	AVERAGE	Pass	Harmonic
6	802.11g	11	2483.50	52.79	54.00	-1.21	H	AVERAGE	Pass	Band Edge
6	802.11g	11	4924.00	49.28	54.00	-4.72	V	AVERAGE	Pass	Harmonic
7	802.11n HT20	01	2389.95	52.23	54.00	-1.77	H	AVERAGE	Pass	Band Edge
7	802.11n HT20	01	4824.00	44.11	54.00	-9.89	V	AVERAGE	Pass	Harmonic
8	802.11n HT20	06	-	-	-	-	-	-	-	Band Edge
8	802.11n HT20	06	4874.00	47.75	54.00	-6.25	V	AVERAGE	Pass	Harmonic
9	802.11n HT20	11	2483.50	52.50	54.00	-1.50	H	AVERAGE	Pass	Band Edge
9	802.11n HT20	11	4924.00	47.98	54.00	-6.02	V	AVERAGE	Pass	Harmonic
10	802.11n HT40	3	2389.95	52.18	54.00	-1.82	H	AVERAGE	Pass	Band Edge
10	802.11n HT40	3	4844.00	41.71	54.00	-12.29	V	AVERAGE	Pass	Harmonic
11	802.11n HT40	6	-	-	-	-	-	-	-	Band Edge
11	802.11n HT40	6	4874.00	44.21	54.00	-9.79	V	AVERAGE	Pass	Harmonic
12	802.11n HT40	9	2483.50	52.30	54.00	-1.70	H	AVERAGE	Pass	Band Edge
12	802.11n HT40	9	4904.00	42.96	54.00	-11.04	H	AVERAGE	Pass	Harmonic

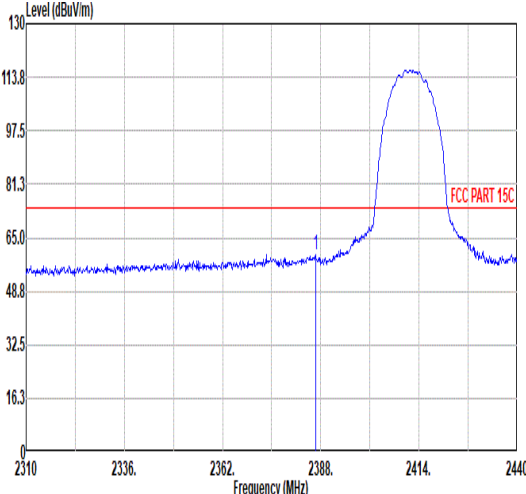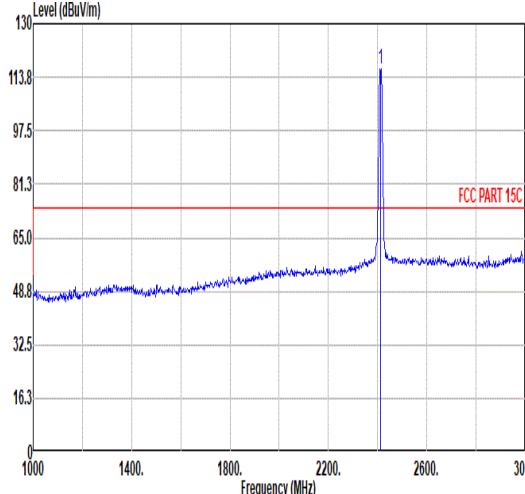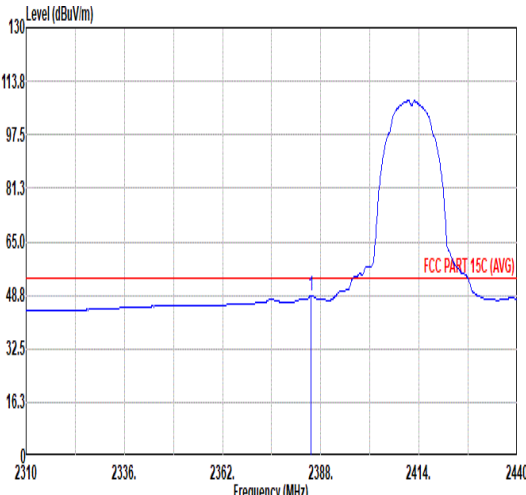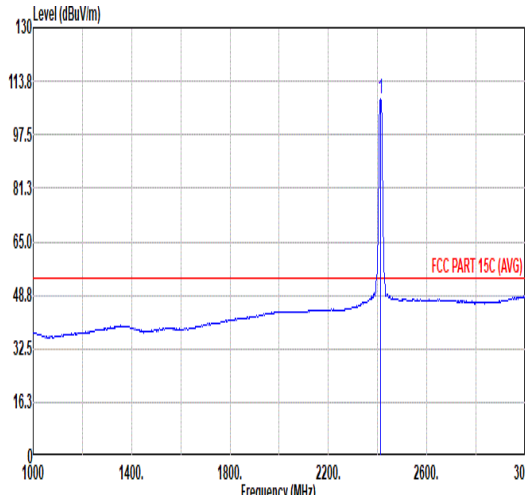

Mode	1																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.57</td><td>59.85</td><td>74.00</td><td>-14.15</td><td>51.40</td><td>31.89</td><td>7.16</td><td>36.60</td><td>6.00</td><td>188</td><td>16 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.57	59.85	74.00	-14.15	51.40	31.89	7.16	36.60	6.00	188	16 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>116.21</td><td>-----</td><td>-----</td><td>107.55</td><td>32.04</td><td>7.20</td><td>36.58</td><td>6.00</td><td>188</td><td>16 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	116.21	-----	-----	107.55	32.04	7.20	36.58	6.00	188
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2386.57	59.85	74.00	-14.15	51.40	31.89	7.16	36.60	6.00	188	16 PEAK																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2412.00	116.21	-----	-----	107.55	32.04	7.20	36.58	6.00	188	16 PEAK																																																																																									
Avg																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.40</td><td>48.54</td><td>54.00</td><td>-5.46</td><td>40.10</td><td>31.88</td><td>7.16</td><td>36.60</td><td>6.00</td><td>188</td><td>16 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2385.40	48.54	54.00	-5.46	40.10	31.88	7.16	36.60	6.00	188	16 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>108.18</td><td>-----</td><td>-----</td><td>99.51</td><td>32.05</td><td>7.20</td><td>36.58</td><td>6.00</td><td>188</td><td>16 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	108.18	-----	-----	99.51	32.05	7.20	36.58	6.00	188
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2385.40	48.54	54.00	-5.46	40.10	31.88	7.16	36.60	6.00	188	16 AVERAGE																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2412.00	108.18	-----	-----	99.51	32.05	7.20	36.58	6.00	188	16 AVERAGE																																																																																									

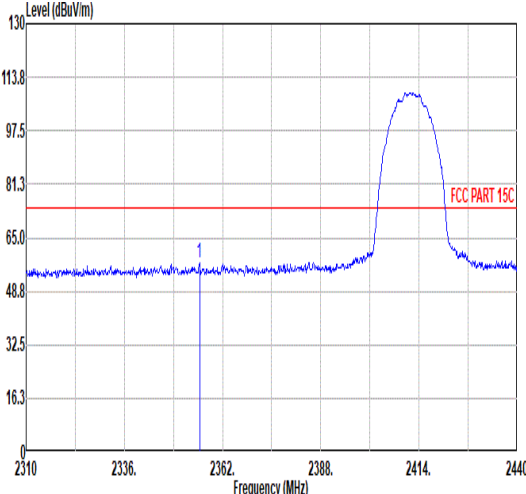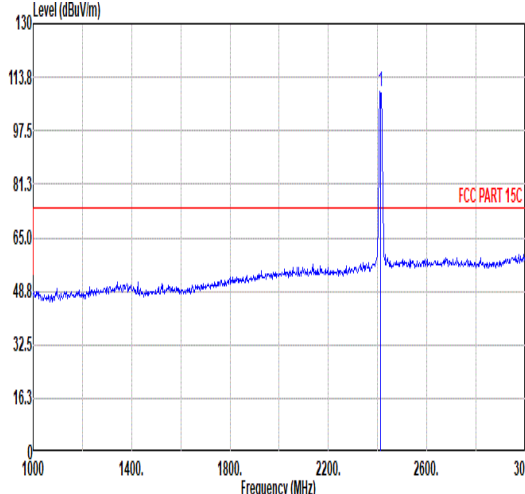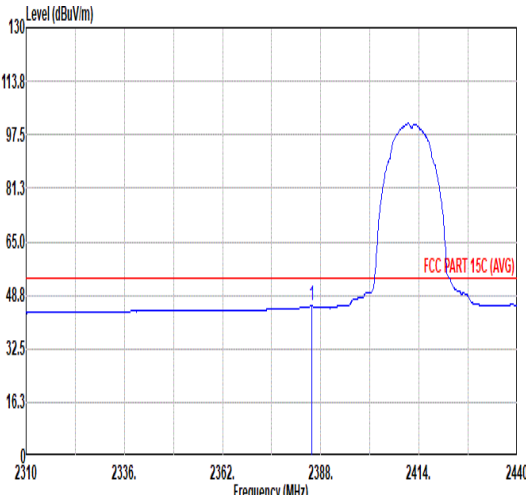
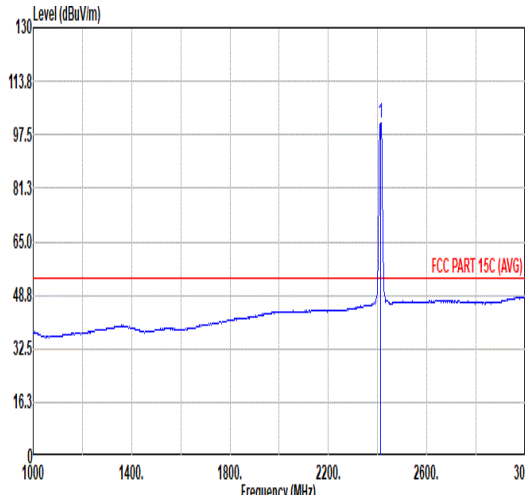


Mode	1																																																								
	Band Edge																																																								
	2400-2483.5_802.11b_CH01_2412MHz																																																								
ANT	1																																																								
Pol.	Vertical																																																								
Peak																																																									
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2355.89</td><td>57.64</td><td>74.00</td><td>-16.36</td><td>49.52</td><td>31.65</td><td>7.11</td><td>36.64</td><td>6.00</td><td>101</td><td>51 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2355.89	57.64	74.00	-16.36	49.52	31.65	7.11	36.64	6.00	101	51 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																														
1	2355.89	57.64	74.00	-16.36	49.52	31.65	7.11	36.64	6.00	101	51 PEAK																																														
Fundamental																																																									
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>109.34</td><td>-----</td><td>-----</td><td>100.68</td><td>32.04</td><td>7.20</td><td>36.58</td><td>6.00</td><td>101</td><td>51 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2412.00	109.34	-----	-----	100.68	32.04	7.20	36.58	6.00	101	51 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																														
1	2412.00	109.34	-----	-----	100.68	32.04	7.20	36.58	6.00	101	51 PEAK																																														
Avg																																																									
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.53</td><td>45.47</td><td>54.00</td><td>-8.53</td><td>37.03</td><td>31.88</td><td>7.16</td><td>36.60</td><td>6.00</td><td>101</td><td>51 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2385.53	45.47	54.00	-8.53	37.03	31.88	7.16	36.60	6.00	101	51 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																														
1	2385.53	45.47	54.00	-8.53	37.03	31.88	7.16	36.60	6.00	101	51 AVERAGE																																														
Avg																																																									
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>101.14</td><td>-----</td><td>-----</td><td>92.47</td><td>32.05</td><td>7.20</td><td>36.58</td><td>6.00</td><td>101</td><td>51 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2412.00	101.14	-----	-----	92.47	32.05	7.20	36.58	6.00	101	51 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																														
1	2412.00	101.14	-----	-----	92.47	32.05	7.20	36.58	6.00	101	51 AVERAGE																																														







Mode	1																																																																																																																													
	Harmonic																																																																																																																													
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																																													
ANT	1																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																							
Peak Avg																																																																																																																														
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>51.04</td><td>74.00</td><td>-22.96</td><td>71.17</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>100</td><td>42</td><td>PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>44.62</td><td>54.00</td><td>-9.38</td><td>64.75</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>100</td><td>42</td><td>AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	51.04	74.00	-22.96	71.17	33.80	10.29	64.22	0.00	100	42	PEAK	2	4824.00	44.62	54.00	-9.38	64.75	33.80	10.29	64.22	0.00	100	42	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>54.70</td><td>74.00</td><td>-19.30</td><td>74.83</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>400</td><td>172</td><td>PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>49.43</td><td>54.00</td><td>-4.57</td><td>69.56</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>400</td><td>172</td><td>AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	54.70	74.00	-19.30	74.83	33.80	10.29	64.22	0.00	400	172	PEAK	2	4824.00	49.43	54.00	-4.57	69.56	33.80	10.29	64.22	0.00	400	172	AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	4824.00	51.04	74.00	-22.96	71.17	33.80	10.29	64.22	0.00	100	42	PEAK																																																																																																																		
2	4824.00	44.62	54.00	-9.38	64.75	33.80	10.29	64.22	0.00	100	42	AVERAGE																																																																																																																		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	4824.00	54.70	74.00	-19.30	74.83	33.80	10.29	64.22	0.00	400	172	PEAK																																																																																																																		
2	4824.00	49.43	54.00	-4.57	69.56	33.80	10.29	64.22	0.00	400	172	AVERAGE																																																																																																																		



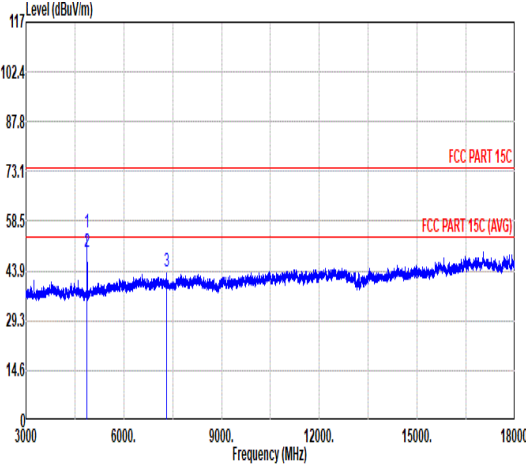
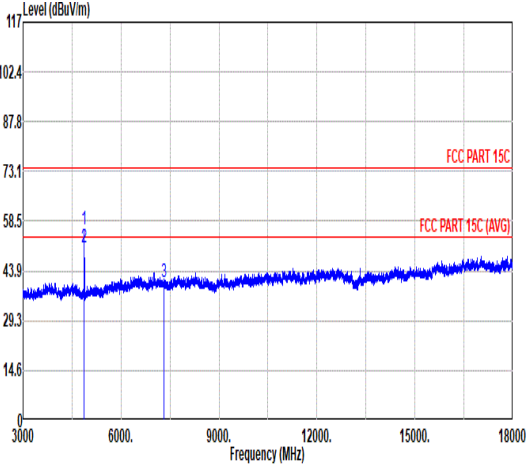


Mode	2																																																																																																																																																						
	Harmonic																																																																																																																																																						
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																																						
ANT	1																																																																																																																																																						
Pol.	Horizontal						Vertical																																																																																																																																																
Peak Avg																																																																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>55.01</td><td>74.00</td><td>-18.99</td><td>75.09</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>146</td><td>176 PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>49.45</td><td>54.00</td><td>-4.55</td><td>69.53</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>146</td><td>176 AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>43.62</td><td>74.00</td><td>-30.38</td><td>61.36</td><td>35.58</td><td>12.78</td><td>66.10</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	55.01	74.00	-18.99	75.09	33.85	10.34	64.27	0.00	146	176 PEAK	2	4874.00	49.45	54.00	-4.55	69.53	33.85	10.34	64.27	0.00	146	176 AVERAGE	3	7311.00	43.62	74.00	-30.38	61.36	35.58	12.78	66.10	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>55.91</td><td>74.00</td><td>-18.09</td><td>75.99</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>277</td><td>170 PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>50.76</td><td>54.00</td><td>-3.24</td><td>70.84</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>277</td><td>170 AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>40.63</td><td>74.00</td><td>-33.37</td><td>58.37</td><td>35.58</td><td>12.78</td><td>66.10</td><td>0.00</td><td>300</td><td>355 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	55.91	74.00	-18.09	75.99	33.85	10.34	64.27	0.00	277	170 PEAK	2	4874.00	50.76	54.00	-3.24	70.84	33.85	10.34	64.27	0.00	277	170 AVERAGE	3	7311.00	40.63	74.00	-33.37	58.37	35.58	12.78	66.10	0.00	300	355 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																													
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																													
1	4874.00	55.01	74.00	-18.99	75.09	33.85	10.34	64.27	0.00	146	176 PEAK																																																																																																																																												
2	4874.00	49.45	54.00	-4.55	69.53	33.85	10.34	64.27	0.00	146	176 AVERAGE																																																																																																																																												
3	7311.00	43.62	74.00	-30.38	61.36	35.58	12.78	66.10	0.00	---	---	PEAK																																																																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																													
1	4874.00	55.91	74.00	-18.09	75.99	33.85	10.34	64.27	0.00	277	170 PEAK																																																																																																																																												
2	4874.00	50.76	54.00	-3.24	70.84	33.85	10.34	64.27	0.00	277	170 AVERAGE																																																																																																																																												
3	7311.00	40.63	74.00	-33.37	58.37	35.58	12.78	66.10	0.00	300	355 PEAK																																																																																																																																												

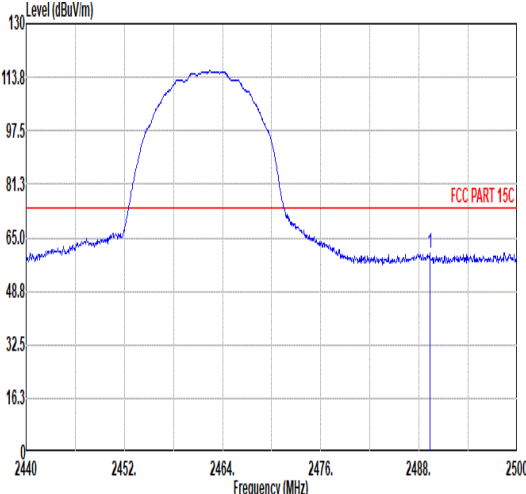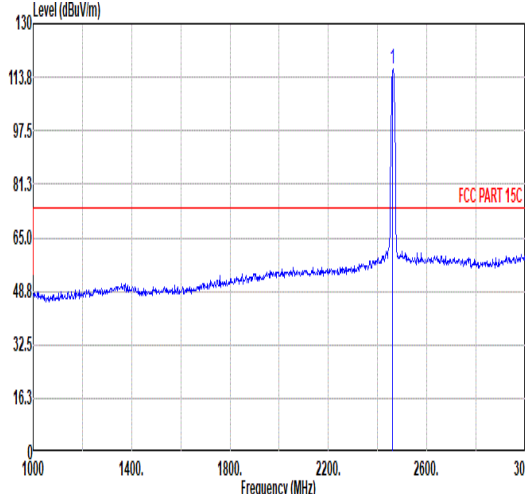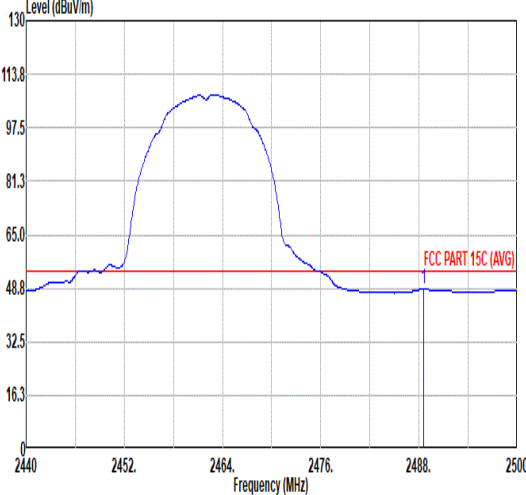
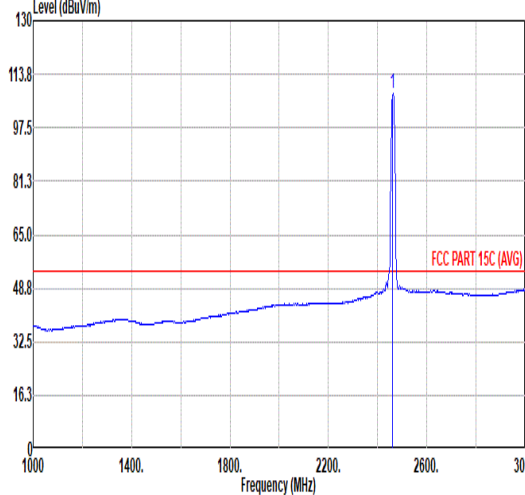


Mode	3																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11b_CH11_2462MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal	Fundamental																																																																																										
Peak	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2489.32</td><td>60.21</td><td>74.00</td><td>-13.79</td><td>51.16</td><td>32.28</td><td>7.34</td><td>36.57</td><td>6.00</td><td>154</td><td>360 PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2489.32	60.21	74.00	-13.79	51.16	32.28	7.34	36.57	6.00	154	360 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>116.26</td><td>-----</td><td>-----</td><td>107.30</td><td>32.23</td><td>7.30</td><td>36.57</td><td>6.00</td><td>154</td><td>360 PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	116.26	-----	-----	107.30	32.23	7.30	36.57	6.00	154	360 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2489.32	60.21	74.00	-13.79	51.16	32.28	7.34	36.57	6.00	154	360 PEAK																																																																																	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2462.00	116.26	-----	-----	107.30	32.23	7.30	36.57	6.00	154	360 PEAK																																																																																	
Avg	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2488.54</td><td>48.66</td><td>54.00</td><td>-5.34</td><td>39.61</td><td>32.28</td><td>7.34</td><td>36.57</td><td>6.00</td><td>154</td><td>360 AVERAGE</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.54	48.66	54.00	-5.34	39.61	32.28	7.34	36.57	6.00	154	360 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>107.84</td><td>-----</td><td>-----</td><td>98.88</td><td>32.23</td><td>7.30</td><td>36.57</td><td>6.00</td><td>154</td><td>360 AVERAGE</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	107.84	-----	-----	98.88	32.23	7.30	36.57	6.00	154	360 AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2488.54	48.66	54.00	-5.34	39.61	32.28	7.34	36.57	6.00	154	360 AVERAGE																																																																																	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2462.00	107.84	-----	-----	98.88	32.23	7.30	36.57	6.00	154	360 AVERAGE																																																																																	

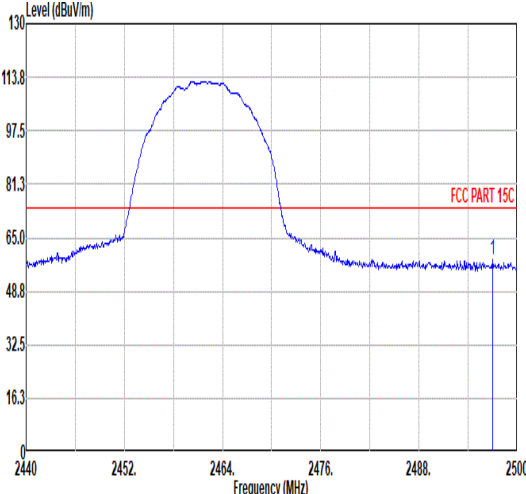
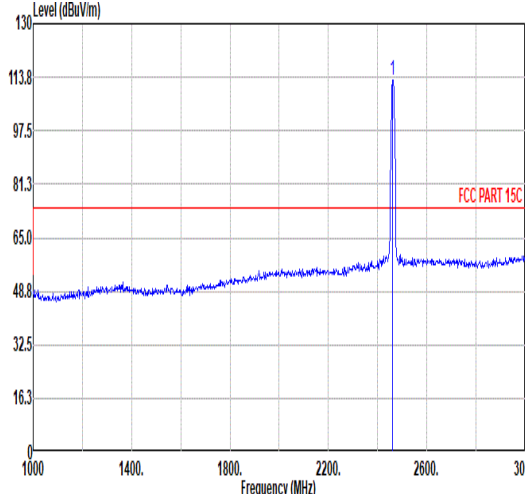
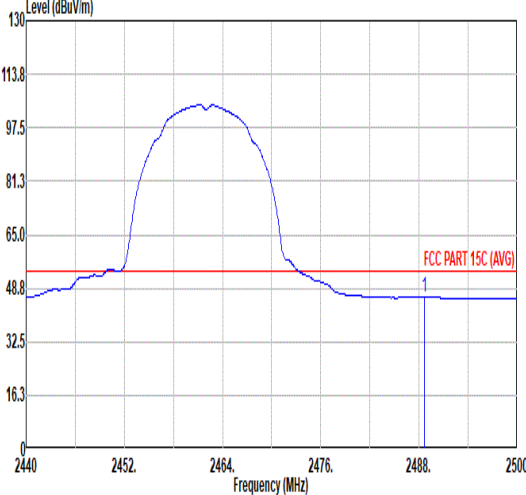
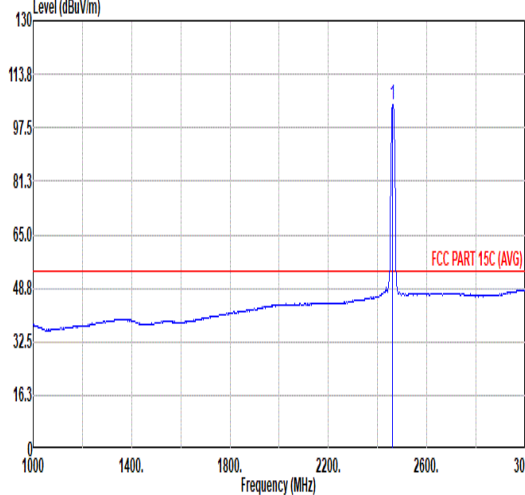


Mode	3																																																																																																						
	Band Edge																																																																																																						
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																						
ANT	1																																																																																																						
Pol.	Vertical						Fundamental																																																																																																
Peak																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2497.00</td><td>58.15</td><td>74.00</td><td>-15.85</td><td>49.00</td><td>32.29</td><td>7.35</td><td>36.57</td><td>6.00</td><td>345</td><td>160</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2497.00	58.15	74.00	-15.85	49.00	32.29	7.35	36.57	6.00	345	160	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>113.00</td><td>-----</td><td>-----</td><td>104.06</td><td>32.22</td><td>7.29</td><td>36.57</td><td>6.00</td><td>345</td><td>160</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	113.00	-----	-----	104.06	32.22	7.29	36.57	6.00	345	160
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2497.00	58.15	74.00	-15.85	49.00	32.29	7.35	36.57	6.00	345	160	PEAK																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2462.00	113.00	-----	-----	104.06	32.22	7.29	36.57	6.00	345	160	PEAK																																																																																											
Avg																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.66</td><td>46.28</td><td>54.00</td><td>-7.72</td><td>37.23</td><td>32.28</td><td>7.34</td><td>36.57</td><td>6.00</td><td>345</td><td>160</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.66	46.28	54.00	-7.72	37.23	32.28	7.34	36.57	6.00	345	160	AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>104.66</td><td>-----</td><td>-----</td><td>95.72</td><td>32.22</td><td>7.29</td><td>36.57</td><td>6.00</td><td>345</td><td>160</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	104.66	-----	-----	95.72	32.22	7.29	36.57	6.00	345	160
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2488.66	46.28	54.00	-7.72	37.23	32.28	7.34	36.57	6.00	345	160	AVERAGE																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2462.00	104.66	-----	-----	95.72	32.22	7.29	36.57	6.00	345	160	AVERAGE																																																																																											



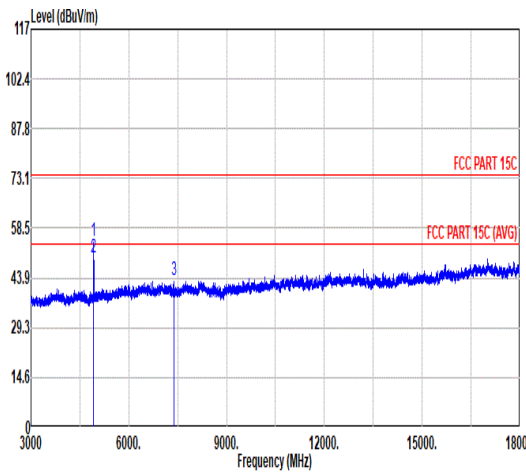
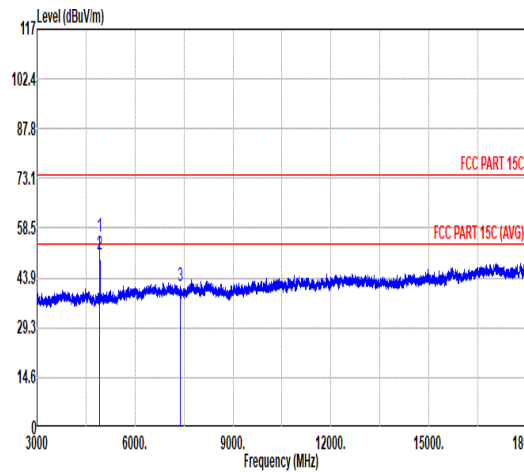


Mode	3																																																																																																																																																														
	Harmonic																																																																																																																																																														
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																																														
ANT	1																																																																																																																																																														
Pol.	Horizontal											Vertical																																																																																																																																																			
Peak Avg																																																																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>54.95</td><td>74.00</td><td>-19.05</td><td>74.95</td><td>33.90</td><td>10.40</td><td>64.30</td><td>0.00</td><td>100</td><td>244</td><td>PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>49.80</td><td>54.00</td><td>-4.20</td><td>69.80</td><td>33.90</td><td>10.40</td><td>64.30</td><td>0.00</td><td>100</td><td>244</td><td>AVERAGE</td></tr><tr><td>3</td><td>7386.00</td><td>43.22</td><td>74.00</td><td>-30.78</td><td>60.99</td><td>35.57</td><td>12.88</td><td>66.22</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	54.95	74.00	-19.05	74.95	33.90	10.40	64.30	0.00	100	244	PEAK	2	4924.00	49.80	54.00	-4.20	69.80	33.90	10.40	64.30	0.00	100	244	AVERAGE	3	7386.00	43.22	74.00	-30.78	60.99	35.57	12.88	66.22	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>56.09</td><td>74.00</td><td>-17.91</td><td>76.09</td><td>33.90</td><td>10.40</td><td>64.30</td><td>0.00</td><td>285</td><td>172</td><td>PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>50.86</td><td>54.00</td><td>-3.14</td><td>70.86</td><td>33.90</td><td>10.40</td><td>64.30</td><td>0.00</td><td>285</td><td>172</td><td>AVERAGE</td></tr><tr><td>3</td><td>7386.00</td><td>41.69</td><td>74.00</td><td>-32.31</td><td>59.46</td><td>35.57</td><td>12.88</td><td>66.22</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	56.09	74.00	-17.91	76.09	33.90	10.40	64.30	0.00	285	172	PEAK	2	4924.00	50.86	54.00	-3.14	70.86	33.90	10.40	64.30	0.00	285	172	AVERAGE	3	7386.00	41.69	74.00	-32.31	59.46	35.57	12.88	66.22	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																					
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																				
1	4924.00	54.95	74.00	-19.05	74.95	33.90	10.40	64.30	0.00	100	244	PEAK																																																																																																																																																			
2	4924.00	49.80	54.00	-4.20	69.80	33.90	10.40	64.30	0.00	100	244	AVERAGE																																																																																																																																																			
3	7386.00	43.22	74.00	-30.78	60.99	35.57	12.88	66.22	0.00	---	---	PEAK																																																																																																																																																			
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																				
1	4924.00	56.09	74.00	-17.91	76.09	33.90	10.40	64.30	0.00	285	172	PEAK																																																																																																																																																			
2	4924.00	50.86	54.00	-3.14	70.86	33.90	10.40	64.30	0.00	285	172	AVERAGE																																																																																																																																																			
3	7386.00	41.69	74.00	-32.31	59.46	35.57	12.88	66.22	0.00	---	---	PEAK																																																																																																																																																			

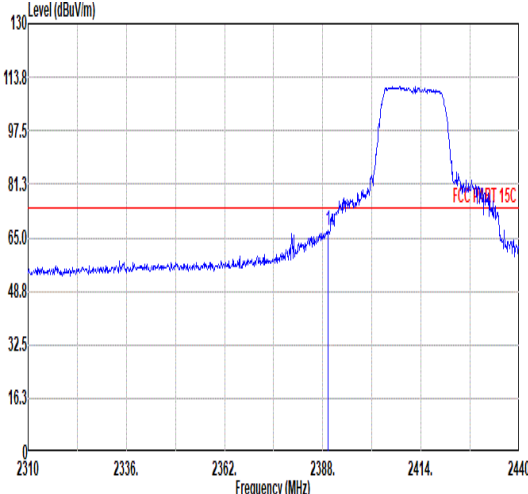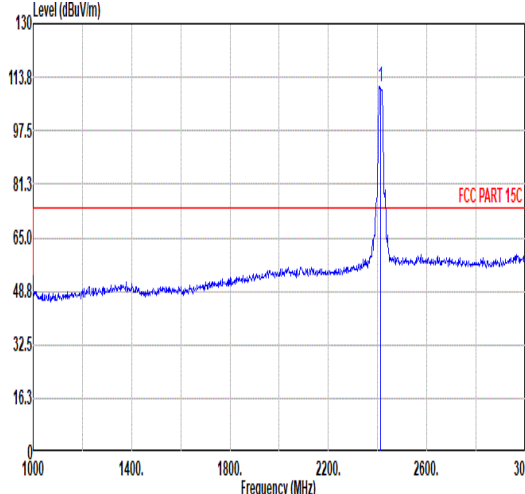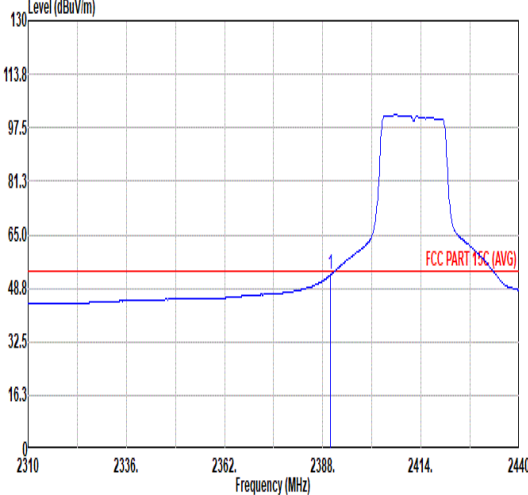
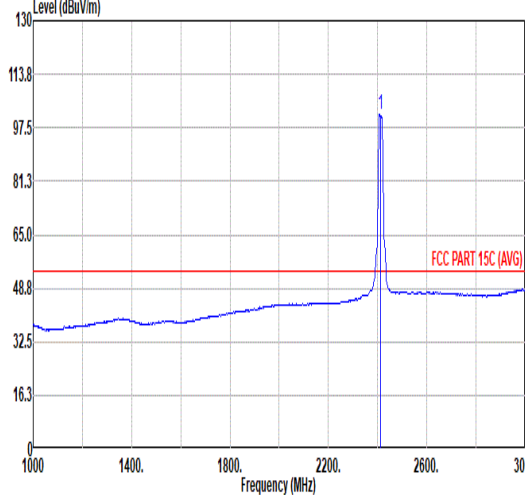


Mode	4																																																							
	Band Edge																																																							
	2400-2483.5_802.11g_CH01_2412MHz																																																							
ANT	1																																																							
Pol.	Horizontal																																																							
Peak																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.30</td><td>67.33</td><td>74.00</td><td>-6.67</td><td>58.85</td><td>31.91</td><td>7.16</td><td>36.59</td><td>6.00</td><td>186</td><td>360 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.30	67.33	74.00	-6.67	58.85	31.91	7.16	36.59	6.00	186	360 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2389.30	67.33	74.00	-6.67	58.85	31.91	7.16	36.59	6.00	186	360 PEAK																																													
Fundamental																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>110.86</td><td>-----</td><td>-----</td><td>102.22</td><td>32.03</td><td>7.19</td><td>36.58</td><td>6.00</td><td>186</td><td>360 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	110.86	-----	-----	102.22	32.03	7.19	36.58	6.00	186	360 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2412.00	110.86	-----	-----	102.22	32.03	7.19	36.58	6.00	186	360 PEAK																																													
Avg																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>52.83</td><td>54.00</td><td>-1.17</td><td>44.34</td><td>31.92</td><td>7.16</td><td>36.59</td><td>6.00</td><td>186</td><td>360 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	52.83	54.00	-1.17	44.34	31.92	7.16	36.59	6.00	186	360 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2389.95	52.83	54.00	-1.17	44.34	31.92	7.16	36.59	6.00	186	360 AVERAGE																																													
AVERAGE																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>101.60</td><td>-----</td><td>-----</td><td>92.96</td><td>32.03</td><td>7.19</td><td>36.58</td><td>6.00</td><td>186</td><td>360 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	101.60	-----	-----	92.96	32.03	7.19	36.58	6.00	186	360 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2412.00	101.60	-----	-----	92.96	32.03	7.19	36.58	6.00	186	360 AVERAGE																																													

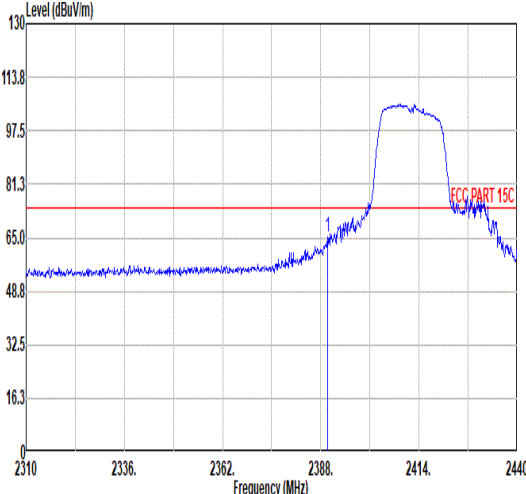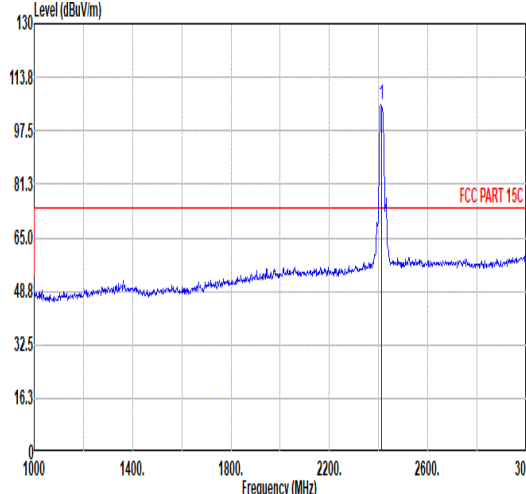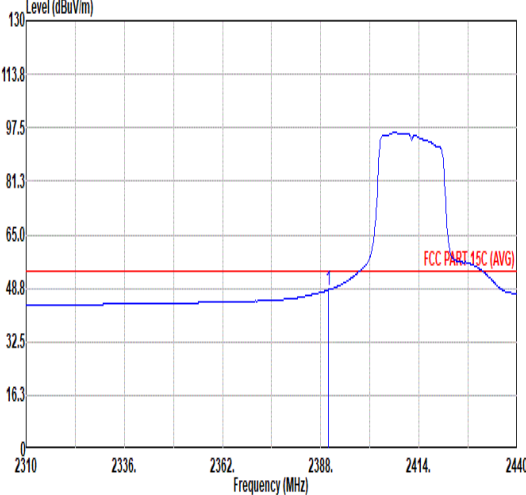
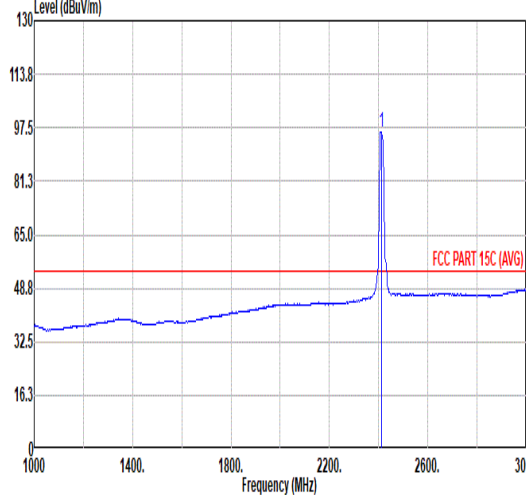


Mode	4																																																																																																				
	Band Edge																																																																																																				
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Vertical						Fundamental																																																																																														
Peak																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>65.01</td><td>74.00</td><td>-8.99</td><td>56.52</td><td>31.92</td><td>7.16</td><td>36.59</td><td>6.00</td><td>106</td><td>129 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	65.01	74.00	-8.99	56.52	31.92	7.16	36.59	6.00	106	129 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>105.46</td><td>-----</td><td>-----</td><td>96.80</td><td>32.04</td><td>7.20</td><td>36.58</td><td>6.00</td><td>106</td><td>129 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	105.46	-----	-----	96.80	32.04	7.20	36.58	6.00	106
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2389.82	65.01	74.00	-8.99	56.52	31.92	7.16	36.59	6.00	106	129 PEAK																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2412.00	105.46	-----	-----	96.80	32.04	7.20	36.58	6.00	106	129 PEAK																																																																																										
Avg																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>48.31</td><td>54.00</td><td>-5.69</td><td>39.82</td><td>31.92</td><td>7.16</td><td>36.59</td><td>6.00</td><td>106</td><td>129 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	48.31	54.00	-5.69	39.82	31.92	7.16	36.59	6.00	106	129 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>96.20</td><td>-----</td><td>-----</td><td>87.56</td><td>32.03</td><td>7.19</td><td>36.58</td><td>6.00</td><td>106</td><td>129 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	96.20	-----	-----	87.56	32.03	7.19	36.58	6.00	106
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2389.95	48.31	54.00	-5.69	39.82	31.92	7.16	36.59	6.00	106	129 AVERAGE																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2412.00	96.20	-----	-----	87.56	32.03	7.19	36.58	6.00	106	129 AVERAGE																																																																																										

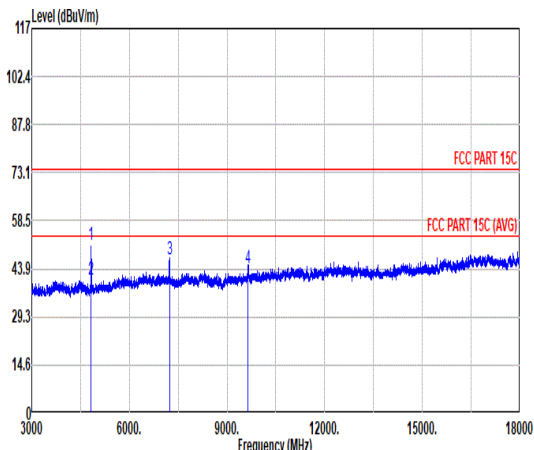
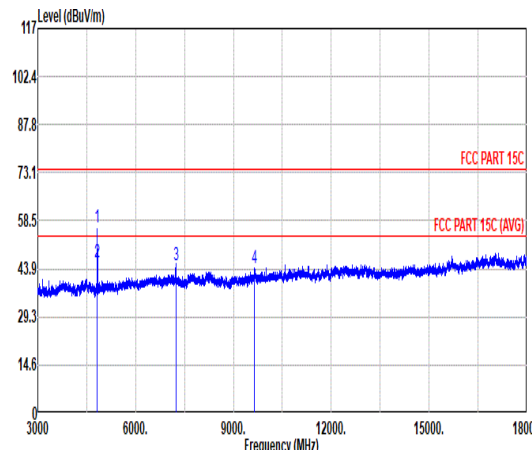


Mode	4																																																																																										
	Harmonic																																																																																										
	2400-2483.5_802.11g_CH01_2412MHz																																																																																										
ANT	1																																																																																										
Pol.	Horizontal																																																																																										
Peak Avg																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>51.38</td><td>74.00</td><td>-22.62</td><td>71.51</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>118</td><td>40 PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>40.82</td><td>54.00</td><td>-13.18</td><td>60.95</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>118</td><td>40 AVERAGE</td></tr><tr><td>3</td><td>7236.00</td><td>46.82</td><td>76.35</td><td>-29.53</td><td>64.54</td><td>35.60</td><td>12.66</td><td>65.98</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>4</td><td>9648.00</td><td>44.07</td><td>76.35</td><td>-32.28</td><td>59.77</td><td>36.70</td><td>14.81</td><td>67.21</td><td>0.00</td><td>---</td><td>--- Peak</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	51.38	74.00	-22.62	71.51	33.80	10.29	64.22	0.00	118	40 PEAK	2	4824.00	40.82	54.00	-13.18	60.95	33.80	10.29	64.22	0.00	118	40 AVERAGE	3	7236.00	46.82	76.35	-29.53	64.54	35.60	12.66	65.98	0.00	---	--- PEAK	4	9648.00	44.07	76.35	-32.28	59.77	36.70	14.81	67.21	0.00	---
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	4824.00	51.38	74.00	-22.62	71.51	33.80	10.29	64.22	0.00	118	40 PEAK																																																																																
2	4824.00	40.82	54.00	-13.18	60.95	33.80	10.29	64.22	0.00	118	40 AVERAGE																																																																																
3	7236.00	46.82	76.35	-29.53	64.54	35.60	12.66	65.98	0.00	---	--- PEAK																																																																																
4	9648.00	44.07	76.35	-32.28	59.77	36.70	14.81	67.21	0.00	---	--- Peak																																																																																
Peak Avg																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>56.40</td><td>74.00</td><td>-17.60</td><td>76.53</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>357</td><td>173 PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>46.02</td><td>54.00</td><td>-7.98</td><td>66.15</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>357</td><td>173 AVERAGE</td></tr><tr><td>3</td><td>7236.00</td><td>44.85</td><td>80.06</td><td>-35.21</td><td>62.57</td><td>35.60</td><td>12.66</td><td>65.98</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>4</td><td>9648.00</td><td>44.35</td><td>80.06</td><td>-35.71</td><td>60.05</td><td>36.70</td><td>14.81</td><td>67.21</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	56.40	74.00	-17.60	76.53	33.80	10.29	64.22	0.00	357	173 PEAK	2	4824.00	46.02	54.00	-7.98	66.15	33.80	10.29	64.22	0.00	357	173 AVERAGE	3	7236.00	44.85	80.06	-35.21	62.57	35.60	12.66	65.98	0.00	---	--- PEAK	4	9648.00	44.35	80.06	-35.71	60.05	36.70	14.81	67.21	0.00	---
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	4824.00	56.40	74.00	-17.60	76.53	33.80	10.29	64.22	0.00	357	173 PEAK																																																																																
2	4824.00	46.02	54.00	-7.98	66.15	33.80	10.29	64.22	0.00	357	173 AVERAGE																																																																																
3	7236.00	44.85	80.06	-35.21	62.57	35.60	12.66	65.98	0.00	---	--- PEAK																																																																																
4	9648.00	44.35	80.06	-35.71	60.05	36.70	14.81	67.21	0.00	---	--- PEAK																																																																																

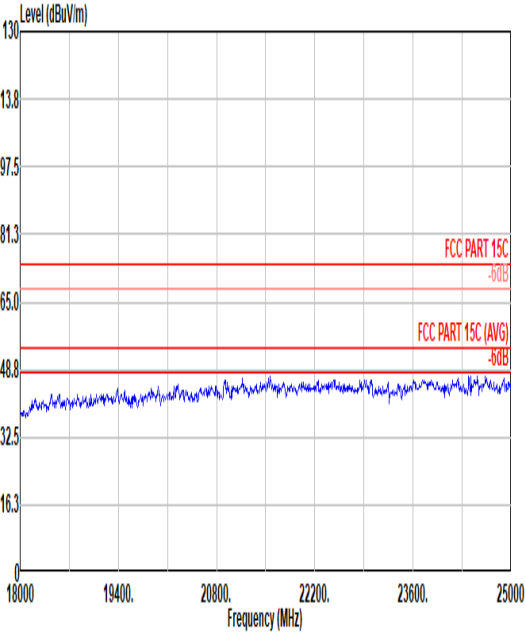
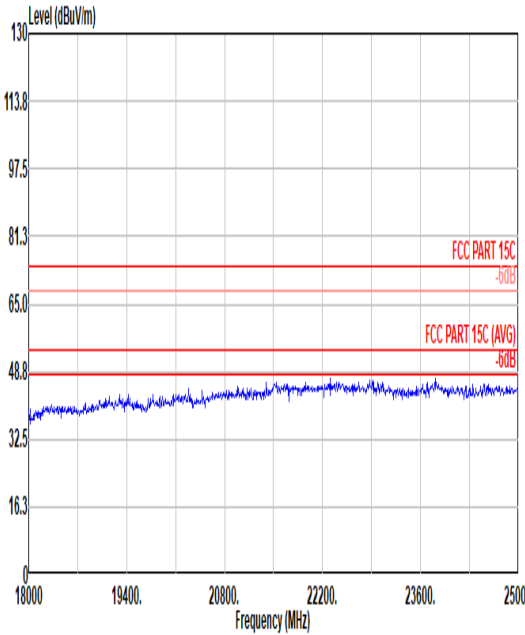


Mode	4	
	18G-25G	
	2400-2483.5_802.11g_CH01_2412MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg		



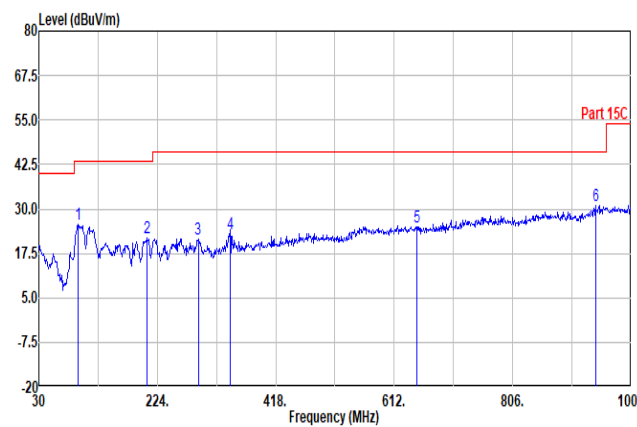
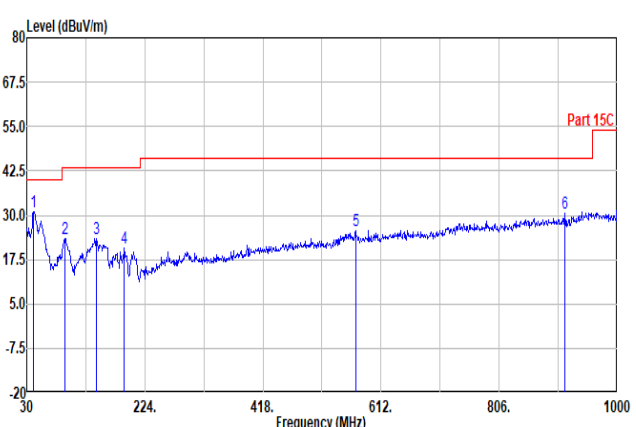


Mode	4																																																																																																																																																																																																																											
	LF																																																																																																																																																																																																																											
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																																																																																																																																											
ANT	1																																																																																																																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																																																																																																																					
QP																																																																																																																																																																																																																												
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>94.02</td><td>25.51</td><td>43.50</td><td>-17.99</td><td>40.99</td><td>15.24</td><td>1.34</td><td>32.06</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>206.54</td><td>21.89</td><td>43.50</td><td>-21.61</td><td>36.83</td><td>15.11</td><td>2.02</td><td>32.07</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>290.93</td><td>21.33</td><td>46.00</td><td>-24.67</td><td>31.75</td><td>19.25</td><td>2.40</td><td>32.07</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>343.31</td><td>23.08</td><td>46.00</td><td>-22.92</td><td>32.44</td><td>20.15</td><td>2.60</td><td>32.11</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>648.86</td><td>24.97</td><td>46.00</td><td>-21.03</td><td>26.95</td><td>26.69</td><td>3.59</td><td>32.26</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>941.80</td><td>30.96</td><td>46.00</td><td>-15.04</td><td>27.15</td><td>30.44</td><td>4.34</td><td>30.97</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	94.02	25.51	43.50	-17.99	40.99	15.24	1.34	32.06	0.00	---	---	Peak	2	206.54	21.89	43.50	-21.61	36.83	15.11	2.02	32.07	0.00	---	---	Peak	3	290.93	21.33	46.00	-24.67	31.75	19.25	2.40	32.07	0.00	---	---	Peak	4	343.31	23.08	46.00	-22.92	32.44	20.15	2.60	32.11	0.00	---	---	Peak	5	648.86	24.97	46.00	-21.03	26.95	26.69	3.59	32.26	0.00	---	---	Peak	6	941.80	30.96	46.00	-15.04	27.15	30.44	4.34	30.97	0.00	---	---	Peak	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>40.67</td><td>30.94</td><td>40.00</td><td>-9.06</td><td>43.06</td><td>19.33</td><td>0.62</td><td>32.07</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>93.05</td><td>23.38</td><td>43.50</td><td>-20.12</td><td>39.01</td><td>15.11</td><td>1.32</td><td>32.06</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>144.46</td><td>23.51</td><td>43.50</td><td>-19.99</td><td>36.58</td><td>17.29</td><td>1.67</td><td>32.03</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>190.05</td><td>20.58</td><td>43.50</td><td>-22.92</td><td>36.01</td><td>14.70</td><td>1.93</td><td>32.06</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>570.29</td><td>25.85</td><td>46.00</td><td>-20.15</td><td>28.67</td><td>26.12</td><td>3.36</td><td>32.30</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>913.67</td><td>30.38</td><td>46.00</td><td>-15.62</td><td>27.93</td><td>29.42</td><td>4.28</td><td>31.25</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	40.67	30.94	40.00	-9.06	43.06	19.33	0.62	32.07	0.00	---	---	Peak	2	93.05	23.38	43.50	-20.12	39.01	15.11	1.32	32.06	0.00	---	---	Peak	3	144.46	23.51	43.50	-19.99	36.58	17.29	1.67	32.03	0.00	---	---	Peak	4	190.05	20.58	43.50	-22.92	36.01	14.70	1.93	32.06	0.00	---	---	Peak	5	570.29	25.85	46.00	-20.15	28.67	26.12	3.36	32.30	0.00	---	---	Peak	6	913.67	30.38	46.00	-15.62	27.93	29.42	4.28	31.25	0.00	---	---	Peak
		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																	
1	94.02	25.51	43.50	-17.99	40.99	15.24	1.34	32.06	0.00	---	---	Peak																																																																																																																																																																																																																
2	206.54	21.89	43.50	-21.61	36.83	15.11	2.02	32.07	0.00	---	---	Peak																																																																																																																																																																																																																
3	290.93	21.33	46.00	-24.67	31.75	19.25	2.40	32.07	0.00	---	---	Peak																																																																																																																																																																																																																
4	343.31	23.08	46.00	-22.92	32.44	20.15	2.60	32.11	0.00	---	---	Peak																																																																																																																																																																																																																
5	648.86	24.97	46.00	-21.03	26.95	26.69	3.59	32.26	0.00	---	---	Peak																																																																																																																																																																																																																
6	941.80	30.96	46.00	-15.04	27.15	30.44	4.34	30.97	0.00	---	---	Peak																																																																																																																																																																																																																
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																	
1	40.67	30.94	40.00	-9.06	43.06	19.33	0.62	32.07	0.00	---	---	Peak																																																																																																																																																																																																																
2	93.05	23.38	43.50	-20.12	39.01	15.11	1.32	32.06	0.00	---	---	Peak																																																																																																																																																																																																																
3	144.46	23.51	43.50	-19.99	36.58	17.29	1.67	32.03	0.00	---	---	Peak																																																																																																																																																																																																																
4	190.05	20.58	43.50	-22.92	36.01	14.70	1.93	32.06	0.00	---	---	Peak																																																																																																																																																																																																																
5	570.29	25.85	46.00	-20.15	28.67	26.12	3.36	32.30	0.00	---	---	Peak																																																																																																																																																																																																																
6	913.67	30.38	46.00	-15.62	27.93	29.42	4.28	31.25	0.00	---	---	Peak																																																																																																																																																																																																																



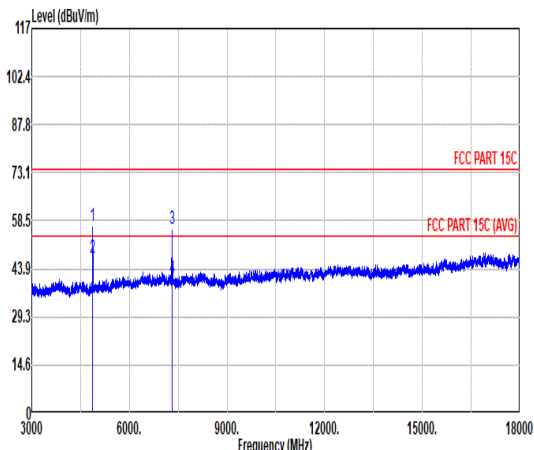
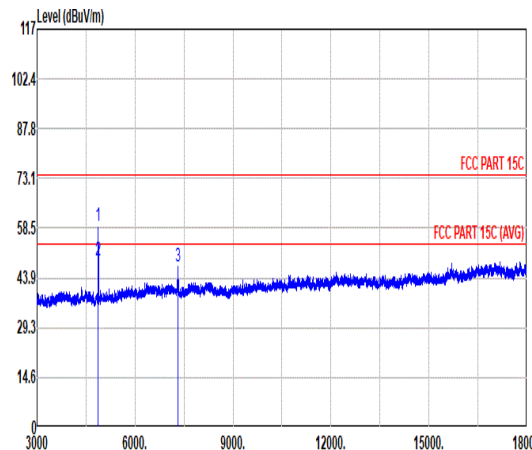


Mode	5																																																																																											
	Harmonic																																																																																											
	2400-2483.5_802.11g_CH06_2437MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal						Vertical																																																																																					
Peak Avg																																																																																												
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>56.88</td><td>74.00</td><td>-17.12</td><td>76.96</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>145</td><td>175 PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>47.46</td><td>54.00</td><td>-6.54</td><td>67.54</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>145</td><td>175 AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>56.01</td><td>74.00</td><td>-17.99</td><td>73.75</td><td>35.58</td><td>12.78</td><td>66.10</td><td>0.00</td><td>100</td><td>209 PEAK</td></tr><tr><td>4</td><td>7311.00</td><td>41.18</td><td>54.00</td><td>-12.82</td><td>58.92</td><td>35.58</td><td>12.77</td><td>66.09</td><td>0.00</td><td>100</td><td>209 AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	56.88	74.00	-17.12	76.96	33.85	10.34	64.27	0.00	145	175 PEAK	2	4874.00	47.46	54.00	-6.54	67.54	33.85	10.34	64.27	0.00	145	175 AVERAGE	3	7311.00	56.01	74.00	-17.99	73.75	35.58	12.78	66.10	0.00	100	209 PEAK	4	7311.00	41.18	54.00	-12.82	58.92	35.58	12.77	66.09	0.00	100	209 AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	4874.00	56.88	74.00	-17.12	76.96	33.85	10.34	64.27	0.00	145	175 PEAK																																																																																	
2	4874.00	47.46	54.00	-6.54	67.54	33.85	10.34	64.27	0.00	145	175 AVERAGE																																																																																	
3	7311.00	56.01	74.00	-17.99	73.75	35.58	12.78	66.10	0.00	100	209 PEAK																																																																																	
4	7311.00	41.18	54.00	-12.82	58.92	35.58	12.77	66.09	0.00	100	209 AVERAGE																																																																																	

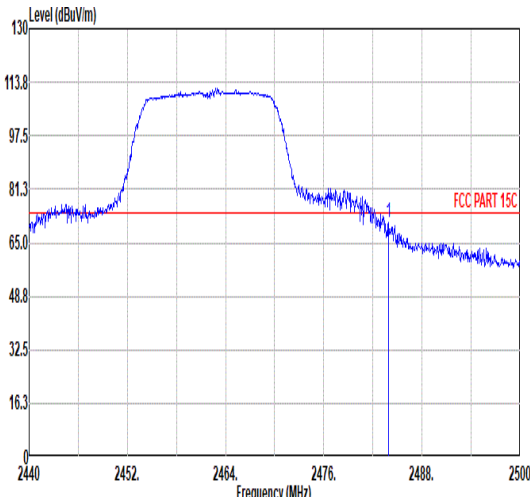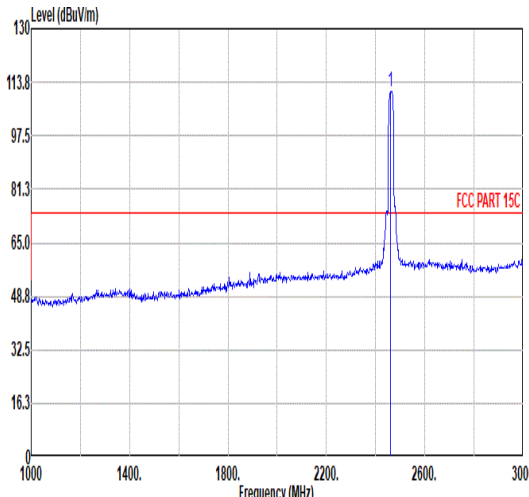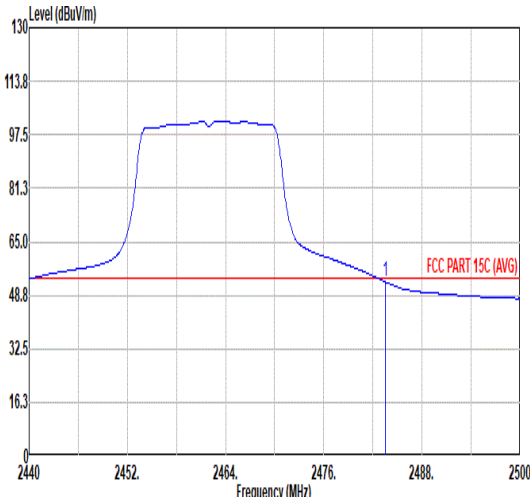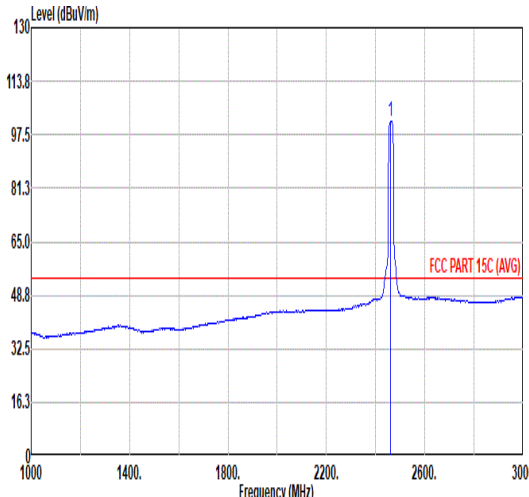


Mode	6																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	 Level (dBuV/m) Frequency (MHz) FCC PART 15C						 Level (dBuV/m) Frequency (MHz) FCC PART 15C																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.92</td><td>70.97</td><td>74.00</td><td>-3.03</td><td>61.94</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>153</td><td>360 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.92	70.97	74.00	-3.03	61.94	32.27	7.33	36.57	6.00	153	360 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>110.93</td><td>-----</td><td>-----</td><td>101.97</td><td>32.23</td><td>7.30</td><td>36.57</td><td>6.00</td><td>153</td><td>360 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	110.93	-----	-----	101.97	32.23	7.30	36.57	6.00	153
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.92	70.97	74.00	-3.03	61.94	32.27	7.33	36.57	6.00	153	360 PEAK																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	110.93	-----	-----	101.97	32.23	7.30	36.57	6.00	153	360 PEAK																																																																																									
Avg	 Level (dBuV/m) Frequency (MHz) FCC PART 15C (AVG)						 Level (dBuV/m) Frequency (MHz) FCC PART 15C (AVG)																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>52.79</td><td>54.00</td><td>-1.21</td><td>43.76</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>153</td><td>360 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	52.79	54.00	-1.21	43.76	32.27	7.33	36.57	6.00	153	360 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>101.78</td><td>-----</td><td>-----</td><td>92.82</td><td>32.23</td><td>7.30</td><td>36.57</td><td>6.00</td><td>153</td><td>360 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	101.78	-----	-----	92.82	32.23	7.30	36.57	6.00	153
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.50	52.79	54.00	-1.21	43.76	32.27	7.33	36.57	6.00	153	360 AVERAGE																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	101.78	-----	-----	92.82	32.23	7.30	36.57	6.00	153	360 AVERAGE																																																																																									

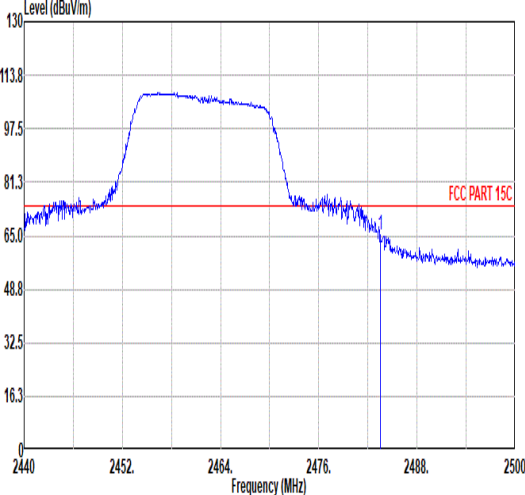
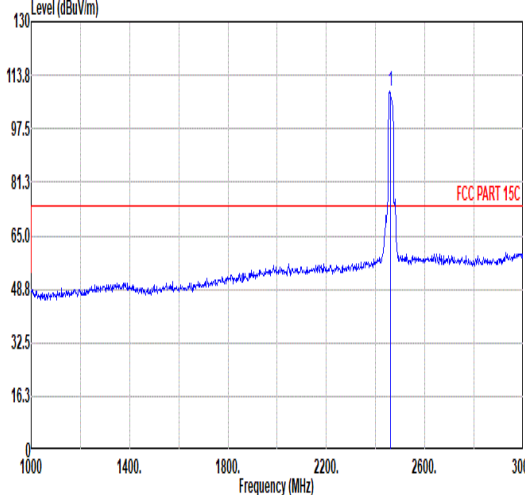
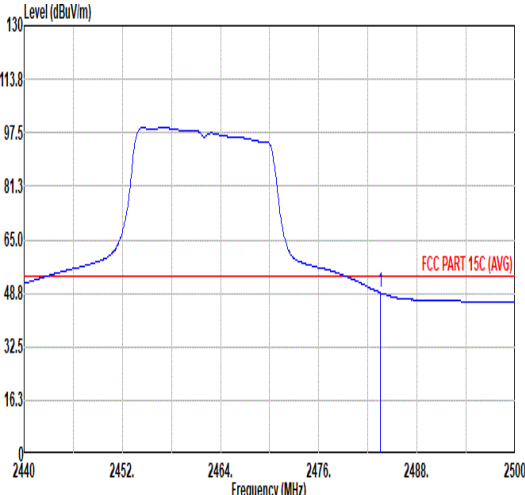
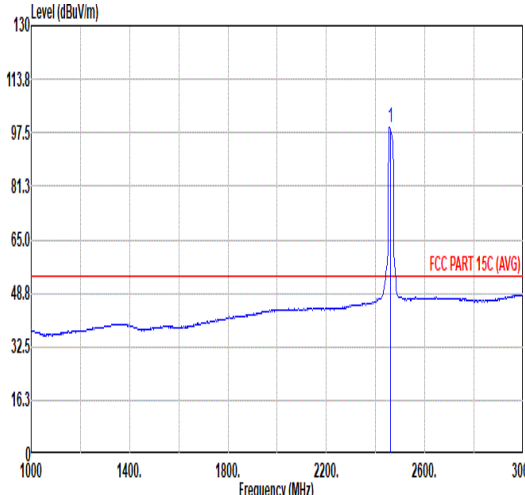


Mode	6																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Vertical					Fundamental																																																																																												
Peak	 <table border="1"> <thead> <tr> <th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr> <tr> <th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr> <td>1</td><td>2483.50</td><td>65.28</td><td>74.00</td><td>-8.72</td><td>56.25</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>342 151 PEAK</td></tr> </tbody> </table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	65.28	74.00	-8.72	56.25	32.27	7.33	36.57	6.00	342 151 PEAK	 <table border="1"> <thead> <tr> <th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr> <tr> <th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr> <td>1</td><td>2462.00</td><td>108.81</td><td>-----</td><td>-----</td><td>99.89</td><td>32.21</td><td>7.28</td><td>36.57</td><td>6.00</td><td>342 151 PEAK</td></tr> </tbody> </table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	108.81	-----	-----	99.89	32.21	7.28	36.57	6.00	342 151 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2483.50	65.28	74.00	-8.72	56.25	32.27	7.33	36.57	6.00	342 151 PEAK																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2462.00	108.81	-----	-----	99.89	32.21	7.28	36.57	6.00	342 151 PEAK																																																																																								
Avg	 <table border="1"> <thead> <tr> <th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr> <tr> <th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr> <td>1</td><td>2483.50</td><td>48.95</td><td>54.00</td><td>-5.05</td><td>39.92</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>342 151 AVERAGE</td></tr> </tbody> </table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	48.95	54.00	-5.05	39.92	32.27	7.33	36.57	6.00	342 151 AVERAGE	 <table border="1"> <thead> <tr> <th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr> <tr> <th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr> <td>1</td><td>2462.00</td><td>99.25</td><td>-----</td><td>-----</td><td>90.32</td><td>32.22</td><td>7.28</td><td>36.57</td><td>6.00</td><td>342 151 AVERAGE</td></tr> </tbody> </table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	99.25	-----	-----	90.32	32.22	7.28	36.57	6.00	342 151 AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2483.50	48.95	54.00	-5.05	39.92	32.27	7.33	36.57	6.00	342 151 AVERAGE																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2462.00	99.25	-----	-----	90.32	32.22	7.28	36.57	6.00	342 151 AVERAGE																																																																																								




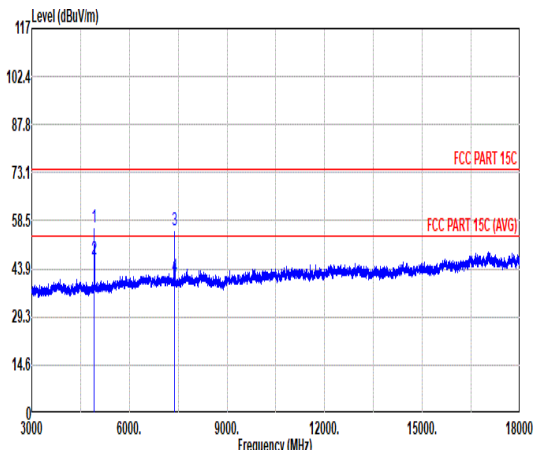


Mode	6																																																																																															
	Harmonic																																																																																															
	2400-2483.5_802.11g_CH11_2462MHz																																																																																															
ANT	1																																																																																															
Pol.	Horizontal																																																																																															
Peak Avg																																																																																																
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>56.32</td><td>74.00</td><td>-17.68</td><td>76.32</td><td>33.90</td><td>10.40</td><td>64.30</td><td>0.00</td><td>100</td><td>244</td><td>PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>46.60</td><td>54.00</td><td>-7.40</td><td>66.60</td><td>33.90</td><td>10.40</td><td>64.30</td><td>0.00</td><td>100</td><td>244</td><td>AVERAGE</td></tr><tr><td>3</td><td>7386.00</td><td>55.78</td><td>74.00</td><td>-18.22</td><td>73.55</td><td>35.57</td><td>12.88</td><td>66.22</td><td>0.00</td><td>134</td><td>207</td><td>PEAK</td></tr><tr><td>4</td><td>7386.00</td><td>41.70</td><td>54.00</td><td>-12.30</td><td>59.46</td><td>35.57</td><td>12.88</td><td>66.21</td><td>0.00</td><td>134</td><td>207</td><td>AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	56.32	74.00	-17.68	76.32	33.90	10.40	64.30	0.00	100	244	PEAK	2	4924.00	46.60	54.00	-7.40	66.60	33.90	10.40	64.30	0.00	100	244	AVERAGE	3	7386.00	55.78	74.00	-18.22	73.55	35.57	12.88	66.22	0.00	134	207	PEAK	4	7386.00	41.70	54.00	-12.30	59.46	35.57	12.88	66.21	0.00	134	207	AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																							
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	4924.00	56.32	74.00	-17.68	76.32	33.90	10.40	64.30	0.00	100	244	PEAK																																																																																				
2	4924.00	46.60	54.00	-7.40	66.60	33.90	10.40	64.30	0.00	100	244	AVERAGE																																																																																				
3	7386.00	55.78	74.00	-18.22	73.55	35.57	12.88	66.22	0.00	134	207	PEAK																																																																																				
4	7386.00	41.70	54.00	-12.30	59.46	35.57	12.88	66.21	0.00	134	207	AVERAGE																																																																																				
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>59.45</td><td>74.00</td><td>-14.55</td><td>79.45</td><td>33.90</td><td>10.40</td><td>64.30</td><td>0.00</td><td>206</td><td>172</td><td>PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>49.28</td><td>54.00</td><td>-4.72</td><td>69.28</td><td>33.90</td><td>10.40</td><td>64.30</td><td>0.00</td><td>206</td><td>172</td><td>AVERAGE</td></tr><tr><td>3</td><td>7386.00</td><td>43.21</td><td>74.00</td><td>-30.79</td><td>60.98</td><td>35.57</td><td>12.88</td><td>66.22</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	59.45	74.00	-14.55	79.45	33.90	10.40	64.30	0.00	206	172	PEAK	2	4924.00	49.28	54.00	-4.72	69.28	33.90	10.40	64.30	0.00	206	172	AVERAGE	3	7386.00	43.21	74.00	-30.79	60.98	35.57	12.88	66.22	0.00	---	---	PEAK														
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	4924.00	59.45	74.00	-14.55	79.45	33.90	10.40	64.30	0.00	206	172	PEAK																																																																																				
2	4924.00	49.28	54.00	-4.72	69.28	33.90	10.40	64.30	0.00	206	172	AVERAGE																																																																																				
3	7386.00	43.21	74.00	-30.79	60.98	35.57	12.88	66.22	0.00	---	---	PEAK																																																																																				
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>59.45</td><td>74.00</td><td>-14.55</td><td>79.45</td><td>33.90</td><td>10.40</td><td>64.30</td><td>0.00</td><td>206</td><td>172</td><td>PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>49.28</td><td>54.00</td><td>-4.72</td><td>69.28</td><td>33.90</td><td>10.40</td><td>64.30</td><td>0.00</td><td>206</td><td>172</td><td>AVERAGE</td></tr><tr><td>3</td><td>7386.00</td><td>43.21</td><td>74.00</td><td>-30.79</td><td>60.98</td><td>35.57</td><td>12.88</td><td>66.22</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	59.45	74.00	-14.55	79.45	33.90	10.40	64.30	0.00	206	172	PEAK	2	4924.00	49.28	54.00	-4.72	69.28	33.90	10.40	64.30	0.00	206	172	AVERAGE	3	7386.00	43.21	74.00	-30.79	60.98	35.57	12.88	66.22	0.00	---	---	PEAK														
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	4924.00	59.45	74.00	-14.55	79.45	33.90	10.40	64.30	0.00	206	172	PEAK																																																																																				
2	4924.00	49.28	54.00	-4.72	69.28	33.90	10.40	64.30	0.00	206	172	AVERAGE																																																																																				
3	7386.00	43.21	74.00	-30.79	60.98	35.57	12.88	66.22	0.00	---	---	PEAK																																																																																				

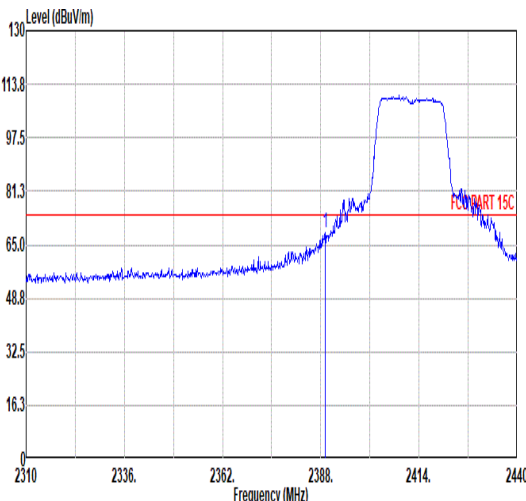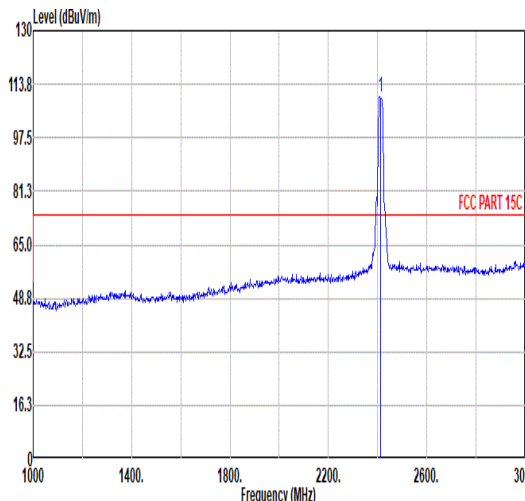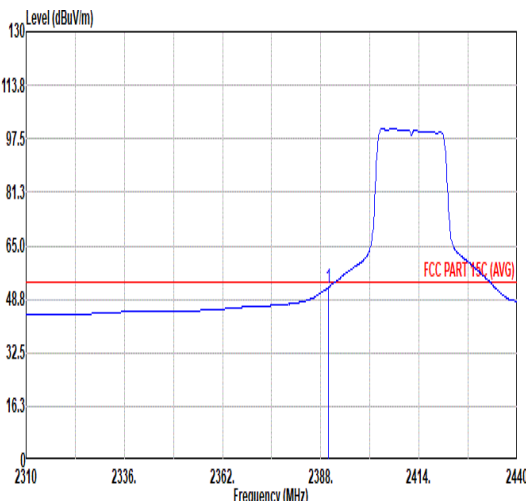
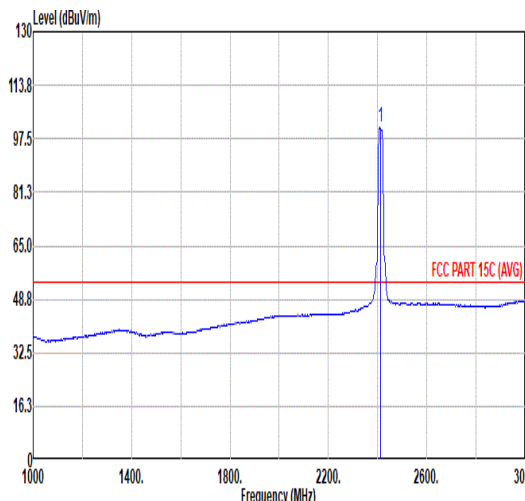


Mode	7																																																																																																						
	Band Edge																																																																																																						
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																																																																																						
ANT	1																																																																																																						
Pol.	Horizontal						Fundamental																																																																																																
Peak																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.17</td><td>68.44</td><td>74.00</td><td>-5.56</td><td>59.97</td><td>31.91</td><td>7.16</td><td>36.60</td><td>6.00</td><td>185</td><td>360</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.17	68.44	74.00	-5.56	59.97	31.91	7.16	36.60	6.00	185	360	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>110.04</td><td>-----</td><td>-----</td><td>101.40</td><td>32.03</td><td>7.19</td><td>36.58</td><td>6.00</td><td>185</td><td>360</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	110.04	-----	-----	101.40	32.03	7.19	36.58	6.00	185	360
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2389.17	68.44	74.00	-5.56	59.97	31.91	7.16	36.60	6.00	185	360	PEAK																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2412.00	110.04	-----	-----	101.40	32.03	7.19	36.58	6.00	185	360	PEAK																																																																																											
Avg																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>52.23</td><td>54.00</td><td>-1.77</td><td>43.74</td><td>31.92</td><td>7.16</td><td>36.59</td><td>6.00</td><td>185</td><td>360</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	52.23	54.00	-1.77	43.74	31.92	7.16	36.59	6.00	185	360	AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>100.87</td><td>-----</td><td>-----</td><td>92.23</td><td>32.03</td><td>7.19</td><td>36.58</td><td>6.00</td><td>185</td><td>360</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	100.87	-----	-----	92.23	32.03	7.19	36.58	6.00	185	360
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2389.95	52.23	54.00	-1.77	43.74	31.92	7.16	36.59	6.00	185	360	AVERAGE																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2412.00	100.87	-----	-----	92.23	32.03	7.19	36.58	6.00	185	360	AVERAGE																																																																																											

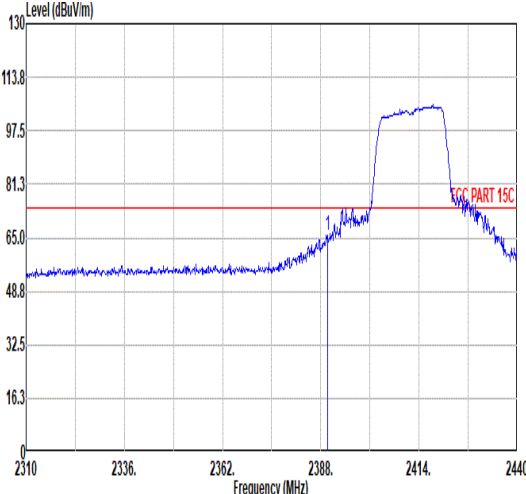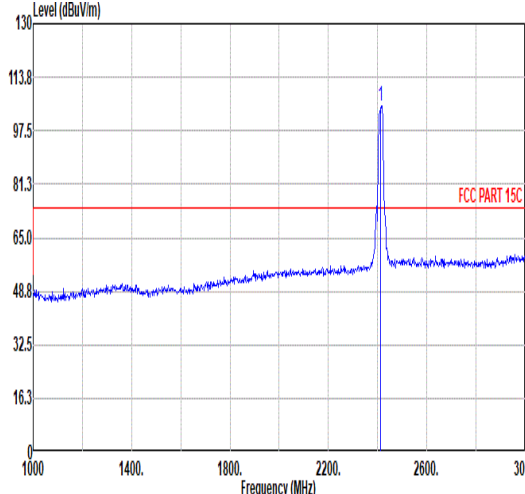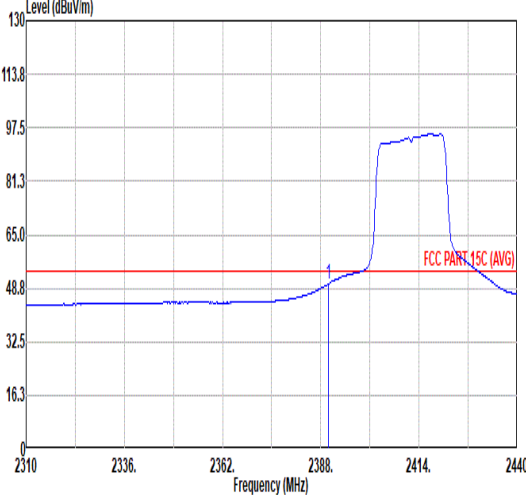
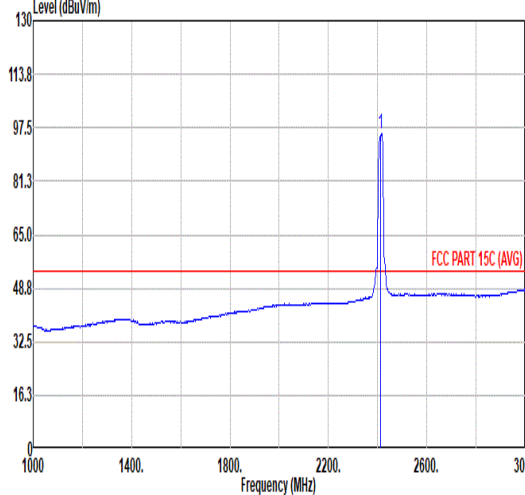


Mode	7																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>65.96</td><td>74.00</td><td>-8.04</td><td>57.47</td><td>31.92</td><td>7.16</td><td>36.59</td><td>6.00</td><td>115</td><td>130 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	65.96	74.00	-8.04	57.47	31.92	7.16	36.59	6.00	115	130 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>104.99</td><td>-----</td><td>-----</td><td>96.30</td><td>32.06</td><td>7.21</td><td>36.58</td><td>6.00</td><td>115</td><td>130 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	104.99	-----	-----	96.30	32.06	7.21	36.58	6.00	115
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.82	65.96	74.00	-8.04	57.47	31.92	7.16	36.59	6.00	115	130 PEAK																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2412.00	104.99	-----	-----	96.30	32.06	7.21	36.58	6.00	115	130 PEAK																																																																																									
Avg																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>49.94</td><td>54.00</td><td>-4.06</td><td>41.45</td><td>31.92</td><td>7.16</td><td>36.59</td><td>6.00</td><td>115</td><td>130 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	49.94	54.00	-4.06	41.45	31.92	7.16	36.59	6.00	115	130 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>95.81</td><td>-----</td><td>-----</td><td>87.12</td><td>32.06</td><td>7.21</td><td>36.58</td><td>6.00</td><td>115</td><td>130 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	95.81	-----	-----	87.12	32.06	7.21	36.58	6.00	115
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.95	49.94	54.00	-4.06	41.45	31.92	7.16	36.59	6.00	115	130 AVERAGE																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2412.00	95.81	-----	-----	87.12	32.06	7.21	36.58	6.00	115	130 AVERAGE																																																																																									



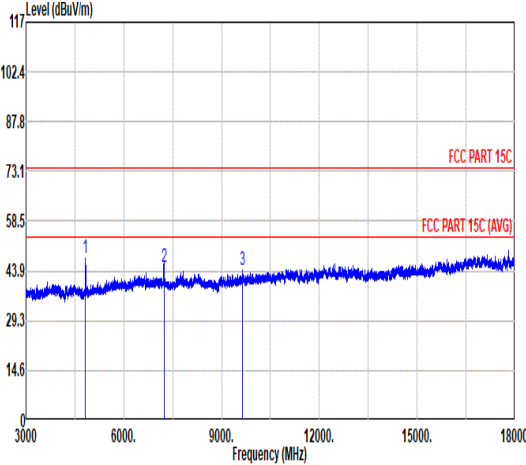
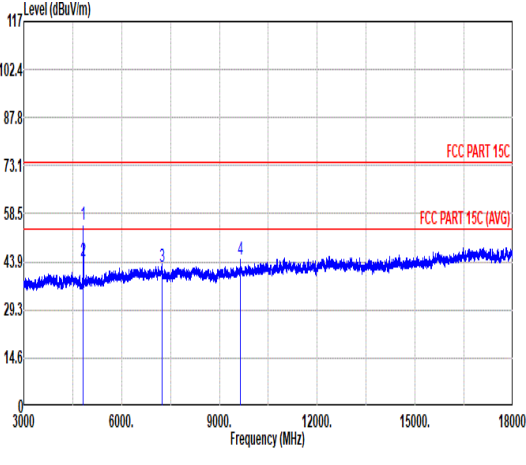


		7																																																																																											
Mode		Harmonic																																																																																											
		2400-2483.5_802.11n_HT20_CH01_2412MHz																																																																																											
ANT		1																																																																																											
Pol.		Horizontal																																																																																											
Peak Avg																																																																																													
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>4822.50</td><td>47.80</td><td>74.00</td><td>-26.20</td><td>67.93</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>7236.00</td><td>44.89</td><td>77.16</td><td>-32.27</td><td>62.61</td><td>35.60</td><td>12.66</td><td>65.98</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>3</td><td>9648.00</td><td>44.35</td><td>77.16</td><td>-32.81</td><td>60.05</td><td>36.70</td><td>14.81</td><td>67.21</td><td>0.00</td><td>---</td><td>--- Peak</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	4822.50	47.80	74.00	-26.20	67.93	33.80	10.29	64.22	0.00	---	--- PEAK	2	7236.00	44.89	77.16	-32.27	62.61	35.60	12.66	65.98	0.00	---	--- Peak	3	9648.00	44.35	77.16	-32.81	60.05	36.70	14.81	67.21	0.00	---	--- Peak												
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1	4822.50	47.80	74.00	-26.20	67.93	33.80	10.29	64.22	0.00	---	--- PEAK																																																																																		
2	7236.00	44.89	77.16	-32.27	62.61	35.60	12.66	65.98	0.00	---	--- Peak																																																																																		
3	9648.00	44.35	77.16	-32.81	60.05	36.70	14.81	67.21	0.00	---	--- Peak																																																																																		
																																																																																													
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>4824.00</td><td>55.10</td><td>74.00</td><td>-18.90</td><td>75.23</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>104</td><td>242 PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>44.11</td><td>54.00</td><td>-9.89</td><td>64.24</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>104</td><td>242 AVERAGE</td></tr><tr><td>3</td><td>7236.00</td><td>42.37</td><td>81.78</td><td>-39.41</td><td>60.09</td><td>35.60</td><td>12.66</td><td>65.98</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>4</td><td>9648.00</td><td>44.73</td><td>81.78</td><td>-37.05</td><td>60.43</td><td>36.70</td><td>14.81</td><td>67.21</td><td>0.00</td><td>---</td><td>--- Peak</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	4824.00	55.10	74.00	-18.90	75.23	33.80	10.29	64.22	0.00	104	242 PEAK	2	4824.00	44.11	54.00	-9.89	64.24	33.80	10.29	64.22	0.00	104	242 AVERAGE	3	7236.00	42.37	81.78	-39.41	60.09	35.60	12.66	65.98	0.00	---	--- Peak	4	9648.00	44.73	81.78	-37.05	60.43	36.70	14.81	67.21	0.00	---	--- Peak
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1	4824.00	55.10	74.00	-18.90	75.23	33.80	10.29	64.22	0.00	104	242 PEAK																																																																																		
2	4824.00	44.11	54.00	-9.89	64.24	33.80	10.29	64.22	0.00	104	242 AVERAGE																																																																																		
3	7236.00	42.37	81.78	-39.41	60.09	35.60	12.66	65.98	0.00	---	--- Peak																																																																																		
4	9648.00	44.73	81.78	-37.05	60.43	36.70	14.81	67.21	0.00	---	--- Peak																																																																																		



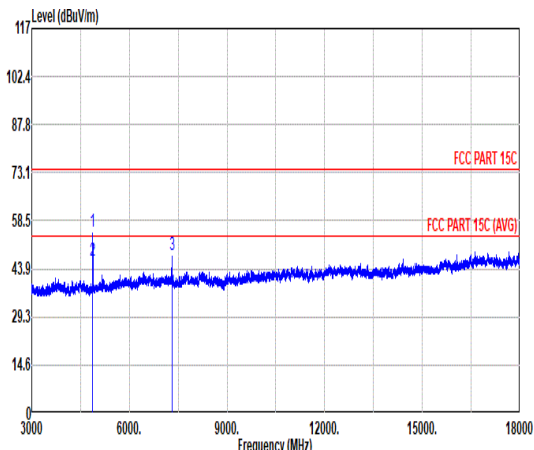
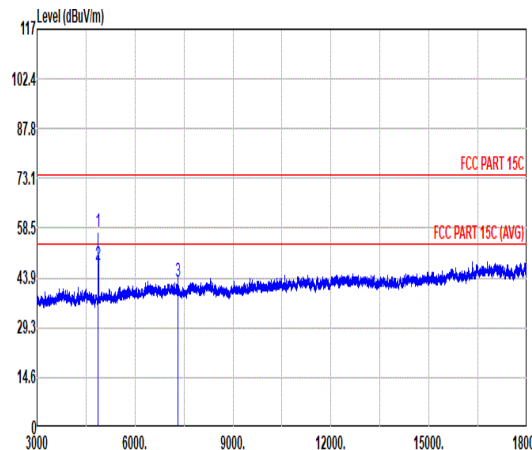


Mode	8																																																																																																																																																																
	Harmonic																																																																																																																																																																
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																																																																																																																																
ANT	1																																																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																																																										
Peak Avg																																																																																																																																																																	
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>55.16</td><td>74.00</td><td>-18.84</td><td>75.24</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>145</td><td>177 PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>46.16</td><td>54.00</td><td>-7.84</td><td>66.24</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>145</td><td>177 AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>48.22</td><td>74.00</td><td>-25.78</td><td>65.96</td><td>35.58</td><td>12.78</td><td>66.10</td><td>0.00</td><td>145</td><td>177 PEAK</td></tr><tr><td>4</td><td>7311.00</td><td>36.72</td><td>54.00</td><td>-17.28</td><td>54.46</td><td>35.58</td><td>12.78</td><td>66.10</td><td>0.00</td><td>145</td><td>177 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	55.16	74.00	-18.84	75.24	33.85	10.34	64.27	0.00	145	177 PEAK	2	4874.00	46.16	54.00	-7.84	66.24	33.85	10.34	64.27	0.00	145	177 AVERAGE	3	7311.00	48.22	74.00	-25.78	65.96	35.58	12.78	66.10	0.00	145	177 PEAK	4	7311.00	36.72	54.00	-17.28	54.46	35.58	12.78	66.10	0.00	145	177 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>57.34</td><td>74.00</td><td>-16.66</td><td>77.42</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>271</td><td>174 PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>47.75</td><td>54.00</td><td>-6.25</td><td>67.83</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>271</td><td>174 AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>42.84</td><td>74.00</td><td>-31.16</td><td>60.58</td><td>35.58</td><td>12.78</td><td>66.10</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	57.34	74.00	-16.66	77.42	33.85	10.34	64.27	0.00	271	174 PEAK	2	4874.00	47.75	54.00	-6.25	67.83	33.85	10.34	64.27	0.00	271	174 AVERAGE	3	7311.00	42.84	74.00	-31.16	60.58	35.58	12.78	66.10	0.00	---	---	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																							
1	4874.00	55.16	74.00	-18.84	75.24	33.85	10.34	64.27	0.00	145	177 PEAK																																																																																																																																																						
2	4874.00	46.16	54.00	-7.84	66.24	33.85	10.34	64.27	0.00	145	177 AVERAGE																																																																																																																																																						
3	7311.00	48.22	74.00	-25.78	65.96	35.58	12.78	66.10	0.00	145	177 PEAK																																																																																																																																																						
4	7311.00	36.72	54.00	-17.28	54.46	35.58	12.78	66.10	0.00	145	177 AVERAGE																																																																																																																																																						
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																							
1	4874.00	57.34	74.00	-16.66	77.42	33.85	10.34	64.27	0.00	271	174 PEAK																																																																																																																																																						
2	4874.00	47.75	54.00	-6.25	67.83	33.85	10.34	64.27	0.00	271	174 AVERAGE																																																																																																																																																						
3	7311.00	42.84	74.00	-31.16	60.58	35.58	12.78	66.10	0.00	---	---	PEAK																																																																																																																																																					

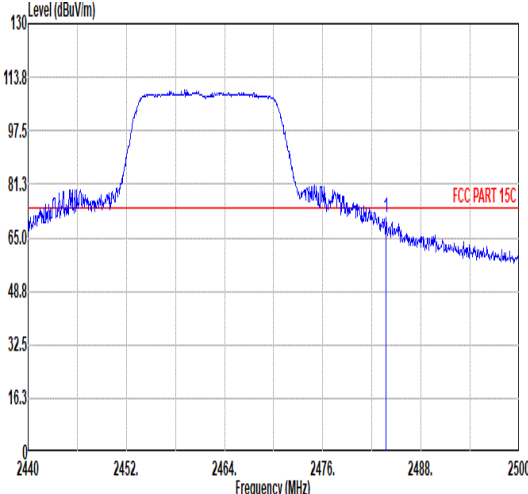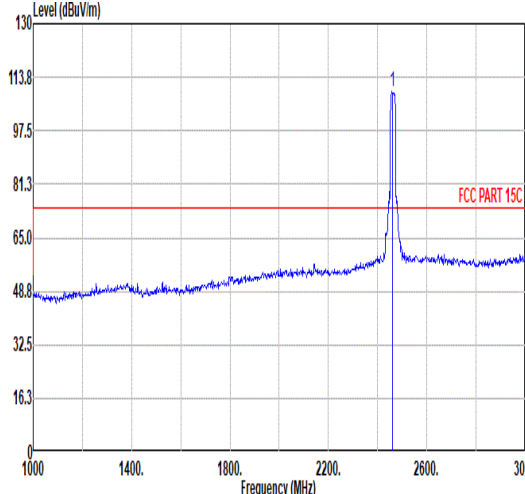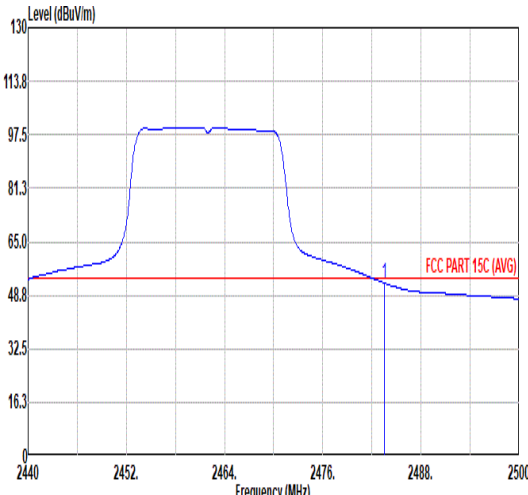
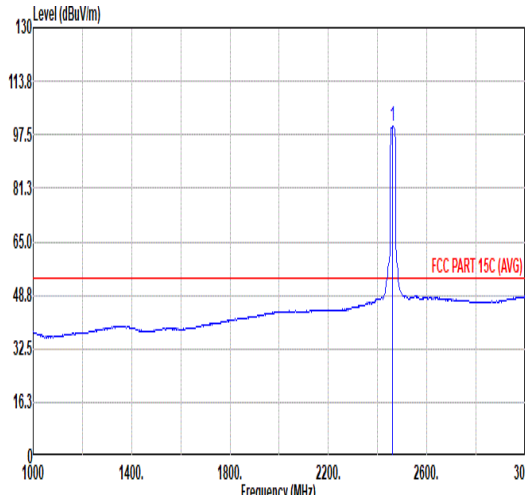


		9																																																																																															
Mode		Band Edge																																																																																															
		2400-2483.5_802.11n_HT20_CH11_2462MHz																																																																																															
ANT		1																																																																																															
Pol.		Horizontal					Fundamental																																																																																										
Peak																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.74</td><td>70.96</td><td>74.00</td><td>-3.04</td><td>61.93</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>100</td><td>360</td><td>PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.74	70.96	74.00	-3.04	61.93	32.27	7.33	36.57	6.00	100	360	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>109.15</td><td>-----</td><td>-----</td><td>100.22</td><td>32.22</td><td>7.28</td><td>36.57</td><td>6.00</td><td>100</td><td>360</td><td>PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	109.15	-----	-----	100.22	32.22	7.28	36.57	6.00	100	360
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2483.74	70.96	74.00	-3.04	61.93	32.27	7.33	36.57	6.00	100	360	PEAK																																																																																					
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2462.00	109.15	-----	-----	100.22	32.22	7.28	36.57	6.00	100	360	PEAK																																																																																					
Avg																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>52.50</td><td>54.00</td><td>-1.50</td><td>43.47</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>100</td><td>360</td><td>AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	52.50	54.00	-1.50	43.47	32.27	7.33	36.57	6.00	100	360	AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>99.98</td><td>-----</td><td>-----</td><td>91.04</td><td>32.22</td><td>7.29</td><td>36.57</td><td>6.00</td><td>100</td><td>360</td><td>AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	99.98	-----	-----	91.04	32.22	7.29	36.57	6.00	100	360
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2483.50	52.50	54.00	-1.50	43.47	32.27	7.33	36.57	6.00	100	360	AVERAGE																																																																																					
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2462.00	99.98	-----	-----	91.04	32.22	7.29	36.57	6.00	100	360	AVERAGE																																																																																					

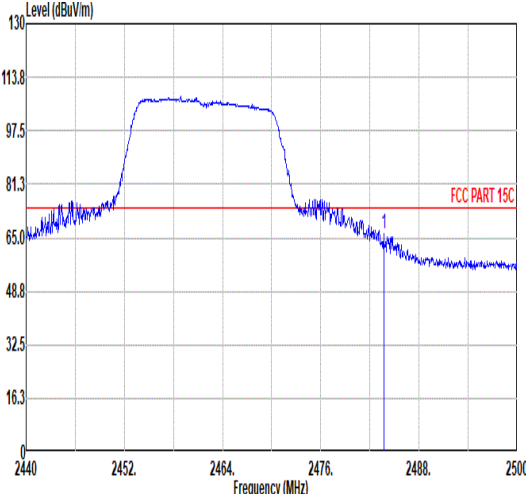
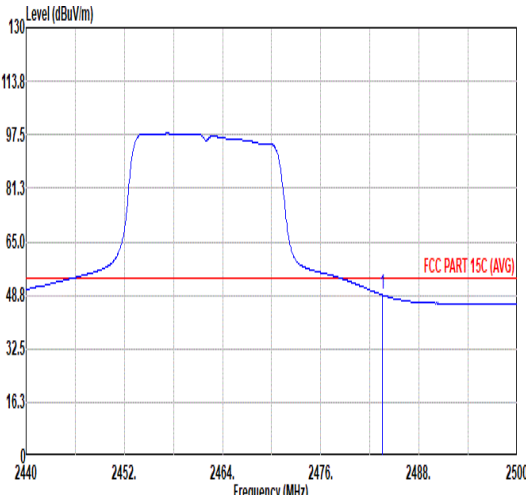
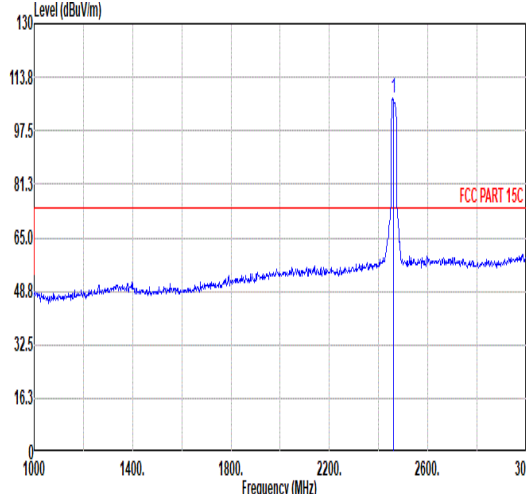
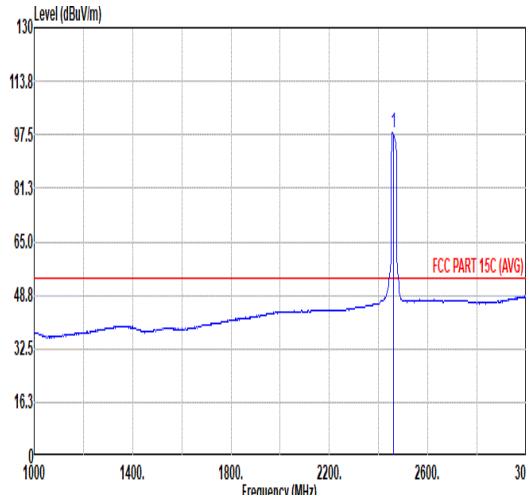


Mode	9																																																											
	Band Edge																																																											
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																											
ANT	1																																																											
Pol.	Vertical						Fundamental																																																					
Peak																																																												
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.68</td><td>66.25</td><td>74.00</td><td>-7.75</td><td>57.22</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>344</td><td>154 PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.68	66.25	74.00	-7.75	57.22	32.27	7.33	36.57	6.00	344	154 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																	
1	2483.68	66.25	74.00	-7.75	57.22	32.27	7.33	36.57	6.00	344	154 PEAK																																																	
Avg																																																												
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>48.90</td><td>54.00</td><td>-5.10</td><td>39.87</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>344</td><td>154 AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.50	48.90	54.00	-5.10	39.87	32.27	7.33	36.57	6.00	344	154 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																	
1	2483.50	48.90	54.00	-5.10	39.87	32.27	7.33	36.57	6.00	344	154 AVERAGE																																																	
Peak																																																												
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>107.30</td><td>-----</td><td>-----</td><td>98.37</td><td>32.22</td><td>7.28</td><td>36.57</td><td>6.00</td><td>344</td><td>154 PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2462.00	107.30	-----	-----	98.37	32.22	7.28	36.57	6.00	344	154 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																	
1	2462.00	107.30	-----	-----	98.37	32.22	7.28	36.57	6.00	344	154 PEAK																																																	
Avg																																																												
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>98.18</td><td>-----</td><td>-----</td><td>89.25</td><td>32.22</td><td>7.28</td><td>36.57</td><td>6.00</td><td>344</td><td>154 AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2462.00	98.18	-----	-----	89.25	32.22	7.28	36.57	6.00	344	154 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																	
1	2462.00	98.18	-----	-----	89.25	32.22	7.28	36.57	6.00	344	154 AVERAGE																																																	

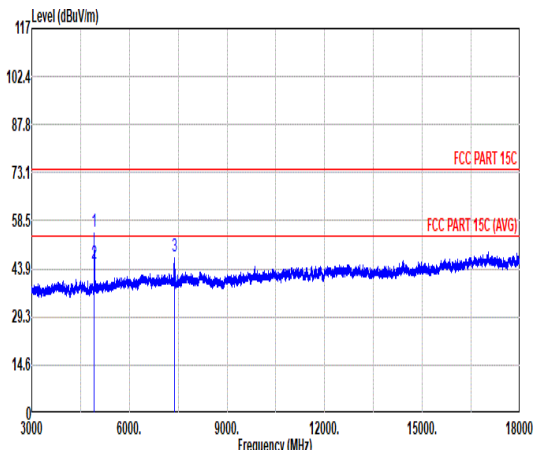
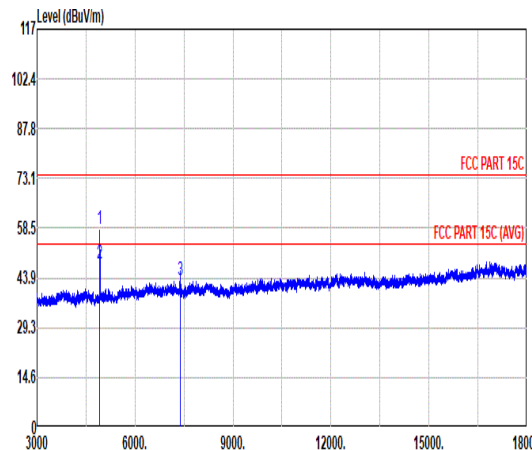


Mode	9																																																																																																																																																																						
	Harmonic																																																																																																																																																																						
	2400-2483.5_802.11n_HT20_CH11_2462MHz																																																																																																																																																																						
ANT	1																																																																																																																																																																						
Pol.	Horizontal						Vertical																																																																																																																																																																
Peak Avg																																																																																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>55.38</td><td>74.00</td><td>-18.62</td><td>75.38</td><td>33.90</td><td>10.40</td><td>64.30</td><td>0.00</td><td>100</td><td>247</td><td>PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>45.51</td><td>54.00</td><td>-8.49</td><td>65.51</td><td>33.90</td><td>10.40</td><td>64.30</td><td>0.00</td><td>100</td><td>247</td><td>AVERAGE</td></tr><tr><td>3</td><td>7386.00</td><td>47.78</td><td>74.00</td><td>-26.22</td><td>65.55</td><td>35.57</td><td>12.88</td><td>66.22</td><td>0.00</td><td>100</td><td>247</td><td>PEAK</td></tr><tr><td>4</td><td>7386.00</td><td>36.24</td><td>54.00</td><td>-17.76</td><td>54.00</td><td>35.57</td><td>12.88</td><td>66.21</td><td>0.00</td><td>100</td><td>247</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	55.38	74.00	-18.62	75.38	33.90	10.40	64.30	0.00	100	247	PEAK	2	4924.00	45.51	54.00	-8.49	65.51	33.90	10.40	64.30	0.00	100	247	AVERAGE	3	7386.00	47.78	74.00	-26.22	65.55	35.57	12.88	66.22	0.00	100	247	PEAK	4	7386.00	36.24	54.00	-17.76	54.00	35.57	12.88	66.21	0.00	100	247	AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>58.37</td><td>74.00</td><td>-15.63</td><td>78.37</td><td>33.90</td><td>10.40</td><td>64.30</td><td>0.00</td><td>286</td><td>173</td><td>PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>47.98</td><td>54.00</td><td>-6.02</td><td>67.98</td><td>33.90</td><td>10.40</td><td>64.30</td><td>0.00</td><td>286</td><td>173</td><td>AVERAGE</td></tr><tr><td>3</td><td>7386.00</td><td>43.09</td><td>74.00</td><td>-30.91</td><td>60.86</td><td>35.57</td><td>12.88</td><td>66.22</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	58.37	74.00	-15.63	78.37	33.90	10.40	64.30	0.00	286	173	PEAK	2	4924.00	47.98	54.00	-6.02	67.98	33.90	10.40	64.30	0.00	286	173	AVERAGE	3	7386.00	43.09	74.00	-30.91	60.86	35.57	12.88	66.22	0.00	---	---
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																													
1	4924.00	55.38	74.00	-18.62	75.38	33.90	10.40	64.30	0.00	100	247	PEAK																																																																																																																																																											
2	4924.00	45.51	54.00	-8.49	65.51	33.90	10.40	64.30	0.00	100	247	AVERAGE																																																																																																																																																											
3	7386.00	47.78	74.00	-26.22	65.55	35.57	12.88	66.22	0.00	100	247	PEAK																																																																																																																																																											
4	7386.00	36.24	54.00	-17.76	54.00	35.57	12.88	66.21	0.00	100	247	AVERAGE																																																																																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																													
1	4924.00	58.37	74.00	-15.63	78.37	33.90	10.40	64.30	0.00	286	173	PEAK																																																																																																																																																											
2	4924.00	47.98	54.00	-6.02	67.98	33.90	10.40	64.30	0.00	286	173	AVERAGE																																																																																																																																																											
3	7386.00	43.09	74.00	-30.91	60.86	35.57	12.88	66.22	0.00	---	---	PEAK																																																																																																																																																											

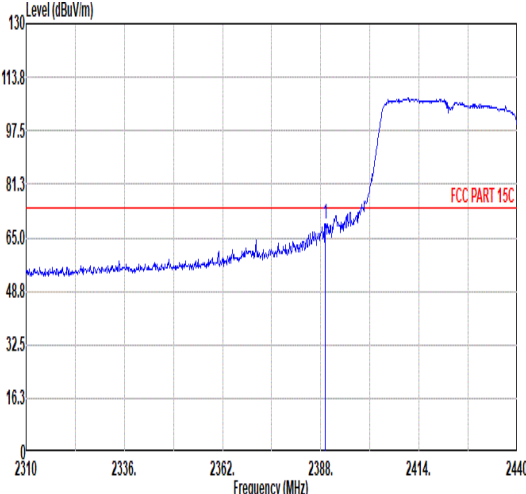
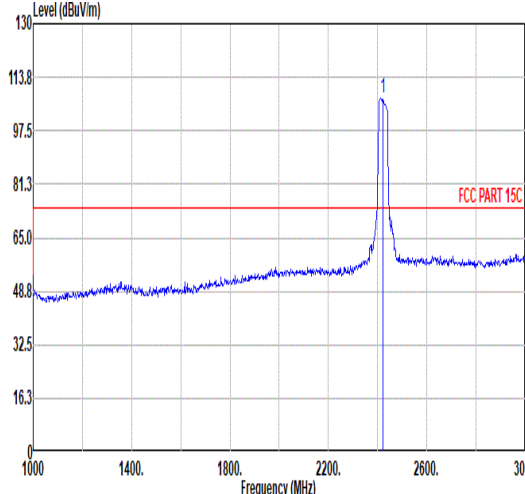
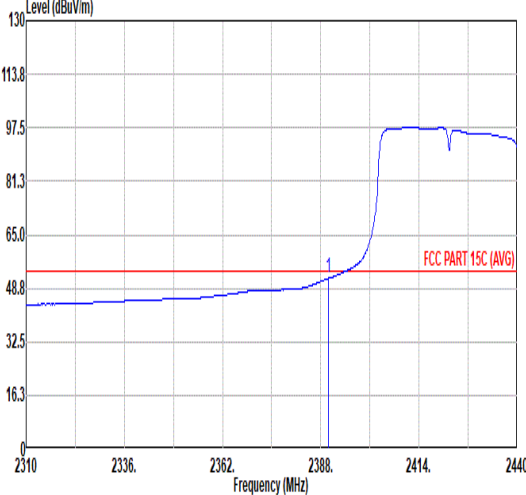
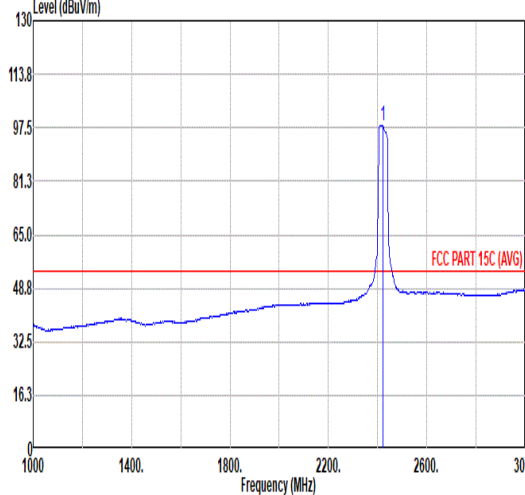


Mode	10																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_802.11n HT40_CH3_2422MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal					Fundamental																																																																																													
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.17</td><td>69.21</td><td>74.00</td><td>-4.79</td><td>60.74</td><td>31.91</td><td>7.16</td><td>36.60</td><td>6.00</td><td>186</td><td>19 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.17	69.21	74.00	-4.79	60.74	31.91	7.16	36.60	6.00	186	19 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>107.22</td><td>-----</td><td>-----</td><td>98.55</td><td>32.05</td><td>7.20</td><td>36.58</td><td>6.00</td><td>186</td><td>19 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	107.22	-----	-----	98.55	32.05	7.20	36.58	6.00	186
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.17	69.21	74.00	-4.79	60.74	31.91	7.16	36.60	6.00	186	19 PEAK																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2422.00	107.22	-----	-----	98.55	32.05	7.20	36.58	6.00	186	19 PEAK																																																																																								
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>52.18</td><td>54.00</td><td>-1.82</td><td>43.69</td><td>31.92</td><td>7.16</td><td>36.59</td><td>6.00</td><td>186</td><td>19 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	52.18	54.00	-1.82	43.69	31.92	7.16	36.59	6.00	186	19 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>98.33</td><td>-----</td><td>-----</td><td>89.66</td><td>32.05</td><td>7.20</td><td>36.58</td><td>6.00</td><td>186</td><td>19 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	98.33	-----	-----	89.66	32.05	7.20	36.58	6.00	186
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.95	52.18	54.00	-1.82	43.69	31.92	7.16	36.59	6.00	186	19 AVERAGE																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2422.00	98.33	-----	-----	89.66	32.05	7.20	36.58	6.00	186	19 AVERAGE																																																																																								

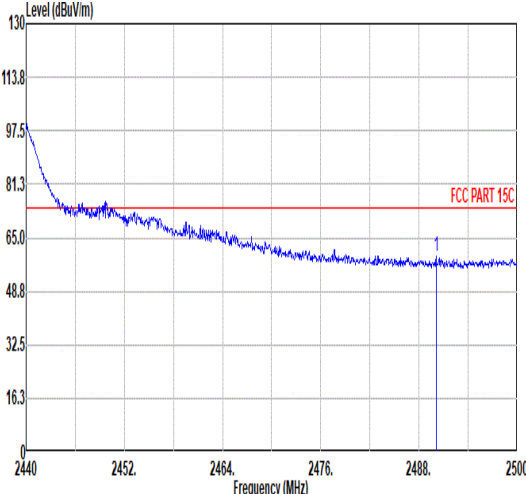
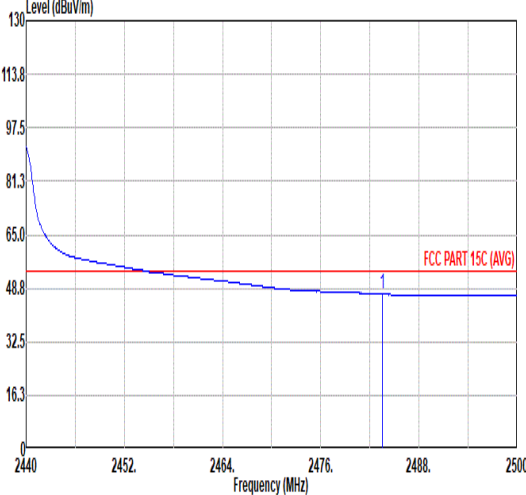


Mode	10																																																					
	Band Edge - R																																																					
	2400-2483.5_802.11n HT40_CH3_2422MHz																																																					
ANT	1																																																					
Pol.	Horizontal										Fundamental																																											
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2490.10</td><td>59.41</td><td>74.00</td><td>-14.59</td><td>50.36</td><td>32.28</td><td>7.34</td><td>36.57</td><td>6.00</td><td>186</td><td>19 PEAK</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2490.10	59.41	74.00	-14.59	50.36	32.28	7.34	36.57	6.00	186	19 PEAK	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2490.10	59.41	74.00	-14.59	50.36	32.28	7.34	36.57	6.00	186	19 PEAK																																											
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>46.97</td><td>54.00</td><td>-7.03</td><td>37.94</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>186</td><td>19 AVERAGE</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	46.97	54.00	-7.03	37.94	32.27	7.33	36.57	6.00	186	19 AVERAGE	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2483.50	46.97	54.00	-7.03	37.94	32.27	7.33	36.57	6.00	186	19 AVERAGE																																											

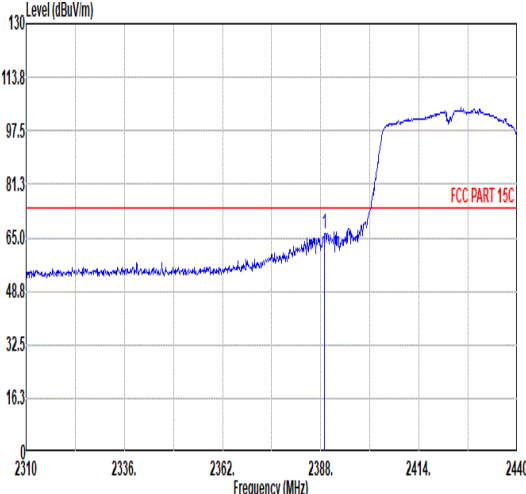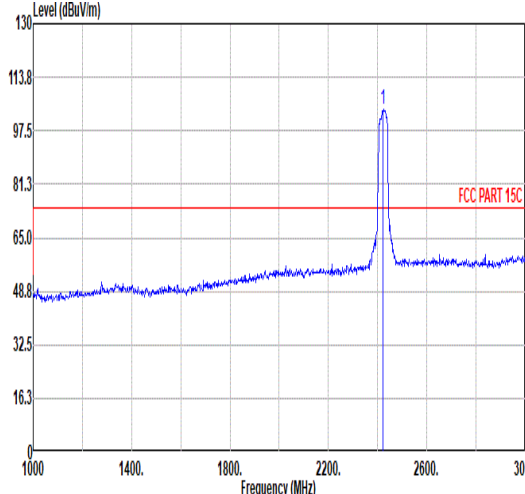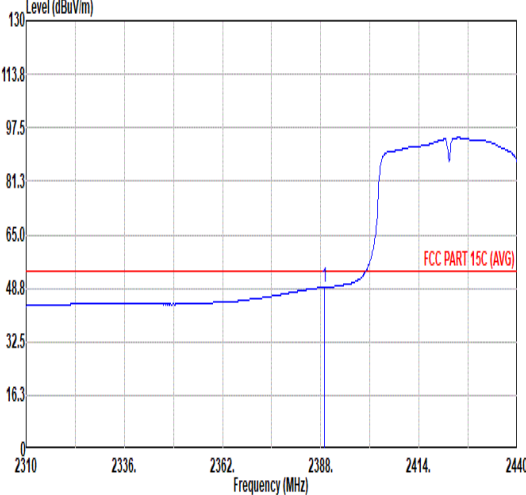
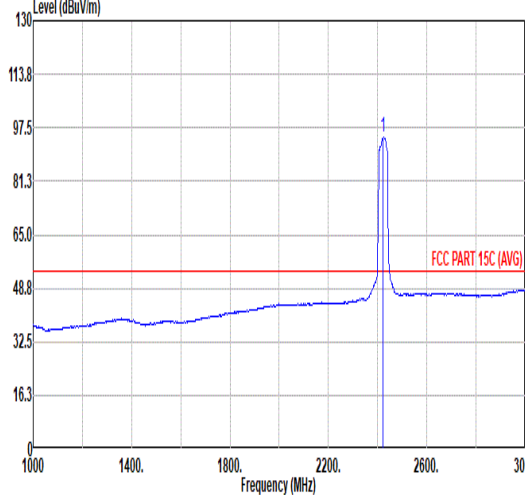


Mode	10																																																																																																				
	Band Edge - L																																																																																																				
	2400-2483.5_802.11n HT40_CH3_2422MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Vertical						Fundamental																																																																																														
Peak																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.04</td><td>66.27</td><td>74.00</td><td>-7.73</td><td>57.80</td><td>31.91</td><td>7.16</td><td>36.60</td><td>6.00</td><td>309</td><td>144 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.04	66.27	74.00	-7.73	57.80	31.91	7.16	36.60	6.00	309	144 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>104.05</td><td>-----</td><td>-----</td><td>95.31</td><td>32.10</td><td>7.22</td><td>36.58</td><td>6.00</td><td>309</td><td>144 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	104.05	-----	-----	95.31	32.10	7.22	36.58	6.00	309
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2389.04	66.27	74.00	-7.73	57.80	31.91	7.16	36.60	6.00	309	144 PEAK																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2422.00	104.05	-----	-----	95.31	32.10	7.22	36.58	6.00	309	144 PEAK																																																																																										
Avg																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.91</td><td>49.08</td><td>54.00</td><td>-4.92</td><td>40.61</td><td>31.91</td><td>7.16</td><td>36.60</td><td>6.00</td><td>309</td><td>144 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.91	49.08	54.00	-4.92	40.61	31.91	7.16	36.60	6.00	309	144 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>94.70</td><td>-----</td><td>-----</td><td>85.96</td><td>32.10</td><td>7.22</td><td>36.58</td><td>6.00</td><td>309</td><td>144 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	94.70	-----	-----	85.96	32.10	7.22	36.58	6.00	309
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2388.91	49.08	54.00	-4.92	40.61	31.91	7.16	36.60	6.00	309	144 AVERAGE																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2422.00	94.70	-----	-----	85.96	32.10	7.22	36.58	6.00	309	144 AVERAGE																																																																																										

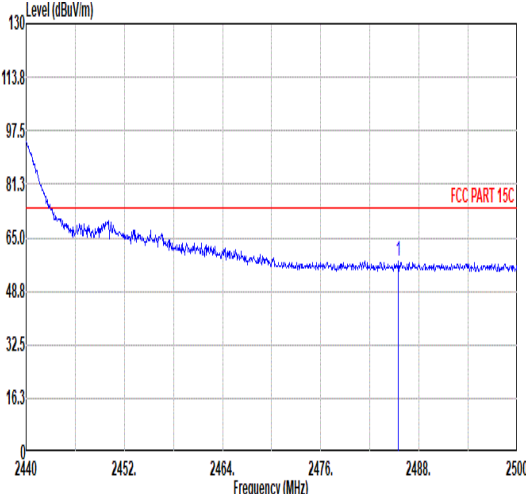
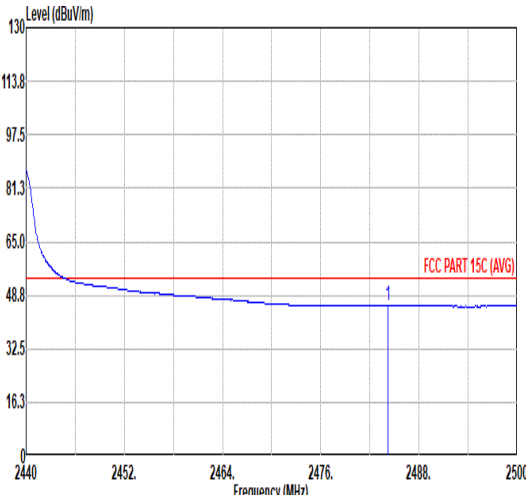


Mode	10																																																									
	Band Edge - R																																																									
	2400-2483.5_802.11n HT40_CH3_2422MHz																																																									
ANT	1																																																									
Pol.	Vertical						Fundamental																																																			
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.48</td><td>57.73</td><td>74.00</td><td>-16.27</td><td>48.70</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>309</td><td>144</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.48	57.73	74.00	-16.27	48.70	32.27	7.33	36.57	6.00	309	144	PEAK	Blank					
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																
1	2485.48	57.73	74.00	-16.27	48.70	32.27	7.33	36.57	6.00	309	144	PEAK																																														
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.16</td><td>45.59</td><td>54.00</td><td>-8.41</td><td>36.56</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>309</td><td>144</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.16	45.59	54.00	-8.41	36.56	32.27	7.33	36.57	6.00	309	144	AVERAGE	Blank					
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																
1	2484.16	45.59	54.00	-8.41	36.56	32.27	7.33	36.57	6.00	309	144	AVERAGE																																														



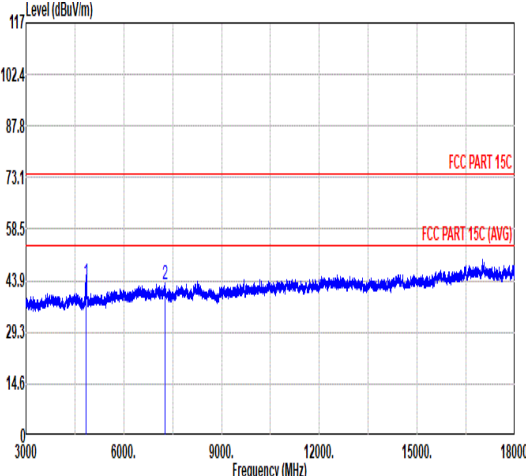
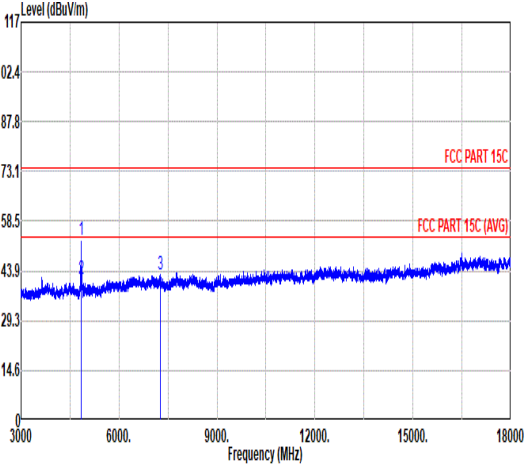


Mode	10																																																																															
	Harmonic																																																																															
	2400-2483.5_802.11n HT40_CH3_2422MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal																																																																															
Peak Avg																																																																																
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4844.00</td><td>43.20</td><td>74.00</td><td>-30.80</td><td>63.33</td><td>33.80</td><td>10.31</td><td>64.24</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>7266.00</td><td>42.85</td><td>74.00</td><td>-31.15</td><td>60.57</td><td>35.60</td><td>12.71</td><td>66.03</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4844.00	43.20	74.00	-30.80	63.33	33.80	10.31	64.24	0.00	---	--- PEAK	2	7266.00	42.85	74.00	-31.15	60.57	35.60	12.71	66.03	0.00	---	--- PEAK												
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																						
1	4844.00	43.20	74.00	-30.80	63.33	33.80	10.31	64.24	0.00	---	--- PEAK																																																																					
2	7266.00	42.85	74.00	-31.15	60.57	35.60	12.71	66.03	0.00	---	--- PEAK																																																																					
Vertical																																																																																
																																																																																
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4844.00</td><td>52.77</td><td>74.00</td><td>-21.23</td><td>72.90</td><td>33.80</td><td>10.31</td><td>64.24</td><td>0.00</td><td>314</td><td>171 PEAK</td></tr><tr><td>2</td><td>4844.00</td><td>41.71</td><td>54.00</td><td>-12.29</td><td>61.84</td><td>33.80</td><td>10.31</td><td>64.24</td><td>0.00</td><td>314</td><td>171 AVERAGE</td></tr><tr><td>3</td><td>7266.00</td><td>42.67</td><td>74.00</td><td>-31.33</td><td>60.39</td><td>35.60</td><td>12.71</td><td>66.03</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4844.00	52.77	74.00	-21.23	72.90	33.80	10.31	64.24	0.00	314	171 PEAK	2	4844.00	41.71	54.00	-12.29	61.84	33.80	10.31	64.24	0.00	314	171 AVERAGE	3	7266.00	42.67	74.00	-31.33	60.39	35.60	12.71	66.03	0.00	---	--- PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																						
1	4844.00	52.77	74.00	-21.23	72.90	33.80	10.31	64.24	0.00	314	171 PEAK																																																																					
2	4844.00	41.71	54.00	-12.29	61.84	33.80	10.31	64.24	0.00	314	171 AVERAGE																																																																					
3	7266.00	42.67	74.00	-31.33	60.39	35.60	12.71	66.03	0.00	---	--- PEAK																																																																					

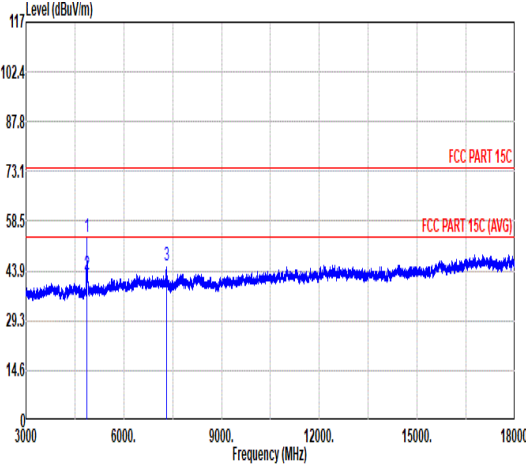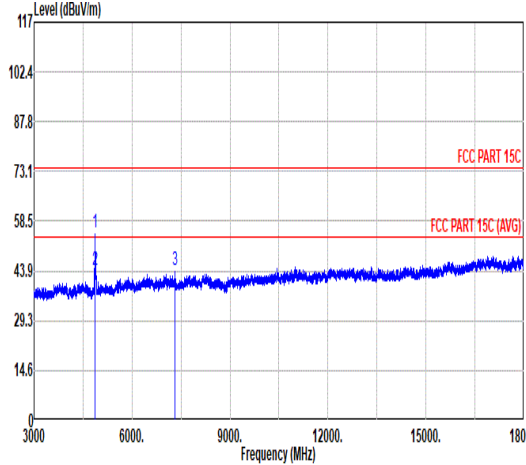

Mode	11																																																																																																																																																											
	Harmonic																																																																																																																																																											
	2400-2483.5_802.11n HT40_CH6_2437MHz																																																																																																																																																											
ANT	1																																																																																																																																																											
Pol.	Horizontal											Vertical																																																																																																																																																
Peak Avg																																																																																																																																																												
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>53.74</td><td>74.00</td><td>-20.26</td><td>73.82</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>162</td><td>170</td><td>PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>42.84</td><td>54.00</td><td>-11.16</td><td>62.92</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>162</td><td>170</td><td>AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>45.52</td><td>74.00</td><td>-28.48</td><td>63.26</td><td>35.58</td><td>12.78</td><td>66.10</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	53.74	74.00	-20.26	73.82	33.85	10.34	64.27	0.00	162	170	PEAK	2	4874.00	42.84	54.00	-11.16	62.92	33.85	10.34	64.27	0.00	162	170	AVERAGE	3	7311.00	45.52	74.00	-28.48	63.26	35.58	12.78	66.10	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>55.16</td><td>74.00</td><td>-18.84</td><td>75.24</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>275</td><td>175</td><td>PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>44.21</td><td>54.00</td><td>-9.79</td><td>64.29</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>275</td><td>175</td><td>AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>44.21</td><td>74.00</td><td>-29.79</td><td>61.95</td><td>35.58</td><td>12.78</td><td>66.10</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	55.16	74.00	-18.84	75.24	33.85	10.34	64.27	0.00	275	175	PEAK	2	4874.00	44.21	54.00	-9.79	64.29	33.85	10.34	64.27	0.00	275	175	AVERAGE	3	7311.00	44.21	74.00	-29.79	61.95	35.58	12.78	66.10	0.00	---	---
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																		
1	4874.00	53.74	74.00	-20.26	73.82	33.85	10.34	64.27	0.00	162	170	PEAK																																																																																																																																																
2	4874.00	42.84	54.00	-11.16	62.92	33.85	10.34	64.27	0.00	162	170	AVERAGE																																																																																																																																																
3	7311.00	45.52	74.00	-28.48	63.26	35.58	12.78	66.10	0.00	---	---	PEAK																																																																																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																		
1	4874.00	55.16	74.00	-18.84	75.24	33.85	10.34	64.27	0.00	275	175	PEAK																																																																																																																																																
2	4874.00	44.21	54.00	-9.79	64.29	33.85	10.34	64.27	0.00	275	175	AVERAGE																																																																																																																																																
3	7311.00	44.21	74.00	-29.79	61.95	35.58	12.78	66.10	0.00	---	---	PEAK																																																																																																																																																

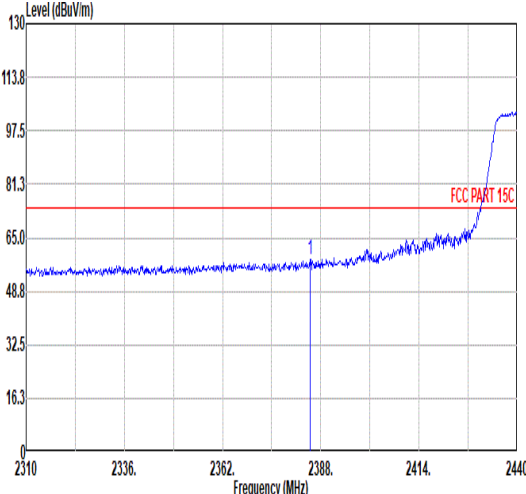
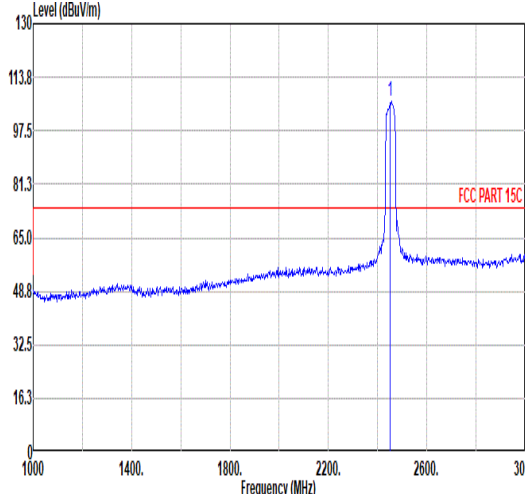
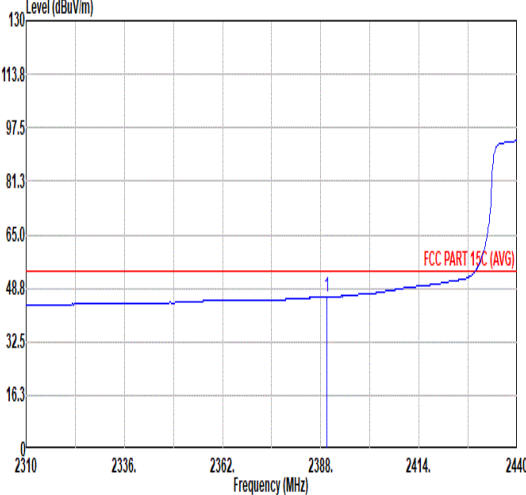
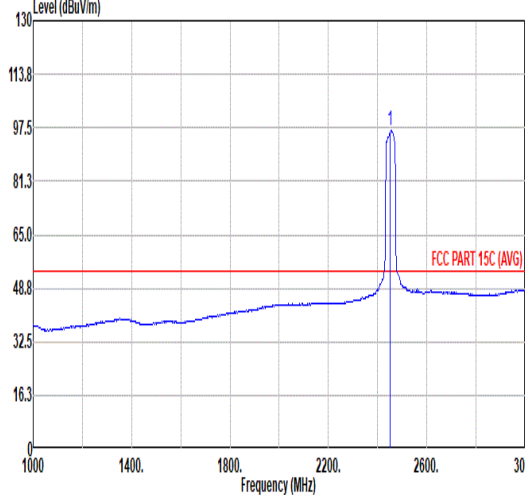


Mode	12																																																																																																							
	Band Edge - L																																																																																																							
	2400-2483.5_802.11n HT40_CH9_2452MHz																																																																																																							
ANT	1																																																																																																							
Pol.	Horizontal						Fundamental																																																																																																	
Peak																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.27</td><td>58.43</td><td>74.00</td><td>-15.57</td><td>49.99</td><td>31.88</td><td>7.16</td><td>36.60</td><td>6.00</td><td>123</td><td>360</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2385.27	58.43	74.00	-15.57	49.99	31.88	7.16	36.60	6.00	123	360	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>106.47</td><td>-----</td><td>-----</td><td>97.55</td><td>32.21</td><td>7.28</td><td>36.57</td><td>6.00</td><td>123</td><td>360</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	106.47	-----	-----	97.55	32.21	7.28	36.57	6.00	123	360	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	2385.27	58.43	74.00	-15.57	49.99	31.88	7.16	36.60	6.00	123	360	PEAK																																																																																												
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	2452.00	106.47	-----	-----	97.55	32.21	7.28	36.57	6.00	123	360	PEAK																																																																																												
Avg																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.56</td><td>46.08</td><td>54.00</td><td>-7.92</td><td>37.59</td><td>31.92</td><td>7.16</td><td>36.59</td><td>6.00</td><td>123</td><td>360</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.56	46.08	54.00	-7.92	37.59	31.92	7.16	36.59	6.00	123	360	AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>96.60</td><td>-----</td><td>-----</td><td>87.68</td><td>32.21</td><td>7.28</td><td>36.57</td><td>6.00</td><td>123</td><td>360</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	96.60	-----	-----	87.68	32.21	7.28	36.57	6.00	123	360	AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	2389.56	46.08	54.00	-7.92	37.59	31.92	7.16	36.59	6.00	123	360	AVERAGE																																																																																												
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	2452.00	96.60	-----	-----	87.68	32.21	7.28	36.57	6.00	123	360	AVERAGE																																																																																												



Mode	12																																																							
	Band Edge - R																																																							
	2400-2483.5_802.11n HT40_CH9_2452MHz																																																							
ANT	1																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.68</td><td>69.03</td><td>74.00</td><td>-4.97</td><td>60.00</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>123</td><td>360</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.68	69.03	74.00	-4.97	60.00	32.27	7.33	36.57	6.00	123	360	PEAK	Blank					
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2483.68	69.03	74.00	-4.97	60.00	32.27	7.33	36.57	6.00	123	360	PEAK																																												
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>52.30</td><td>54.00</td><td>-1.70</td><td>43.27</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>123</td><td>360</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	52.30	54.00	-1.70	43.27	32.27	7.33	36.57	6.00	123	360	AVERAGE	Blank					
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2483.50	52.30	54.00	-1.70	43.27	32.27	7.33	36.57	6.00	123	360	AVERAGE																																												

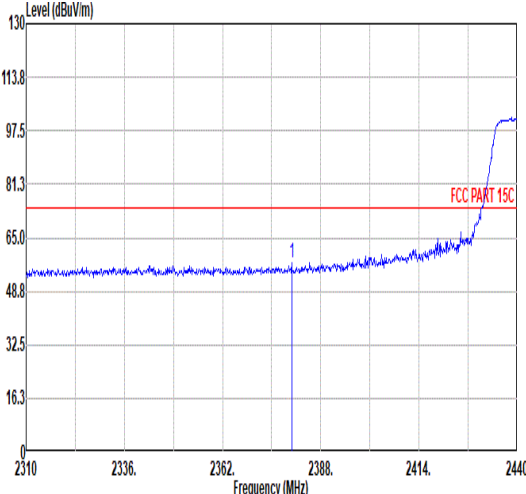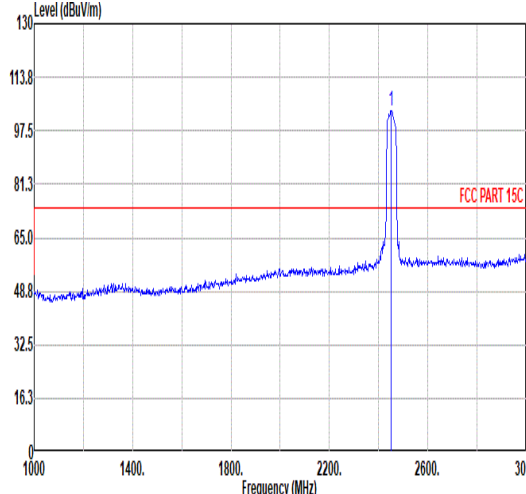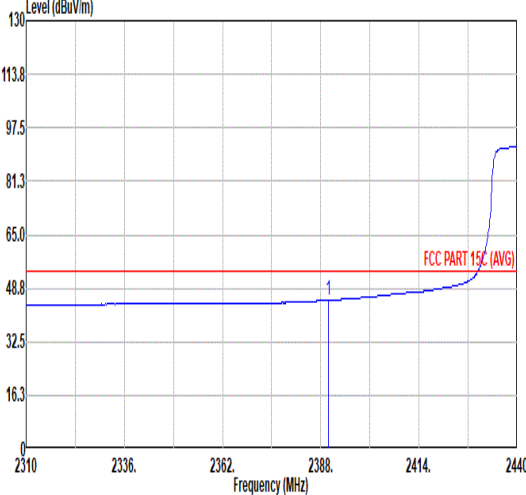
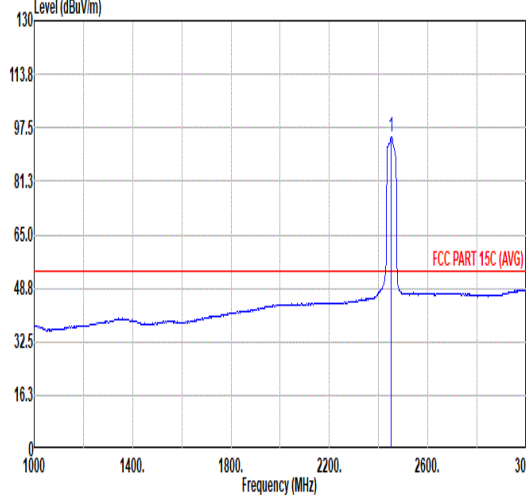


Mode	12																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_802.11n HT40_CH9_2452MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.33</td><td>57.34</td><td>74.00</td><td>-16.66</td><td>48.96</td><td>31.84</td><td>7.15</td><td>36.61</td><td>6.00</td><td>391 152 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.33	57.34	74.00	-16.66	48.96	31.84	7.15	36.61	6.00	391 152 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>103.72</td><td>-----</td><td>-----</td><td>94.80</td><td>32.21</td><td>7.28</td><td>36.57</td><td>6.00</td><td>391 152 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	103.72	-----	-----	94.80	32.21	7.28	36.57	6.00	391 152 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2388.33	57.34	74.00	-16.66	48.96	31.84	7.15	36.61	6.00	391 152 PEAK																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2452.00	103.72	-----	-----	94.80	32.21	7.28	36.57	6.00	391 152 PEAK																																																																																									
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>45.08</td><td>54.00</td><td>-8.92</td><td>36.59</td><td>31.92</td><td>7.16</td><td>36.59</td><td>6.00</td><td>391 152 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	45.08	54.00	-8.92	36.59	31.92	7.16	36.59	6.00	391 152 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>94.48</td><td>-----</td><td>-----</td><td>85.58</td><td>32.20</td><td>7.27</td><td>36.57</td><td>6.00</td><td>391 152 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	94.48	-----	-----	85.58	32.20	7.27	36.57	6.00	391 152 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.95	45.08	54.00	-8.92	36.59	31.92	7.16	36.59	6.00	391 152 AVERAGE																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2452.00	94.48	-----	-----	85.58	32.20	7.27	36.57	6.00	391 152 AVERAGE																																																																																									



Mode	12																																																					
	Band Edge - R																																																					
	2400-2483.5_802.11n HT40_CH9_2452MHz																																																					
ANT	1																																																					
Pol.	Vertical										Fundamental																																											
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.88</td><td>60.53</td><td>74.00</td><td>-13.47</td><td>51.50</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>391</td><td>152 PEAK</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.88	60.53	74.00	-13.47	51.50	32.27	7.33	36.57	6.00	391	152 PEAK	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2484.88	60.53	74.00	-13.47	51.50	32.27	7.33	36.57	6.00	391	152 PEAK																																											
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>46.80</td><td>54.00</td><td>-7.20</td><td>37.77</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>391</td><td>152 AVERAGE</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	46.80	54.00	-7.20	37.77	32.27	7.33	36.57	6.00	391	152 AVERAGE	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2483.50	46.80	54.00	-7.20	37.77	32.27	7.33	36.57	6.00	391	152 AVERAGE																																											

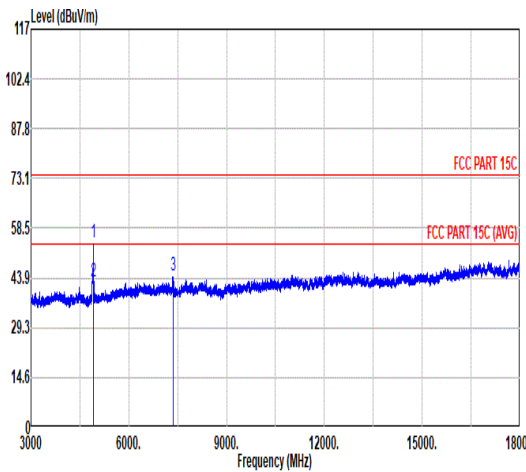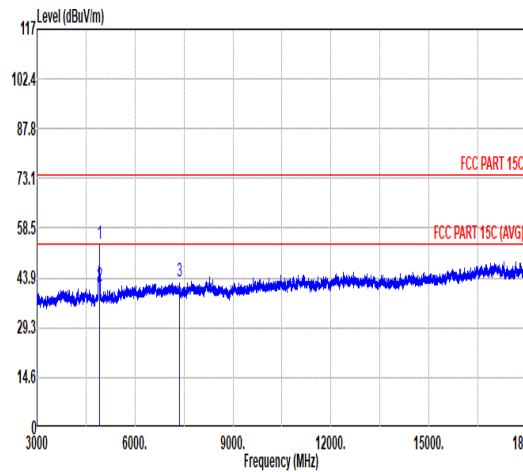


Mode	12																																																																																																																																																						
	Harmonic																																																																																																																																																						
	2400-2483.5_802.11n HT40_CH9_2452MHz																																																																																																																																																						
ANT	1																																																																																																																																																						
Pol.	Horizontal						Vertical																																																																																																																																																
Peak Avg																																																																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4904.00</td><td>54.16</td><td>74.00</td><td>-19.84</td><td>74.19</td><td>33.90</td><td>10.37</td><td>64.30</td><td>0.00</td><td>172</td><td>173 PEAK</td></tr><tr><td>2</td><td>4904.00</td><td>42.96</td><td>54.00</td><td>-11.04</td><td>62.99</td><td>33.90</td><td>10.37</td><td>64.30</td><td>0.00</td><td>172</td><td>173 AVERAGE</td></tr><tr><td>3</td><td>7356.00</td><td>44.77</td><td>74.00</td><td>-29.23</td><td>62.59</td><td>35.51</td><td>12.84</td><td>66.17</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4904.00	54.16	74.00	-19.84	74.19	33.90	10.37	64.30	0.00	172	173 PEAK	2	4904.00	42.96	54.00	-11.04	62.99	33.90	10.37	64.30	0.00	172	173 AVERAGE	3	7356.00	44.77	74.00	-29.23	62.59	35.51	12.84	66.17	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4904.00</td><td>53.69</td><td>74.00</td><td>-20.31</td><td>73.72</td><td>33.90</td><td>10.37</td><td>64.30</td><td>0.00</td><td>106</td><td>218 PEAK</td></tr><tr><td>2</td><td>4904.00</td><td>41.66</td><td>54.00</td><td>-12.34</td><td>61.69</td><td>33.90</td><td>10.37</td><td>64.30</td><td>0.00</td><td>106</td><td>218 AVERAGE</td></tr><tr><td>3</td><td>7356.00</td><td>42.75</td><td>74.00</td><td>-31.25</td><td>60.57</td><td>35.51</td><td>12.84</td><td>66.17</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4904.00	53.69	74.00	-20.31	73.72	33.90	10.37	64.30	0.00	106	218 PEAK	2	4904.00	41.66	54.00	-12.34	61.69	33.90	10.37	64.30	0.00	106	218 AVERAGE	3	7356.00	42.75	74.00	-31.25	60.57	35.51	12.84	66.17	0.00	---	---
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																													
1	4904.00	54.16	74.00	-19.84	74.19	33.90	10.37	64.30	0.00	172	173 PEAK																																																																																																																																												
2	4904.00	42.96	54.00	-11.04	62.99	33.90	10.37	64.30	0.00	172	173 AVERAGE																																																																																																																																												
3	7356.00	44.77	74.00	-29.23	62.59	35.51	12.84	66.17	0.00	---	---	PEAK																																																																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																													
1	4904.00	53.69	74.00	-20.31	73.72	33.90	10.37	64.30	0.00	106	218 PEAK																																																																																																																																												
2	4904.00	41.66	54.00	-12.34	61.69	33.90	10.37	64.30	0.00	106	218 AVERAGE																																																																																																																																												
3	7356.00	42.75	74.00	-31.25	60.57	35.51	12.84	66.17	0.00	---	---	PEAK																																																																																																																																											


Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	100	-	-	10HZ
802.11g	100	-	-	10HZ
802.11n HT20	100	-	-	10HZ
802.11n HT40	98.56	-	-	10HZ


802.11b

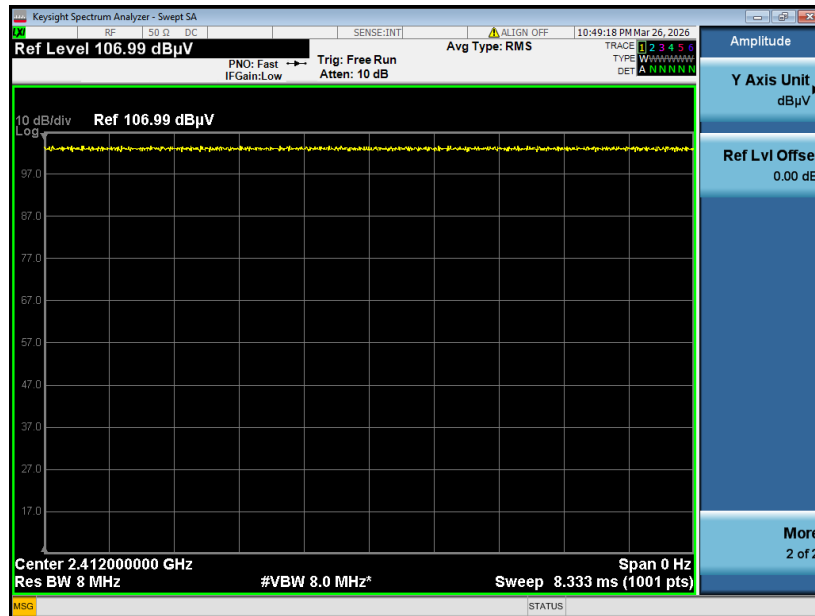

802.11g

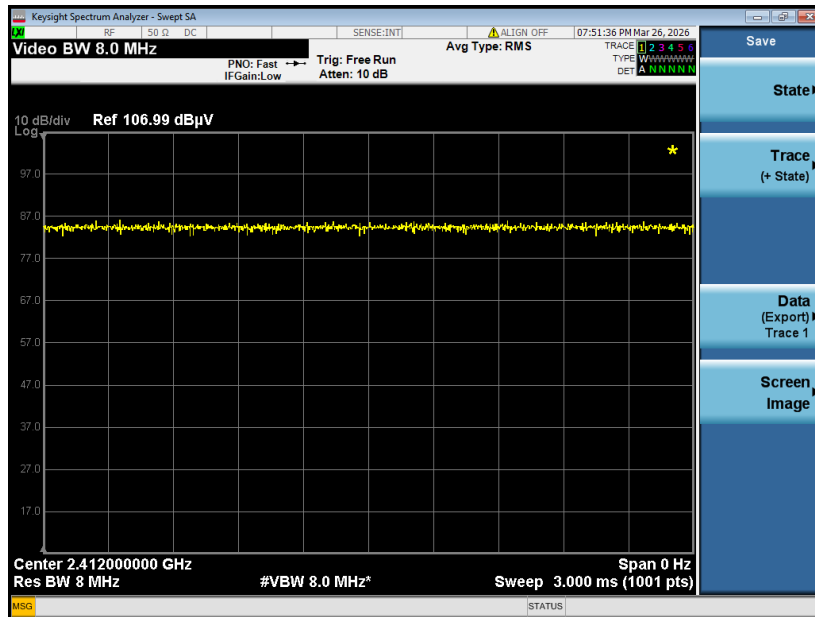

802.11n HT20

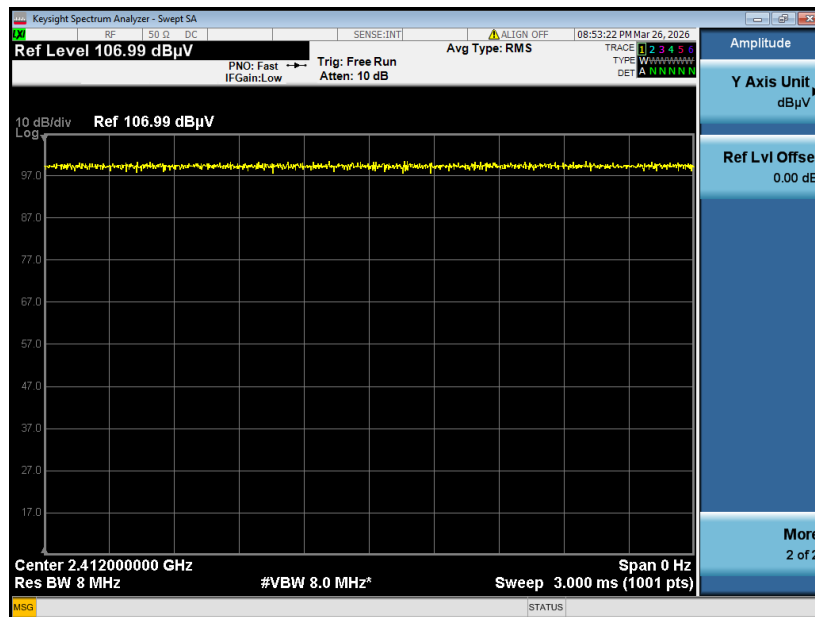



802.11n HT40

