

MANUAL 说明书

Helmet Bluetooth® Intercom Kit 头盔蓝牙对讲机



English

日本語

中文



FG

Contents:


1. Product Features	P1
2. Parts List	P1
3. Installation Steps	P2
4. Product Control Panels	P2
5. Basic Operation	P3
6. Mobile Phone or Other Bluetooth Enabled Device Connection	P3
7. Music Sharing Operation	P5
8. Operations for Intercom Talking	P5
9. Steps of connecting with intercom device through K wire (K wire needs to be purchased separately)	P6
10. How does FG pair with a third-party intercom device?	P7
11. Technical Specifications	P7
12. Charging the Bluetooth® Device	P7
13. About Maintenance	P8
14. Tips & Trouble Shooting	P8



Please charge before using for the first time!

In order to ensure that the performance of the product is not damaged, please do not charge the product with other charging cable, please use a 5V / 1A charger and standard charging cable.


1. Product Features

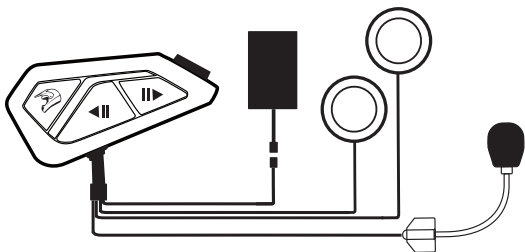

- A communicative device that supports Bluetooth intercom among multi-users
- Support connection with most intelligent phones, MP3 players and GPS navigation systems
- Support connection with walkie-talkie via K wire
- Support connection with Bluetooth devices from other brands
- Music sharing
- Suitable for various kinds of helmets

English

2. Parts List




Bluetooth main engine (including a microphone and a loudspeaker) X 1



Battery case module x 1



Double sides adhesive tape x 2



Magic tapes x 4



Type-C charging wire x 1



User Manual x1


3. Installation Steps



- 1** Stick the double sides tape at the bottom of the main engine.



- 2** Stick the main engine at an appropriate position on the left side of the helmet.



- 3** Stick the magic tapes of the headset on the EPS in the helmet on the corresponding sides of the ears.



- 4** Stick the two headset units on the magic tapes.



- 5** Stick the microphone on EPS inside the helmet or the shell just at the mouth position.



- 6** Find a suitable position in the helmet for the battery case and stuff it in.



- 7** Connect the battery case with the main engine.

4. Product Control Panels

Multi-function button/
indicator light

The previous music/
Volume down button



On/off button/
intercom button

The next music/
Volume up button

Charging port/ data port

5. Basic Operation

Functions	Buttons	Actions	Voice Prompt	LED Indicator
Turn on		Press and hold for 2 seconds	"Power on"	The blue light flashes quickly and then turns to flash slowly
Turn off		Press and hold for 3 seconds	"Power off"	The red indicator light remains on for a while and then goes off
Languages Switching	 + 	Short press once at the same time	"Power on"	The blue light remains on for a while and then flashes twice
Turn on/off Auto-answer Function	 + 	Under the standby states, short press once at the same time	"Open auto answer" Or "close auto answer"	
Delete History Paring Info.		Under the turn on states, press and hold for 8 seconds	Power off..."Clear pairing"	The red light remains on for a second while being shut down and it flashes twice while the pairing info is being cleared up.
Automatically Shut Down	If there is no any action (including no connecting with mobile) within 15 minutes after turning on, it will automatically shut down			

6. Mobile Phone or Other Bluetooth Enabled Device Connection

Functions	Buttons	Actions	Voice Prompt	LED Indicator
Connect to Mobile Phone		Press and hold for 8 seconds, and choose FG in your Bluetooth device to connect	"Pairing" "Connected"	Pairing state: The red and blue lights flash alternately; Connected: The blue light flashes
Restore the Mobile phone connection		Press and hold for 2 seconds then release your hand	"Connected"	The blue light flashes
Reject a call		Press and hold for 2 seconds then release your hand	"Call rejected"	

Answering a call		Short press the multi-function button once	"Call answered"	
Automatically answer a call	Tips: If there is no any action after 15 seconds when the phone is calling, it will automatically answer the call		"Call answered"	Blue LED is flashing
Convert the phone answering mode		Under the Phone talking states,press and hold for 2 seconds then release your hand	"Du.Du."	Red LED is flashing
End a call		Short press once	"Call terminated"	Blue LED is flashing
Activate Siri function		Under the Phone connecting states press and hold for 2 seconds then release your hand	"Voice dial"	Blue LED is flashing
Play Music		Short press once Tips: make sure music APP already open in your mobile	"Play music"	
Pause Music		Short press once	"Pause music"	
Last Song		Short press once	"Previous song"	
Next Song		Short press once	"Next song"	
Volume up		Press and hold until you feel the volume is good	"Beep.Beep"	
Volume down		Press and hold until you feel the volume is good	"Du.Du."	

7. Music Sharing Operation

Tips: 1. Only available after two devices have been paired;

2. Do not support in 3 devices sharing, do not available, if any of them has not delete the third device pairing history information.


Functions	Buttons	Actions	Voice Prompt	LED Indicator
1. Repeat note 5, to delete pairing info, in the two devices. 2. Follow note 8, 1 to pair the two devices.				
Turn on Sharing		Double click on A or B to share music to another one If two headsets is connecting with mobile, and both are playing music, who double click his/her headset his/her music will be shared, and the person being shared must stop her music then she could hear his/her the sharing music.	"Turn on share"	No change
Play/pause the shared music		Click on the multi-function button of sharing music headset to play or pause the music	"Play music"/ "Pause music"	No change
Turn off Sharing		Method1: Double click the on/off button on A or B. Method 2: Click the multi-function key of the being-shared headset.	"Turn off share"	No change

8. Operations for Intercom Talking

8.1 For Two Riders


Tips: 1. To start an intercom talk, you should pair the two units firstly;

2. Make sure both headsets are turned off before starting.



Functions	Buttons	Actions	Voice Prompt	LED Indicator
Step1. Turn A & B into Pairing status		In power-off state, long press on A B (8 seconds)	Pairing	Flashing between red and blue LED
Step 2. Turn A into searching status		Short press on A and wait for pairing finished	Search network	No change
Step 3. Pairing finished	Now you could start intercom talking		Intercom connected	The blue light flashes twice within 5 seconds
Step 4. End Conversation		Short press on A or B	Intercom disconnected	No change
Step 5. Restore Conversation		Short press on A or B	Search network Intercom connected	No change

8.2 How to pair with the 3rd.,4th.....devices?



Functions	Buttons	Actions
Pairing		Step1. Turn off B and ready to pair with the third headset C. (Tips: when you turn off B, do not press power on/off button longer than 3 seconds ,or you will delete the pairing history info. in B)
		Step2. Repeat the pairing method above to finish pairing B and C then turn off C,
		Step3. Repeat the pairing method above to finish pairing C and D then turn off D,
		Repeat the steps above to pair the follow up devices.

8.3 How to start Group Intercom Conversation after pairing ?

Click the intercom buttons from the first device one by one (first → second → third →... Except for the last two devices).


8.4 How to disconnect with the group intercom talking?



- 1 Click once to disconnect with group talking.
- 2 Click again to connect to the latest paired device.
- 3 Double click to connect to the previous paired device.

9. Steps of connecting with intercom device through K wire (K wire needs to be purchased separately)

(1). As shown in the below picture, while FG is power on, use the PTT control wire to connect to an intercom device:



- (2). Bind the PTT magic tape on the motorcycle
- (3). Stick the PPT button of the PTT control wire on the magic tape

(5). Put the intercom device in a suitable position, then you can use the intercom call by pressing the PTT button in the middle of cycling.

Note: During the using process, the prioritized order of the corresponding functions is: Phone call > PTT intercom > music/ GPS.

10. How does FG pair with a third-party intercom device?



Under the standby states, press the multi-function button for 8 seconds to enter the third-party pairing mode. When the red indicator light flashes, short press the on/ off button to connect with a headset from a third-party brand. (The third-party branded headset should be in pairing mold, too.)

11. Technical parameters

BT. Version: 5.0

Frequency: 2.4 GHZ

Weight: 81g

Size: 80mmx38mmx11mm

Intercom time: 19 hours

Phone talking: 19 hours

Music playing time: 17 hours

Standby time: one month (If no operation or connection within 15 minutes, it will automatically shut down.)

Travel Adaptor: DC 5V 1A

Battery Type: Rechargeable Lithium Polymer Battery

Battery material: Lithium ion polymer

Battery model: 602248

Capacity: 650mAh

Voltage: 3.7V

Power: 2.45WH

12. Charging the Bluetooth® Device

- Please fully charge the Bluetooth device before using this device.



- To maintain long life from the internal polymer battery, charge your device at least once each month.

- If the red light is off when it's charging, maybe the voltage is too low.

It is better to charge 0.5-1 hour then recheck if the Bluetooth receiver is successfully charged.

13. About Maintenance

- Do not put the product at very high (or low) temperatures environment, with an optimum storage environment of -40 to +60 degrees, otherwise it will shorten the product's life.
- Keep away from the fire.
- Keep away from the sharp object, or it may cause scratches or damage on the product.
- Do not try to disassemble the headset.
- For a long time without using, please put the headset at a dry environment, and make sure one time charging per month in order to guarantee its performance.

14. Tips & Trouble Shooting

1. Bluetooth headset cannot be connected by the phone ?

Please retry to delete the pairing history information on the headset and restart the headset to enter the pairing state, or details refer to NOTE 5 & NOTE 6, or there are too many Bluetooth pairing records on the phone. You need to clear the pairing records on the phone, and restart the phone, retry the pairing again.

2. Two headsets cannot be paired well:

Clear the pairing history information and restart to enter the pairing state and then again.

3. When listening to music, one earphone is silent or the other intercom is silent.

Reinsert the earphone and microphone to ensure earphone contacted well.

4. Dead state:

Plug in the charging cable to recharge the power can reset headset.

5. Music sharing failed:

The headset pairing information may not be cleared, and you need to perform the clear Pairing information action again.

6. The sound quality deteriorates suddenly during the intercom, which may be caused by the asynchronism of Bluetooth signals. Please disconnect the intercom and try again.

7. If the music is stuck or cannot be played, there may be other apps occupying the audio channel in the background of the phone. Please check whether other apps are operating in the background of the phone and close them.

8. Failed to charge after shutdown:

The charger or charging line does not meet the standard.

9. The Bluetooth receiver has no power:

The headset must be charged for at least 2.5 hours prior to first use. Refer for “Charging the Bluetooth Device” on page 7.

FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.


目次:

1. 製品の機能	P11
2. パーツリスト	P11
3. 取り付け手順	P12
4. 操作パネル	P12
5. 基本操作	P13
6. スマホやBluetooth式デバイスと接続について	P13
7. 音楽共有について	P15
8. インターコム操作について	P15
9. K 線でインターコム機と接続する手順 (K 線は別途でご購入ください)	P16
10. 本製品(FG)を他社のヘッドセットとのペアリング方法	P17
11. 技術データ	P17
12. 充電について	P17
13. メンテナンスについて	P18
14. よくある問題	P18




初めて使用する際、フル充電してから、お使いください
製品の性能にダメージを与えないように、他社の充電ケーブルを使用しないで、の5V / 1Aの充電器で充電してください。

1. 製品の機能

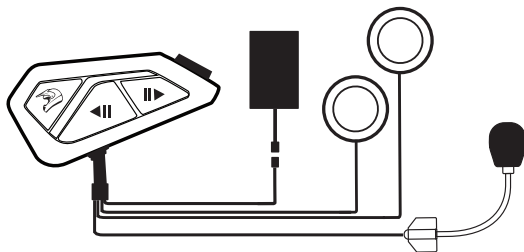

- グループ間でのブルートゥース・インターコム通話に対応
- 殆どのスマホ、MP3プレイヤーとGPSナビゲーションシステムとの接続に対応
- Kケーブルでインターコム接続に対応
- 他社のブルートゥース・ヘッドセットとの接続に対応
- 音楽共有機能付き
- 各種ヘルメットに適用

2. パーツリスト




本体(マイク、スピーカー含め) ×1



バッテリーユニットx1



両面テープx2



マジックテープX4



Type-C充電ケーブルX1



マニュアルx1

3. 取り付け手順



- ❶ 本体の底部に両面テープを貼付。



- ❷ ヘルメットの左側の適切な位置に本体を取付け。



- ❸ ヘルメット内部にある耳に当たる位置にマジックテープを貼付。



- ❹ 2つのスピーカーをマジックテープに貼付。



- ❺ ヘルメットの裏側の発泡スチロールあるいは口の位置に合わせて、マイクをケースに貼り付けてください。



- ❻ ヘルメット内部の適切な位置にバッテリーユニットを入れる。



- ❼ バッテリーユニットを本体と接続。

4. 操作パネル

多機能ボタン/LED

前の曲/音声ダウンボタン



電源オン・オフボタン/イン
ターコムボタン

次の曲/音声アップボタン

充電スポット/USB挿入口

5. 基本操作

機能	ダイヤル	操作	音声案内	LED表示
電源オン		2秒間押し	"Power on"	青色のLEDが速い点滅からゆっくり点滅に変わります
電源オフ		3 秒間押し	"Power off"	赤色のLEDが1回点灯し、その後は消えます
言語切替	 + 	同時に短く1回押す	"Power on"	青色のLEDが長点灯をした後、2 回点滅します
着信を自動的に応答する機能をオン／オフ	 + 	待機状態で、同時に1回短く押す	"Open auto answer" Or "close auto answer"	
ペアリング履歴をクリアする		電源オンした状態で、8 秒間長押し	Power off..."Clear pairing"	電源オフした際、赤色のLEDが1回長点灯し、ペアリング履歴を削除した際、赤色のLEDが2 回点滅します
電源を自動的にオフ	電源オンして15分以内に、何の操作もしない場合（スマホに接続することを含む）本製品は自動的に電源オフになる			

6. スマホやBluetooth式デバイスと接続について

機能	ダイヤル	操作	音声案内	LED表示
スマホと接続		8秒間押し、BluetoothスリストからFGを選び及び接続	"Pairing" "Connected"	ペアリング状態: 青色と赤色のLEDが交互に点滅 接続しました: 青色のLEDが点滅
スマホと接続する状態に戻す		2 秒間押し	"Connected"	青色のLEDが点滅します。
着信拒否		2 秒間押し	"Call rejected"	

着信に応答		1 回短く押す	"Call rejected"	青色のLEDが点滅
着信を自動的に応答	備考：着信音が鳴ってから15秒間の内に、何も操作しない場合、スマホから自動的に着信に応答する		"Call answered"	青色のLEDが点滅
着信に応答するモードを切替		通話中の状態で、2 秒間押し	"Du.Du."	赤色のLEDが点滅
通話終了		1 回短く押す	"Call terminated"	青色のLEDが点滅
Siri機能を起動する		スマホと接続した状態で、2 秒間押し	"Voice dial"	青色のLEDが点滅
音楽を再生		1 回短く押す 備考: あなたの携帯電話で既に開いて音楽アプリを確認してください	"Play music"	
音楽を一時停止		1 回短く押す	"Pause music"	
前の曲/前のラジオチャンネル		1 回短く押す	"Previous song"	
次の曲/次のラジオチャンネル		1 回短く押す	"Next song"	
音量アップ		適切な音量まで長押しします	"Beep.Beep"	
音量ダウン		適切な音量まで長押しします	"Du.Du."	

7. 音楽共有について

備考: 1. 2つのデバイスがペアリング後に使用できる。

2. 3つのデバイスの中で音楽共有機能を使えない、共有する2つのデバイスのいずれかが第3のデバイスのペアリング履歴をクリアしていない場合、この音楽共有機能を使えません。


機能	ダイヤル	操作	案内音声	LED表示
1. 5と同じように、2つのデバイスのペアリング履歴をクリアする。 2. 8.1の操作方法で2つのデバイスの間のインターコムを設定してください。				
共有機能をオープン		共有するヘッドセットのAあるいはBをダブルクリックして、音楽を片方に共有する 2つのヘッドセットともスマホと接続、且つ音楽再生中であれば、ヘッドセットをダブルクリックした人は自分の音楽を共有し、共有された人は音楽を停止してから、共有された音楽を聴くことができる。	"Turn on share"	変化なし
共有されている音楽を再生/一時停止		共有されているヘッドセットの多機能ダイヤルをクリックする	"Play music"/ "Pause music"	変化なし
共有を終了する		方法1: ヘッドセットAあるいはBの電源オン・オフダイヤルをダブルクリック。 方法2: 共有されているヘッドセットの多機能ダイヤルをクリック。	"Turn off share"	変化なし

8. インターコム操作について

8.1 ライダー2人の場合

備考: 1. 2台のヘッドセットのペアリング完了後、インターコムできる。

2. イヤホン機能を退出してから、インターコムできる。



機能	ダイヤル	操作	案内音声	LED表示
ステップ1、AとBをペアリング状態にする		5秒間AとBを長押し	Pairing	青色と赤色のLEDが交互に点滅
ステップ2、Aを検索状態にする		Aを短く押し、Bとペアリングする	Search network	変化なし
ステップ3、ペアリング完成	インターコムできる		Intercom connected	青色のLEDが2回/5秒の点滅します
ステップ4、通話終了		AあるいはB短く押し	Intercom disconnected	変化なし
ステップ5、通話に戻す		AあるいはB短く押し	Search network Intercom connected	変化なし

8.2 グループの間でペアリングについて



機能	ダイヤル	操作
ペアリング		ステップ1、Bを電源オフし、Cとペアリングする手順を実行する（備考: Bの電源をオフにする際、ダイヤルを押す時間は2秒を超えると、Bのペアリング履歴をクリアするため、2秒を超えないように気をつけてください。）
		ステップ2、上記のペアリング方法により、BとCのペアリングを完了後、Cを電源オフにする。
		ステップ3、上記のペアリング方法により、CとDのペアリングを完了後、Dを電源オフにする。
		上記のペアリング方法により、次のヘッドセットとペアリングする。

8.3 ペアリング後のグループの間でのインターコムについて

1個目のヘッドセットのインターコムボタンをク押し、次に順番にヘッドセットのインターコムボタンを押します(最後の2つのヘッドセットのインターコムボタンは押さないでください)。


8.4 グループの間でのインターコムを切断するには



- ① 1回クリックすると、グループとのインターコムを切断できる。
- ② 再度クリックすると、最新のヘッドセットとペアリングできる。
- ③ ダブルクリックすると、前のヘッドセットとペアリングできる。

9. K 線でインターコム機と接続する手順 (K 線は別途でご購入ください)

(1). 下記写真のように、本製品を電源オンした状態で、PTT制御線でインターコム機と接続してください。



(2). PTT用のマジックテープをバイクのハンドルに固定してください。

(3). PTTキーをマジックテープに貼り付けてください。

(4). インターコム機を適切なTところに置き、ツーリング中にPTTキーを押すだけで、インターコムできます。

注: 使用中に、機能の優先順位は「電話＞PTTインターコム＞音楽/GPS。」

10. 本製品(FG)を他社のヘッドセットとのペアリング方法



待機した状態で、多機能ボタンを8秒長押し、他社のヘッドセットとペアリング状態に入ります。赤色と青色のLEDが点滅する際、ボタンを短く押し、他社のヘッドセットと接続してください（他社のヘッドセットも事前にペアリング状態にしてください）。

11. 技術データ

ブルートゥースバージョン: 5.0

周波数: 2.4 GHZ

重量: 81g

サイズ: 80mmx38mmx11mm

インターコム可能時間: 19時間

スマホで通話可能時間: 19時間

音楽鑑賞時間: 17時間

待機時間: 1ヶ月(15分以内に操作せず、他のデバイスとも接続もしていない場合、自動的に電源オフになります)

ACアダプター: 直流 5V 1A

バッテリータイプ: 充電式リチウムポリマー電池

バッテリー材質: リチウムイオンポリマー

バッテリー型番: 602248

バッテリー容量: 650mAh

電圧: 3.7V

電量: 2.45WH

12. 充電について

・本ヘッドセットを使用する前に、完全に充電してください。



・内蔵ポリマー電池を長持ちするために、少なくとも毎月1回は充電してください。

・充電中に赤色のLEDが消灯する場合は、電圧が低すぎる可能性があり、0.5～1時間充電し、ブルートゥーススレーバが正常に充電されているかを再確認することをお勧めする。

13. メンテナンスについて

- 製品寿命を短くしないために、高すぎるあるいは低すぎる温度環境の中に置かず、-40度から+60度の範囲で保管してください。
- 火から離れたところで保管してください。
- FXを分解しないでください。あ
- 長期間使用しない場合は、乾燥した場所に置き、性能を保つため、1ヶ月に1回必ず充電してください。

14. よくある問題

1. ブルートゥース式ヘッドセットがスマホに接続できない:

ヘッドセットのペアリング履歴情報を削除して、ヘッドセットを再起動して、ペアリングステートに入る。 詳細には5あるいは6項の説明を参照してください。スマホとのペアリング履歴が多すぎるため、それらのペアリング履歴をクリア、スマホを再起動し、ペアリングを再試行してください。

2. 2つのヘッドセットがうまくペアリングできない:

ペアリング履歴をクリアしてから、再起動及び再試行してください。

3. 音楽を鑑賞中、片方のイヤホンが無音になったり、もう片方のインターコムが無音になったりする:

イヤホンとマイクジャックを入れ直し、イヤホンがうまく接触しているかを確認してください。

4. 何も反応しない:

ヘッドセットに充電することで、ヘッドセットを再度起動してください。

5. 音楽共有できない:

ヘッドセットのペアリング履歴がクリアされていない可能性があり、再度ペアリング履歴をクリアしてください。

6. インターコム中に急に音質が悪くなる:

ブルートゥースの信号の干渉であることが原因の可能性があり、インターコム機能を切断して、再度接続してください。

7. 音楽が止まったり、再生できない:

他のアプリがスマホのバックグラウンドでオーディオチャンネルを再生している可能性があり、他のアプリがスマホのバックグラウンドで動作しているかを確認し、そのアプリを終了してください。

8. 電源オフ後、充電できない:
充電器または充電ケーブルが規格に適合していない。

9. 受信機に電池残量がない:
初めて使用する際、2.5 時間以上充電する必要があります。第17ページの「充電」を参照してください。

目录:


1. 产品功能	P21
2. 部件清单	P21
3. 安装步骤	P22
4. 产品控制面板	P22
5. 基本操作	P23
6. 与手机或其他蓝牙功能的设备连接	P23
7. 音乐分享操作	P25
8. 对讲机通话操作	P25
9. K 线连接对讲机步骤(K 线需另外选购)	P26
10. 如何与第三方对讲耳机配对?	P27
11. 技术规格	P27
12. 为蓝牙设备充电	P27
13. 关于保养	P28
14. 提示和故障排除	P28



第一次使用, 请先充电!


为了确保产品的性能不受损坏, 请不要用其他充电线给产品充电, 请用5V / 1A的充电器。

1. 产品功能

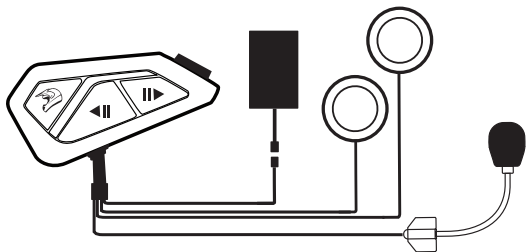

- 一款支持多人群组蓝牙对讲的通讯设备
- 支持与大部分智能手机、MP3播放器和GPS导航系统连接
- 支持K线连接对讲机
- 支持与其他蓝牙品牌连接
- 音乐分享
- 适用于各种盔型

2. 部件清单




蓝牙主机(含麦克风,喇叭)x1




电池盒组件x1



双面胶x2



魔术贴x4



Type-C充电线x1



用户手册x1


3. 安装步骤



- ❶ 将双面胶贴在主机底部。



- ❷ 将主机贴在头盔左侧合适的位置。



- ❸ 将耳机魔术贴贴到头盔内对应耳朵两侧的EPS上。



- ❹ 将两个耳机单元贴到魔术贴上。



- ❺ 将麦克风贴在头盔内合适位置。



- ❻ 在头盔内侧找到适合插入电池盒的位置将电池盒塞进去。



- ❼ 将电池盒接到主机上。

4. 产品控制面板

多功能键/指示灯

开/关机键/对讲键

上一曲/音量减键

下一曲/音量加键

充电口/数据接口



5. 基本操作

功能	按键	操作	语音提示	LED指示灯
开机		按住2秒	“开机”	蓝灯快闪后转慢闪
关机		按住3秒	“关机”	红色指示灯长亮一下熄灭
语言切换	 + 	同时短按一次	“开机”	蓝灯长亮一下然后再闪两下
开启/关闭自动接听功能	 + 	在待机状态下,同时短按一次	“打开自动接听”/ “关闭自动接听”	
删除历史配对信息		在开机状态下,按住8秒钟	“关机...清除配对”	关机时红色灯长亮一下,清除配对时红灯双闪
自动关机	开机后15分钟内没有连接任何设备的状态下,不做任何操作将会自动关机			

6. 与手机或其他蓝牙功能的设备连接

功能	按键	操作	语音提示	LED指示灯
连接到手机		关机状态下,按住开机键8秒进入配对状态,然后在蓝牙设备中选择FG进行连接	“配对状态” “蓝牙已连接”	配对状态:红蓝灯交替闪烁,已连接:蓝灯闪烁
恢复手机连接		关机状态下,按住开机键2秒钟	“蓝牙已连接”	蓝灯闪烁
拒接来电		按2秒多功能键	“电话拒接”	

接听电话		短按一次多功能键	“电话接听”	蓝色LED闪烁
自动接听电话	提示:如果来电15秒后没有任何操作,手机会自动接听来电		“电话接听”	蓝色LED闪烁
转换电话接听模式		在手机通话状态下,按住2秒钟,然后松手	“嘟,滴嘟”	红色LED闪烁
结束通话		短按一次	“电话挂断”	蓝色LED闪烁
激活语音助手		在手机连接状态下,按住2秒钟,然后松手	“语音呼叫”	蓝色LED闪烁
播放音乐		短按一下多功能键 提示:确保手机中的音乐应用程序已经打开	“播放音乐”	
暂停音乐		短按一次	“暂停音乐”	
上一曲		短按一次	“上一曲”	
下一曲		短按一次	“下一曲”	
音量加		按住,直到感觉音量适合	“嘀嘀”	
音量减		按住,直到感觉音量适合	“嘟嘟”	

7. 音乐分享操作

提示:1. 仅在两台设备配对后可用;

2. 不支持三台设备共享,如果其中任何一台没有删除第三台设备配对历史信息,则不可用。


功能	按键	操作	语音提示	LED指示灯
1.重复第5点清除两台设备中的配对信息。2.按8.1进行两台设备之间的蓝牙对讲配对。				
打开共享		双击 A 或 B 将音乐分享给另一个人	“打开分享”	无变化
		如果两个耳机都已连接手机,并且都在播放音乐,接受分享的人必须停止自己的音乐,任何一方双击对讲键都可以开启分享功能		
播放/暂停共享音乐		点击正在分享音乐的耳机多功能键	“播放音乐”/“暂停音乐”	无变化
关闭共享		方法1:双击A或B上的开/关按键。 方法2:点击共享耳机的多功能按键。	“关闭分享”	无变化

8. 对讲机通话操作

8.1 两名骑手


提示:1.要开始对讲机通话,应先将两个机器进行配对;

2.开始前要确保两个耳机都已关闭。



功能	按键	操作	语音提示	LED指示灯
第一步、将A和B打开到配对状态		关机状态下,长按A和B(8秒)配对状态	“配对状态”	红蓝灯交替闪烁
第二步、将A转换为搜索配对状态		短按A,等待配对完成	“搜索网络”	无变化
第三步、配对完成		现在你可以开始对讲机通话了	“对讲已连接”	蓝灯闪烁
第四步、结束对话		短按A或B	“对讲已断开”	无变化
第五步、恢复对话		短按A或B	“搜索网络,对讲已连接”	无变化

8.2 如何与第三个, 第四个...配对?



功能	按键	操作
配对		步骤一、关闭B并准备与第三个耳机C配对。(提示关机后, 松开开/关机键, 否则将删除B中的历史配对信息)
		步骤二、重复上述8.1配对方法, 完成B和C配对, 然后关闭C,
		步骤三、重复上述8.1配对方法, 完成C和D配对, 然后关闭D,
		重复上述步骤, 配对后续设备。

8.3 完成配对后如何开启群组对讲机通话?

从第一台设备逐个单击对讲按钮(第一→第二→第三→...除了最后两台设备)。


8.4 如何断开与群组对讲机通话的连接?



- 1 点击一次可断开与群聊的连接。
- 2 再次单击连接最近一次配对的设备。
- 3 双击连接上一个配对设备。

9. K 线连接对讲机步骤(K 线需另外选购)

(1). 如下图所示, 在FG开机状态下使用PTT控制线连接对讲机;



(2). 将PTT魔术粘贴带绑定在摩托车的车把上;

- (3). 将PTT控制线的PTT键粘贴在魔术粘贴带上；
- (4). 将对讲机放置在合适位置，在骑行过程中即可通过按压PTT 按键使用对讲机讲话。
- 注意：在使用过程中，相应功能的优先级顺序为“电话＞PTT对讲＞音乐/GPS”。

10. 如何与第三方对讲耳机配对？



待机状态下，按住多功能按键8秒，进入第三方配对模式，当红蓝指示灯闪烁时，短按“开/关”键连接第三方品牌耳机（第三方品牌耳机也应进入蓝牙配对模式）。

11. 技术参数

蓝牙版本：5.0	适配器：5V 1A
频率：2.4 GHZ	电池类型：可充电锂聚合物电池
重量：81克	电池材料：锂离子聚合物
尺寸：80mmx38mmx11mm	电池型号：602248
对讲时间：19小时	容量：650mAh
手机通话：19小时	电压：3.7V
音乐时间：17小时	功率：2.45Wh
待机时间：一个月（15分钟内无操作，无连接自动关机）	

12. 为蓝牙设备充电

- 使用蓝牙设备前，请先将其充满电。



- 为了延长内置聚合物电池的使用寿命，请每月至少为设备充电一次。
 - 如果充电时红灯熄灭，可能是电压过低。
- 最好充电0.5-1小时，然后重新检查蓝牙接收器是否成功充电。

13. 关于保养

- 不要将产品放在-过高(或过低)温度环境中,最佳储存环境为-40至+60度,否则会缩短产品寿命。
- 远离火源。
- 远离尖锐物体,否则可能会导致产品划伤或损坏。
- 不要试图拆卸耳机。
- 长时间不使用时,请将耳机置于干燥环境中,并确保每月充电一次,以保证其性能。

14. 提示和故障排除

1.手机配对失败?

请重试删除耳机上的配对历史记录信息,然后重新启动耳机以进入配对状态,或者详细信息请参阅第5点和第6点,或者手机上的蓝牙配对记录太多。您需要清除手机上的配对记录,然后重新启动手机,再次重试配对。

2. 两个耳机不能很好地配对:

清除配对历史记录并重新启动以进入配对状态,然后重试。

3. 听音乐时,一个耳机静音或另一个对讲机静音。重新插入耳机和麦克风,确保耳机接触良好。

4. 死机状态:

插上充电线为主机充电,即可重启耳机。

5. 音乐共享失败:

主机配对信息可能没有被清除,您需要再次进行清除配对信息操作。

6. 在对讲过程中,音质变差,这可能是由于蓝牙信号的干扰造成的。请断开对讲机并重试。

7. 如果音乐被卡住或无法播放,则可能有其他应用占用了手机背景中的音频通道。请检查其他应用程序是否在手机后台运行,并将其关闭。

8. 关机后充电失败:

充电器或充电线不符合标准。

9. 蓝牙接收器没电:

首次使用前,主机必须至少充电2.5小时。请参阅第27页的“为蓝牙设备充电”。

Version: V1-2022.10.25

