


AI Translation Earbuds USER MANUAL



Please read this instruction manual carefully before using the product and keep it properly

Specifications


- Item No.: SX-219
- Wireless:5.3
- Speaker:13*3.0 hollow composite horn
- Frequency Response:20hz-20Khz
- Audio Output:119±3dB
- Rechargeable Lithium Polymer Battery
- Charging Case:300mAh,earphones:35mAh*2
- Playtime: earphones 6 hours (60% volume),Case 15 hours (Full Batlery)
- Input: DC-5V/300mA
- Charging time:1.5h(earbuds);1.5h(charging case)
- Range: 30+ft
- Protocols: HSP / HFP / A2DP / AVRCP
- Codecs: AAC/SBC
- Weight: 41g (8g for earphones + 33g for charging case)
- IP Rating: IPX4(earphones only)
- Accessories: Wireless earphones,Charging Case, Type-C Charging Cable

Pairing

Pairing Mode: for first time connection, open the charing case, the earphones enter into pairing mode automatically. Search for SX-219 and choose to connect, there is a prompt after the earphones are connected successfully. The next time you turn on, the earphones will connect automatically with the lat device.
Manual Pairing: if the automatic is not successful (single earphone with no sound or earphones are disconnected), you can do the manual connection.
(1) Turn off the phone's wireless.
(2) Take the earphones out after putting them into the charging case or 10seconds, and wait for 5seconds.
(3) Turn on the phone's wireless, and search for SX-219 to connect.

Touch Operation


- ① Left Earphone
- ② Touch Button
- ③ Audio Receiving Hole
- ④ Right Earphone
- ⑤ Charging Case



- Previous song:triple tape left/right.
- Next song:double tape left/right.
- Play/Pause:single tape left/right.
- Answer call/Hang up:double tape left/right.
- Reject call:Long press left/right.
- Voice Assistant:hold left.
- Game/music mode switch: hold right.

Charging Indicator Light

- Charging: Red light flashing.
- Fully charged: Red light on.
- Low x battery: Blue light flashing.



Playing Time	6 hours (60% volume)
Standby Time	120 hours
Calling Time	3.5 hours
Charging Time	1.5 hours


Note: Earphone can be full charged for 3 times by full battery case.

Easy operation

Before using the translation function, need to make sure translator earbuds wireless connect with mobilephone, and at same time download APP "Wooask" firstly.
Operation steps as below:


APP

(1) Download APP: search "Wooask" in the application store and download.

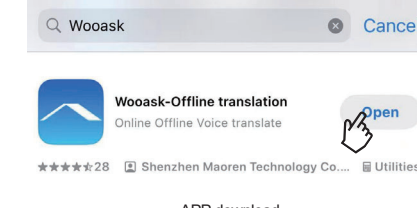

APP download


(2)Sign up to get an ID(only the 1st time) then you can start to use the translation functon.

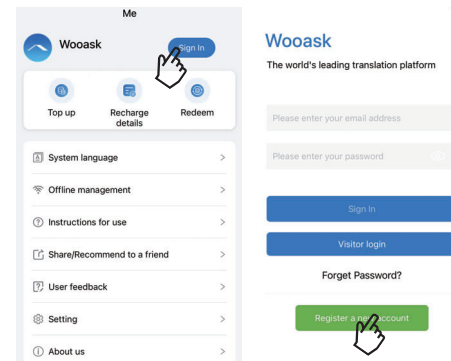

Registration and login

(3)Five Translation Mode

- ①**Touch control mode:** two people wear a earphone. Click or double click the earphone to translate in real-time, suitable for acquaintances who are willing to wear your earphone.
- ②**Speaker Mode:** one person wears earphones and the other holds the mobile phone,suitable for strangers who are not convenient to wear your earphones.
- ③**Free Talk Mode:** both of them wear a earphone, Real-time,translate in real time,release their hands and communicate freely.
- ④**Photo Translation:** Translate as you shoot, suport both real-time photo translation and import photo translation.
- ⑤**Offline Mode (paid to use):** can translate without internet,support 8 lanuages translation:Chinese, English, Japanese, Korean, Russian, German, French,Spanish real time offline translation.

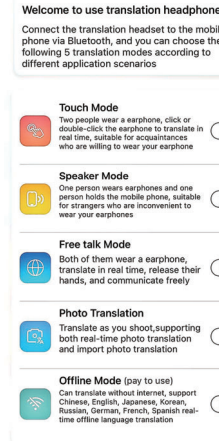

Precautions

- (1)The translation accuracy mainly depends on the recognition accuracy. Each sentence's pronunciation should correct,clarity, with appropriate pauses.
- (2)If earphones cannot accurately understand the translation, try using a different expression.
- (3)When there is no internet or the network is poor, you can pay to use offline mode(offline translation with limited languages,with slightly lower accuracy than online translation mode).
- (4)If earphones need to give someone else to use while is bound, please be sure to "Unbind" first from the APP,in order not to affect other people's normal use.
- (5)**Offline Mode (paid to use):** can translate without internet,support 8 lanuages translation:Chinese, English, Japanese, Korean, Russian, German, French,Spanish real time offline translation.

Trouble Shooting

- If there is no sound on one side of the earphone or the earphone is disconnected, etc., the earphone will be in automatic pairing state. No manual pairing is required, and the device will automatically connect. Unconnected/Reconnected Wireless device:
1. Enter the wireless settings of your device and delete or ignore "SX-219".
2. Turn off the Wireless function (see Picture B), then put the earphones into the charging case and close the lid. Wait for one minute. Take out the earphones (keep the distance between the two earphones within 20CM) and wait for 30 seconds.
3. Reopen the mobile phone wireless and search and connect to "SX-219".



Precautions

1. Do not charge by unofficial means to avoid fire, explosion or other dangers.
2. Do not deliberately drop, burn, pierce, squeeze or immerse the product in liquid to avoid equipment damage.
3. Do not expose the product to high temperatures or around heating equipment (such as inside or outside a microwave oven or oven).
4. Please use this device within the temperature range of 0 to 35 degrees Celsius. If the ambient temperature is too high or too low, it will cause equipment failure.

5. Our company is not responsible for any quality problems, equipment failures and safety accidents caused by privately disassembling the earphones and using accessories not recognized by the official.

FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.
Caution: Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.This equipment has been tested and found to comply with the limits for Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmfulinterference to radio communications. However, there is no guarantee thatinterference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turningthe equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:--Reorient or relocate the receiving antenna. --Increase the separation between the equipment and receiver. --Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. --Consult the dealer or an experienced radio/TV technician for help.
The device has been evaluated to meet general RF exposure requi rement. The devicecan be used in portable exposure condition without restriction.

