

SNM212 Zigbee & BLE antenna information

Base material: FR4, 4 layers


Copper: 35u

Applicable: SNM212, Transmitted power: +4dBm (± 2 dBm)

Max Antenna gain: +2.85dBi

Resonance frequency: 2.40 GHz, bandwidth: 80MHz, Line loss: 1.4dB

Manufacturer: Signify Nederlands B.V. IBRS 10461, 5600VB, NL

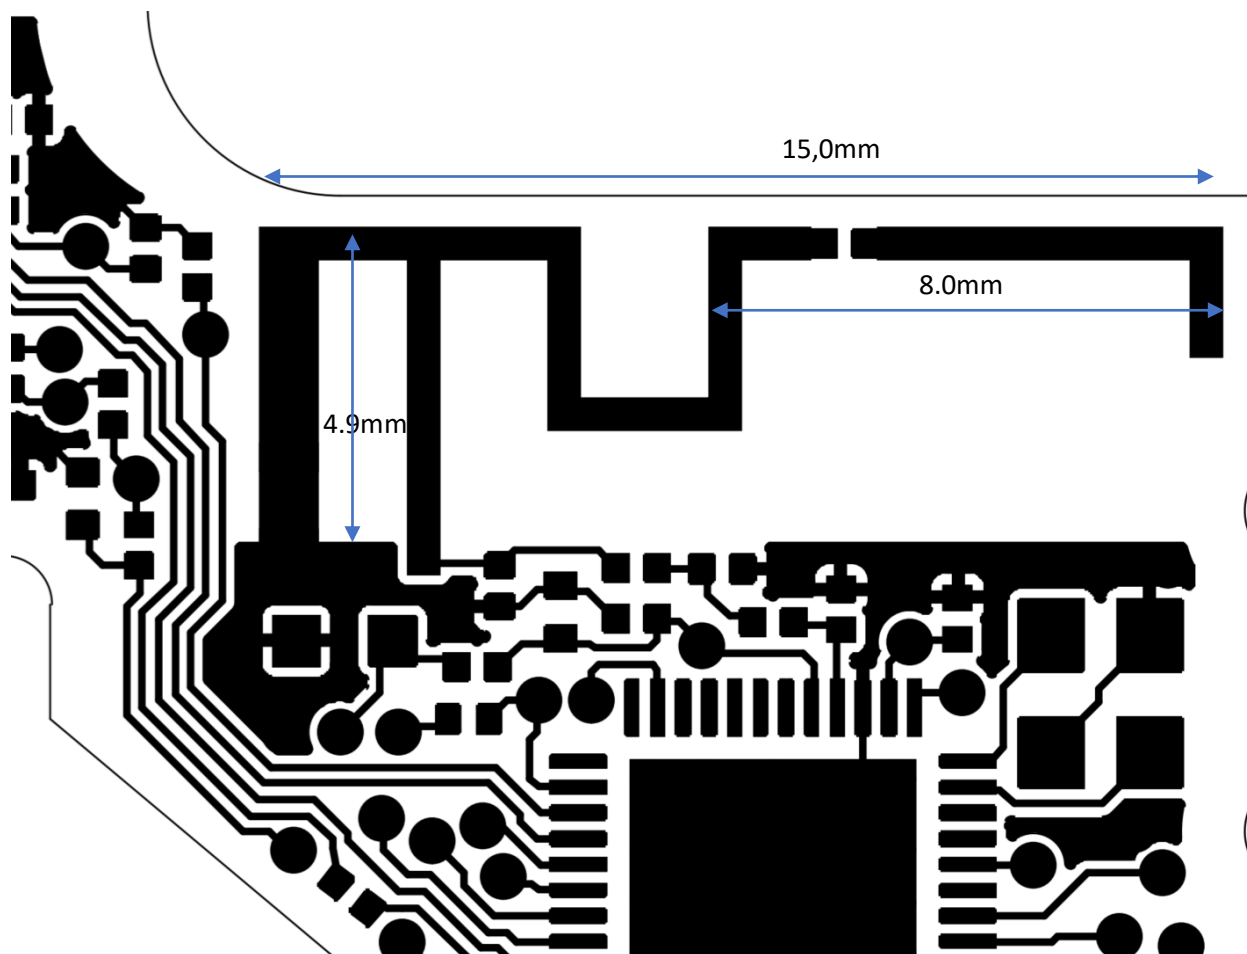

Radiation pattern: SNM212 mounted on aluminum luminaire

