


PA2632 BT ANT SPEC

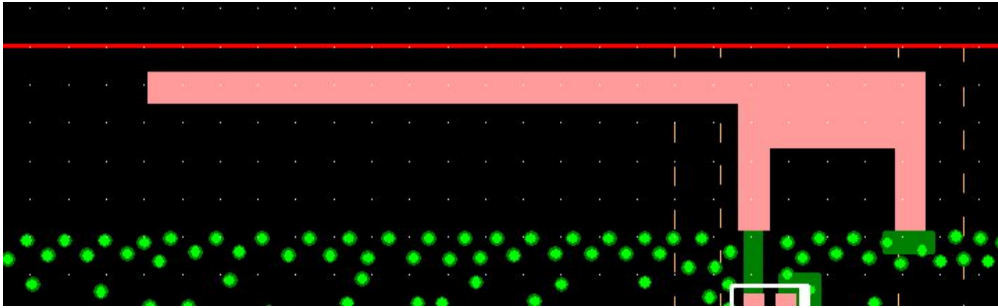

Type: PCB On Board ANT

Length: 20.5mm


Width: 4.2 mm

Technology: FR4&Cover Resistance Welding Oil

Manufacturer of Antenna: SHENZHEN FENDA TECHNOLOGY CO., LTD.

Address of antenna manufacturer: Fenda Hi-Tech Park, Zhoushi Road,
Shiyan Town, Baoan District, Shenzhen City, Guangdong, China

SWR & Return Loss

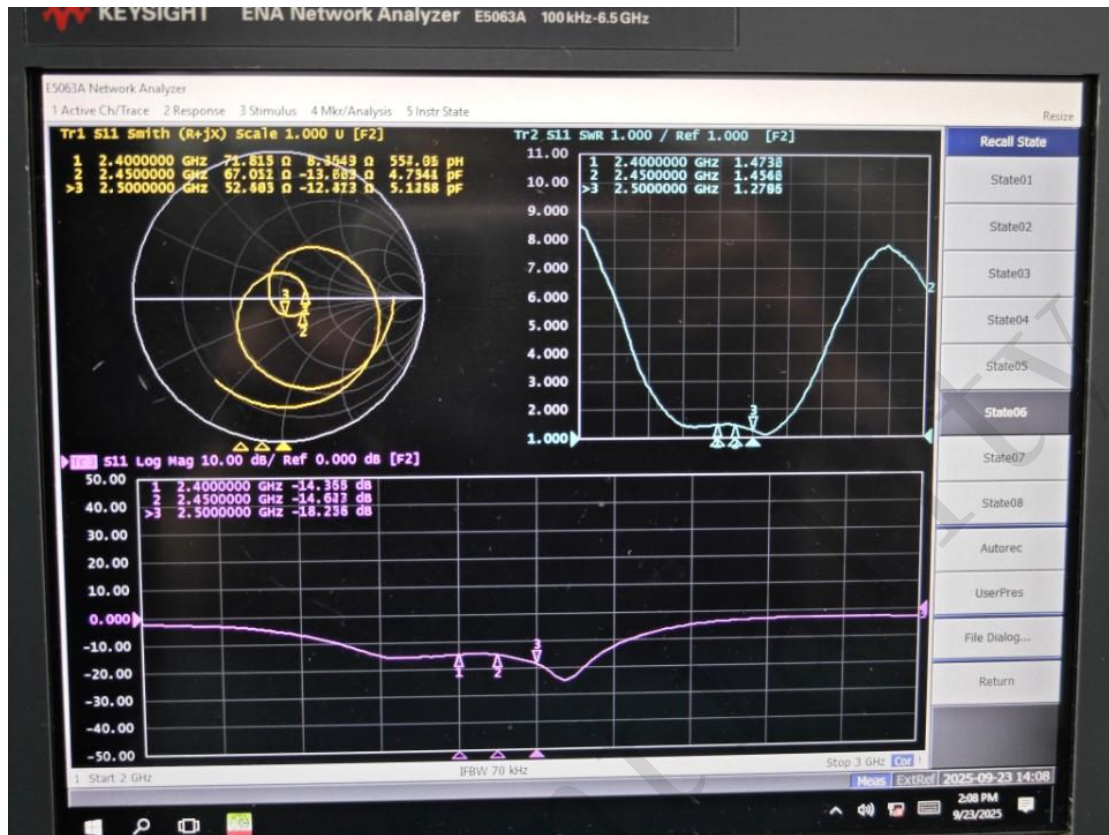

Efficiency & Gain

天线		
Freq(MHz)	Efficiency (%)	Gian(dBi)
2400	34.52	1.48
2410	35.63	1.50
2420	36.82	1.46
2430	35.75	1.51
2440	37.60	1.55
2450	37.48	1.60
2460	36.96	1.62
2470	36.75	1.57
2480	36.80	1.54
2490	35.39	1.45
2500	34.82	1.49

Antenna Radiation Pattern

