



SMART WATCH
Mobile technology on your wrist



smart watch
User Guide
BT329

TECHNICAL SHEET

Li-ion battery 380mAh

Rated voltage : DC 5V  200mA

Max consumption : 1W

Standby time : 2-3 days

Charging time : 2 hours

Compatible Bluetooth 3.0

Touch screen 1,54"

Processor : MT6261

Maximum Supported Memory Card Size : 32 GB

Compatibility


* Android 4.3 above

* Iphone IOS 7.1 above

Package contains

Watch x 1, manual x 1, USB cable x 1

DESCRIPTION

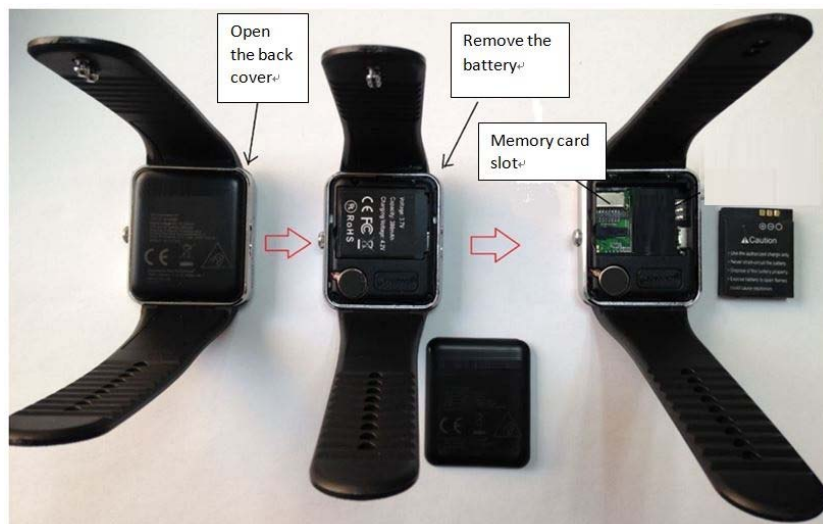


ON/OFF key :

Turning the watch ON and OFF. Press and hold the ON / OFF button to turn the screen ON or OFF.

Press the ON / OFF button to return to the main screen.

USB port :

Recharging and transferring data.

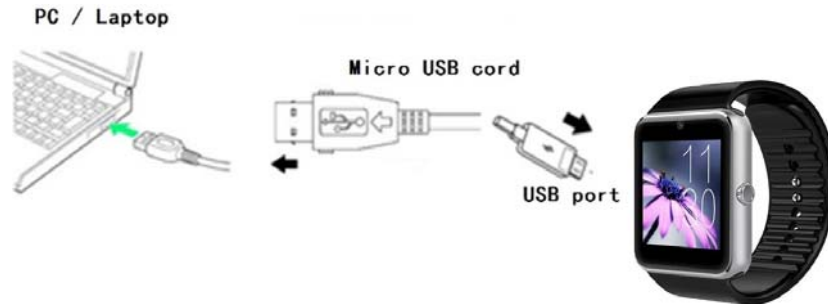**Touch screen :**

Perform all available operations by dragging or tapping the touch screen.

Recharge the watch at least 2 hours before using it.

After switching on, slide your finger on the touch screen:

- * Right to left, to display the next page of the menu.

- * Press a menu icon to enter its submenu.

RETURN key to go back.

Drag up and down to return to the main menu.

- * To turn on the watch; Press and hold the ON / OFF button.

- * To exit the menu, press the ON / OFF button briefly.

- * Press the left soft key for Menu / Confirm.


- Enter the menu from the clock,

- "Confirm" an item in the menu.


* Press the right key for Back / Hang up.

FUNCTIONS

Change clock display

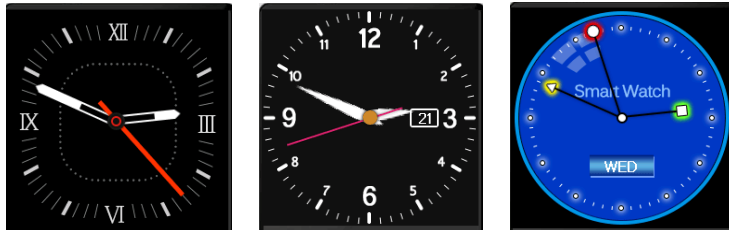

Tap in the center of the screen to change the display type of the clock. 3 displays are available.



Numbering



click this icon, you can make a call.

Messages



click this icon, you can write or read SMS

Call history



click this icon, you can see the call history of the Smartphone.

Long-distance capture



click this icon, you can control the camera by the watch.

You must activate the phone's camera. Requires installation of the "Smile Notification" application. click " Capture" to take photos

BT Connecting



click this icon, and click " Search new device ". You can search your smart phone and make the BT connection between the watch and the phone.

Bluetooth




click this icon, you can turn Bluetooth ON or OFF.

Contacts



click this icon, you can see the contact list on the phone.



Anti-lost




click this icon, choose on/off, and Alert type, then click "Save"
when phone is far away from the watch, watch will alert.

Parameter



click this icon, you can choose: time, languages, display, etc.

In watch setting, choose Time and date, then you can set time.

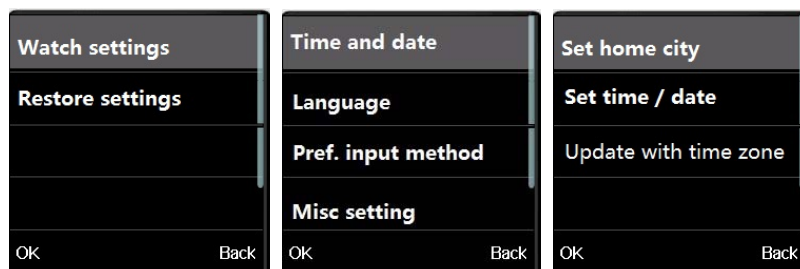

Reminder of inactivity



click this icon, For people who stay at an office at work. It is recommended to take a break at least once per hour.

Calendar



click it, you can see calendar

Drink



click this icon, **it will suggest you to drink once per hour**

QR Code



To scan and download APP

Sleep monitoring



click this icon, Click "Sleep" it will start to Record the time of deep sleep and light sleep to know the quality of sleep.



Calculator



click this icon to use calculator.

Alarm



click this icon, click "Edit" to set alarm clock time, and click "save"

Music player



click this icon to play music from the watch. You must first open the music player on the phone. Tap the middle key or the "+" or "-" icons to control the volume.

Pictures



click this icon to see the photos in memory card

Pedometer / Calories burned / Pedometer



click this icon to enter pedometer Click  to start pedometer.

Step counting is especially useful for those who want to monitor their health. To get as accurate a calculation as possible, walk or run, without swinging your arms hardly.

Camera



click this icon to enter. Click  to take pictures from your watch.

File manager



click this icon to enter into TF card.



Microphone



click this icon and click  to start recording. Requires installation of a memory card.

Profiles



click this icon to choose mode, including general, silent, meeting and outdoor mode.

Chronometer



click this icon to use chronometer.

Economy



click this icon, and click On /off, then click "OK"

Date and time settings



click this icon set time and click "Save"

Notification by Bluetooth



click this icon to see news from APP

DOWNLOAD APP

Pls install " SmileWatch " application into your Android smart phone. Then your watch can read message from your smart phone.

Scan the QR code below. There are two download address, and you only need to choose one to download.

SmileWatch - address 1 	SmileWatch - address 2 
	


***SC-81SW does not need any APP to work with iPhone;
SC-81SW only has APP for Android smart phone***

We reserve the rights to make some modifications or advance notices about the product in this manual.

INSTRUCTION OF APP

1. Please install APP into your smart phone. Turn on the APP and keep it in background.
2. Please open your phone's setting menu, and turn on

Bluetooth and turn on visibility to make your smart phone is visible to all nearby bluetooth devices

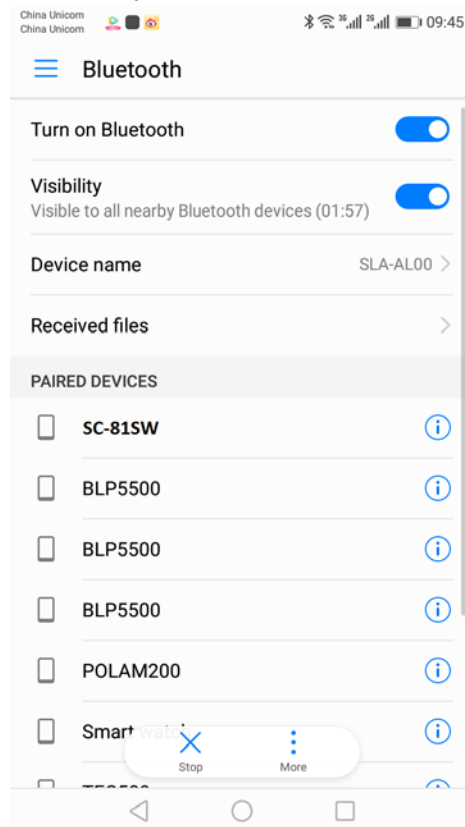



3. Click  in watch, and search bluetooth device. Find the smart phone. Then pair and bond.

Once connected, the watch sends a request to your phone to


access the contact list or call history (this requires access to your private information, some phones do not allow it). Accept the request, otherwise the watch will not be able to synchronize the information.

The watch will automatically be disconnected if it is more than 10 meters away from the phone (no obstacle between the two). The watch will issue a notification when connecting or disconnecting.


4. when your mobile phone and smart watches both show Bluetooth pairing request, please click Yes and pair to match

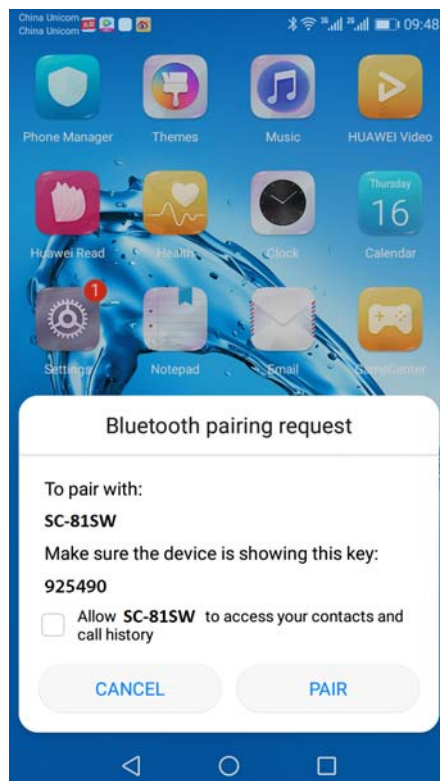

5. after pairing successfully, you will see following message:
smart phone want to access your contact list and history, please
click on the yes

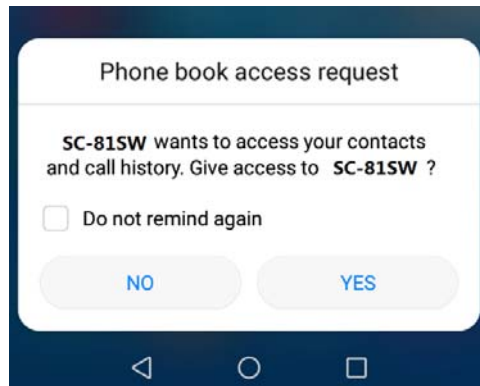


6. Bluetooth connection success.

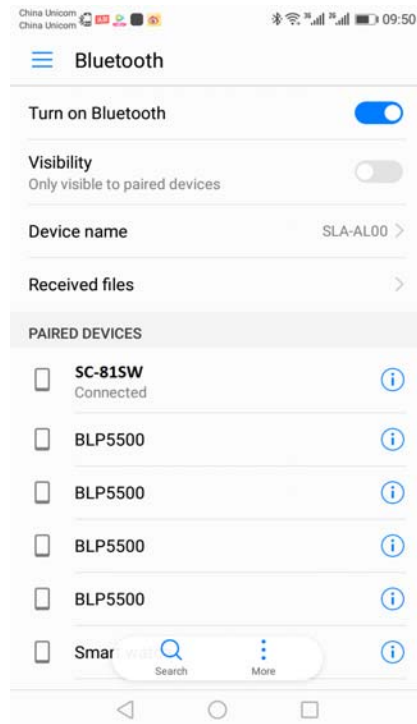

When you enter into APP, you will see like this. All the settings are pre-settled well, so you do not need to set anything here.



Enter into Notifications menu, you can choose which notifications you will receive.

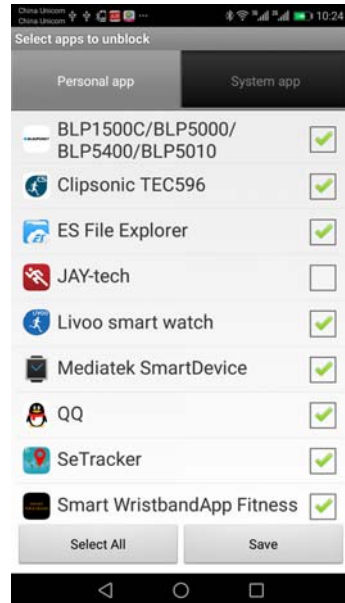

Other setting menu is not suitable for this watch.

If the APP shows: smart watch is disconnected, pls do following steps:

- 1) Turn off the APP
- 2) Enter into smart phone setting menu, and enter into bluetooth menu
- 3) Turn off bluetooth, and then turn on bluetooth again
- 4) connect the watch again

*** Pls do not search and re-connect in APP menu.**

Warranty

Basic Warranty Statement

Supersonic Inc. ("Supersonic") warrants this product to the original purchaser ONLY, to be free from defects in materials and workmanship under normal use, for ninety (90) DAYS from the date of original purchase. Proof of purchase (receipt) required.

Please visit <http://www.supersonicinc.com/warranty> for additional information.

FCC Warning Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- - Reorient or relocate the receiving antenna.
- - Increase the separation between the equipment and receiver.
- - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- - Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following

two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.