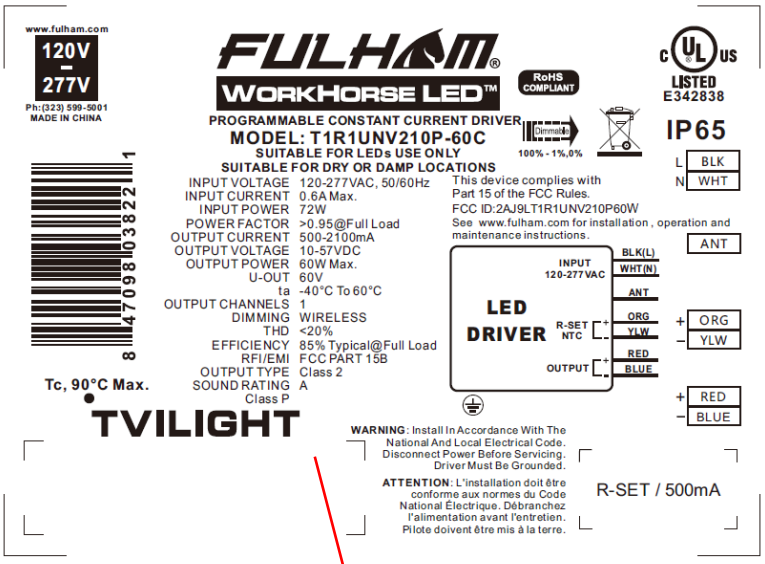

www.fulham.com
120V
277V
Ph:(323) 599-5001
MADE IN CHINA
8 47098 03822 1
Tc, 90°C Max.
TVILIGHT
FULHAM
WORKHORSE LED™
RoHS COMPLIANT
PROGRAMMABLE CONSTANT CURRENT DRIVER
MODEL: T1R1UNV210P-60C
SUITABLE FOR LEDs USE ONLY
SUITABLE FOR DRY OR DAMP LOCATIONS
INPUT VOLTAGE 120-277VAC, 50/60Hz
INPUT CURRENT 0.6A Max.
INPUT POWER 72W
POWER FACTOR >0.95@Full Load
OUTPUT CURRENT 500-2100mA
OUTPUT VOLTAGE 10-57VDC
OUTPUT POWER 60W Max.
U-OUT 60V
ta -40°C To 60°C
OUTPUT CHANNELS 1
DIMMING WIRELESS
THD <20%
EFFICIENCY 85% Typical@Full Load
RFI/EMI FCC PART 15B
OUTPUT TYPE Class 2
SOUND RATING A
Class P
Dimmable
100% - 1%,0%
c UL us
LISTED
E342838
IP65
This device complies with Part 15 of the FCC Rules.
FCC ID:2AJ9LT1R1UNV210P60W
See www.fulham.com for installation , operation and maintenance instructions.
LED DRIVER
INPUT 120-277VAC
R-SET NTC
OUTPUT
BLK(L)
WHT(N)
ANT
ORG
YLW
RED
BLUE
L BLK
N WHT
ANT
+ ORG
− YLW
+ RED
− BLUE
WARNING: Install In Accordance With The National And Local Electrical Code. Disconnect Power Before Servicing. Driver Must Be Grounded.
ATTENTION: L'installation doit être conforme aux normes du Code National Électrique. Débranchez l'alimentation avant l'entretien. Pilote doivent être mis à la terre.
R-SET / 500mA

