


Presentation of the menus



Starting up the Printer

1

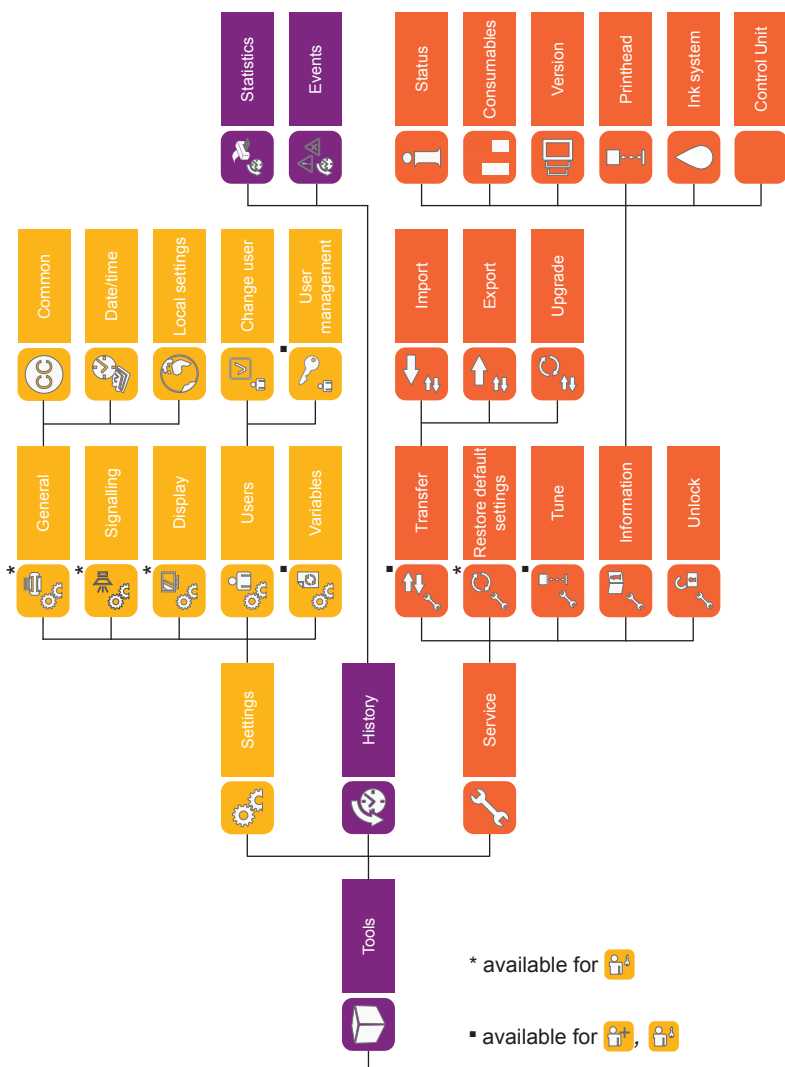

2

3



4



5

BOX job is ready to be printed.



Shutting down the Printer

1




1s Press to shut down the printer in regular mode.

4s To shut down the printer in emergency mode, press and hold 4 seconds.

2



00:02:00

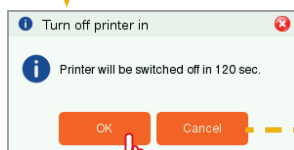


3



00:00:05

if necessary



4

5

7



Printing the current job

1

BOX job is ready to be printed.




2



Update any variable fields, if necessary or enter values for the fields with the attribute "edit before printing".

3

BOX job is printing.

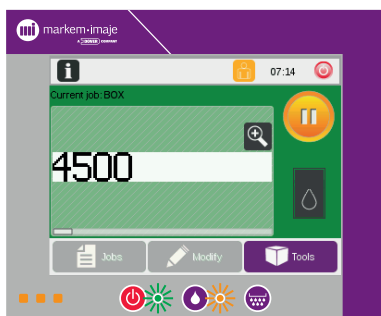

Printing the current job

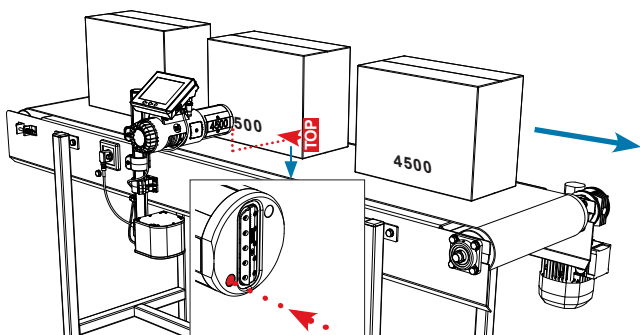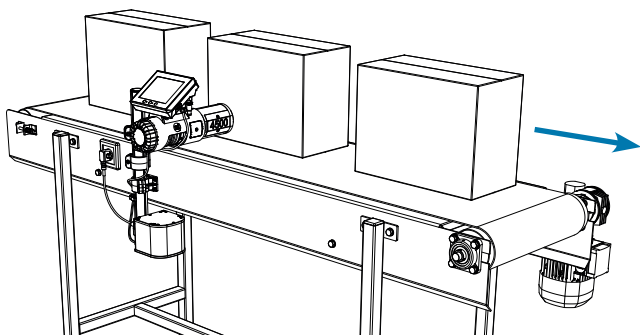

Pause



Start



Selecting a job to print

- 1 Press  (Jobs).



- 2 Select a job to print (1).
Job preview.



Press  (2).

- 3 CHOCOLATE job is ready to be printed.



- 1 Press  (Jobs).

- 2 Select a job to edit (1).

Job preview.

Press  (2).

- 3 Select a field to edit (1).

Editable fields are highlighted in blue.

Press  (2).

- 4

Editing field parameters.

