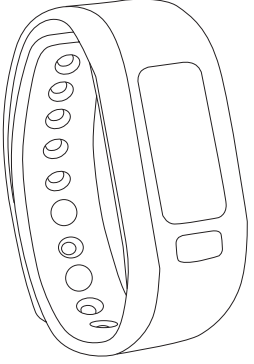
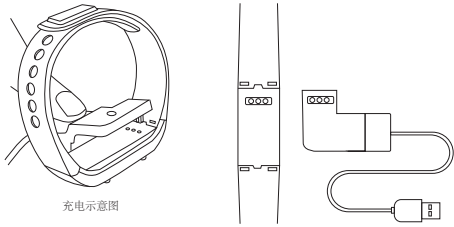
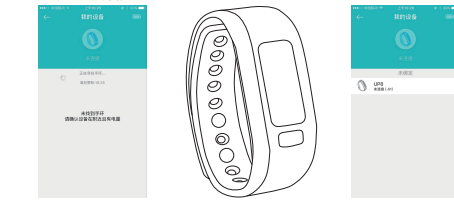


中文版面

智能蓝牙手环 使用说明书  MODEL:UP2	手环功能介绍 ● 运动功能（计步，距离，卡路里） ● 睡眠监测（睡眠时间、睡眠质量） ● 来电提醒、短信提醒、QQ、微信提醒（Android支持,iOS部分支持） ● 久坐提醒(iOS固定一小时) ● 恢复出厂设置 ● 防丢提醒（手机超出范围提醒） ● 智能闹钟 摇一摇拍照 ● 运动目标设定、运动信息分享 ● 固件升级 同步数据 ● 运动轨迹（仅支持安卓系统） 基本参数 ● 主体重量: 19g ● 待机时间: 10天 ● 工作温度: -20℃~50℃ ● 手环全长: 245mm ● 腕扣材料: 锌合金 ● 电池类型: 聚合物 ● 电池容量: 60MAH ● 同步方式: 蓝牙4.0 ● 工作时间: 3-5天 ● 显示屏尺寸: OLED 0.91白光/蓝光 ● 腕带材料: 硅胶 在手机上安装手环APP 扫描下方二维码进入各大应用市场下载并安装“天天手环”  安卓中文  iOS 系统要求: 安卓4.4及以上系统且蓝牙4.0机型, iOS8.0以上机型。	开始使用手环 1.充电 初次使用确保手环电量正常,若低电不能正常开机,请连接充电器对设备进行充电,手环会自动开机。 充电方式:将充电器三个触点对准手环背部充电位置,另一端连接标准USB接口,即可进行充电。  充电示意图 2.开/关机 长按手环主体的物理按键3秒以上,开机震动,屏幕点亮;开机状态长按物理按键3秒以上,关机震动。 3.手环显示说明 时钟页面  蓝牙图标常亮,表示与手机连接成功; 蓝牙未连接, 图标不出现; 与手机同步后, 手环会自动校准时间。	计步页面  佩戴手环,记录每天运动步数,可查看当前实时步数。 距离页面  根据行走步数,计算运动的距离。 卡路里页面  4.设备连接 首次使用需连接APP进行校准,连接成功后手环会自动同步时间,否则计步和睡眠数据不准。 打开手机APP 点击设置图标 ↓ 我的设备 (iOS) / 搜索设备 (Android) 	配对成功后,APP会自动保存手环蓝牙地址,APP打开或在后台运行,都会自动搜索并连接手环。 在APP运动、睡眠、界面下手动下拉同步数据。 手环可存储7天的离线数据,数据量越多,同步时间越长。 最长大约2分钟,同步完成后,会有“同步完成”的提示。 5.手环APP界面说明  计步数据  睡眠数据 6.APP功能及设定 个人信息和运动目标,进入APP后请先设定个人信息,设置一个人设置。可设置头像、性别、年龄、身高、体重,个人信息可提高数据的精确度。 定制个人每天的运动目标,合理的运动规划,有助于身体素质的提高。	7.提醒功能 提醒功能需要在APP内设置中心开启提醒开关,并保持手机与手环在蓝牙连接成功的状态,来消息时震动提醒。  来电提醒: 连接状态下,如果开启了来电提醒功能,当来电时,手环上会震动,并显示来电的姓名或号码。(安卓系统:如果来电方名字在手机通讯录中已保存有,则显示姓名,否则显示号码; iOS系统: 来电手环震动提醒)。 短信提醒: 安卓设备,通讯录联系人的短信显示姓名,陌生人的短信显示号码。 QQ提醒: 连接状态下,如果开启了QQ提醒功能,当有QQ信息来时,手环上会震动,并显示QQ图标提醒。 微信提醒: 连接状态下,如果开启了微信提醒功能,当有微信信息来时,手环上会震动,并显示微信图标提醒。 智能闹钟: 连接状态下,可进行三个闹钟的设置,设置后,会同步给手环,智能闹钟是一种无声音闹钟,闹钟时,手环会发起适度的震动,不会惊吓到用户,支持高线闹钟提醒。 久坐提醒: 设置是否开启久坐提醒功能和提醒时间间隔,默认时间间隔是一个小时;连接状态下,开启后,如果用户一个小时内都没有进行运动,而是一直坐着,手环将会发出震动,提醒用户进行运动。(Android用户可设置提醒时间间隔; iOS用户固定一小时。) A n d r o i d 用 户 温 馨 提 示: 使用提醒功能时需要设置为允许手环APP后台运行; 建议在权限管理中添加daydayband为信任。	其他功能 更多APP提醒 可添加更多APP提醒,目前只支持部分机型。 智能防丢 手环与手机超出一定范围,手机会发出震动提醒 查找手环 连接状态下,点击“查找手环”选项,手环会发出震动。 摇一摇拍照 进入摇摄拍照界面,连接状态下,用户摇一摇手环即可进行倒计时3秒后拍照。 固件升级 用于检测手环固件是否有新版本;升级过程中,保证蓝牙连接状态下,大约需2-3分钟升级完成,期间避免蓝牙设备断开。 恢复出厂设置 手环和APP的数据会全部被清零,并重启APP。 注意事项 1.首次使用手环,请先将手环与APP进行连接,自动同步时间,否则计步和睡眠数据不准。 2.不要随意拆机更换手环电池。 3.使用自带的触点充电线为手环充电。 4.同步数据时请先连接手环。 5.不要把手环暴露在高湿度或极低的环境。 6.手环出现死机或重启现象,蓝牙连接或数据同步出现异常,请退出APP后重新打开连接。 7.充电时请确保充电弹针和主机触点位置对准,不正确的充电方式可能会导致手环主机过热或短路 8.拿到产品后请认真阅读本手册,参照手环APP/APK下载方式安装手环软件。智能手环软件在出厂后,工厂会继续对产品功能及手环软件更新维护,如有遇到手环说明书和手环功能不一致的情况,请以手环具体功能为准;或者在手机app上帮助-栏查看软件相关介绍及功能详解。
--	---	--	---	---	--	--

第一页

第二页

第三页




第四页

第五页

第六页

第七页

英文版面

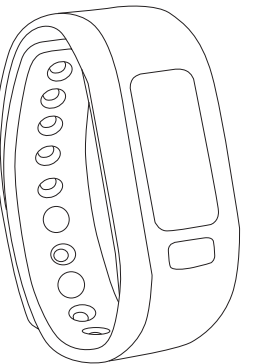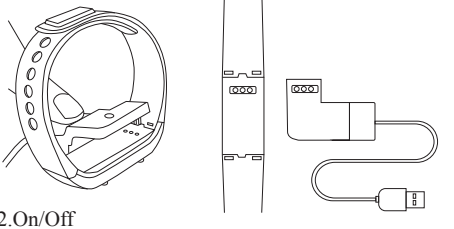Smart Bluetooth Wristband User Manual  MODEL:UP2	Introduction of Function: ● exercise function (step, distance, calories) ● Sleep monitoring (sleep quality, sleep time) ● Call reminder/Message reminder/qq/WeChat reminder (Support Android and partial iOS) ● Sedentariness remind(iOS for fixed an hour) ● Lost reminder (phone beyond the range of reminder) ● Smart alarm clock ● Shake to take a photo ● Exercise goal setting, sports information sharing ● Firmware Upgrade Sync data Factory reset ● sport path Basic Parameters: ● Host weight: 19g ● Standby time: 10 days ● Working temperature: -20℃ ~50℃ ● Band length: 245mm ● Wrist clasp material: Aluminum alloy ● Battery type: Lithium polymer ● Battery capacity:60mah ● Sync way: Bluetooth 4.0 ● Working hours: 3-5days ● Show mode: 0.91inches OLED ● Strap material: silicone Install the band APP on the phone Scan the following QR code or enter the application market to download and install "Day Day Band" Download "DayDay Band " APP/APK from Google Play for Android System Download "DayDayBand " APP/APK from Google Play for IOS System	 Android  iOS System requirements: Android 4.4 and above, iOS 8.0 and above, phone supports for Bluetooth 4.0. How to Use 1.Wristband Charging Please make sure the battery level is normal at first use. Low battery will causeshutdown and you need to charge the band for automatic power-on. How to Charge ? Joint the USB-charging cable with Band at match point backside and USB port for charging.  2. On/Off Long press the Button for over 3 seconds to boot up with vibration and screen light-up. On boot-up state, long press the Button for over 3 seconds to enter the shutdown interface.	3.Symbol Description Clock Interface  Bluetooth Icon Lights always, indicating connected with phone successfully. Icon disappears otherwise. Time calibrated automatically after syncing to phone. Steps Interface  Wear band to record steps every day.Check out real-time steps constantly Distance Interface  Show total distance via calculating steps. Calories interface  4.How to Connect Connect the APP at first use to calibrate the band, automatic sync time, otherwise steps and sleep data will be incorrect. Open APP Click Settings Icon ↓ My Device (iOS) / Search Device(Android) ↓ Pull-down to Scan Device ↓ Click to Connect	 When band connects the phone successfully, APP will automatically save Bluetooth address Once opened, APP will automatically search and connect band. Manually syncs data bypull-down under Exercise, Sleep and Heart rate interfaces. Seven days offline-data is saved. The more the data is the longer it takes to sync maximumnearly 2 minutes. "Sync finished" reminder shown after syncing done. 5.APP/APK Description  Step  Sleep	6.Main APP Features and Settings Personal Information and Exercise Goal Please set personal information firs after entering APP. Settings→Personal Settings. Editing your portrait, gender, age,height and weight included to increase data accuracy.Plan a daily exercise goal.A feasible plan links to a sound body. 7.Notifications This feature will be workable under: Notifications enabled in Settings; Bluetooth-connecting successfully. Vibrate reminder once got messages.  Incoming Call: Android devices,Vibrate and name or number displayed (Display name only if it's in yourcontacts,display number otherwise.) Message: Android devices,Reminding with name from Contacts or number if unknown. QQ: Vibrating and QQ icon reminder WeChat: vibrating and WeChat icon reminder Clock: Up to 3 alarms with user-friendly vibration. Support offline Clock alarming. Sedentary: One hour default interval. Notified with vibration after sitting for 1 hour. (modified of time interval in Settings for Android users; always 1 hour for IOS users.) Warn tips for Android users: Allow "Dayday band"APP/APK running in backstage when uses Notifications and add it to trust one in your privilege management.	Other Features More APP Notifications Add more APP notifications in Settings,which support partial model only. Against Lost The phone will vibrate when the band out of the phone Find Band Click "Find band", band will vibrate: when connected with phone Shake to Snap On Shake to Snap, shake and snap after 3 seconds. Firmware Upgrade Detecting new version; upgrade must be Bluetooth-connected; upgrade takes 2~3 minutes and avoid disconnecting with Bluetooth. Factory Date Reset Zero out all data from band and APP, then APP rebooted. Attention 1. When you use the smart wristband for the first time, connect the wristband and APP/APK and sync the time, otherwise the Pedometer and Sleeping tracker data will not be accurate. 2.Do not tamper with the battery. Seek professional advice only. 3.Only use the standard charging cable supplied. 4.Connect the smart wristband during data sync 5.Do not expose the wristband to very high or low temperatures. 6.If the smart wristband restarts or crashes, please pay attention.Try again after clearing up the storage. 7.Please do not remove the device from the wristband to ensure precise connection during charging. Incorrect charging will lead to the wristband getting hot and /or short circuit. (Ensure all points of the charger connect precisely. Bad connection could result in overheating or short circuit.)
---	---	--	--	---	--	---

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.