




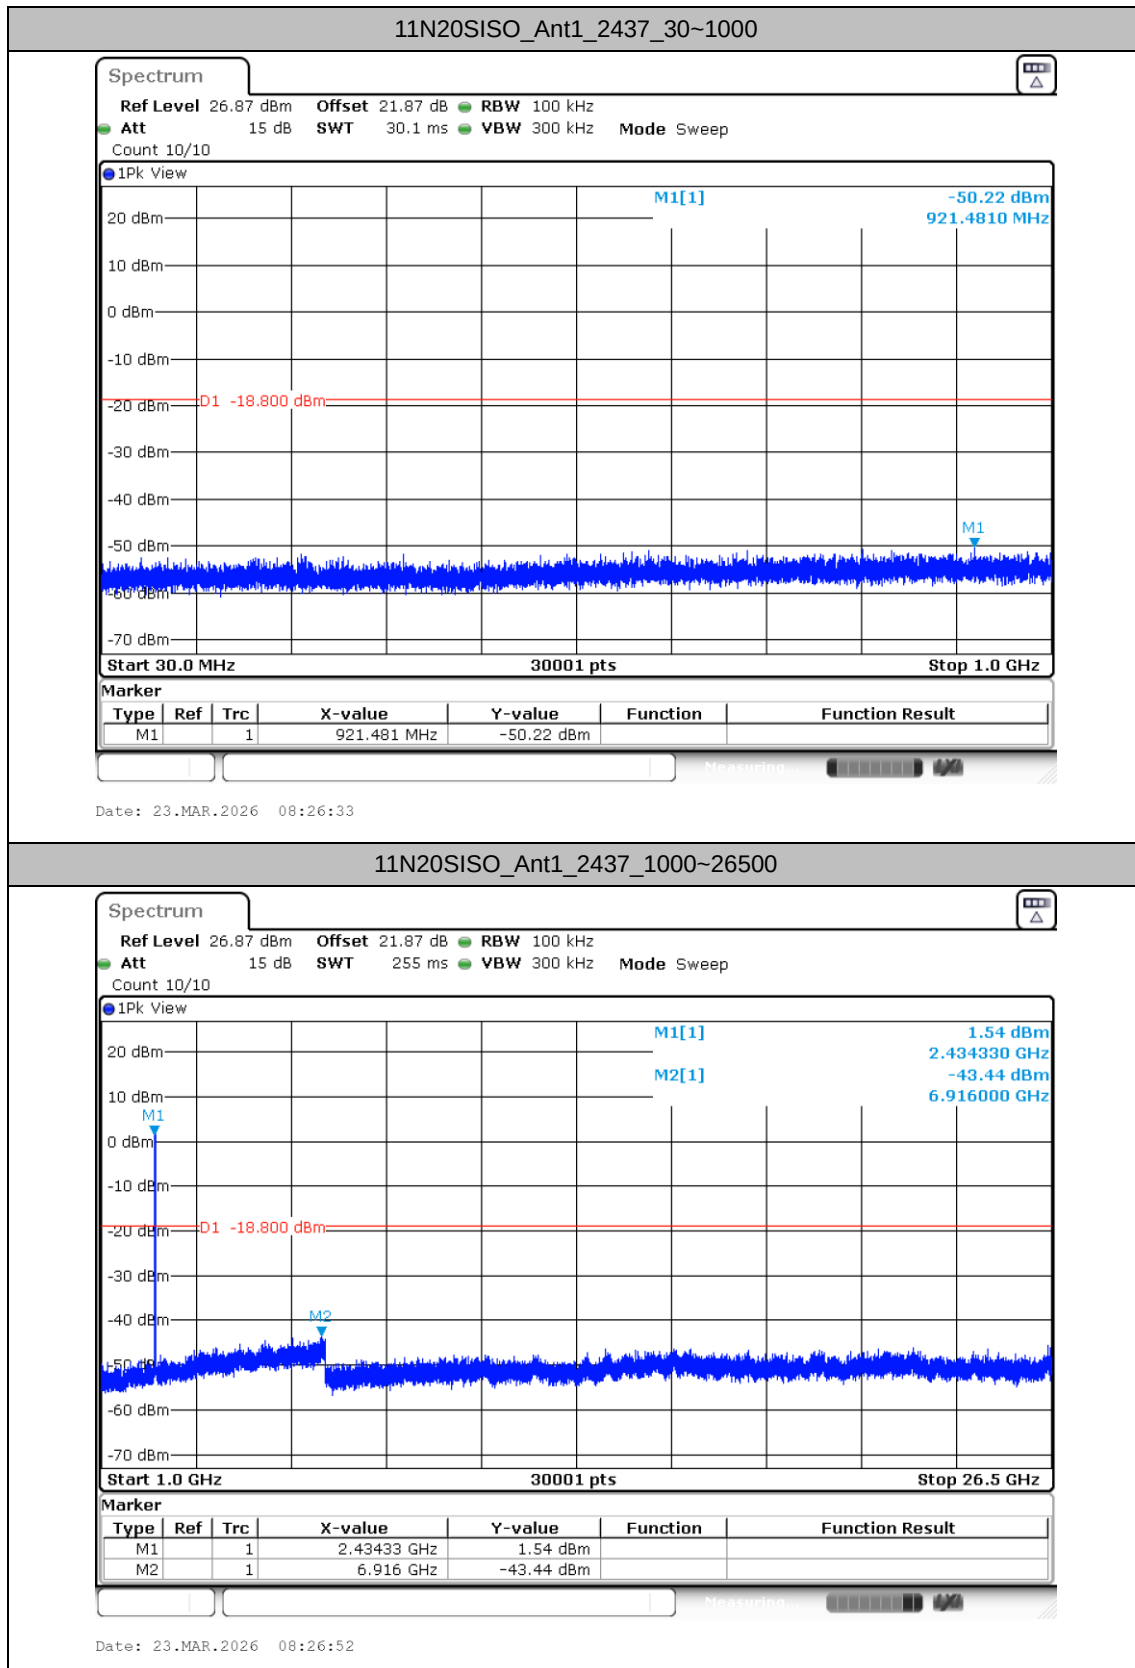
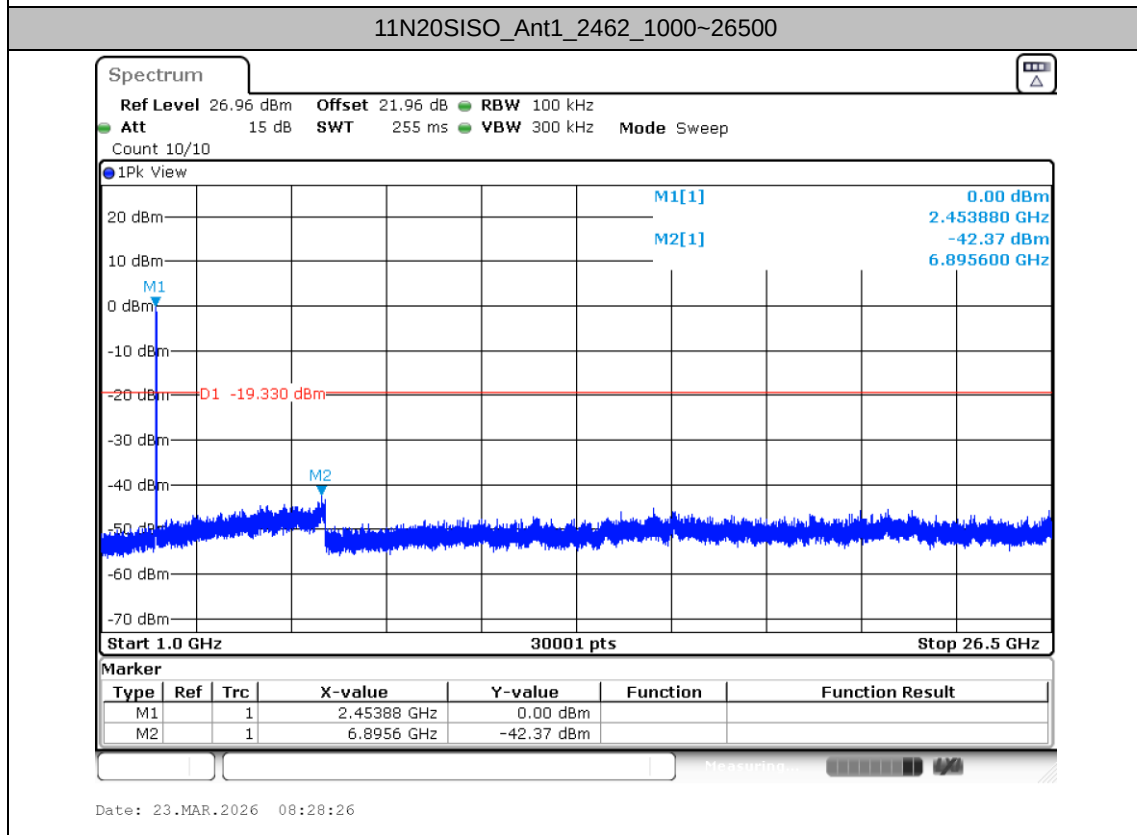
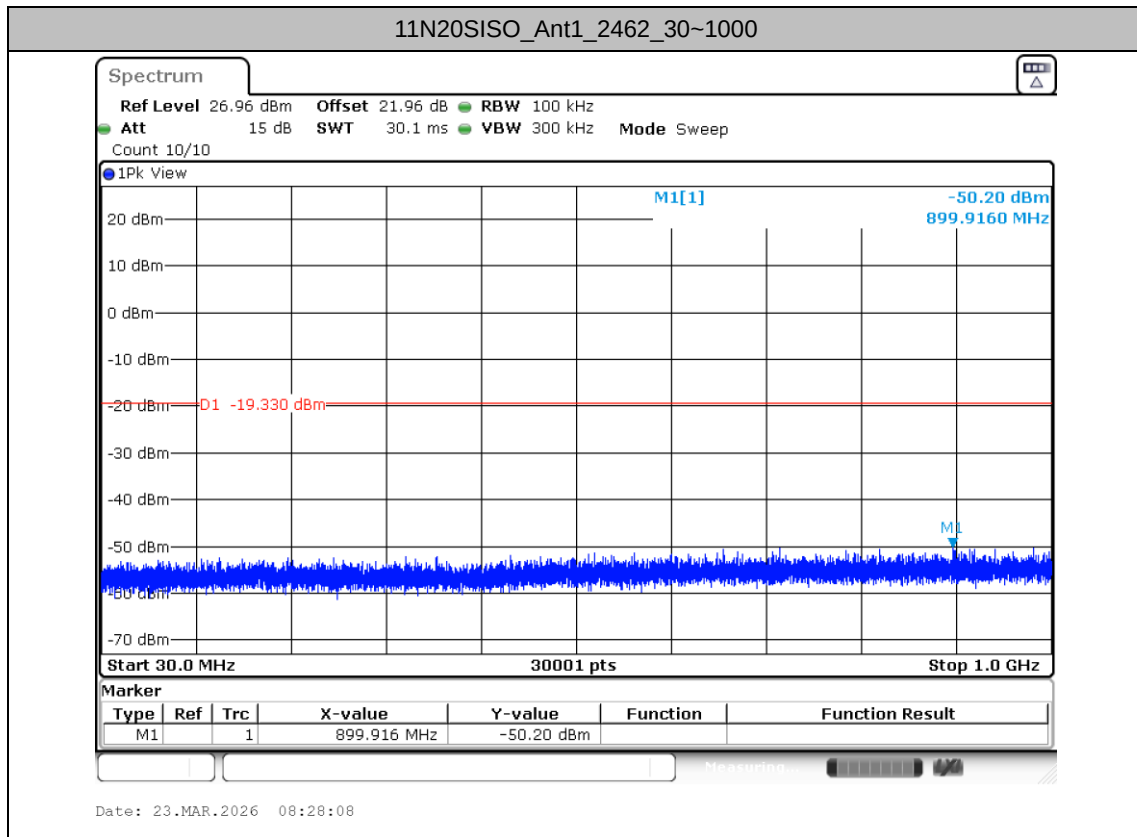
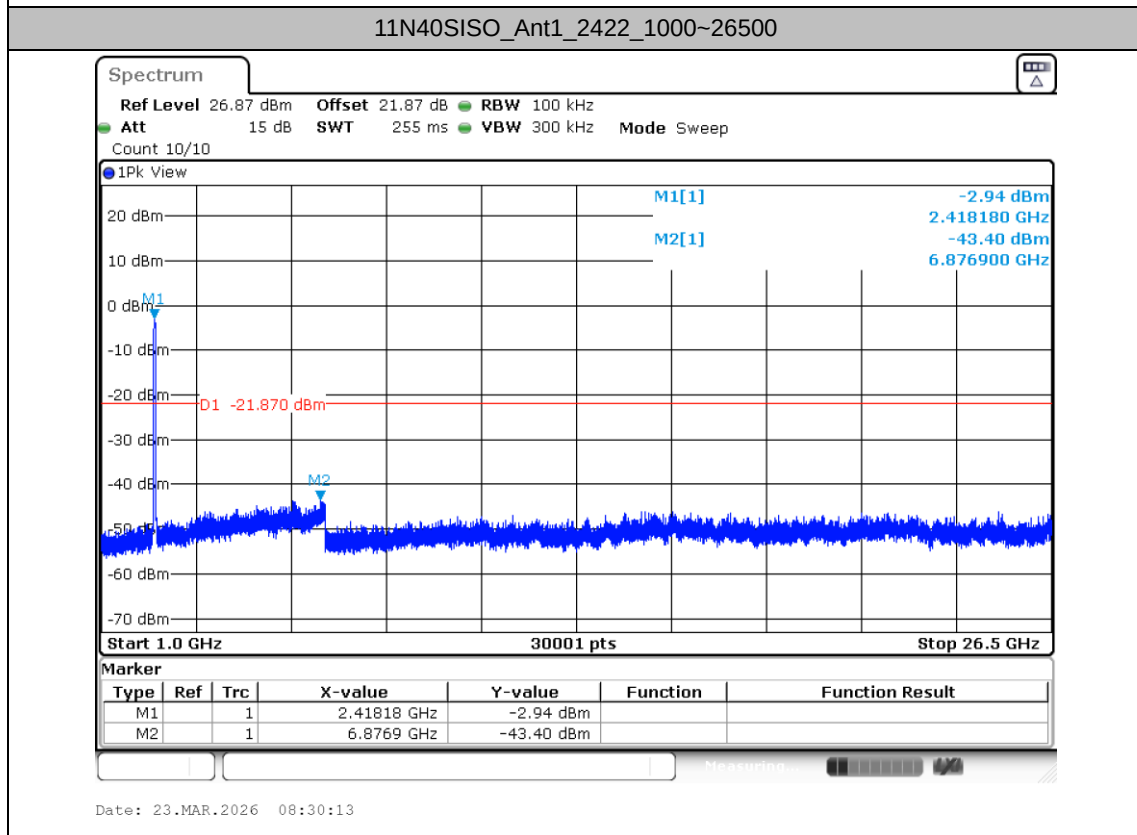


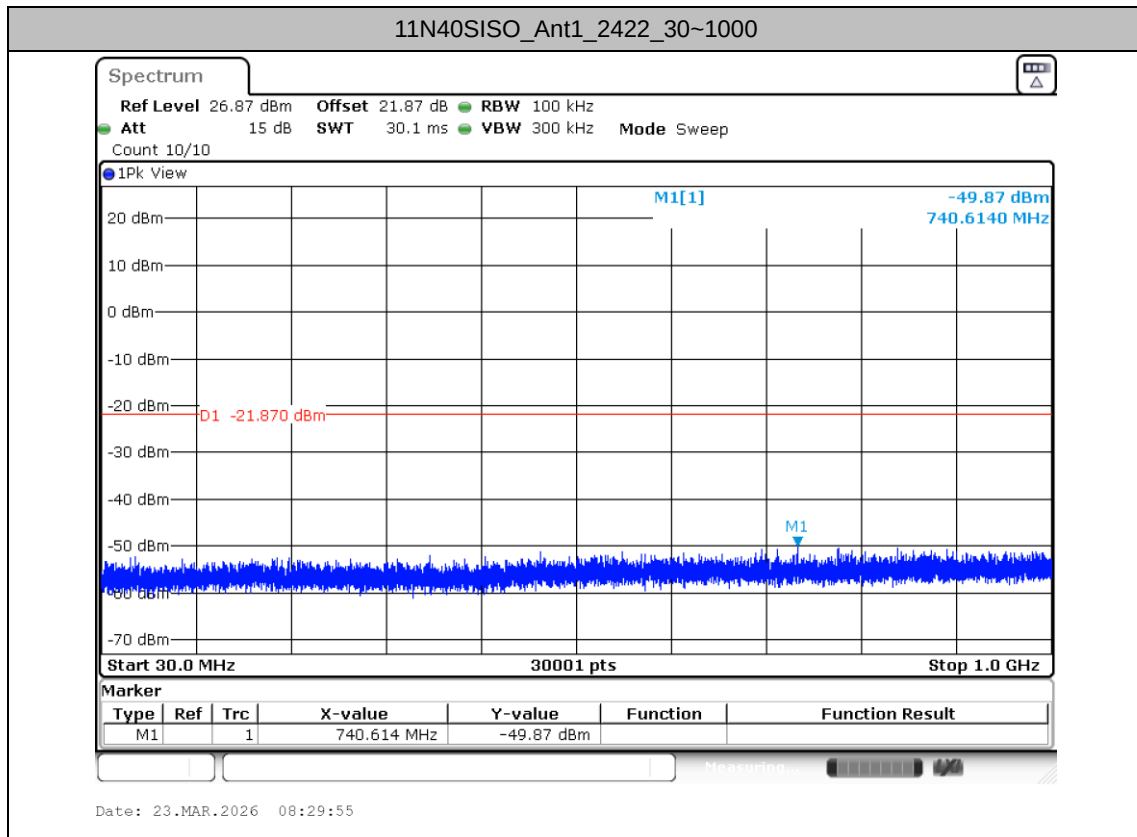

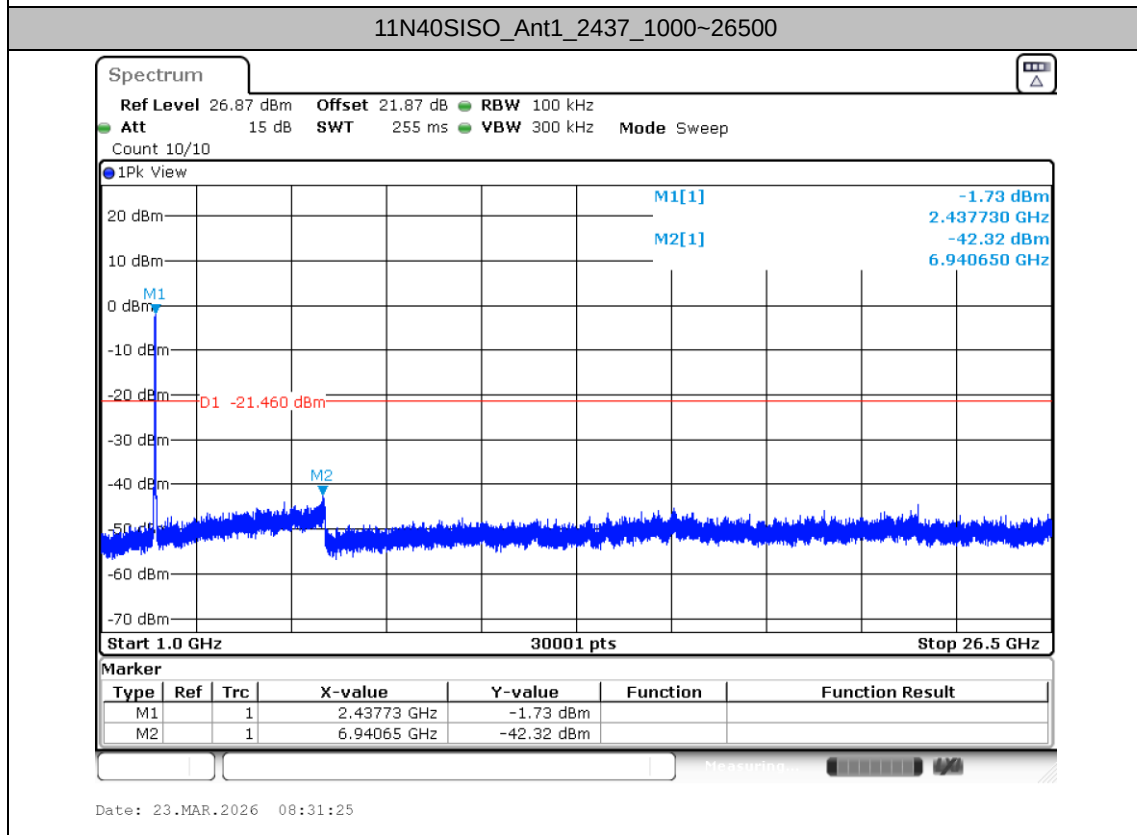

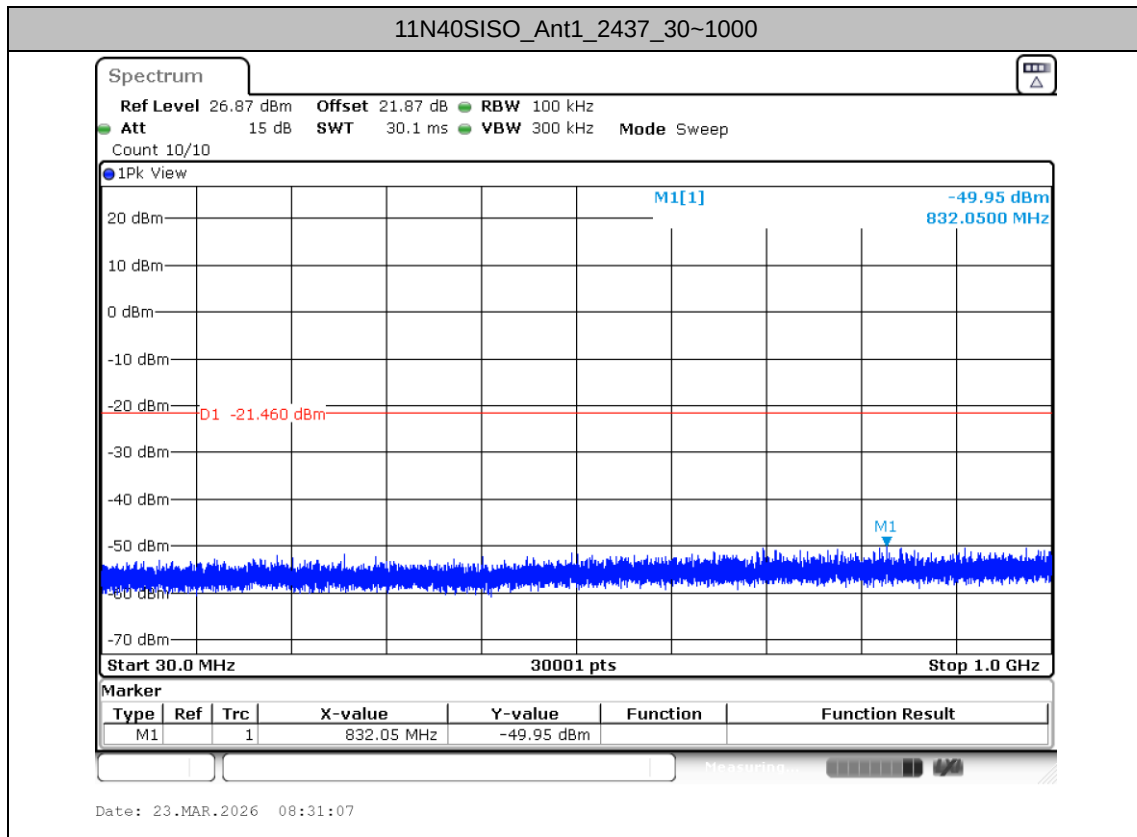


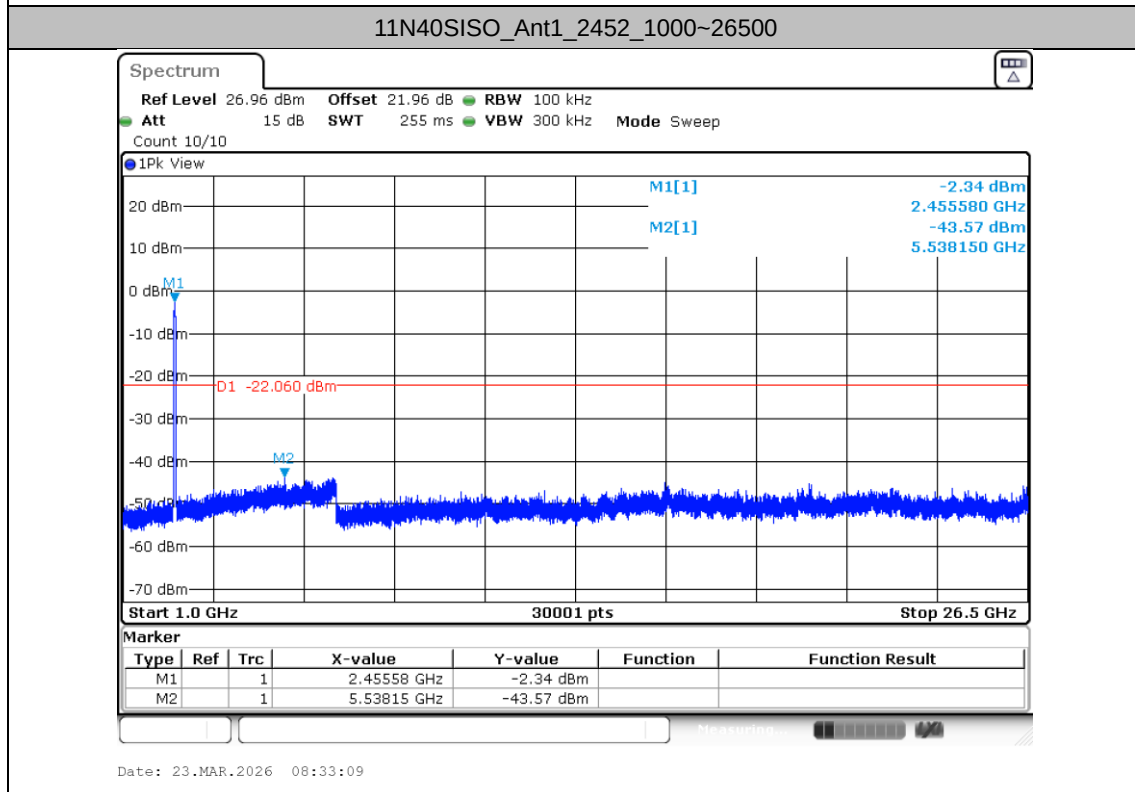

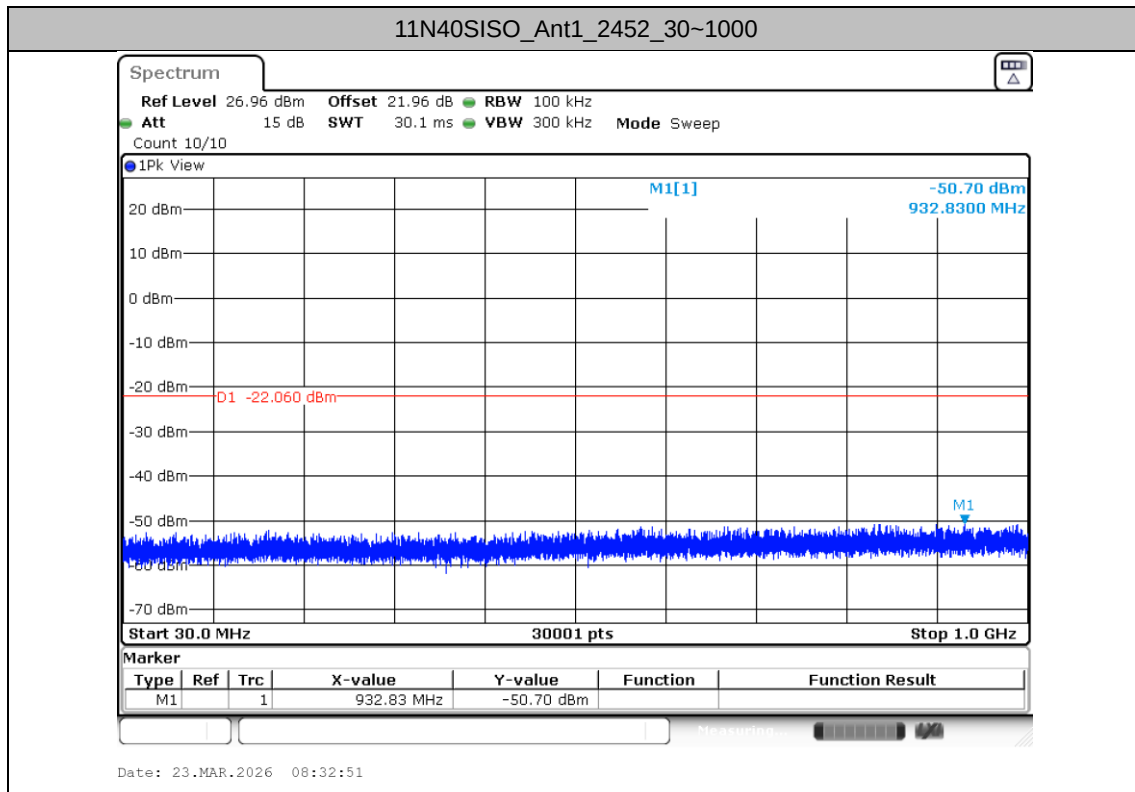




Appendix B. AC Conducted Emission Test Results

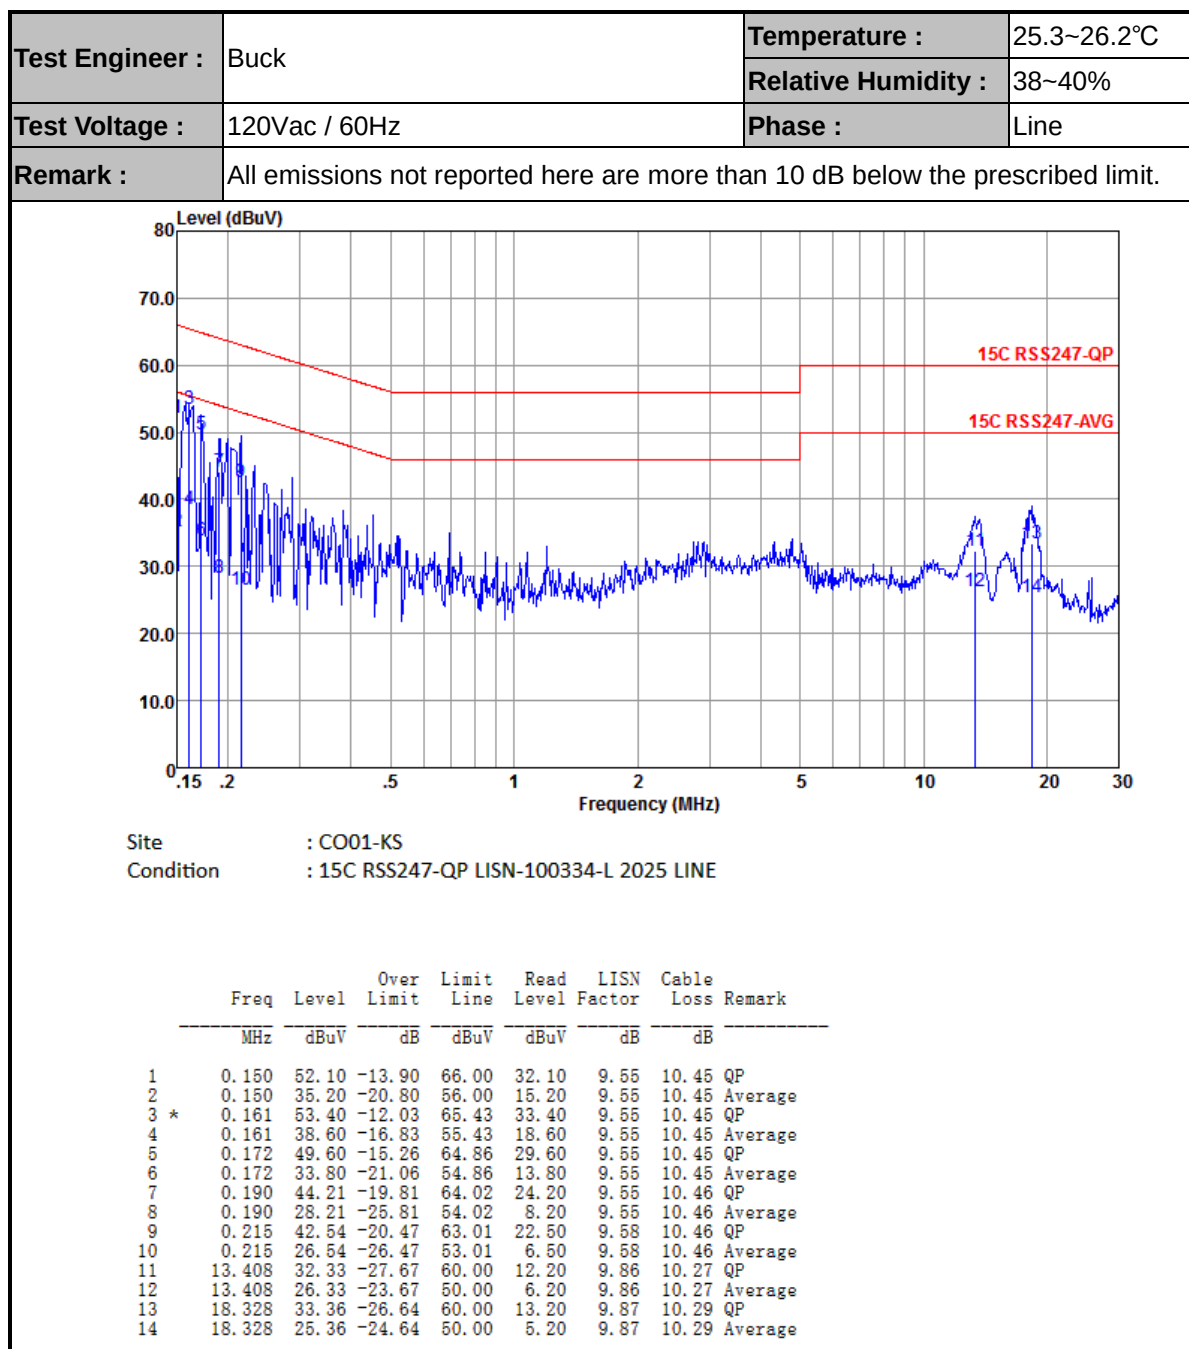

Test Engineer :	Buck	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

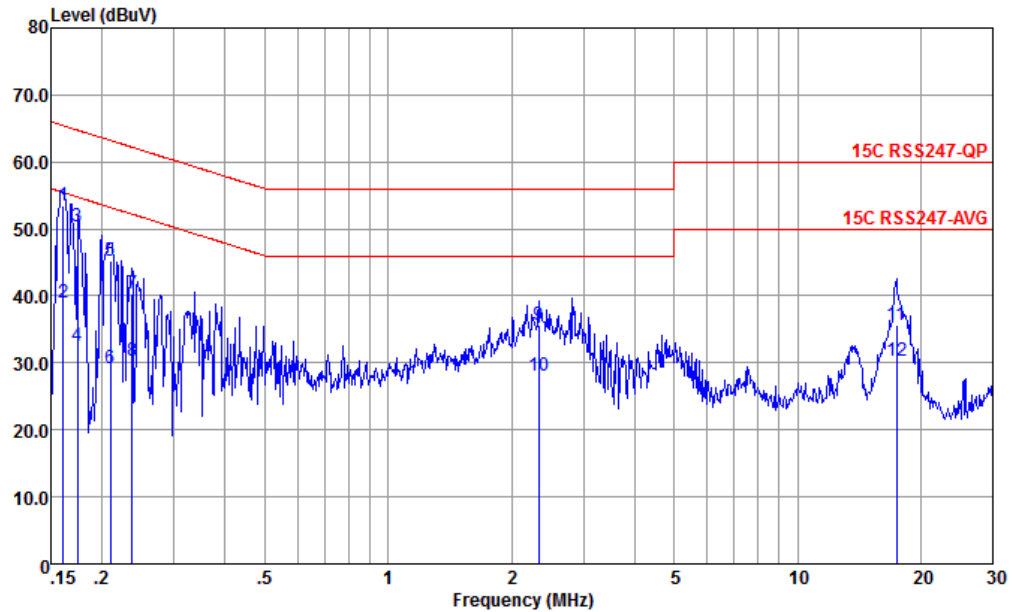

Site : CO01-KS
Condition : 15C RSS247-QP LISN-100334-N 2025 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1 *	0.161	53.50	-11.93	65.43	33.50	9.55	10.45	QP
2	0.161	38.90	-16.53	55.43	18.90	9.55	10.45	Average
3	0.174	50.40	-14.37	64.77	30.39	9.55	10.46	QP
4	0.174	32.50	-22.27	54.77	12.49	9.55	10.46	Average
5	0.209	45.27	-17.96	63.23	25.20	9.61	10.46	QP
6	0.209	29.27	-23.96	53.23	9.20	9.61	10.46	Average
7	0.237	40.31	-21.91	62.22	20.20	9.64	10.47	QP
8	0.237	30.31	-21.91	52.22	10.20	9.64	10.47	Average
9	2.334	35.61	-20.39	56.00	15.61	9.77	10.23	QP
10	2.334	28.13	-17.87	46.00	8.13	9.77	10.23	Average
11	17.475	35.65	-24.35	60.00	15.60	9.76	10.29	QP
12	17.475	30.25	-19.75	50.00	10.20	9.76	10.29	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C Radiated Spurious Emission

Test Engineer :	Maven	Relative Humidity :	52~56%
		Temperature :	22~ 25℃





Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	802.11b	01	2412	1Mbps	-	-
Mode 2	2400-2483.5	1	802.11b	06	2437	1Mbps	-	-
Mode 3	2400-2483.5	1	802.11b	11	2462	1Mbps	-	-
Mode 4	2400-2483.5	1	802.11g	01	2412	6Mbps	-	-
Mode 5	2400-2483.5	1	802.11g	06	2437	6Mbps	-	-
Mode 6	2400-2483.5	1	802.11g	11	2462	6Mbps	-	-
Mode 7	2400-2483.5	1	802.11n HT20	01	2412	MCS0	-	-
Mode 8	2400-2483.5	1	802.11n HT20	06	2437	MCS0	-	-
Mode 9	2400-2483.5	1	802.11n HT20	11	2462	MCS0	-	-
Mode 10	2400-2483.5	1	802.11n HT40	3	2422	MCS0	-	-
Mode 11	2400-2483.5	1	802.11n HT40	6	2437	MCS0	-	-
Mode 12	2400-2483.5	1	802.11n HT40	9	2452	MCS0	-	-





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11b	01	2386.70	40.94	54.00	-13.06	V	AVERAGE	Pass	Band Edge
1	802.11b	01	4824.00	49.73	54.00	-4.27	H	AVERAGE	Pass	Harmonic
2	802.11b	06	-	-	-	-	-	-	-	Band Edge
2	802.11b	06	4874.00	50.59	54.00	-3.41	H	AVERAGE	Pass	Harmonic
3	802.11b	11	2483.50	41.10	54.00	-12.90	V	AVERAGE	Pass	Band Edge
3	802.11b	11	4924.00	50.16	54.00	-3.84	H	AVERAGE	Pass	Harmonic
4	802.11g	01	2389.95	44.02	54.00	-9.98	V	AVERAGE	Pass	Band Edge
4	802.11g	01	4824.00	42.63	54.00	-11.37	V	AVERAGE	Pass	Harmonic
5	802.11g	06	-	-	-	-	-	-	-	Band Edge
5	802.11g	06	4874.00	42.56	54.00	-11.44	V	AVERAGE	Pass	Harmonic
6	802.11g	11	2483.74	68.94	74.00	-5.06	V	PEAK	Pass	Band Edge
6	802.11g	11	7386.00	39.68	54.00	-14.32	H	AVERAGE	Pass	Harmonic
7	802.11n HT20	01	2389.95	42.92	54.00	-11.08	V	AVERAGE	Pass	Band Edge
7	802.11n HT20	01	4824.00	41.12	54.00	-12.88	H	AVERAGE	Pass	Harmonic
8	802.11n HT20	06	-	-	-	-	-	-	-	Band Edge
8	802.11n HT20	06	4874.00	40.61	54.00	-13.39	H	AVERAGE	Pass	Harmonic
9	802.11n HT20	11	2483.50	42.76	54.00	-11.24	V	AVERAGE	Pass	Band Edge
9	802.11n HT20	11	7386.00	44.95	74.00	-29.05	H	PEAK	Pass	Harmonic
10	802.11n HT40	3	2389.95	42.27	54.00	-11.73	V	AVERAGE	Pass	Band Edge
10	802.11n HT40	3	4843.50	45.74	74.00	-28.26	H	-	Pass	Harmonic
11	802.11n HT40	6	-	-	-	-	-	-	-	Band Edge
11	802.11n HT40	6	7311.00	43.86	74.00	-30.14	V	PEAK	Pass	Harmonic
12	802.11n HT40	9	2483.50	44.81	54.00	-9.19	V	AVERAGE	Pass	Band Edge
12	802.11n HT40	9	7356.00	43.53	74.00	-30.47	H	PEAK	Pass	Harmonic

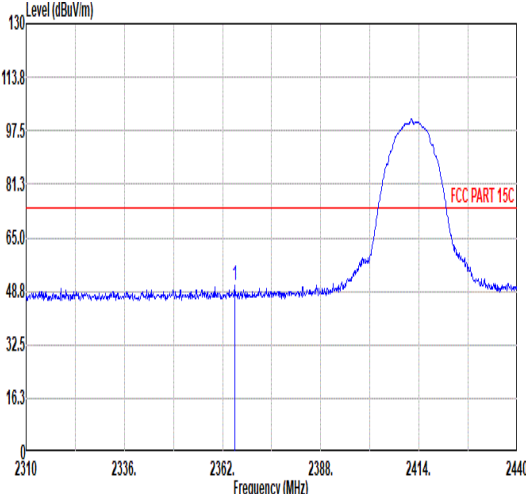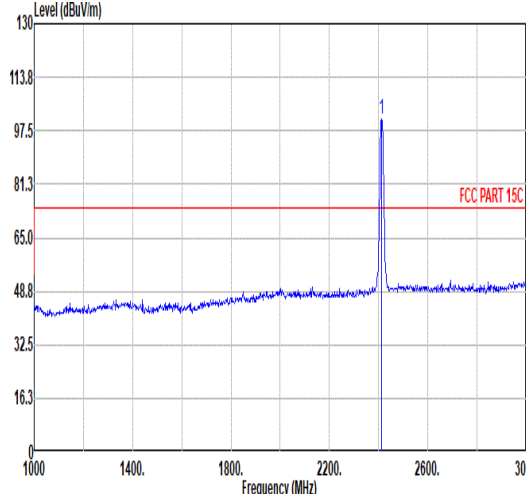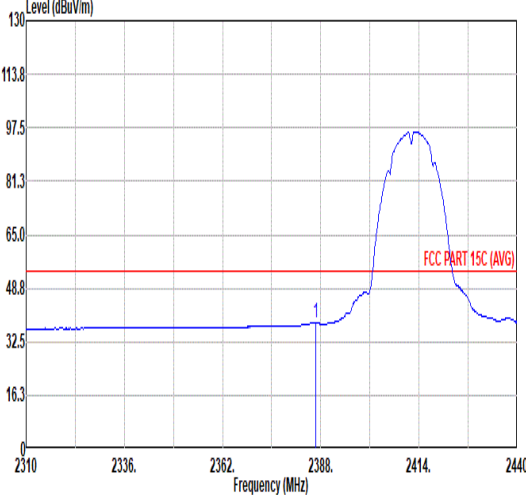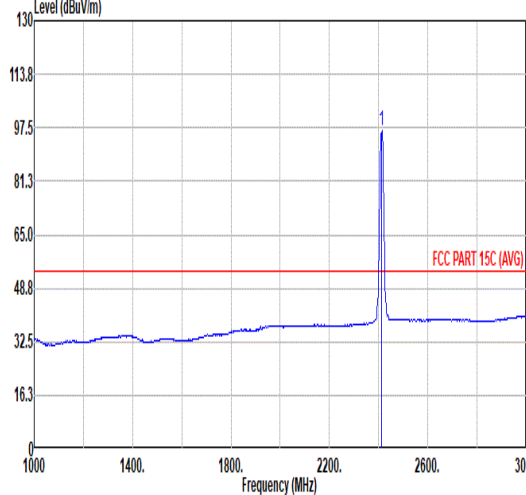

Mode	1																																																																																																				
	Band Edge																																																																																																				
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Horizontal						Fundamental																																																																																														
Peak																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2365.25</td><td>50.66</td><td>74.00</td><td>-23.34</td><td>42.45</td><td>31.72</td><td>7.12</td><td>36.63</td><td>6.00</td><td>181</td><td>206 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2365.25	50.66	74.00	-23.34	42.45	31.72	7.12	36.63	6.00	181	206 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>101.28</td><td>-----</td><td>-----</td><td>92.61</td><td>32.05</td><td>7.20</td><td>36.58</td><td>6.00</td><td>181</td><td>206 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	101.28	-----	-----	92.61	32.05	7.20	36.58	6.00	181	206 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2365.25	50.66	74.00	-23.34	42.45	31.72	7.12	36.63	6.00	181	206 PEAK																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2412.00	101.28	-----	-----	92.61	32.05	7.20	36.58	6.00	181	206 PEAK																																																																																										
Avg																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.70</td><td>38.43</td><td>54.00</td><td>-15.57</td><td>29.98</td><td>31.09</td><td>7.16</td><td>36.60</td><td>6.00</td><td>181</td><td>206 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.70	38.43	54.00	-15.57	29.98	31.09	7.16	36.60	6.00	181	206 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>96.43</td><td>-----</td><td>-----</td><td>87.74</td><td>32.06</td><td>7.21</td><td>36.58</td><td>6.00</td><td>181</td><td>206 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	96.43	-----	-----	87.74	32.06	7.21	36.58	6.00	181	206 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2386.70	38.43	54.00	-15.57	29.98	31.09	7.16	36.60	6.00	181	206 AVERAGE																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2412.00	96.43	-----	-----	87.74	32.06	7.21	36.58	6.00	181	206 AVERAGE																																																																																										

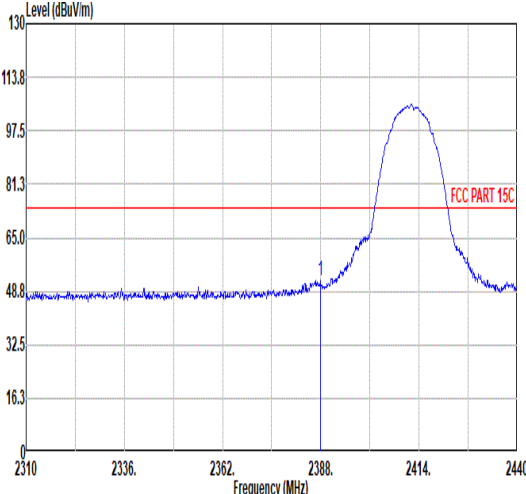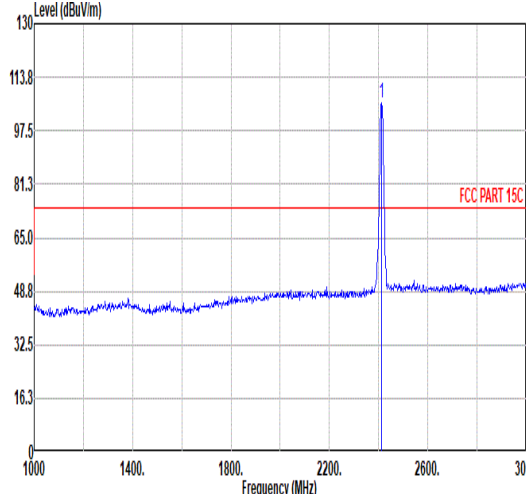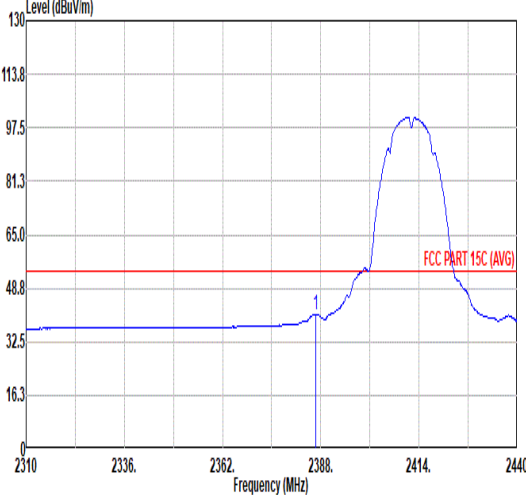
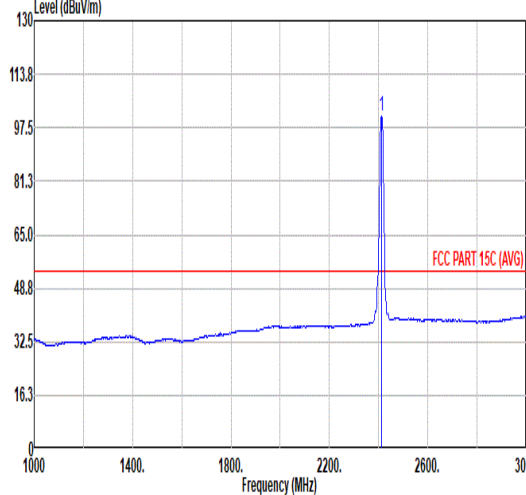


Mode	1																																																						
	Band Edge																																																						
	2400-2483.5_802.11b_CH01_2412MHz																																																						
ANT	1																																																						
Pol.	Vertical																																																						
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.87</td><td>51.91</td><td>74.00</td><td>-22.09</td><td>43.45</td><td>31.90</td><td>7.16</td><td>36.60</td><td>6.00</td><td>100 304 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.87	51.91	74.00	-22.09	43.45	31.90	7.16	36.60	6.00	100 304 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2387.87	51.91	74.00	-22.09	43.45	31.90	7.16	36.60	6.00	100 304 PEAK																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>106.15</td><td>-----</td><td>-----</td><td>97.48</td><td>32.05</td><td>7.20</td><td>36.58</td><td>6.00</td><td>100 304 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	106.15	-----	-----	97.48	32.05	7.20	36.58	6.00	100 304 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2412.00	106.15	-----	-----	97.48	32.05	7.20	36.58	6.00	100 304 PEAK																																													
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.70</td><td>40.94</td><td>54.00</td><td>-13.06</td><td>32.49</td><td>31.09</td><td>7.16</td><td>36.60</td><td>6.00</td><td>100 304 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.70	40.94	54.00	-13.06	32.49	31.09	7.16	36.60	6.00	100 304 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2386.70	40.94	54.00	-13.06	32.49	31.09	7.16	36.60	6.00	100 304 AVERAGE																																													
AVERAGE																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>100.92</td><td>-----</td><td>-----</td><td>92.25</td><td>32.05</td><td>7.20</td><td>36.58</td><td>6.00</td><td>100 304 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	100.92	-----	-----	92.25	32.05	7.20	36.58	6.00	100 304 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2412.00	100.92	-----	-----	92.25	32.05	7.20	36.58	6.00	100 304 AVERAGE																																													





Mode	1																																																																			
	Harmonic																																																																			
	2400-2483.5_802.11b_CH01_2412MHz																																																																			
ANT	1																																																																			
Pol.	Horizontal						Vertical																																																													
Peak Avg																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>51.89</td><td>74.00</td><td>-22.11</td><td>72.02</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>103</td><td>56 PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>49.73</td><td>54.00</td><td>-4.27</td><td>69.86</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>103</td><td>56 AVERAGE</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	51.89	74.00	-22.11	72.02	33.80	10.29	64.22	0.00	103	56 PEAK	2	4824.00	49.73	54.00	-4.27	69.86	33.80	10.29	64.22	0.00	103	56 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																										
1	4824.00	51.89	74.00	-22.11	72.02	33.80	10.29	64.22	0.00	103	56 PEAK																																																									
2	4824.00	49.73	54.00	-4.27	69.86	33.80	10.29	64.22	0.00	103	56 AVERAGE																																																									
<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>48.37</td><td>74.00</td><td>-25.63</td><td>68.50</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>103</td><td>194 PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>45.14</td><td>54.00</td><td>-8.86</td><td>65.27</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>103</td><td>194 AVERAGE</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	48.37	74.00	-25.63	68.50	33.80	10.29	64.22	0.00	103	194 PEAK	2	4824.00	45.14	54.00	-8.86	65.27	33.80	10.29	64.22	0.00	103	194 AVERAGE	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																										
1	4824.00	48.37	74.00	-25.63	68.50	33.80	10.29	64.22	0.00	103	194 PEAK																																																									
2	4824.00	45.14	54.00	-8.86	65.27	33.80	10.29	64.22	0.00	103	194 AVERAGE																																																									

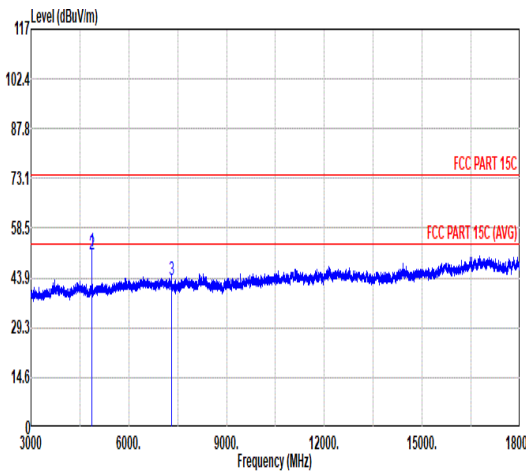
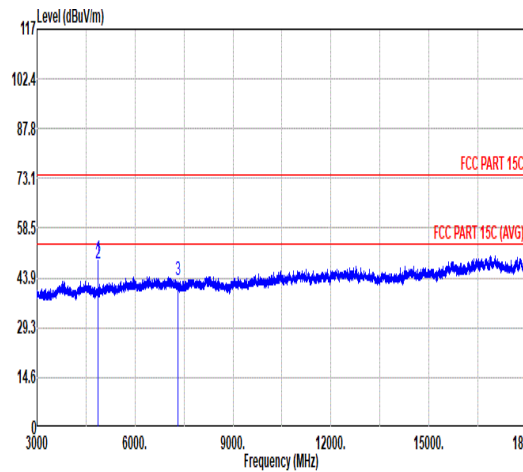


Mode	2																																																																																																																																																						
	Harmonic																																																																																																																																																						
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																																						
ANT	1																																																																																																																																																						
Pol.	Horizontal						Vertical																																																																																																																																																
Peak Avg																																																																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>51.79</td><td>74.00</td><td>-22.21</td><td>71.87</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>100</td><td>121 PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>50.59</td><td>54.00</td><td>-3.41</td><td>70.67</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>100</td><td>121 AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>43.39</td><td>74.00</td><td>-30.61</td><td>61.13</td><td>35.58</td><td>12.78</td><td>66.10</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	51.79	74.00	-22.21	71.87	33.85	10.34	64.27	0.00	100	121 PEAK	2	4874.00	50.59	54.00	-3.41	70.67	33.85	10.34	64.27	0.00	100	121 AVERAGE	3	7311.00	43.39	74.00	-30.61	61.13	35.58	12.78	66.10	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>49.59</td><td>74.00</td><td>-24.41</td><td>69.67</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>100</td><td>78 PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>48.02</td><td>54.00</td><td>-5.98</td><td>68.10</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>100</td><td>78 AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>43.47</td><td>74.00</td><td>-30.53</td><td>61.21</td><td>35.58</td><td>12.78</td><td>66.10</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	49.59	74.00	-24.41	69.67	33.85	10.34	64.27	0.00	100	78 PEAK	2	4874.00	48.02	54.00	-5.98	68.10	33.85	10.34	64.27	0.00	100	78 AVERAGE	3	7311.00	43.47	74.00	-30.53	61.21	35.58	12.78	66.10	0.00	---	---
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																													
1	4874.00	51.79	74.00	-22.21	71.87	33.85	10.34	64.27	0.00	100	121 PEAK																																																																																																																																												
2	4874.00	50.59	54.00	-3.41	70.67	33.85	10.34	64.27	0.00	100	121 AVERAGE																																																																																																																																												
3	7311.00	43.39	74.00	-30.61	61.13	35.58	12.78	66.10	0.00	---	---	PEAK																																																																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																													
1	4874.00	49.59	74.00	-24.41	69.67	33.85	10.34	64.27	0.00	100	78 PEAK																																																																																																																																												
2	4874.00	48.02	54.00	-5.98	68.10	33.85	10.34	64.27	0.00	100	78 AVERAGE																																																																																																																																												
3	7311.00	43.47	74.00	-30.53	61.21	35.58	12.78	66.10	0.00	---	---	PEAK																																																																																																																																											



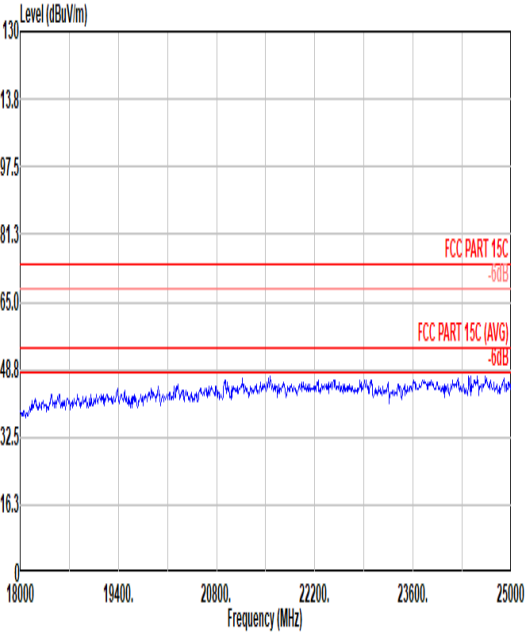
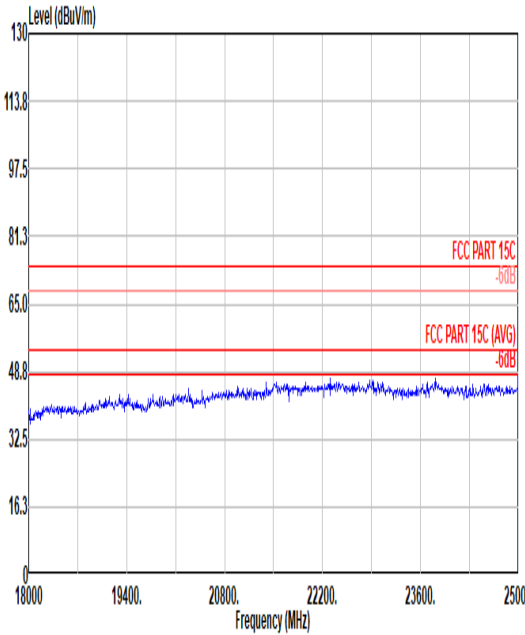


Mode	2	
	18G-25G	
	2400-2483.5_802.11b_CH06_2437MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg		



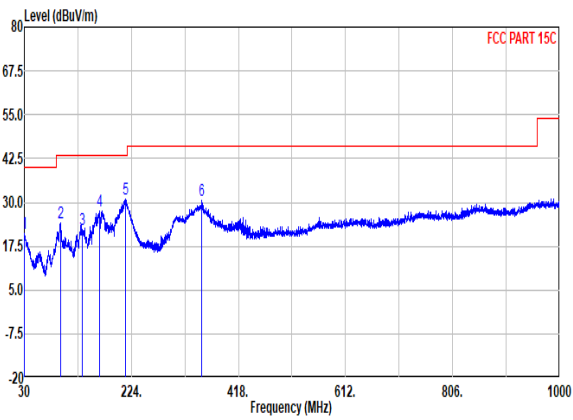
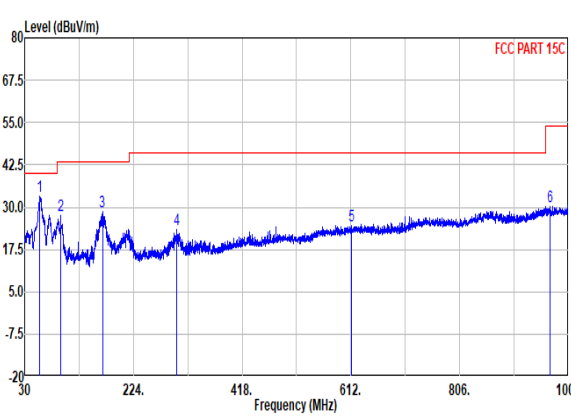


Mode	2																																																																																																																																																																																																											
	LF																																																																																																																																																																																																											
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																																																																																											
ANT	1																																																																																																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																																																																																																					
Peak																																																																																																																																																																																																												
	<table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>30.24</td><td>21.16</td><td>40.00</td><td>-18.84</td><td>27.52</td><td>25.02</td><td>0.83</td><td>32.21</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>96.20</td><td>24.05</td><td>43.50</td><td>-19.45</td><td>39.14</td><td>15.43</td><td>1.50</td><td>32.02</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>134.76</td><td>22.11</td><td>43.50</td><td>-21.39</td><td>34.91</td><td>17.50</td><td>1.76</td><td>32.06</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>166.29</td><td>27.45</td><td>43.50</td><td>-16.05</td><td>41.85</td><td>15.71</td><td>1.96</td><td>32.07</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>213.82</td><td>30.95</td><td>43.50</td><td>-12.55</td><td>45.77</td><td>14.98</td><td>2.22</td><td>32.02</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>351.07</td><td>30.41</td><td>46.00</td><td>-15.59</td><td>39.29</td><td>20.25</td><td>2.85</td><td>31.98</td><td>0.00</td><td>---</td><td>Peak</td></tr></tbody></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	30.24	21.16	40.00	-18.84	27.52	25.02	0.83	32.21	0.00	---	Peak	2	96.20	24.05	43.50	-19.45	39.14	15.43	1.50	32.02	0.00	---	Peak	3	134.76	22.11	43.50	-21.39	34.91	17.50	1.76	32.06	0.00	---	Peak	4	166.29	27.45	43.50	-16.05	41.85	15.71	1.96	32.07	0.00	---	Peak	5	213.82	30.95	43.50	-12.55	45.77	14.98	2.22	32.02	0.00	---	Peak	6	351.07	30.41	46.00	-15.59	39.29	20.25	2.85	31.98	0.00	---	Peak	<table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>56.43</td><td>33.29</td><td>40.00</td><td>-6.71</td><td>52.06</td><td>12.16</td><td>1.14</td><td>32.07</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>94.75</td><td>27.46</td><td>43.50</td><td>-16.04</td><td>42.74</td><td>15.24</td><td>1.49</td><td>32.01</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>168.71</td><td>28.85</td><td>43.50</td><td>-14.65</td><td>43.44</td><td>15.51</td><td>1.97</td><td>32.07</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>301.36</td><td>23.32</td><td>46.00</td><td>-22.68</td><td>33.79</td><td>19.15</td><td>2.67</td><td>32.29</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>613.46</td><td>24.58</td><td>46.00</td><td>-21.42</td><td>26.92</td><td>25.87</td><td>3.78</td><td>31.99</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>967.02</td><td>30.31</td><td>54.00</td><td>-23.69</td><td>25.31</td><td>30.79</td><td>4.72</td><td>30.51</td><td>0.00</td><td>---</td><td>Peak</td></tr></tbody></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	56.43	33.29	40.00	-6.71	52.06	12.16	1.14	32.07	0.00	---	Peak	2	94.75	27.46	43.50	-16.04	42.74	15.24	1.49	32.01	0.00	---	Peak	3	168.71	28.85	43.50	-14.65	43.44	15.51	1.97	32.07	0.00	---	Peak	4	301.36	23.32	46.00	-22.68	33.79	19.15	2.67	32.29	0.00	---	Peak	5	613.46	24.58	46.00	-21.42	26.92	25.87	3.78	31.99	0.00	---	Peak	6	967.02	30.31	54.00	-23.69	25.31	30.79	4.72	30.51	0.00	---	Peak
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																	
	1	30.24	21.16	40.00	-18.84	27.52	25.02	0.83	32.21	0.00	---	Peak																																																																																																																																																																																																
	2	96.20	24.05	43.50	-19.45	39.14	15.43	1.50	32.02	0.00	---	Peak																																																																																																																																																																																																
	3	134.76	22.11	43.50	-21.39	34.91	17.50	1.76	32.06	0.00	---	Peak																																																																																																																																																																																																
	4	166.29	27.45	43.50	-16.05	41.85	15.71	1.96	32.07	0.00	---	Peak																																																																																																																																																																																																
	5	213.82	30.95	43.50	-12.55	45.77	14.98	2.22	32.02	0.00	---	Peak																																																																																																																																																																																																
	6	351.07	30.41	46.00	-15.59	39.29	20.25	2.85	31.98	0.00	---	Peak																																																																																																																																																																																																
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																		
1	56.43	33.29	40.00	-6.71	52.06	12.16	1.14	32.07	0.00	---	Peak																																																																																																																																																																																																	
2	94.75	27.46	43.50	-16.04	42.74	15.24	1.49	32.01	0.00	---	Peak																																																																																																																																																																																																	
3	168.71	28.85	43.50	-14.65	43.44	15.51	1.97	32.07	0.00	---	Peak																																																																																																																																																																																																	
4	301.36	23.32	46.00	-22.68	33.79	19.15	2.67	32.29	0.00	---	Peak																																																																																																																																																																																																	
5	613.46	24.58	46.00	-21.42	26.92	25.87	3.78	31.99	0.00	---	Peak																																																																																																																																																																																																	
6	967.02	30.31	54.00	-23.69	25.31	30.79	4.72	30.51	0.00	---	Peak																																																																																																																																																																																																	

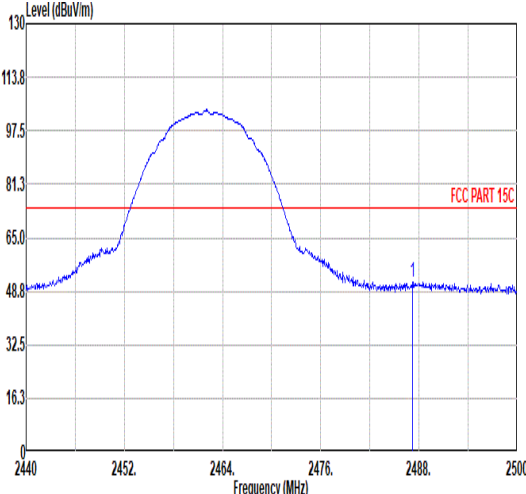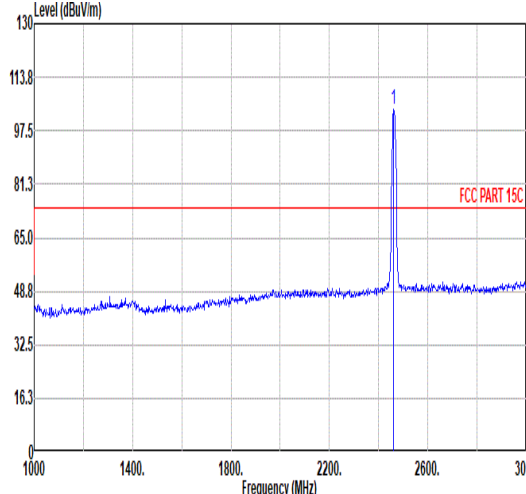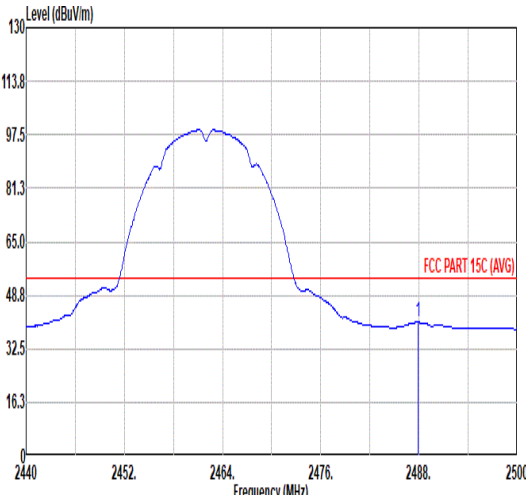
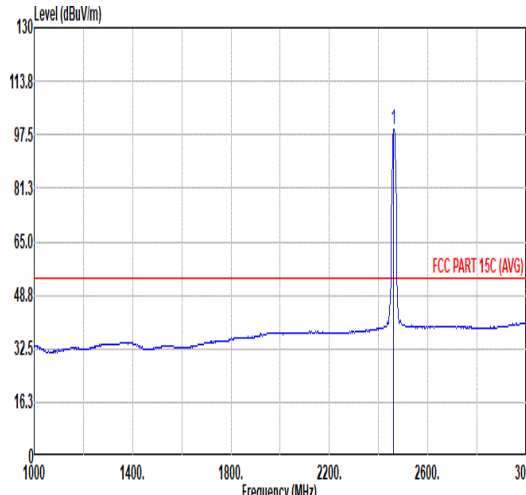


Mode	3																																																																																																																			
	Band Edge																																																																																																																			
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																			
ANT	1																																																																																																																			
Pol.	Horizontal						Fundamental																																																																																																													
Peak																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.22</td><td>51.46</td><td>74.00</td><td>-22.54</td><td>42.42</td><td>32.27</td><td>7.34</td><td>36.57</td><td>6.00</td><td>100</td><td>205 PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2487.22	51.46	74.00	-22.54	42.42	32.27	7.34	36.57	6.00	100	205 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>104.16</td><td>-----</td><td>-----</td><td>95.22</td><td>32.22</td><td>7.29</td><td>36.57</td><td>6.00</td><td>100</td><td>205 PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2462.00	104.16	-----	-----	95.22	32.22	7.29	36.57	6.00	100	205 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																									
1	2487.22	51.46	74.00	-22.54	42.42	32.27	7.34	36.57	6.00	100	205 PEAK																																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																									
1	2462.00	104.16	-----	-----	95.22	32.22	7.29	36.57	6.00	100	205 PEAK																																																																																																									
Avg																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.88</td><td>40.58</td><td>54.00</td><td>-13.42</td><td>31.53</td><td>32.28</td><td>7.34</td><td>36.57</td><td>6.00</td><td>100</td><td>205 AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2487.88	40.58	54.00	-13.42	31.53	32.28	7.34	36.57	6.00	100	205 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>99.06</td><td>-----</td><td>-----</td><td>90.12</td><td>32.22</td><td>7.29</td><td>36.57</td><td>6.00</td><td>100</td><td>205 AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2462.00	99.06	-----	-----	90.12	32.22	7.29	36.57	6.00	100	205 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																									
1	2487.88	40.58	54.00	-13.42	31.53	32.28	7.34	36.57	6.00	100	205 AVERAGE																																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																									
1	2462.00	99.06	-----	-----	90.12	32.22	7.29	36.57	6.00	100	205 AVERAGE																																																																																																									

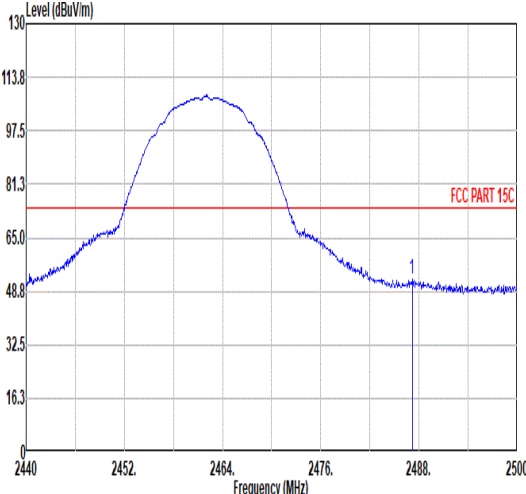
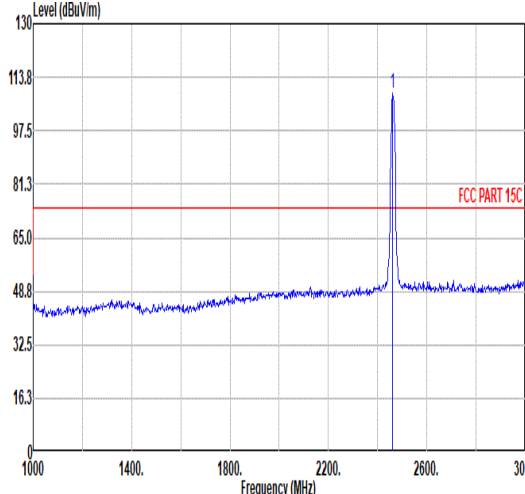
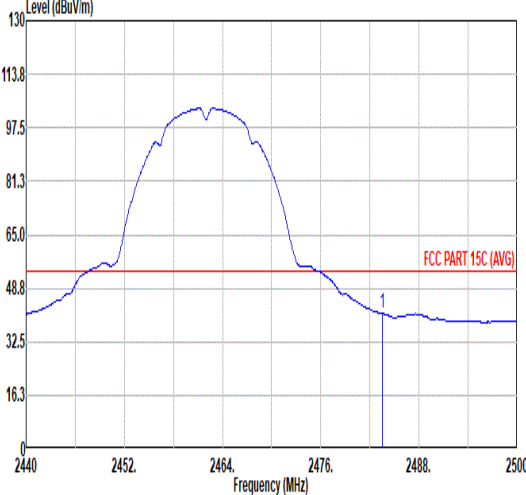
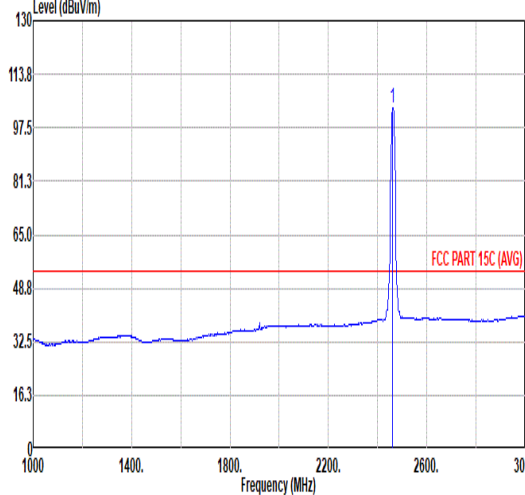


Mode	3																																																							
	Band Edge																																																							
	2400-2483.5_802.11b_CH11_2462MHz																																																							
ANT	1																																																							
Pol.	Vertical																																																							
Peak																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.16</td><td>52.27</td><td>74.00</td><td>-21.73</td><td>43.23</td><td>32.27</td><td>7.34</td><td>36.57</td><td>6.00</td><td>103</td><td>72 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.16	52.27	74.00	-21.73	43.23	32.27	7.34	36.57	6.00	103	72 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2487.16	52.27	74.00	-21.73	43.23	32.27	7.34	36.57	6.00	103	72 PEAK																																													
Fundamental																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>108.79</td><td>-----</td><td>-----</td><td>99.85</td><td>32.22</td><td>7.29</td><td>36.57</td><td>6.00</td><td>103</td><td>72 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	108.79	-----	-----	99.85	32.22	7.29	36.57	6.00	103	72 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2462.00	108.79	-----	-----	99.85	32.22	7.29	36.57	6.00	103	72 PEAK																																													
Avg																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>41.10</td><td>54.00</td><td>-12.90</td><td>32.07</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>103</td><td>72 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	41.10	54.00	-12.90	32.07	32.27	7.33	36.57	6.00	103	72 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2483.50	41.10	54.00	-12.90	32.07	32.27	7.33	36.57	6.00	103	72 AVERAGE																																													
AVERAGE																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>103.57</td><td>-----</td><td>-----</td><td>94.63</td><td>32.22</td><td>7.29</td><td>36.57</td><td>6.00</td><td>103</td><td>72 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	103.57	-----	-----	94.63	32.22	7.29	36.57	6.00	103	72 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2462.00	103.57	-----	-----	94.63	32.22	7.29	36.57	6.00	103	72 AVERAGE																																													



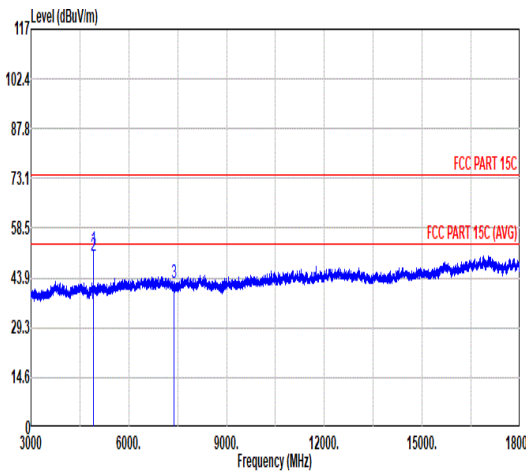
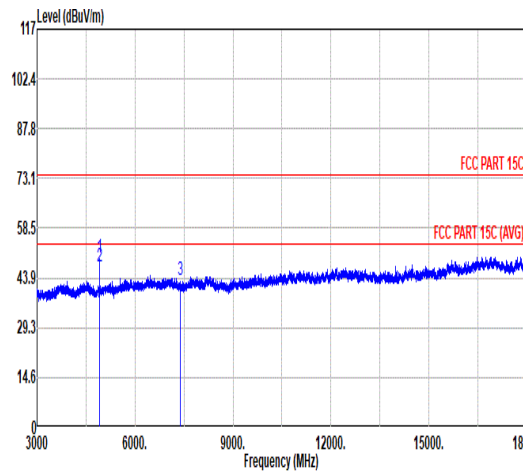


Mode	3																																																																																					
	Harmonic																																																																																					
	2400-2483.5_802.11b_CH11_2462MHz																																																																																					
ANT	1																																																																																					
Pol.	Horizontal											Vertical																																																																										
Peak Avg																																																																																						
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>52.03</td><td>74.00</td><td>-21.97</td><td>72.03</td><td>33.90</td><td>10.40</td><td>64.30</td><td>0.00</td><td>120</td><td>43</td><td>PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>50.16</td><td>54.00</td><td>-3.84</td><td>70.16</td><td>33.90</td><td>10.40</td><td>64.30</td><td>0.00</td><td>120</td><td>43</td><td>AVERAGE</td></tr><tr><td>3</td><td>7386.00</td><td>42.47</td><td>74.00</td><td>-31.53</td><td>60.24</td><td>35.57</td><td>12.88</td><td>66.22</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>														Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	52.03	74.00	-21.97	72.03	33.90	10.40	64.30	0.00	120	43	PEAK	2	4924.00	50.16	54.00	-3.84	70.16	33.90	10.40	64.30	0.00	120	43	AVERAGE	3	7386.00	42.47	74.00	-31.53	60.24	35.57	12.88	66.22	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																												
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																											
1	4924.00	52.03	74.00	-21.97	72.03	33.90	10.40	64.30	0.00	120	43	PEAK																																																																										
2	4924.00	50.16	54.00	-3.84	70.16	33.90	10.40	64.30	0.00	120	43	AVERAGE																																																																										
3	7386.00	42.47	74.00	-31.53	60.24	35.57	12.88	66.22	0.00	---	---	PEAK																																																																										
Peak Avg																																																																																						
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>49.90</td><td>74.00</td><td>-24.10</td><td>69.90</td><td>33.90</td><td>10.40</td><td>64.30</td><td>0.00</td><td>110</td><td>190</td><td>PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>47.42</td><td>54.00</td><td>-6.58</td><td>67.42</td><td>33.90</td><td>10.40</td><td>64.30</td><td>0.00</td><td>110</td><td>190</td><td>AVERAGE</td></tr><tr><td>3</td><td>7386.00</td><td>43.08</td><td>74.00</td><td>-30.92</td><td>60.85</td><td>35.57</td><td>12.88</td><td>66.22</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>														Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	49.90	74.00	-24.10	69.90	33.90	10.40	64.30	0.00	110	190	PEAK	2	4924.00	47.42	54.00	-6.58	67.42	33.90	10.40	64.30	0.00	110	190	AVERAGE	3	7386.00	43.08	74.00	-30.92	60.85	35.57	12.88	66.22	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																												
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																											
1	4924.00	49.90	74.00	-24.10	69.90	33.90	10.40	64.30	0.00	110	190	PEAK																																																																										
2	4924.00	47.42	54.00	-6.58	67.42	33.90	10.40	64.30	0.00	110	190	AVERAGE																																																																										
3	7386.00	43.08	74.00	-30.92	60.85	35.57	12.88	66.22	0.00	---	---	PEAK																																																																										

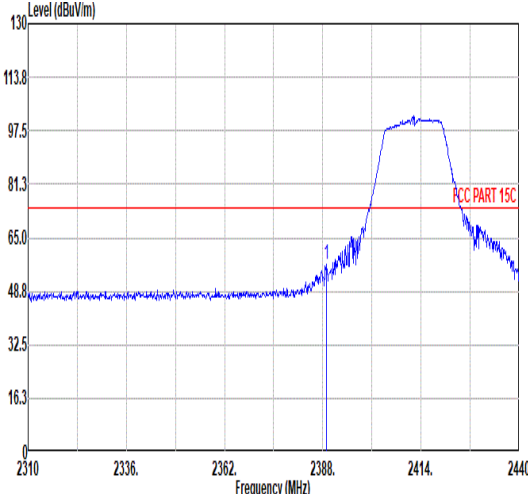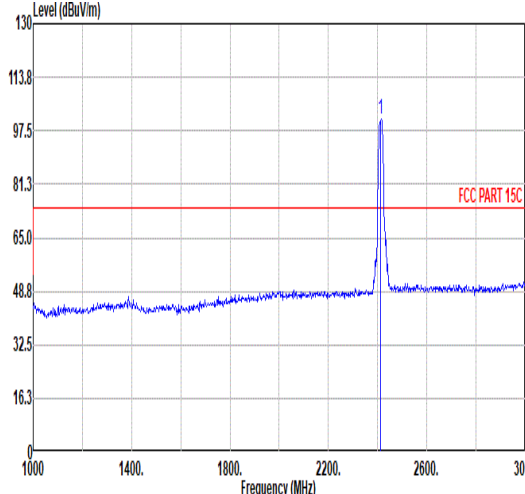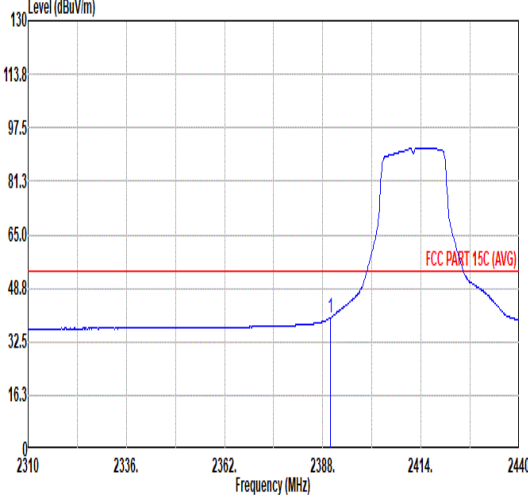
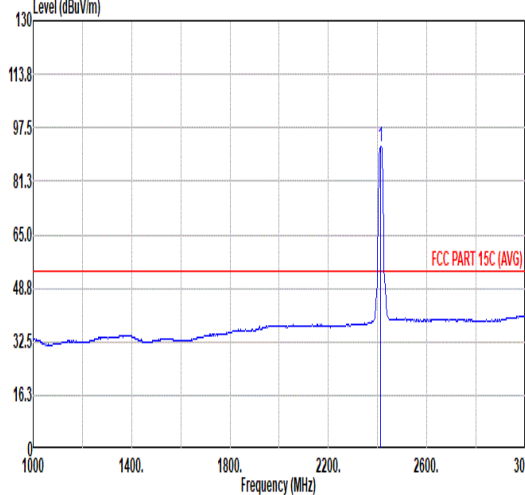


		4																																																																																																						
Mode		Band Edge																																																																																																						
		2400-2483.5_802.11g_CH01_2412MHz																																																																																																						
ANT		1																																																																																																						
Pol.		Horizontal					Fundamental																																																																																																	
Peak																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.91</td><td>57.00</td><td>74.00</td><td>-17.00</td><td>48.53</td><td>31.91</td><td>7.16</td><td>36.60</td><td>6.00</td><td>180</td><td>207 PEAK</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.91	57.00	74.00	-17.00	48.53	31.91	7.16	36.60	6.00	180	207 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>101.03</td><td>-----</td><td>-----</td><td>92.34</td><td>32.06</td><td>7.21</td><td>36.58</td><td>6.00</td><td>180</td><td>207 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	101.03	-----	-----	92.34	32.06	7.21	36.58	6.00	180
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	2388.91	57.00	74.00	-17.00	48.53	31.91	7.16	36.60	6.00	180	207 PEAK																																																																																													
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	2412.00	101.03	-----	-----	92.34	32.06	7.21	36.58	6.00	180	207 PEAK																																																																																													
Avg																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>39.78</td><td>54.00</td><td>-14.22</td><td>31.29</td><td>31.92</td><td>7.16</td><td>36.59</td><td>6.00</td><td>180</td><td>207 AVERAGE</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	39.78	54.00	-14.22	31.29	31.92	7.16	36.59	6.00	180	207 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>91.63</td><td>-----</td><td>-----</td><td>82.94</td><td>32.06</td><td>7.21</td><td>36.58</td><td>6.00</td><td>180</td><td>207 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	91.63	-----	-----	82.94	32.06	7.21	36.58	6.00	180
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	2389.95	39.78	54.00	-14.22	31.29	31.92	7.16	36.59	6.00	180	207 AVERAGE																																																																																													
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	2412.00	91.63	-----	-----	82.94	32.06	7.21	36.58	6.00	180	207 AVERAGE																																																																																													

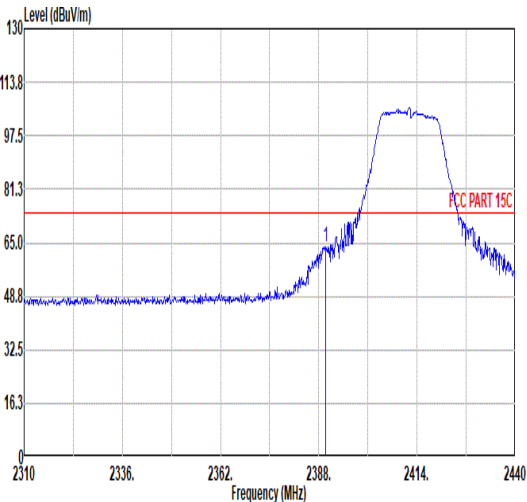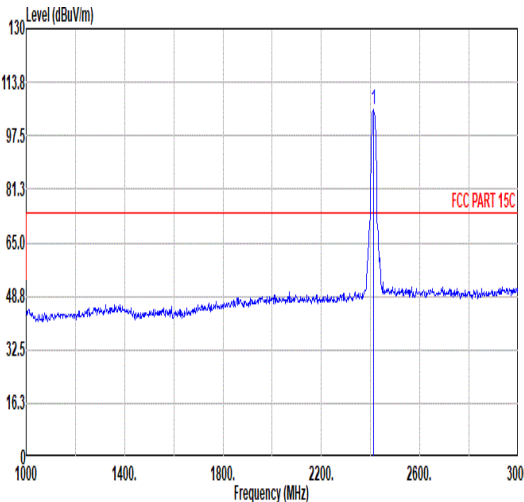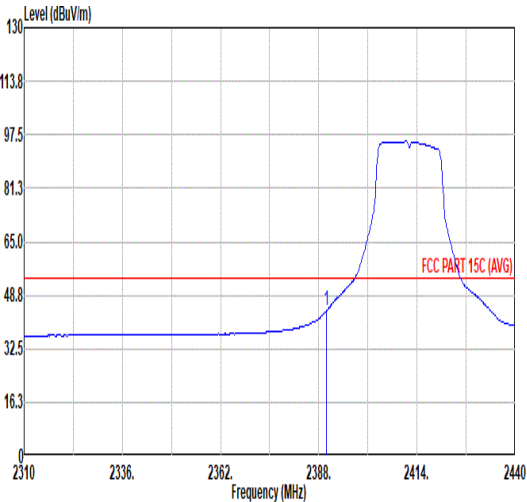
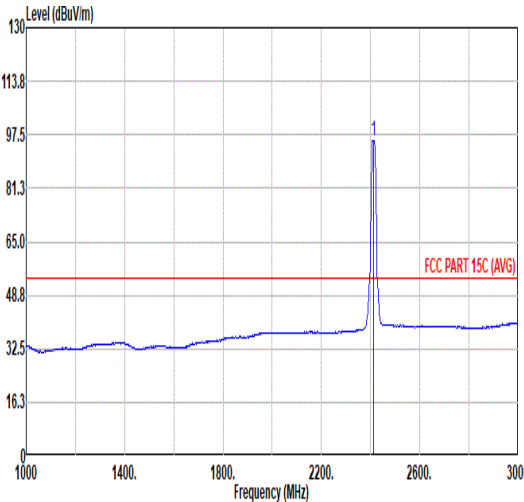


Mode	4																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.82</td><td>63.63</td><td>74.00</td><td>-10.37</td><td>55.14</td><td>31.92</td><td>7.16</td><td>36.59</td><td>6.00</td><td>100</td><td>303 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	63.63	74.00	-10.37	55.14	31.92	7.16	36.59	6.00	100	303 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>105.36</td><td>-----</td><td>-----</td><td>96.69</td><td>32.05</td><td>7.20</td><td>36.58</td><td>6.00</td><td>100</td><td>303 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	105.36	-----	-----	96.69	32.05	7.20	36.58	6.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.82	63.63	74.00	-10.37	55.14	31.92	7.16	36.59	6.00	100	303 PEAK																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2412.00	105.36	-----	-----	96.69	32.05	7.20	36.58	6.00	100	303 PEAK																																																																																									
Avg																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>44.02</td><td>54.00</td><td>-9.98</td><td>35.53</td><td>31.92</td><td>7.16</td><td>36.59</td><td>6.00</td><td>100</td><td>303 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	44.02	54.00	-9.98	35.53	31.92	7.16	36.59	6.00	100	303 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>95.70</td><td>-----</td><td>-----</td><td>87.03</td><td>32.05</td><td>7.20</td><td>36.58</td><td>6.00</td><td>100</td><td>303 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	95.70	-----	-----	87.03	32.05	7.20	36.58	6.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.95	44.02	54.00	-9.98	35.53	31.92	7.16	36.59	6.00	100	303 AVERAGE																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2412.00	95.70	-----	-----	87.03	32.05	7.20	36.58	6.00	100	303 AVERAGE																																																																																									



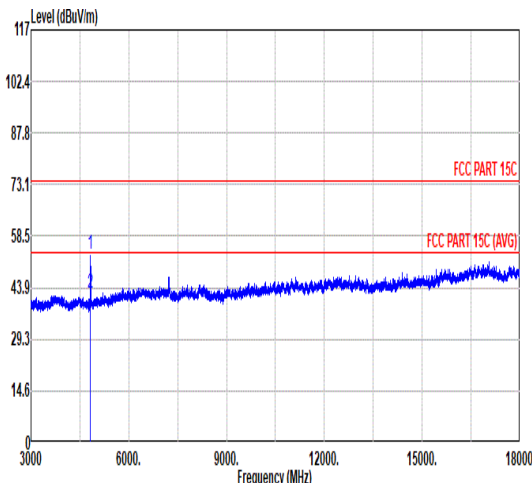
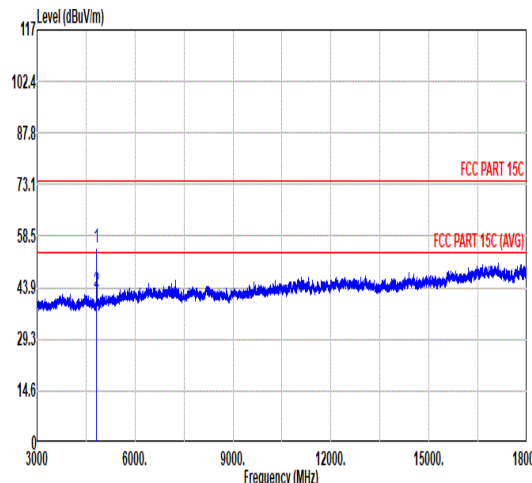


Mode	4																																																																																																																								
	Harmonic																																																																																																																								
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																																								
ANT	1																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																		
Peak Avg																																																																																																																									
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>53.42</td><td>74.00</td><td>-20.58</td><td>73.55</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>208</td><td>59 PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>42.40</td><td>54.00</td><td>-11.60</td><td>62.53</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>208</td><td>59 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	53.42	74.00	-20.58	73.55	33.80	10.29	64.22	0.00	208	59 PEAK	2	4824.00	42.40	54.00	-11.60	62.53	33.80	10.29	64.22	0.00	208	59 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>55.13</td><td>74.00</td><td>-18.87</td><td>75.26</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>119</td><td>76 PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>42.63</td><td>54.00</td><td>-11.37</td><td>62.76</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>119</td><td>76 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	55.13	74.00	-18.87	75.26	33.80	10.29	64.22	0.00	119	76 PEAK	2	4824.00	42.63	54.00	-11.37	62.76	33.80	10.29	64.22	0.00	119	76 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																															
1	4824.00	53.42	74.00	-20.58	73.55	33.80	10.29	64.22	0.00	208	59 PEAK																																																																																																														
2	4824.00	42.40	54.00	-11.60	62.53	33.80	10.29	64.22	0.00	208	59 AVERAGE																																																																																																														
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																															
1	4824.00	55.13	74.00	-18.87	75.26	33.80	10.29	64.22	0.00	119	76 PEAK																																																																																																														
2	4824.00	42.63	54.00	-11.37	62.76	33.80	10.29	64.22	0.00	119	76 AVERAGE																																																																																																														

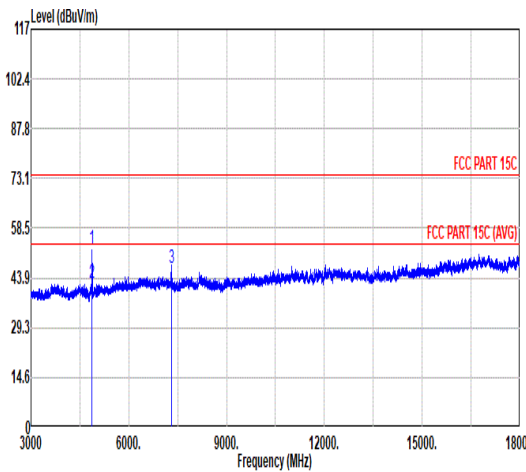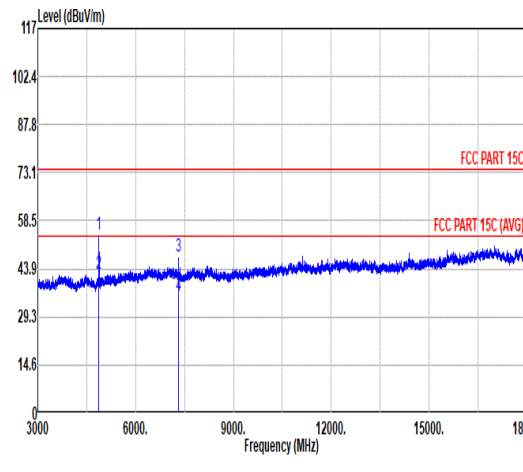

Mode	5																																																																																																																																																																	
	Harmonic																																																																																																																																																																	
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																																																																																	
ANT	1																																																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																																																											
Peak Avg																																																																																																																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>52.73</td><td>74.00</td><td>-21.27</td><td>72.81</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>100</td><td>119 PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>42.28</td><td>54.00</td><td>-11.72</td><td>62.36</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>100</td><td>119 AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>46.80</td><td>74.00</td><td>-27.20</td><td>64.54</td><td>35.58</td><td>12.78</td><td>66.10</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	52.73	74.00	-21.27	72.81	33.85	10.34	64.27	0.00	100	119 PEAK	2	4874.00	42.28	54.00	-11.72	62.36	33.85	10.34	64.27	0.00	100	119 AVERAGE	3	7311.00	46.80	74.00	-27.20	64.54	35.58	12.78	66.10	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>54.44</td><td>74.00</td><td>-19.56</td><td>74.52</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>101</td><td>73 PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>42.56</td><td>54.00</td><td>-11.44</td><td>62.64</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>101</td><td>73 AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>47.80</td><td>74.00</td><td>-26.20</td><td>65.54</td><td>35.58</td><td>12.78</td><td>66.10</td><td>0.00</td><td>101</td><td>73 PEAK</td></tr><tr><td>4</td><td>7311.00</td><td>35.80</td><td>54.00</td><td>-18.20</td><td>53.53</td><td>35.59</td><td>12.77</td><td>66.09</td><td>0.00</td><td>101</td><td>73 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	54.44	74.00	-19.56	74.52	33.85	10.34	64.27	0.00	101	73 PEAK	2	4874.00	42.56	54.00	-11.44	62.64	33.85	10.34	64.27	0.00	101	73 AVERAGE	3	7311.00	47.80	74.00	-26.20	65.54	35.58	12.78	66.10	0.00	101	73 PEAK	4	7311.00	35.80	54.00	-18.20	53.53	35.59	12.77	66.09	0.00	101
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																								
1	4874.00	52.73	74.00	-21.27	72.81	33.85	10.34	64.27	0.00	100	119 PEAK																																																																																																																																																							
2	4874.00	42.28	54.00	-11.72	62.36	33.85	10.34	64.27	0.00	100	119 AVERAGE																																																																																																																																																							
3	7311.00	46.80	74.00	-27.20	64.54	35.58	12.78	66.10	0.00	---	---	PEAK																																																																																																																																																						
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																								
1	4874.00	54.44	74.00	-19.56	74.52	33.85	10.34	64.27	0.00	101	73 PEAK																																																																																																																																																							
2	4874.00	42.56	54.00	-11.44	62.64	33.85	10.34	64.27	0.00	101	73 AVERAGE																																																																																																																																																							
3	7311.00	47.80	74.00	-26.20	65.54	35.58	12.78	66.10	0.00	101	73 PEAK																																																																																																																																																							
4	7311.00	35.80	54.00	-18.20	53.53	35.59	12.77	66.09	0.00	101	73 AVERAGE																																																																																																																																																							

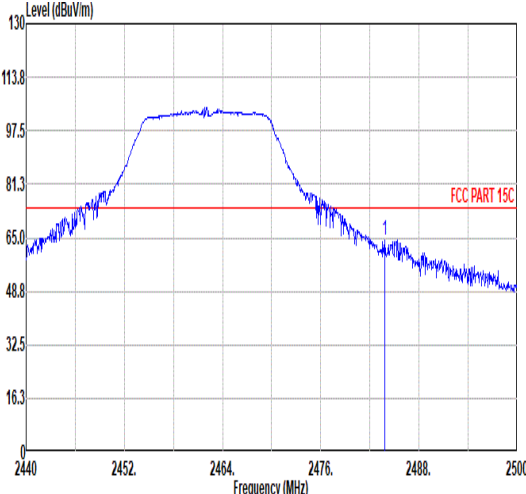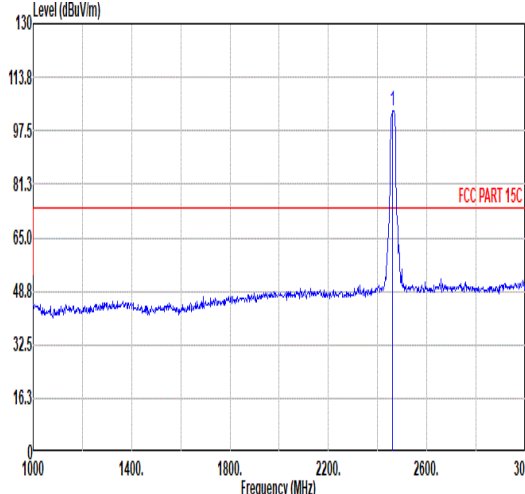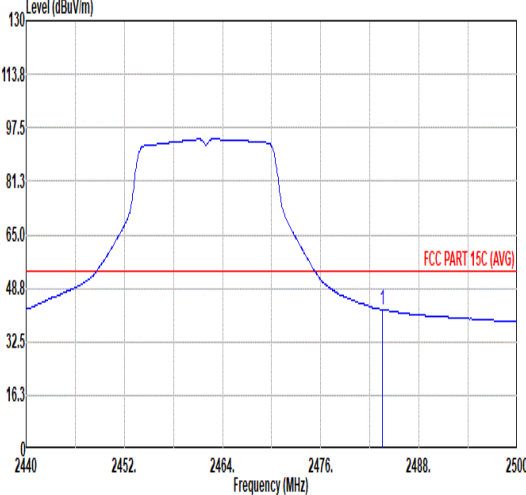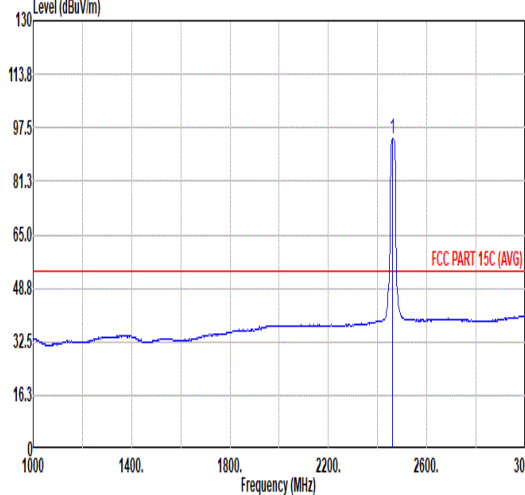

Mode	6																																																							
	Band Edge																																																							
	2400-2483.5_802.11g_CH11_2462MHz																																																							
ANT	1																																																							
Pol.	Horizontal																																																							
Peak																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.80</td><td>64.34</td><td>74.00</td><td>-9.66</td><td>55.31</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>100</td><td>207 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.80	64.34	74.00	-9.66	55.31	32.27	7.33	36.57	6.00	100	207 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2483.80	64.34	74.00	-9.66	55.31	32.27	7.33	36.57	6.00	100	207 PEAK																																													
Fundamental																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>103.72</td><td>-----</td><td>-----</td><td>94.76</td><td>32.23</td><td>7.30</td><td>36.57</td><td>6.00</td><td>100</td><td>207 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	103.72	-----	-----	94.76	32.23	7.30	36.57	6.00	100	207 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2462.00	103.72	-----	-----	94.76	32.23	7.30	36.57	6.00	100	207 PEAK																																													
Avg																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>42.27</td><td>54.00</td><td>-11.73</td><td>33.24</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>100</td><td>207 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	42.27	54.00	-11.73	33.24	32.27	7.33	36.57	6.00	100	207 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2483.50	42.27	54.00	-11.73	33.24	32.27	7.33	36.57	6.00	100	207 AVERAGE																																													
Fundamental																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>94.28</td><td>-----</td><td>-----</td><td>85.32</td><td>32.23</td><td>7.30</td><td>36.57</td><td>6.00</td><td>100</td><td>207 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	94.28	-----	-----	85.32	32.23	7.30	36.57	6.00	100	207 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2462.00	94.28	-----	-----	85.32	32.23	7.30	36.57	6.00	100	207 AVERAGE																																													







Mode	6																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.74</td><td>68.94</td><td>74.00</td><td>-5.06</td><td>59.91</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>100</td><td>70 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.74	68.94	74.00	-5.06	59.91	32.27	7.33	36.57	6.00	100	70 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>109.18</td><td>-----</td><td>-----</td><td>100.24</td><td>32.22</td><td>7.29</td><td>36.57</td><td>6.00</td><td>100</td><td>70 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	109.18	-----	-----	100.24	32.22	7.29	36.57	6.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.74	68.94	74.00	-5.06	59.91	32.27	7.33	36.57	6.00	100	70 PEAK																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	109.18	-----	-----	100.24	32.22	7.29	36.57	6.00	100	70 PEAK																																																																																									
Avg																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>46.49</td><td>54.00</td><td>-7.51</td><td>37.46</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>100</td><td>70 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	46.49	54.00	-7.51	37.46	32.27	7.33	36.57	6.00	100	70 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>98.79</td><td>-----</td><td>-----</td><td>89.83</td><td>32.23</td><td>7.30</td><td>36.57</td><td>6.00</td><td>100</td><td>70 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	98.79	-----	-----	89.83	32.23	7.30	36.57	6.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.50	46.49	54.00	-7.51	37.46	32.27	7.33	36.57	6.00	100	70 AVERAGE																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	98.79	-----	-----	89.83	32.23	7.30	36.57	6.00	100	70 AVERAGE																																																																																									







Mode	6																																																																																																																																															
	Harmonic																																																																																																																																															
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																																															
ANT	1																																																																																																																																															
Pol.	Horizontal											Vertical																																																																																																																																				
Peak Avg																																																																																																																																																
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>43.46</td><td>74.00</td><td>-30.54</td><td>63.46</td><td>33.90</td><td>10.40</td><td>64.30</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>52.45</td><td>74.00</td><td>-21.55</td><td>70.22</td><td>35.57</td><td>12.88</td><td>66.22</td><td>0.00</td><td>114</td><td>100</td><td>PEAK</td></tr><tr><td>3</td><td>7386.00</td><td>39.68</td><td>54.00</td><td>-14.32</td><td>57.44</td><td>35.57</td><td>12.88</td><td>66.21</td><td>0.00</td><td>114</td><td>100</td><td>AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	43.46	74.00	-30.54	63.46	33.90	10.40	64.30	0.00	---	---	PEAK	2	7386.00	52.45	74.00	-21.55	70.22	35.57	12.88	66.22	0.00	114	100	PEAK	3	7386.00	39.68	54.00	-14.32	57.44	35.57	12.88	66.21	0.00	114	100	AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>42.12</td><td>74.00</td><td>-31.88</td><td>62.12</td><td>33.90</td><td>10.40</td><td>64.30</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>43.09</td><td>74.00</td><td>-30.91</td><td>60.86</td><td>35.57</td><td>12.88</td><td>66.22</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	42.12	74.00	-31.88	62.12	33.90	10.40	64.30	0.00	---	---	PEAK	2	7386.00	43.09	74.00	-30.91	60.86	35.57	12.88	66.22	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																						
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																						
1	4924.00	43.46	74.00	-30.54	63.46	33.90	10.40	64.30	0.00	---	---	PEAK																																																																																																																																				
2	7386.00	52.45	74.00	-21.55	70.22	35.57	12.88	66.22	0.00	114	100	PEAK																																																																																																																																				
3	7386.00	39.68	54.00	-14.32	57.44	35.57	12.88	66.21	0.00	114	100	AVERAGE																																																																																																																																				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																						
1	4924.00	42.12	74.00	-31.88	62.12	33.90	10.40	64.30	0.00	---	---	PEAK																																																																																																																																				
2	7386.00	43.09	74.00	-30.91	60.86	35.57	12.88	66.22	0.00	---	---	PEAK																																																																																																																																				

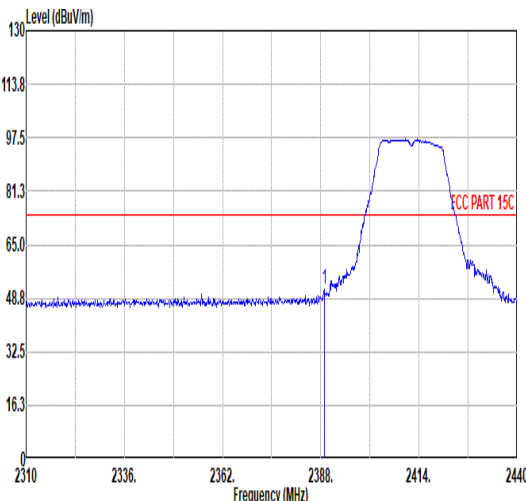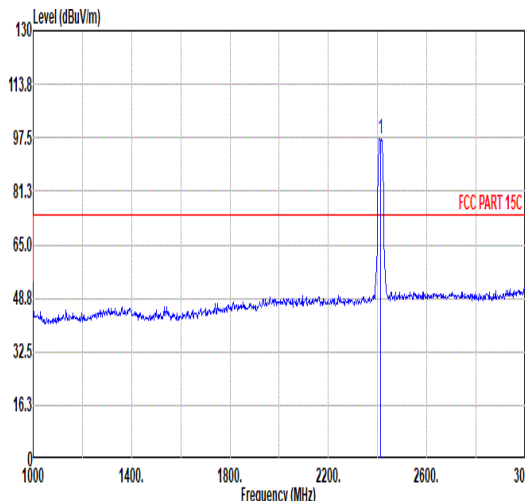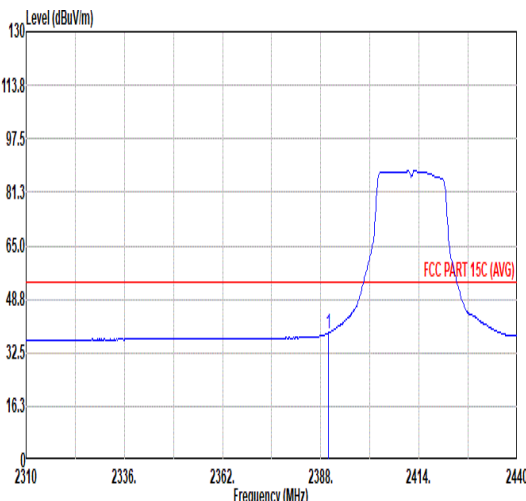
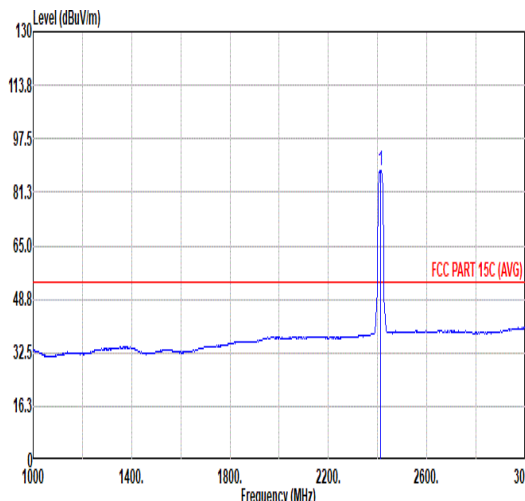


Mode	7																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal	Fundamental																																																																																										
Peak	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.91</td><td>51.34</td><td>74.00</td><td>-22.66</td><td>42.87</td><td>31.91</td><td>7.16</td><td>36.60</td><td>6.00</td><td>100</td><td>354 PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.91	51.34	74.00	-22.66	42.87	31.91	7.16	36.60	6.00	100	354 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>97.34</td><td>-----</td><td>-----</td><td>88.65</td><td>32.06</td><td>7.21</td><td>36.58</td><td>6.00</td><td>100</td><td>354 PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	97.34	-----	-----	88.65	32.06	7.21	36.58	6.00	100	354 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2388.91	51.34	74.00	-22.66	42.87	31.91	7.16	36.60	6.00	100	354 PEAK																																																																																	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2412.00	97.34	-----	-----	88.65	32.06	7.21	36.58	6.00	100	354 PEAK																																																																																	
Avg	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>38.43</td><td>54.00</td><td>-15.57</td><td>29.94</td><td>31.92</td><td>7.16</td><td>36.59</td><td>6.00</td><td>100</td><td>354 AVERAGE</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	38.43	54.00	-15.57	29.94	31.92	7.16	36.59	6.00	100	354 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>87.81</td><td>-----</td><td>-----</td><td>79.14</td><td>32.05</td><td>7.20</td><td>36.58</td><td>6.00</td><td>100</td><td>354 AVERAGE</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	87.81	-----	-----	79.14	32.05	7.20	36.58	6.00	100	354 AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2389.95	38.43	54.00	-15.57	29.94	31.92	7.16	36.59	6.00	100	354 AVERAGE																																																																																	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2412.00	87.81	-----	-----	79.14	32.05	7.20	36.58	6.00	100	354 AVERAGE																																																																																	

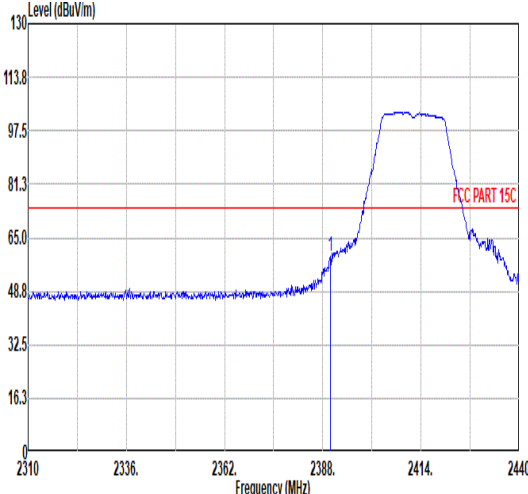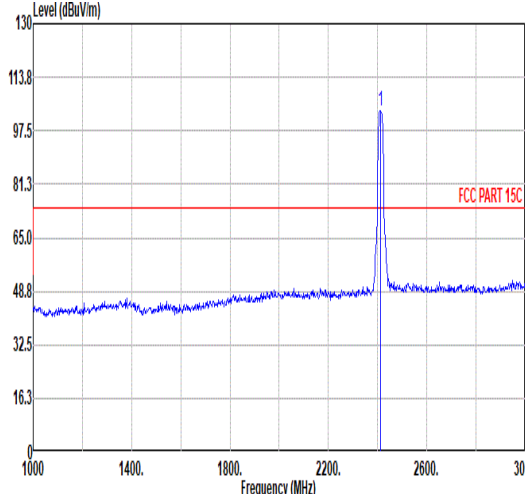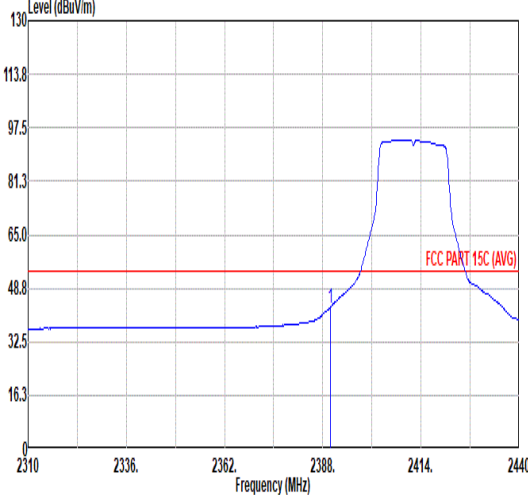
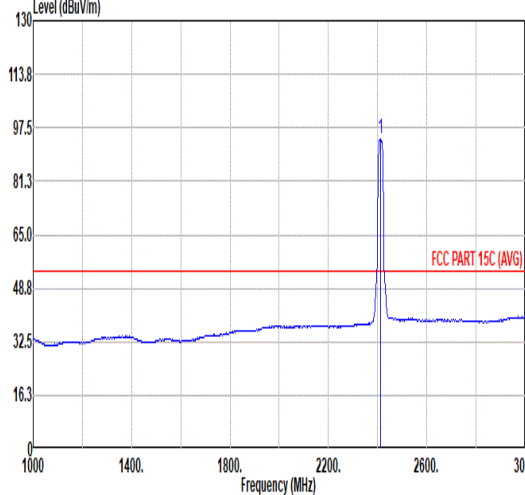


Mode	7																																																																																																				
	Band Edge																																																																																																				
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Vertical						Fundamental																																																																																														
Peak																																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>59.22</td><td>74.00</td><td>-14.78</td><td>50.73</td><td>31.92</td><td>7.16</td><td>36.59</td><td>6.00</td><td>100</td><td>309 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	59.22	74.00	-14.78	50.73	31.92	7.16	36.59	6.00	100	309 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>103.43</td><td>-----</td><td>-----</td><td>94.77</td><td>32.04</td><td>7.20</td><td>36.58</td><td>6.00</td><td>100</td><td>309 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	103.43	-----	-----	94.77	32.04	7.20	36.58	6.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2389.95	59.22	74.00	-14.78	50.73	31.92	7.16	36.59	6.00	100	309 PEAK																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2412.00	103.43	-----	-----	94.77	32.04	7.20	36.58	6.00	100	309 PEAK																																																																																										
Avg																																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>42.92</td><td>54.00</td><td>-11.08</td><td>34.43</td><td>31.92</td><td>7.16</td><td>36.59</td><td>6.00</td><td>100</td><td>309 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	42.92	54.00	-11.08	34.43	31.92	7.16	36.59	6.00	100	309 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>94.01</td><td>-----</td><td>-----</td><td>85.34</td><td>32.05</td><td>7.20</td><td>36.58</td><td>6.00</td><td>100</td><td>309 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	94.01	-----	-----	85.34	32.05	7.20	36.58	6.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2389.95	42.92	54.00	-11.08	34.43	31.92	7.16	36.59	6.00	100	309 AVERAGE																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2412.00	94.01	-----	-----	85.34	32.05	7.20	36.58	6.00	100	309 AVERAGE																																																																																										



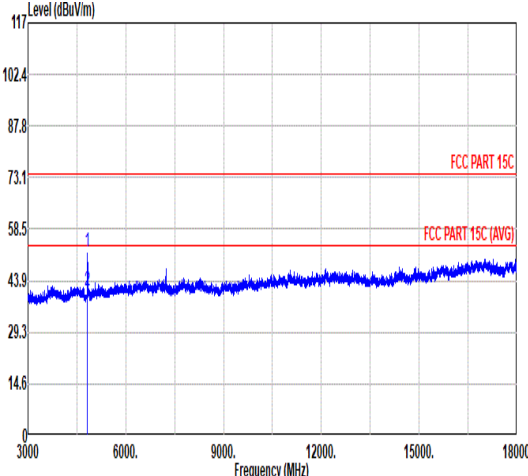
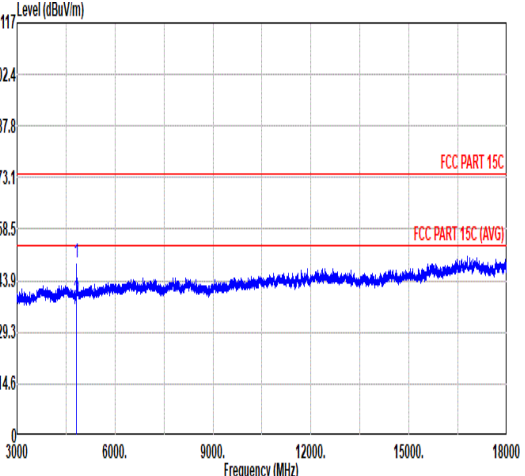


Mode	7																																																																																																															
	Harmonic																																																																																																															
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																																																																																															
ANT	1																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg																																																																																																																
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4824.00</td><td>52.16</td><td>74.00</td><td>-21.84</td><td>72.29</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>100</td><td>58 PEAK</td></tr><tr><td>2 4824.00</td><td>41.12</td><td>54.00</td><td>-12.88</td><td>61.25</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>100</td><td>58 AVERAGE</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 4824.00	52.16	74.00	-21.84	72.29	33.80	10.29	64.22	0.00	100	58 PEAK	2 4824.00	41.12	54.00	-12.88	61.25	33.80	10.29	64.22	0.00	100	58 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4824.00</td><td>49.08</td><td>74.00</td><td>-24.92</td><td>69.21</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>341</td><td>7 PEAK</td></tr><tr><td>2 4824.00</td><td>38.34</td><td>54.00</td><td>-15.66</td><td>58.47</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>341</td><td>7 AVERAGE</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 4824.00	49.08	74.00	-24.92	69.21	33.80	10.29	64.22	0.00	341	7 PEAK	2 4824.00	38.34	54.00	-15.66	58.47	33.80	10.29	64.22	0.00	341	7 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1 4824.00	52.16	74.00	-21.84	72.29	33.80	10.29	64.22	0.00	100	58 PEAK																																																																																																						
2 4824.00	41.12	54.00	-12.88	61.25	33.80	10.29	64.22	0.00	100	58 AVERAGE																																																																																																						
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1 4824.00	49.08	74.00	-24.92	69.21	33.80	10.29	64.22	0.00	341	7 PEAK																																																																																																						
2 4824.00	38.34	54.00	-15.66	58.47	33.80	10.29	64.22	0.00	341	7 AVERAGE																																																																																																						



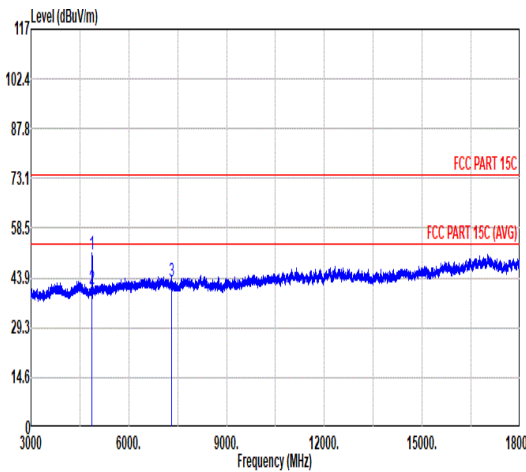
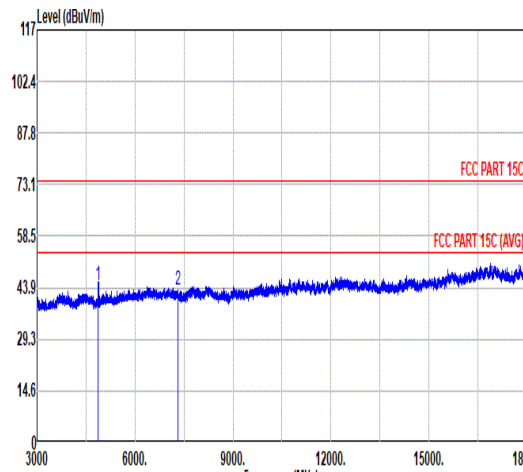


Mode	8																																																																																																																																																
	Harmonic																																																																																																																																																
	2400-2483.5_802.11n_HT20_CH06_2437MHz																																																																																																																																																
ANT	1																																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																																										
Peak Avg																																																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>50.94</td><td>74.00</td><td>-23.06</td><td>71.02</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>100</td><td>120</td><td>PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>40.61</td><td>54.00</td><td>-13.39</td><td>60.69</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>100</td><td>120</td><td>AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>42.92</td><td>74.00</td><td>-31.08</td><td>60.66</td><td>35.58</td><td>12.78</td><td>66.10</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	50.94	74.00	-23.06	71.02	33.85	10.34	64.27	0.00	100	120	PEAK	2	4874.00	40.61	54.00	-13.39	60.69	33.85	10.34	64.27	0.00	100	120	AVERAGE	3	7311.00	42.92	74.00	-31.08	60.66	35.58	12.78	66.10	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>44.47</td><td>74.00</td><td>-29.53</td><td>64.55</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>43.44</td><td>74.00</td><td>-30.56</td><td>61.18</td><td>35.58</td><td>12.78</td><td>66.10</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	44.47	74.00	-29.53	64.55	33.85	10.34	64.27	0.00	---	---	PEAK	2	7311.00	43.44	74.00	-30.56	61.18	35.58	12.78	66.10	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																							
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																						
1	4874.00	50.94	74.00	-23.06	71.02	33.85	10.34	64.27	0.00	100	120	PEAK																																																																																																																																					
2	4874.00	40.61	54.00	-13.39	60.69	33.85	10.34	64.27	0.00	100	120	AVERAGE																																																																																																																																					
3	7311.00	42.92	74.00	-31.08	60.66	35.58	12.78	66.10	0.00	---	---	PEAK																																																																																																																																					
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																						
1	4874.00	44.47	74.00	-29.53	64.55	33.85	10.34	64.27	0.00	---	---	PEAK																																																																																																																																					
2	7311.00	43.44	74.00	-30.56	61.18	35.58	12.78	66.10	0.00	---	---	PEAK																																																																																																																																					

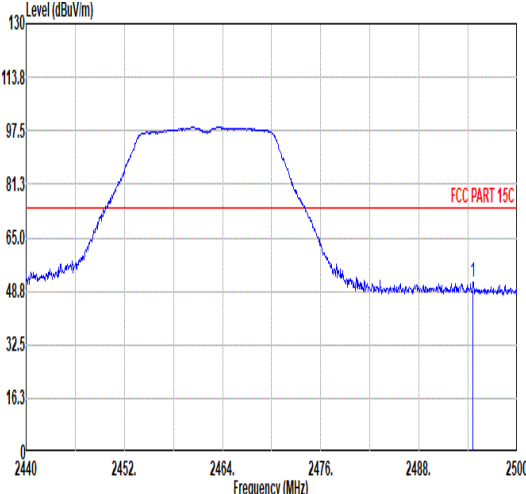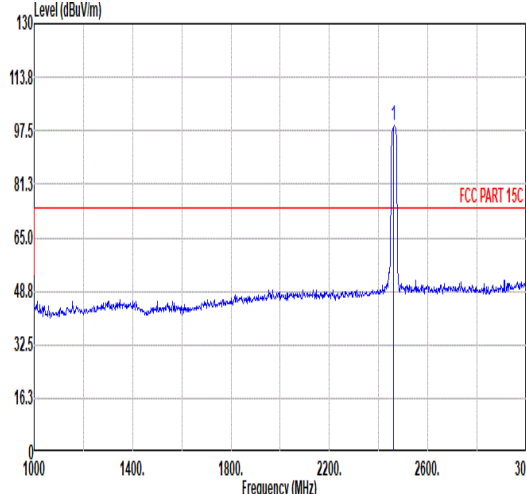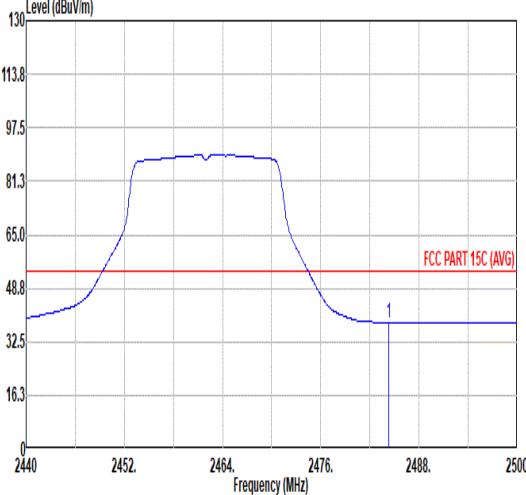
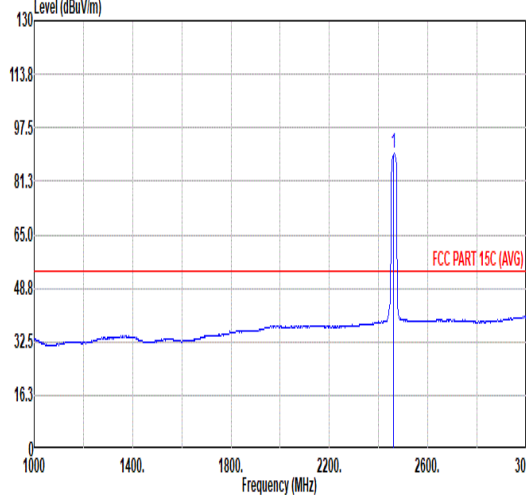


Mode	9																																																																																																														
	Band Edge																																																																																																														
	2400-2483.5_802.11n_HT20_CH11_2462MHz																																																																																																														
ANT	1																																																																																																														
Pol.	Horizontal						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2494.60</td><td>51.34</td><td>74.00</td><td>-22.66</td><td>42.27</td><td>32.29</td><td>7.35</td><td>36.57</td><td>6.00</td><td>100</td><td>167 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2494.60	51.34	74.00	-22.66	42.27	32.29	7.35	36.57	6.00	100	167 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>98.86</td><td>-----</td><td>-----</td><td>89.90</td><td>32.23</td><td>7.30</td><td>36.57</td><td>6.00</td><td>100</td><td>167 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	98.86	-----	-----	89.90	32.23	7.30	36.57	6.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2494.60	51.34	74.00	-22.66	42.27	32.29	7.35	36.57	6.00	100	167 PEAK																																																																																																				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2462.00	98.86	-----	-----	89.90	32.23	7.30	36.57	6.00	100	167 PEAK																																																																																																				
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.34</td><td>38.39</td><td>54.00</td><td>-15.61</td><td>29.36</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>100</td><td>167 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.34	38.39	54.00	-15.61	29.36	32.27	7.33	36.57	6.00	100	167 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>89.56</td><td>-----</td><td>-----</td><td>80.60</td><td>32.23</td><td>7.30</td><td>36.57</td><td>6.00</td><td>100</td><td>167 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	89.56	-----	-----	80.60	32.23	7.30	36.57	6.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2484.34	38.39	54.00	-15.61	29.36	32.27	7.33	36.57	6.00	100	167 AVERAGE																																																																																																				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2462.00	89.56	-----	-----	80.60	32.23	7.30	36.57	6.00	100	167 AVERAGE																																																																																																				

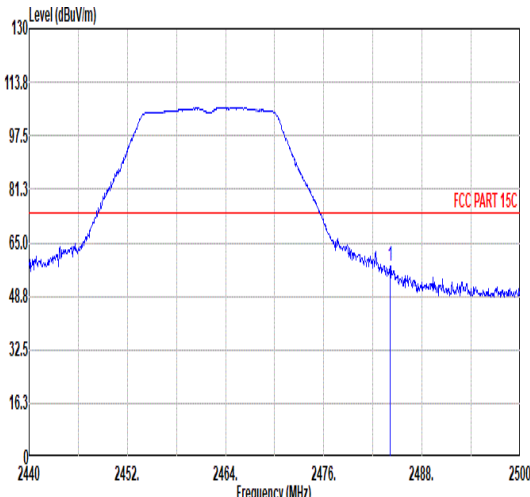
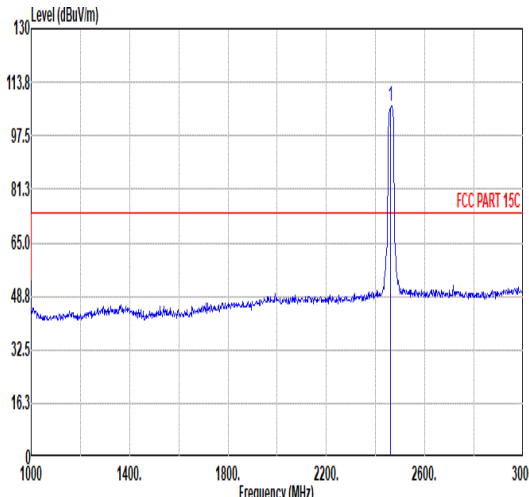
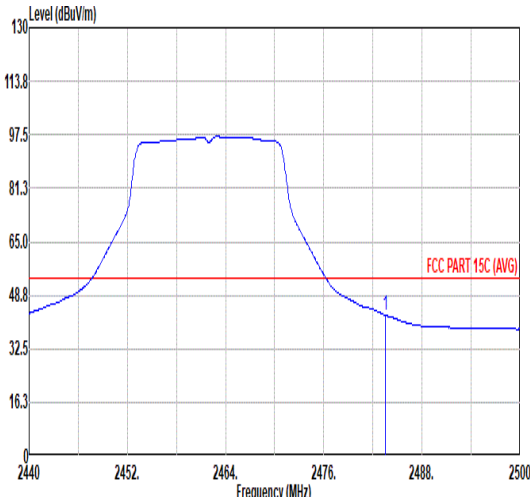
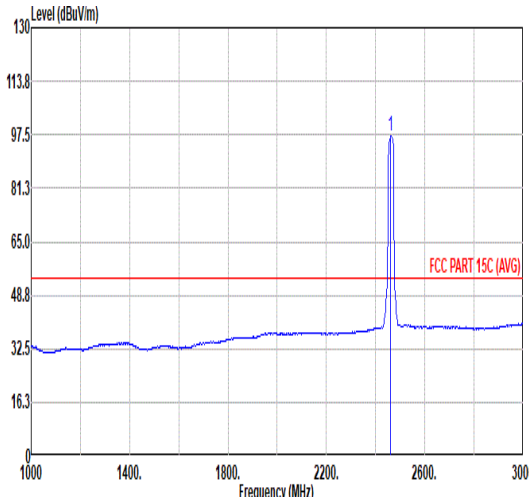


Mode	9																																																																																																					
	Band Edge																																																																																																					
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																					
ANT	1																																																																																																					
Pol.	Vertical						Fundamental																																																																																															
Peak																																																																																																						
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.10</td><td>57.76</td><td>74.00</td><td>-16.24</td><td>48.73</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>107</td><td>297 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.10	57.76	74.00	-16.24	48.73	32.27	7.33	36.57	6.00	107	297 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>106.45</td><td>-----</td><td>-----</td><td>97.49</td><td>32.23</td><td>7.30</td><td>36.57</td><td>6.00</td><td>107</td><td>297 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	106.45	-----	-----	97.49	32.23	7.30	36.57	6.00	107	297 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	2484.10	57.76	74.00	-16.24	48.73	32.27	7.33	36.57	6.00	107	297 PEAK																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	2462.00	106.45	-----	-----	97.49	32.23	7.30	36.57	6.00	107	297 PEAK																																																																																											
Avg																																																																																																						
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>42.76</td><td>54.00</td><td>-11.24</td><td>33.73</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>107</td><td>297 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	42.76	54.00	-11.24	33.73	32.27	7.33	36.57	6.00	107	297 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>97.05</td><td>-----</td><td>-----</td><td>88.09</td><td>32.23</td><td>7.30</td><td>36.57</td><td>6.00</td><td>107</td><td>297 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	97.05	-----	-----	88.09	32.23	7.30	36.57	6.00	107	297 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	2483.50	42.76	54.00	-11.24	33.73	32.27	7.33	36.57	6.00	107	297 AVERAGE																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	2462.00	97.05	-----	-----	88.09	32.23	7.30	36.57	6.00	107	297 AVERAGE																																																																																											

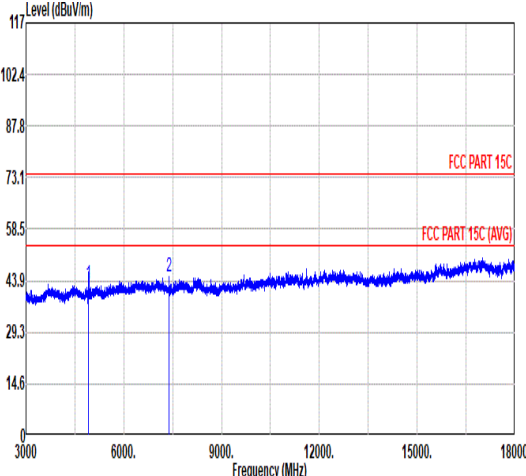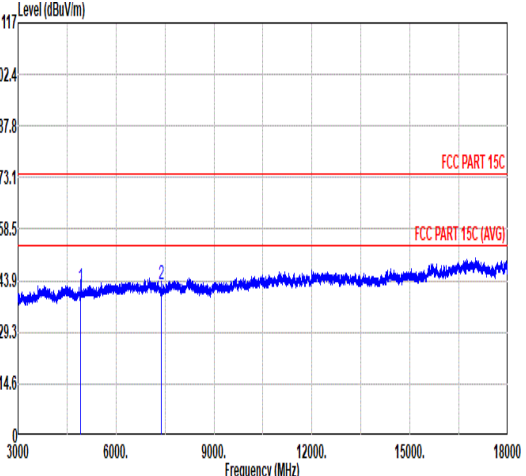

Mode	9																																																																																																																													
	Harmonic																																																																																																																													
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																																													
ANT	1																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																							
Peak Avg																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>42.76</td><td>74.00</td><td>-31.24</td><td>62.76</td><td>33.90</td><td>10.40</td><td>64.30</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>44.95</td><td>74.00</td><td>-29.05</td><td>62.72</td><td>35.57</td><td>12.88</td><td>66.22</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	42.76	74.00	-31.24	62.76	33.90	10.40	64.30	0.00	---	---	PEAK	2	7386.00	44.95	74.00	-29.05	62.72	35.57	12.88	66.22	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>41.99</td><td>74.00</td><td>-32.01</td><td>61.99</td><td>33.90</td><td>10.40</td><td>64.30</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>42.65</td><td>74.00</td><td>-31.35</td><td>60.42</td><td>35.57</td><td>12.88</td><td>66.22</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	41.99	74.00	-32.01	61.99	33.90	10.40	64.30	0.00	---	---	PEAK	2	7386.00	42.65	74.00	-31.35	60.42	35.57	12.88	66.22	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4924.00	42.76	74.00	-31.24	62.76	33.90	10.40	64.30	0.00	---	---	PEAK																																																																																																																		
2	7386.00	44.95	74.00	-29.05	62.72	35.57	12.88	66.22	0.00	---	---	PEAK																																																																																																																		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4924.00	41.99	74.00	-32.01	61.99	33.90	10.40	64.30	0.00	---	---	PEAK																																																																																																																		
2	7386.00	42.65	74.00	-31.35	60.42	35.57	12.88	66.22	0.00	---	---	PEAK																																																																																																																		

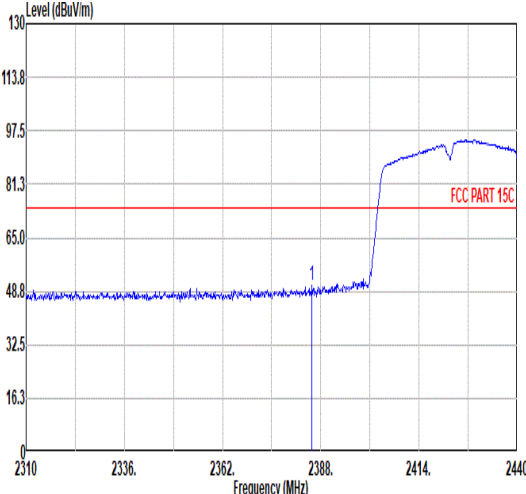
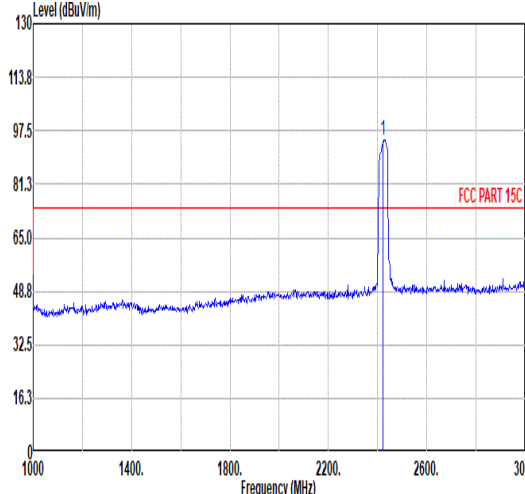
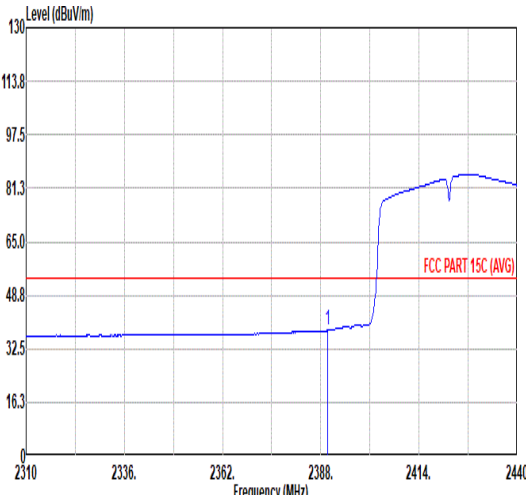
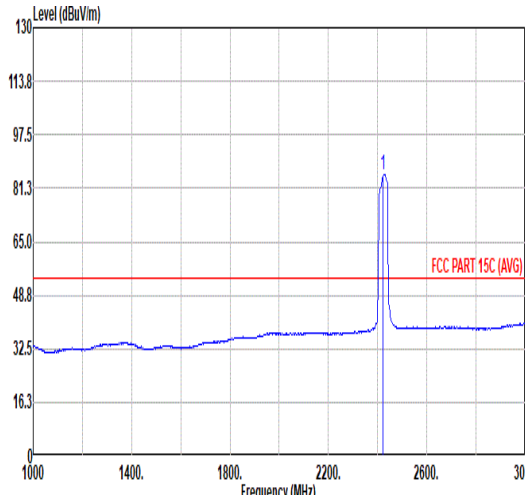


Mode	10																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_802.11n HT40_CH3_2422MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal					Fundamental																																																																																													
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.66</td><td>50.43</td><td>74.00</td><td>-23.57</td><td>41.98</td><td>31.89</td><td>7.16</td><td>36.60</td><td>6.00</td><td>313</td><td>0 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2385.66	50.43	74.00	-23.57	41.98	31.89	7.16	36.60	6.00	313	0 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>94.87</td><td>-----</td><td>-----</td><td>86.12</td><td>32.10</td><td>7.23</td><td>36.58</td><td>6.00</td><td>313</td><td>0 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	94.87	-----	-----	86.12	32.10	7.23	36.58	6.00	313
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2385.66	50.43	74.00	-23.57	41.98	31.89	7.16	36.60	6.00	313	0 PEAK																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2422.00	94.87	-----	-----	86.12	32.10	7.23	36.58	6.00	313	0 PEAK																																																																																								
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>38.05</td><td>54.00</td><td>-15.95</td><td>29.56</td><td>31.92</td><td>7.16</td><td>36.59</td><td>6.00</td><td>313</td><td>0 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	38.05	54.00	-15.95	29.56	31.92	7.16	36.59	6.00	313	0 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>85.51</td><td>-----</td><td>-----</td><td>76.76</td><td>32.10</td><td>7.23</td><td>36.58</td><td>6.00</td><td>313</td><td>0 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	85.51	-----	-----	76.76	32.10	7.23	36.58	6.00	313
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.82	38.05	54.00	-15.95	29.56	31.92	7.16	36.59	6.00	313	0 AVERAGE																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2422.00	85.51	-----	-----	76.76	32.10	7.23	36.58	6.00	313	0 AVERAGE																																																																																								





Mode	10																																																				
	Band Edge - R																																																				
	2400-2483.5_802.11n HT40_CH3_2422MHz																																																				
ANT	1																																																				
Pol.	Horizontal					Fundamental																																															
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.80</td><td>50.29</td><td>74.00</td><td>-23.71</td><td>41.25</td><td>32.27</td><td>7.34</td><td>36.57</td><td>6.00</td><td>313</td><td>0 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.80	50.29	74.00	-23.71	41.25	32.27	7.34	36.57	6.00	313	0 PEAK	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2486.80	50.29	74.00	-23.71	41.25	32.27	7.34	36.57	6.00	313	0 PEAK																																										
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.98</td><td>37.77</td><td>54.00</td><td>-16.23</td><td>28.74</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>313</td><td>0 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.98	37.77	54.00	-16.23	28.74	32.27	7.33	36.57	6.00	313	0 AVERAGE	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2483.98	37.77	54.00	-16.23	28.74	32.27	7.33	36.57	6.00	313	0 AVERAGE																																										

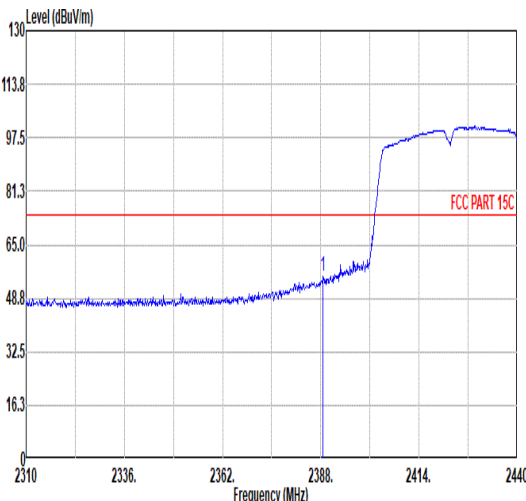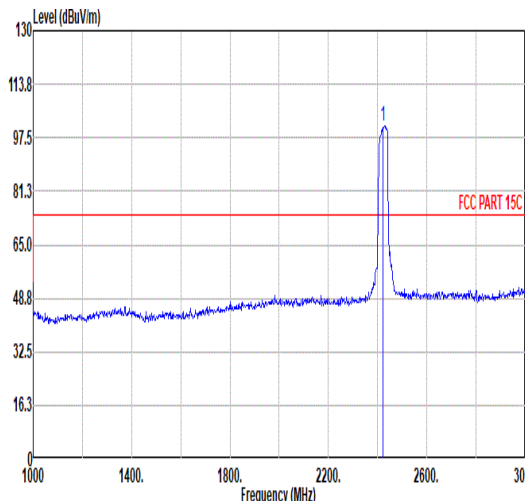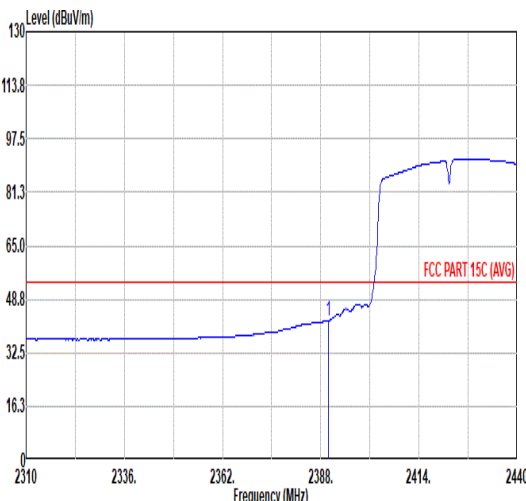
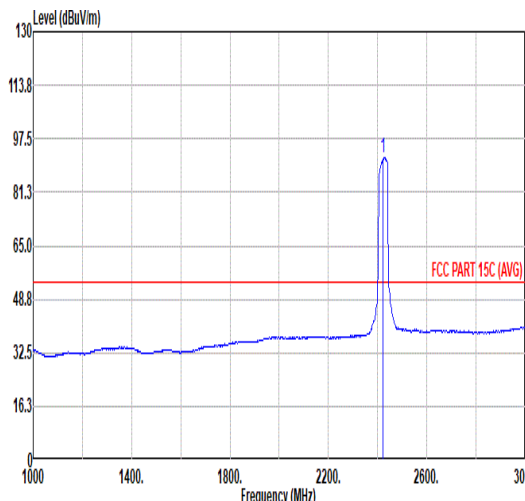


		10																																																					
Mode		Band Edge - L																																																					
		2400-2483.5_802.11n HT40_CH3_2422MHz																																																					
ANT		1																																																					
Pol.		Vertical					Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.65</td><td>55.20</td><td>74.00</td><td>-18.80</td><td>46.73</td><td>31.91</td><td>7.16</td><td>36.60</td><td>6.00</td><td>130</td><td>305 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.65	55.20	74.00	-18.80	46.73	31.91	7.16	36.60	6.00	130
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2388.65	55.20	74.00	-18.80	46.73	31.91	7.16	36.60	6.00	130	305 PEAK																																												
																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>101.24</td><td>-----</td><td>-----</td><td>92.48</td><td>32.11</td><td>7.23</td><td>36.58</td><td>6.00</td><td>130</td><td>305 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	101.24	-----	-----	92.48	32.11	7.23	36.58	6.00	130
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2422.00	101.24	-----	-----	92.48	32.11	7.23	36.58	6.00	130	305 PEAK																																												
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>42.27</td><td>54.00</td><td>-11.73</td><td>33.78</td><td>31.92</td><td>7.16</td><td>36.59</td><td>6.00</td><td>130</td><td>305 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	42.27	54.00	-11.73	33.78	31.92	7.16	36.59	6.00	130
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2389.95	42.27	54.00	-11.73	33.78	31.92	7.16	36.59	6.00	130	305 AVERAGE																																												
																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>91.62</td><td>-----</td><td>-----</td><td>82.86</td><td>32.11</td><td>7.23</td><td>36.58</td><td>6.00</td><td>130</td><td>305 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	91.62	-----	-----	82.86	32.11	7.23	36.58	6.00	130
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2422.00	91.62	-----	-----	82.86	32.11	7.23	36.58	6.00	130	305 AVERAGE																																												

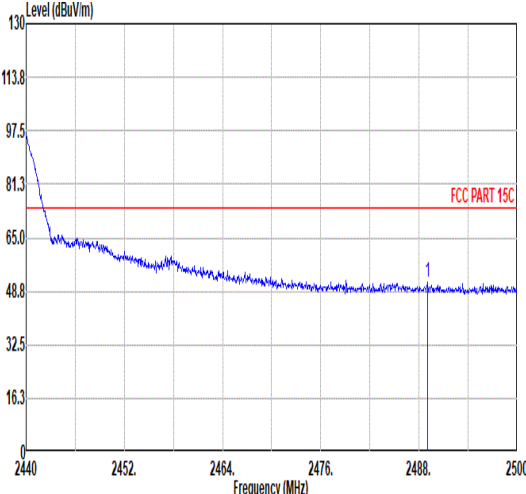
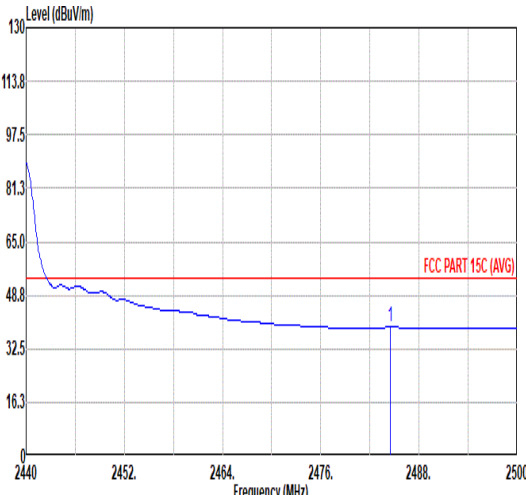


Mode	10																																																				
	Band Edge - R																																																				
	2400-2483.5_802.11n HT40_CH3_2422MHz																																																				
ANT	1																																																				
Pol.	Vertical					Fundamental																																															
Peak						Blank																																															
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2489.08</td><td>51.57</td><td>74.00</td><td>-22.43</td><td>42.52</td><td>32.28</td><td>7.34</td><td>36.57</td><td>6.00</td><td>130 305 PEAK</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2489.08	51.57	74.00	-22.43	42.52	32.28	7.34	36.57	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2489.08	51.57	74.00	-22.43	42.52	32.28	7.34	36.57	6.00	130 305 PEAK																																											
Avg						Blank																																															
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.46</td><td>39.09</td><td>54.00</td><td>-14.91</td><td>30.06</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>130 305 AVERAGE</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.46	39.09	54.00	-14.91	30.06	32.27	7.33	36.57	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2484.46	39.09	54.00	-14.91	30.06	32.27	7.33	36.57	6.00	130 305 AVERAGE																																											



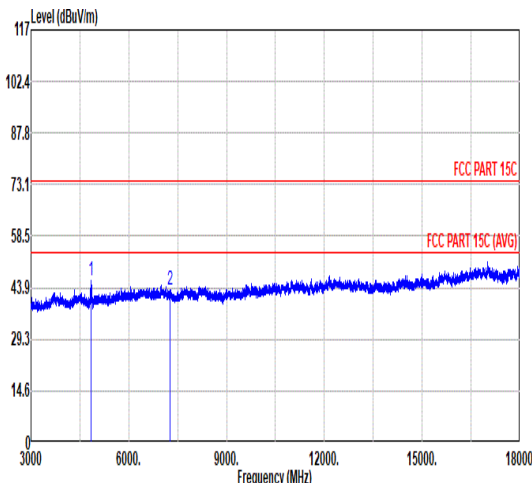
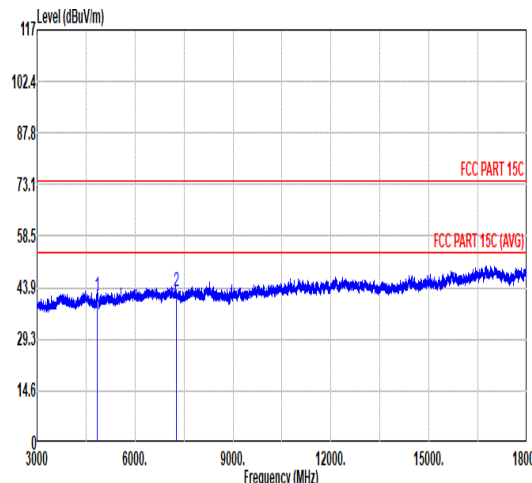


Mode	10																																																																																																																													
	Harmonic																																																																																																																													
	2400-2483.5_802.11n HT40_CH3_2422MHz																																																																																																																													
ANT	1																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																							
Peak Avg																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4843.50</td><td>45.74</td><td>74.00</td><td>-28.26</td><td>65.87</td><td>33.80</td><td>10.31</td><td>64.24</td><td>0.00</td><td>100</td><td>55</td></tr><tr><td>2</td><td>7266.00</td><td>43.14</td><td>74.00</td><td>-30.86</td><td>60.86</td><td>35.60</td><td>12.71</td><td>66.03</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4843.50	45.74	74.00	-28.26	65.87	33.80	10.31	64.24	0.00	100	55	2	7266.00	43.14	74.00	-30.86	60.86	35.60	12.71	66.03	0.00	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4844.00</td><td>41.40</td><td>74.00</td><td>-32.60</td><td>61.53</td><td>33.80</td><td>10.31</td><td>64.24</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7266.00</td><td>42.97</td><td>74.00</td><td>-31.03</td><td>60.69</td><td>35.60</td><td>12.71</td><td>66.03</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4844.00	41.40	74.00	-32.60	61.53	33.80	10.31	64.24	0.00	---	PEAK	2	7266.00	42.97	74.00	-31.03	60.69	35.60	12.71	66.03	0.00	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	4843.50	45.74	74.00	-28.26	65.87	33.80	10.31	64.24	0.00	100	55																																																																																																																			
2	7266.00	43.14	74.00	-30.86	60.86	35.60	12.71	66.03	0.00	---	PEAK																																																																																																																			
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	4844.00	41.40	74.00	-32.60	61.53	33.80	10.31	64.24	0.00	---	PEAK																																																																																																																			
2	7266.00	42.97	74.00	-31.03	60.69	35.60	12.71	66.03	0.00	---	PEAK																																																																																																																			

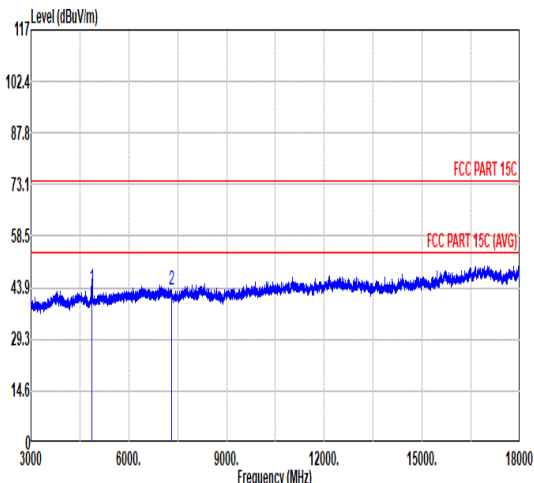
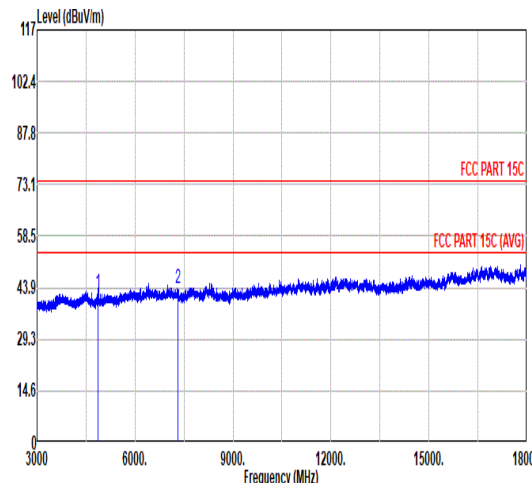


Mode	11																																																																							
	Harmonic																																																																							
	2400-2483.5_802.11n HT40_CH6_2437MHz																																																																							
ANT	1																																																																							
Pol.	Horizontal						Vertical																																																																	
Peak Avg																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th colspan="2">Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>43.79</td><td>74.00</td><td>-30.21</td><td>63.87</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>43.18</td><td>74.00</td><td>-30.82</td><td>60.92</td><td>35.58</td><td>12.78</td><td>66.10</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></tbody></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4874.00	43.79	74.00	-30.21	63.87	33.85	10.34	64.27	0.00	---	--- PEAK	2	7311.00	43.18	74.00	-30.82	60.92	35.58	12.78	66.10	0.00	---	--- PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																														
1	4874.00	43.79	74.00	-30.21	63.87	33.85	10.34	64.27	0.00	---	--- PEAK																																																													
2	7311.00	43.18	74.00	-30.82	60.92	35.58	12.78	66.10	0.00	---	--- PEAK																																																													
<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th colspan="2">Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>42.42</td><td>74.00</td><td>-31.58</td><td>62.50</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>43.86</td><td>74.00</td><td>-30.14</td><td>61.60</td><td>35.58</td><td>12.78</td><td>66.10</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></tbody></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4874.00	42.42	74.00	-31.58	62.50	33.85	10.34	64.27	0.00	---	--- PEAK	2	7311.00	43.86	74.00	-30.14	61.60	35.58	12.78	66.10	0.00	---	--- PEAK	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																														
1	4874.00	42.42	74.00	-31.58	62.50	33.85	10.34	64.27	0.00	---	--- PEAK																																																													
2	7311.00	43.86	74.00	-30.14	61.60	35.58	12.78	66.10	0.00	---	--- PEAK																																																													

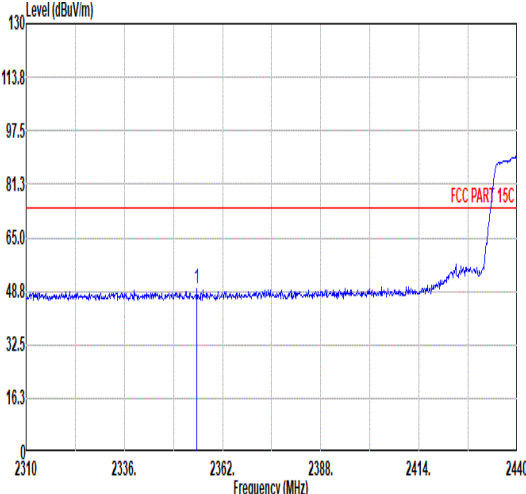
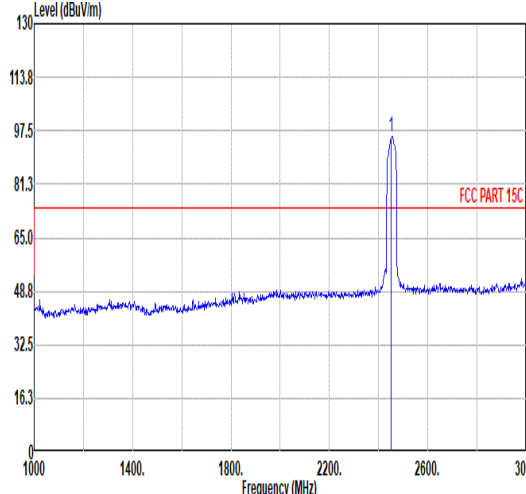
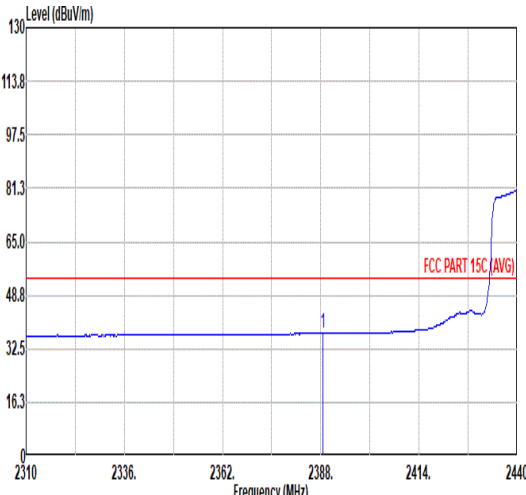
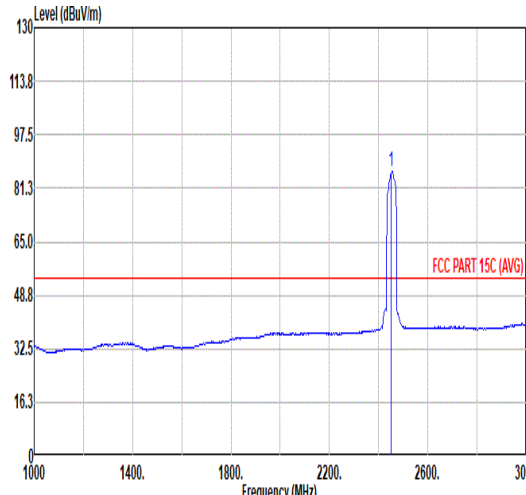


Mode	12																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_802.11n HT40_CH9_2452MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2355.24</td><td>49.40</td><td>74.00</td><td>-24.60</td><td>41.29</td><td>31.64</td><td>7.11</td><td>36.64</td><td>6.00</td><td>191 360 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2355.24	49.40	74.00	-24.60	41.29	31.64	7.11	36.64	6.00	191 360 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>95.59</td><td>-----</td><td>-----</td><td>86.67</td><td>32.21</td><td>7.28</td><td>36.57</td><td>6.00</td><td>191 360 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	95.59	-----	-----	86.67	32.21	7.28	36.57	6.00	191 360 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2355.24	49.40	74.00	-24.60	41.29	31.64	7.11	36.64	6.00	191 360 PEAK																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2452.00	95.59	-----	-----	86.67	32.21	7.28	36.57	6.00	191 360 PEAK																																																																																									
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.65</td><td>37.25</td><td>54.00</td><td>-16.75</td><td>28.78</td><td>31.91</td><td>7.16</td><td>36.60</td><td>6.00</td><td>191 360 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.65	37.25	54.00	-16.75	28.78	31.91	7.16	36.60	6.00	191 360 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>86.45</td><td>-----</td><td>-----</td><td>77.53</td><td>32.21</td><td>7.28</td><td>36.57</td><td>6.00</td><td>191 360 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	86.45	-----	-----	77.53	32.21	7.28	36.57	6.00	191 360 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2388.65	37.25	54.00	-16.75	28.78	31.91	7.16	36.60	6.00	191 360 AVERAGE																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2452.00	86.45	-----	-----	77.53	32.21	7.28	36.57	6.00	191 360 AVERAGE																																																																																									

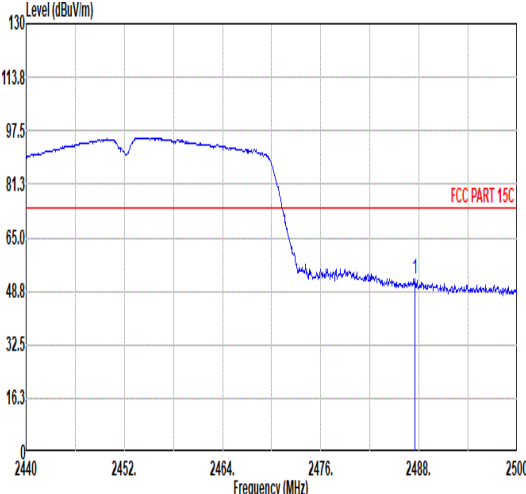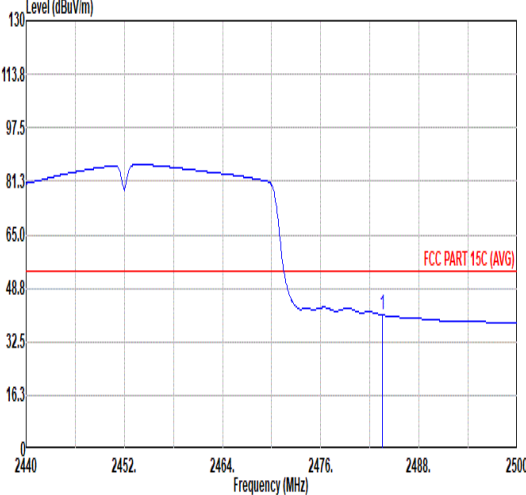

Mode	12																																																							
	Band Edge - R																																																							
	2400-2483.5_802.11n HT40_CH9_2452MHz																																																							
ANT	1																																																							
Pol.	Horizontal										Fundamental																																													
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.46</td><td>52.64</td><td>74.00</td><td>-21.36</td><td>43.60</td><td>32.27</td><td>7.34</td><td>36.57</td><td>6.00</td><td>191</td><td>360</td><td>PEAK</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.46	52.64	74.00	-21.36	43.60	32.27	7.34	36.57	6.00	191	360	PEAK	Blank	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2487.46	52.64	74.00	-21.36	43.60	32.27	7.34	36.57	6.00	191	360	PEAK																																												
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>40.66</td><td>54.00</td><td>-13.34</td><td>31.63</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>191</td><td>360</td><td>AVERAGE</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	40.66	54.00	-13.34	31.63	32.27	7.33	36.57	6.00	191	360	AVERAGE	Blank	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2483.50	40.66	54.00	-13.34	31.63	32.27	7.33	36.57	6.00	191	360	AVERAGE																																												

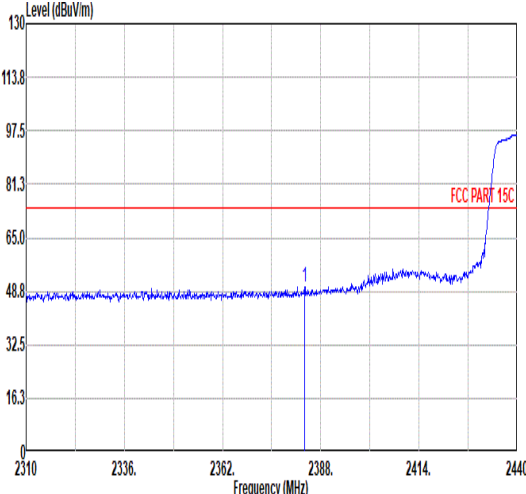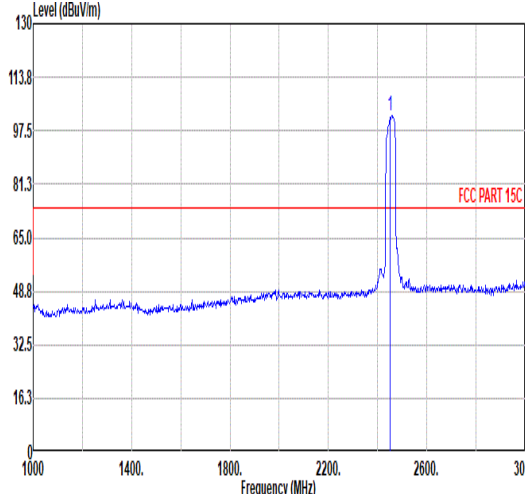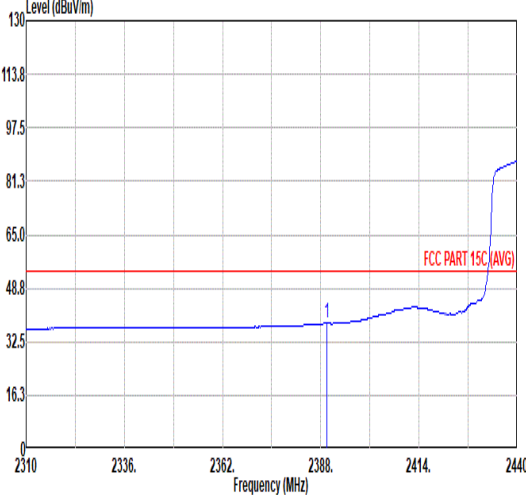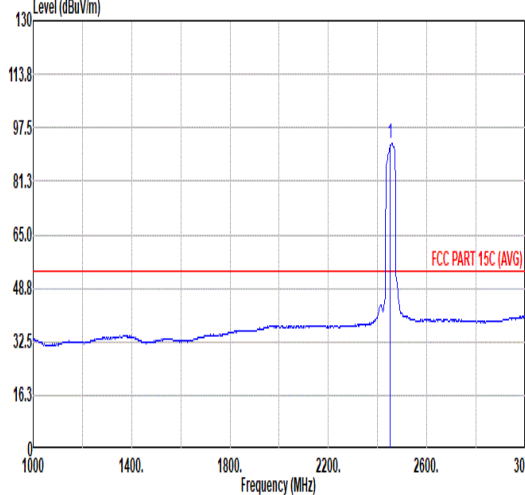

		12																																																																																																													
Mode		Band Edge - L																																																																																																													
		2400-2483.5_802.11n HT40_CH9_2452MHz																																																																																																													
ANT		1																																																																																																													
Pol.		Vertical					Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2383.71</td><td>50.27</td><td>74.00</td><td>-23.73</td><td>41.85</td><td>31.87</td><td>7.15</td><td>36.60</td><td>6.00</td><td>100</td><td>97 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2383.71	50.27	74.00	-23.73	41.85	31.87	7.15	36.60	6.00	100	97 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>102.08</td><td>-----</td><td>-----</td><td>93.14</td><td>32.22</td><td>7.29</td><td>36.57</td><td>6.00</td><td>100</td><td>97 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	102.08	-----	-----	93.14	32.22	7.29	36.57	6.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2383.71	50.27	74.00	-23.73	41.85	31.87	7.15	36.60	6.00	100	97 PEAK																																																																																																				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2452.00	102.08	-----	-----	93.14	32.22	7.29	36.57	6.00	100	97 PEAK																																																																																																				
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.69</td><td>38.13</td><td>54.00</td><td>-15.87</td><td>29.64</td><td>31.92</td><td>7.16</td><td>36.59</td><td>6.00</td><td>100</td><td>97 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	38.13	54.00	-15.87	29.64	31.92	7.16	36.59	6.00	100	97 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>92.53</td><td>-----</td><td>-----</td><td>83.59</td><td>32.22</td><td>7.29</td><td>36.57</td><td>6.00</td><td>100</td><td>97 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	92.53	-----	-----	83.59	32.22	7.29	36.57	6.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2389.69	38.13	54.00	-15.87	29.64	31.92	7.16	36.59	6.00	100	97 AVERAGE																																																																																																				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2452.00	92.53	-----	-----	83.59	32.22	7.29	36.57	6.00	100	97 AVERAGE																																																																																																				



Mode	12																																																					
	Band Edge - R																																																					
	2400-2483.5_802.11n HT40_CH9_2452MHz																																																					
ANT	1																																																					
Pol.	Vertical						Fundamental																																															
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.74</td><td>58.56</td><td>74.00</td><td>-15.44</td><td>49.53</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>100</td><td>97 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.74	58.56	74.00	-15.44	49.53	32.27	7.33	36.57	6.00	100	97 PEAK	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2483.74	58.56	74.00	-15.44	49.53	32.27	7.33	36.57	6.00	100	97 PEAK																																											
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>44.81</td><td>54.00</td><td>-9.19</td><td>35.78</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>100</td><td>97 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	44.81	54.00	-9.19	35.78	32.27	7.33	36.57	6.00	100	97 AVERAGE	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2483.50	44.81	54.00	-9.19	35.78	32.27	7.33	36.57	6.00	100	97 AVERAGE																																											




Mode	12																																																																																																																													
	Harmonic																																																																																																																													
	2400-2483.5_802.11n HT40_CH9_2452MHz																																																																																																																													
ANT	1																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																							
Peak Avg																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4984.00</td><td>42.75</td><td>74.00</td><td>-31.25</td><td>62.78</td><td>33.90</td><td>10.37</td><td>64.30</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7356.00</td><td>43.53</td><td>74.00</td><td>-30.47</td><td>61.35</td><td>35.51</td><td>12.84</td><td>66.17</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4984.00	42.75	74.00	-31.25	62.78	33.90	10.37	64.30	0.00	---	---	PEAK	2	7356.00	43.53	74.00	-30.47	61.35	35.51	12.84	66.17	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4984.00</td><td>42.31</td><td>74.00</td><td>-31.69</td><td>62.34</td><td>33.90</td><td>10.37</td><td>64.30</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7356.00</td><td>42.76</td><td>74.00</td><td>-31.24</td><td>60.58</td><td>35.51</td><td>12.84</td><td>66.17</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4984.00	42.31	74.00	-31.69	62.34	33.90	10.37	64.30	0.00	---	---	PEAK	2	7356.00	42.76	74.00	-31.24	60.58	35.51	12.84	66.17	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4984.00	42.75	74.00	-31.25	62.78	33.90	10.37	64.30	0.00	---	---	PEAK																																																																																																																		
2	7356.00	43.53	74.00	-30.47	61.35	35.51	12.84	66.17	0.00	---	---	PEAK																																																																																																																		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4984.00	42.31	74.00	-31.69	62.34	33.90	10.37	64.30	0.00	---	---	PEAK																																																																																																																		
2	7356.00	42.76	74.00	-31.24	60.58	35.51	12.84	66.17	0.00	---	---	PEAK																																																																																																																		

Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	100	-	-	10Hz
802.11g	100	-	-	10Hz
802.11n HT20	100	-	-	10Hz
802.11n HT40	100	-	-	10Hz

802.11b

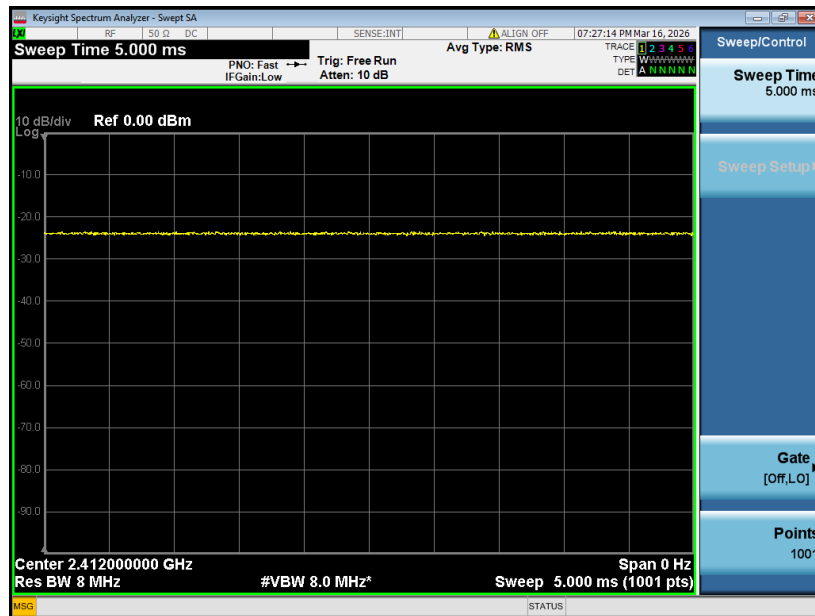




802.11g

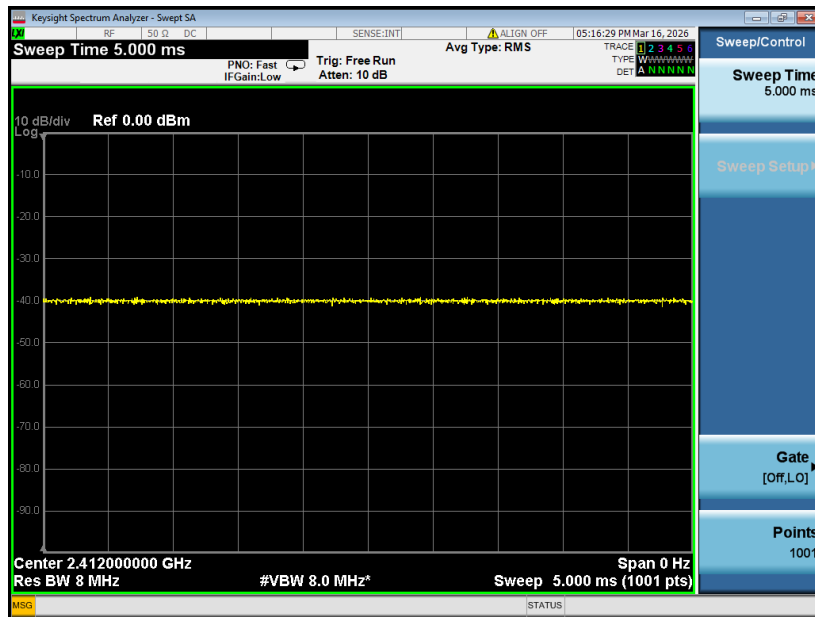

802.11n HT20

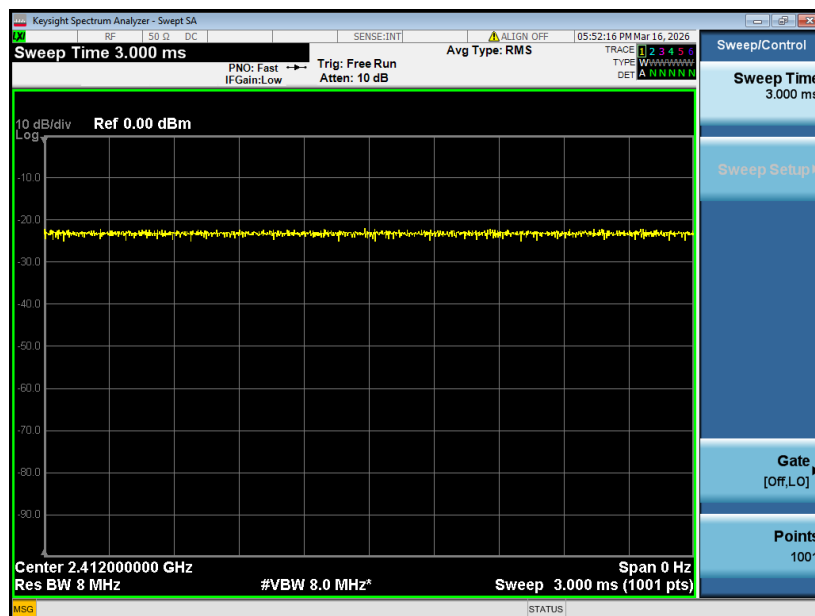



802.11n HT40

