



Mobile Appearance

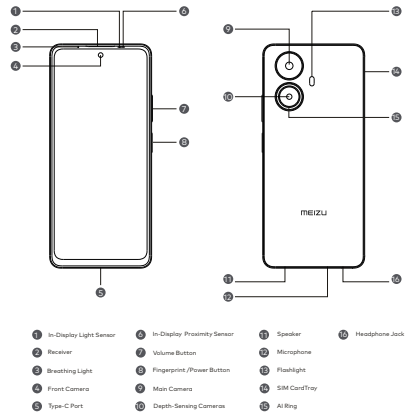

Important Notifications

- Power Button Instructions:
 - After powering on, press and hold the power button for 0.5s to activate the Voice Assistant.
 - For initial startup, press and hold the power button for 5s. After powering on, press and hold the power button for 3s to access the power off/restart interface.
 - If the mobile phone is acting abnormally, please press and hold the power button continuously. This will force the phone to power off and then restart.
- The rear cover and battery are non-removable. Please do not attempt to remove them yourself. If you need a replacement, please contact MEIZU after-sales service or your authorised local MEIZU representative.

SIM Card Installation (SIM card supports 2G/3G/4G)

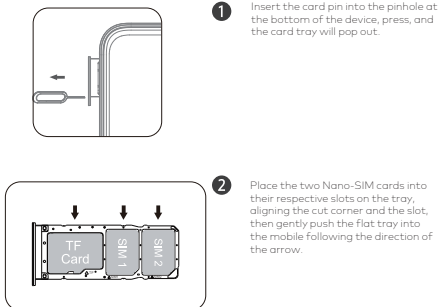

- Switch between primary/accessory SIM cards in Settings when using dual SIM cards.
- Please use a standard Nano-SIM (contact your operator for a standard card). Cut or non-standard Nano-SIM cards may result in the device's malfunctioning.
- Damage to the device due to the use of non-standard Nano-SIM cards, incorrect installation, or incorrect SIM card tray installation will cause the warranty to become void.

Specifications

Product model	M412H	
Main screen parameter	6.78"	
Dimension	76.6mm*168.5mm*8.35mm	
Battery	4850mAh/18.77Wh(Min) 4950mAh/19.16Wh (Typ)	
Camera	64 Megapixels + 2 Megapixels Rear 13 Megapixels Depan	
Operating temperature	0°C-35°C	
SAR Values	CE SAR	<2.0W/Kg(Head) <2.0W/Kg(Body)
	FCC SAR	<1.6W/Kg(cabeza) <1.6W/Kg(cuerpo)

Radio Waves Specifications

Radio	Frequency	Max Output Power
GSM	850MHz/900MHz	34 dBm
	1800MHz/1900MHz	30.5 dBm
WCDMA	Bands 1/2/4	23.5 dBm
	Bands 5/8	24.5 dBm
LTE FDD	Bands 1/2/3/4/7/66	23.5 dBm
	Bands 5/8/12/17/18/19/20/26/28	25 dBm
LTE TDD	Bands 40	23.5 dBm
	Bands 38/41	23.5 dBm
Bluetooth	2.400GHz-2.4835GHz	10.5 dBm(EIRP)
2.4G Wi-Fi	2.400GHz-2.4835GHz	16 dBm(EIRP)
5G Wi-Fi	5.150GHz-5.350GHz	13.5 dBm(EIRP)
	5.470GHz-5.725GHz	13.5 dBm(EIRP)
	5.725GHz-5.850GHz	13.5 dBm(EIRP)
NFC	13.56MHz	42 dBuA/m @10m