



Bluetooth Antenna
specification&Test report


yichip Microelectronics

©2014

Yichip Microelectronics (Hangzhou) Co. Ltd.

Address: Room 501, Building 1A, No. 57, Jianger Rd., Changhe Street, Binjiang District,
Hangzhou, Zhejiang Province, PRC.
Tele: 0571-87963396


ANT7:

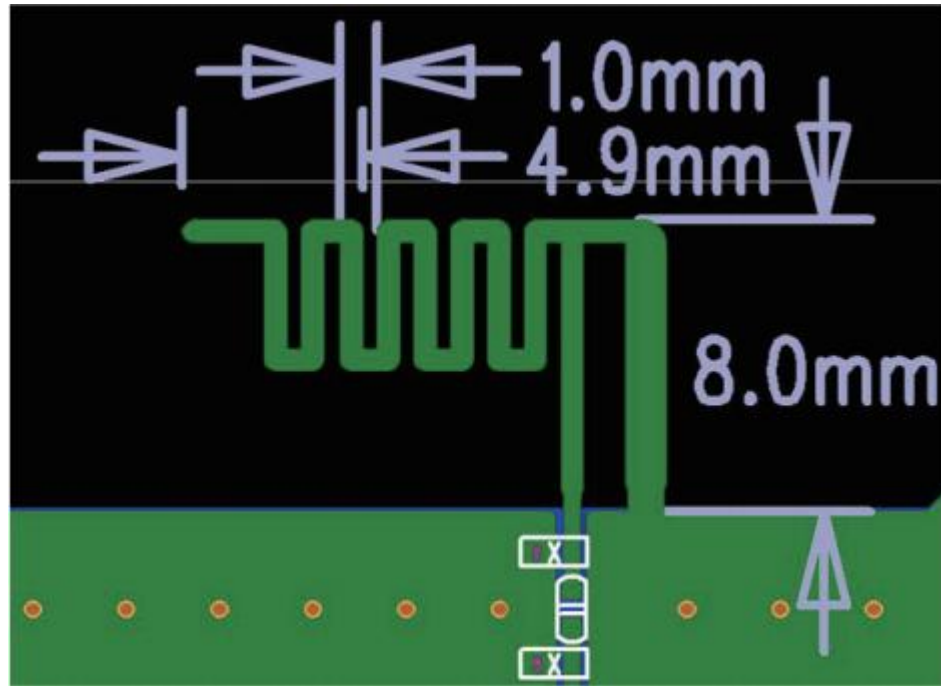


Gian and Efficiency

Frequency (MHz)	Efficiency(%)	Gain(dBi)
2300	51.44	2.59
2320	58.82	3.33
2340	57.60	3.39
2360	55.64	3.16
2380	48.67	2.63
2400	47.27	2.25
2420	51.45	2.14
2440	54.40	2.19
2460	56.94	2.51
2480	60.41	3.02
2500	64.59	3.26
2520	63.59	3.50
2540	64.52	3.71


3D and 1D Radiation Patterns

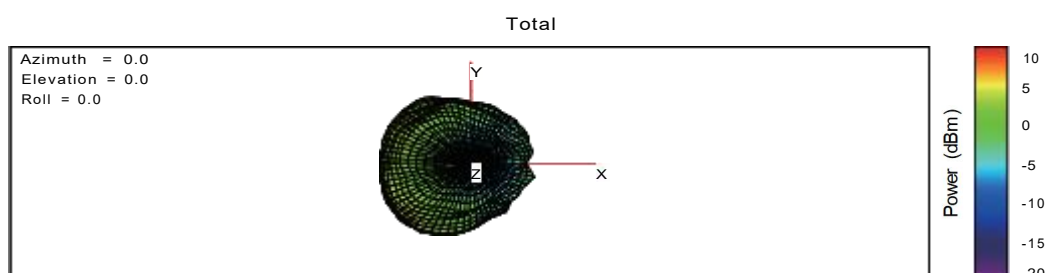

Max : 6
Min : -10
scale: 2/div

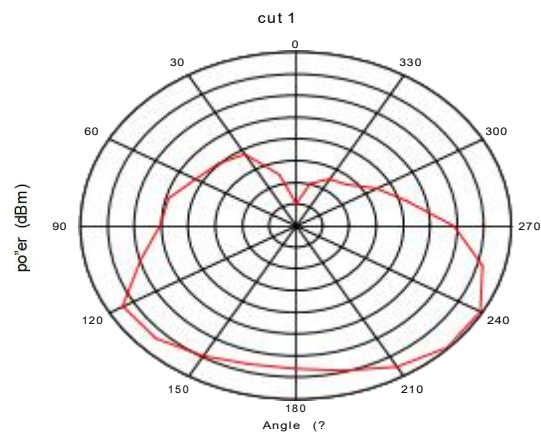

Max : 4
Min : -12
scale: 2/div

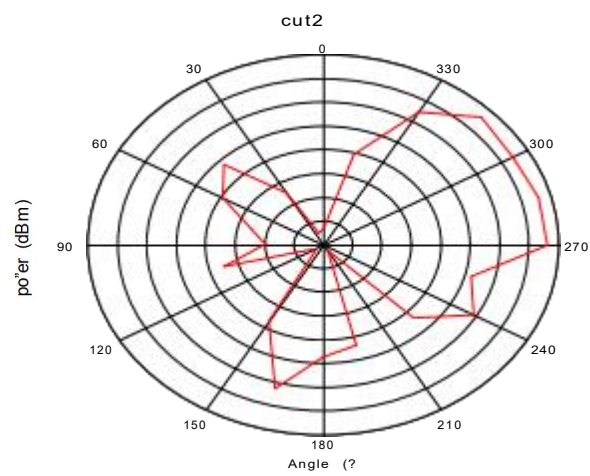

Max : 4
Min : -12
scale: 2/div

