


4 in

wireless speaker

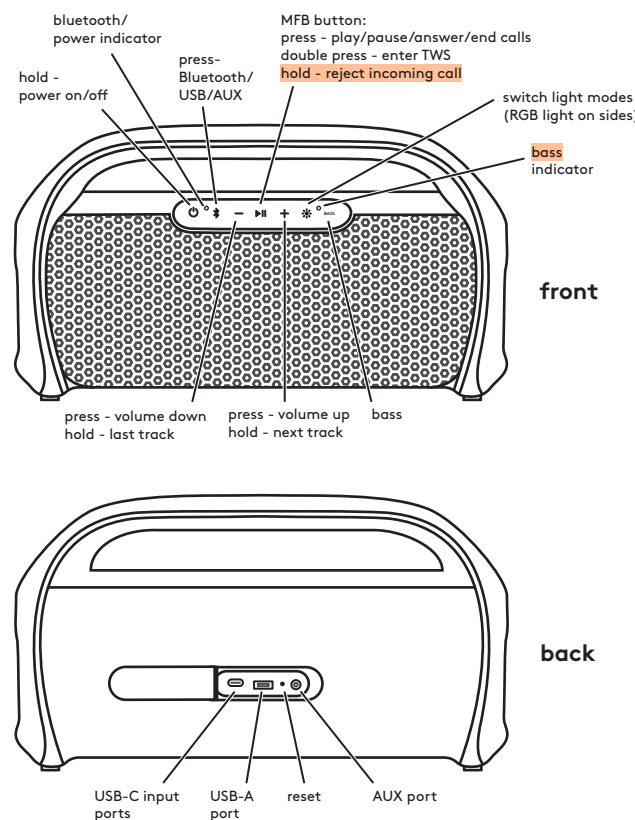

- included**
- Wireless speaker (large portable speaker)
 - USB-A to USB-C charging cable
 - 3.5mm AUX cable

- indicators**
- Flashing red - low battery
 - Solid red - charging
 - No red light - fully charged
 - Rapid flashing white - pairing mode
 - Solid white - bluetooth connected

- Ascending tones - power on
- Descending tones- power off
- Descending double chime - ready to pair
- Ascending double chime - paired
- Low descending tune - low battery
- Two high chimes - max volume
- Two low chimes - min. volume

- rgb light effects**
- Lights on - rainbow
 - Moving rainbow
 - Solid colors loop
 - Music match
 - Breathing red
 - Breathing green
 - Breathing blue
 - Lights off

- pairing**
- Hold power button to power ON speaker
 - Rapid flashing white light
 - Use Bluetooth settings on your phone to pair with heyday portable
 - White light turns solid followed by an ascending double chime - pairing successful
 - If the speaker is already on and paired but needs to be repaired to another device, hold the Bluetooth button for 2 seconds to enter pairing mode again
- charging**
- Full charge requires approximately 3.5 hours and can play for 10 hours when fully charged
 - Charging is complete when red light turns off
 - Plug USB-C end of charging cable into back of speaker
 - Plug USB end of charging cable into a power supply of at least DC 5V 2A

- AUX/line in**
- Insert the included AUX cable into AUX port of the speaker
 - Insert opposite end of the AUX cable into the media source

- USB-A output**
- The USB-A port can be used to charge your device
 - Note:** charging a device will reduce playback time of speaker
 - When a USB flash drive is inserted, music will automatically play after a few seconds; compatible music formats include MP3 and Wav

- TWS (True Wireless Stereo) pairing**
- You can pair two speakers of this same model together to get true stereo sound
 - Turn Bluetooth off on your device, place two matching speakers together, power them on, and double press the MFB button on one speaker to enter TWS pairing
 - The speakers will automatically pair with one another, you will hear an ascending double chime when they pair
 - After the speakers are paired, the TWS indicator light will be solid white on the left channel speaker and flash white every 1 second on the right channel speaker; use your device to connect to heyday portable
 - When TWS is successfully grouped and Bluetooth is connected, the TWS indicator on the left channel speaker will always be on and the right channel speaker will flash once every 5 seconds

- troubleshooting**
- If the speaker is not working correctly, hold the power button for 8 seconds to reset
 - If the speaker won't turn on, recharge the battery and try again
 - If the speaker won't charge, make sure the supply works, is 5V 2A, and not damaged
 - If the speaker makes no sound or does not show as an available device, make sure it is not paired with other devices, if so unpair the device and repair the desired device

need some help?
Can't get it to pair? Just have a question?



call us at: 1-833-TGT-Tech or: 1-833-848-8324

- safety**
- The speaker is waterproof IPX4 (splash resistant), do not submerge under water
 - Do not modify or repair this device
 - Do not use in high temperatures or extreme weather
 - Do not use chemical detergents to clean your device, use a soft dry cloth

heyday 

FCC ID: 2A023-BTSP24 Model: BTSP24 Input: 5V = 2A Made in China
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: 1) This device may not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation.
Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.
However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
• Reorient or relocate the receiving antenna.
• Increase the separation between the equipment and receiver.
• Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
• Consult the dealer or an experienced radio/TV technician for help.
The device has been evaluated to meet general RF exposure requirements. The device can be used in portable exposure conditions without restriction.
Target Corp. Mpls. MN, 55403 Phone: 612-304-6073
For qualified repair specialists requesting repair information and parts please contact the original manufacturer at customersupport@gemfindyours.com

front

back

7.2in