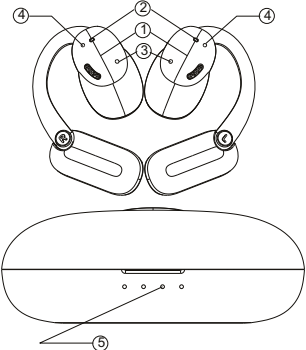


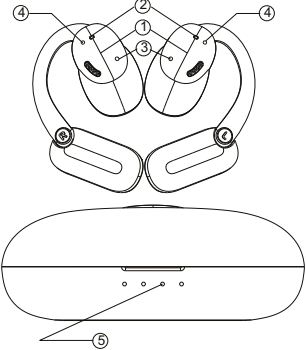



开放式立体声无线耳机  说明书	按键功能概述  1.触摸：手动开机/关机/暂停/播放/接电话/挂电话/上下曲/SIRI 2.LED指示灯 3.通话麦克风 4.通话降噪麦克风 5.充电盒指示灯	产品描述 蓝牙版本：5.3 工作温度：-5°C到40°C 耳机电池容量：80mA/h 充电时间：1.5H 音乐时间：约5.5小时（中等音量） 芯片类型：JL7003 音频解码：AAC,SBC 喇叭类型：1511（MM）全频复合钛膜喇叭 频响范围：20Hz-20KHz 待机时间：20天 连接距离：12米 支持机型：可与支持HFP/A2DP/AVRCP/AVCTP等协议的蓝牙设备配合使用，如手机、电脑等等进行通话、听歌等功能 移动充电盒 充电盒电池容量：450mA/h 充电盒充电时间：1.5H 输入电流：5V/300mA 输出电流：5V/50mA/h（单个） 充电次数：约2.5-3次	功能介绍 开机：充电盒开盖自动开机/耳机关机状态下长按3S手动开机，蓝灯常亮1S，耳机提示音Power on，此时耳机进入回连状态，如附近有曾经配对连接过的设备，将自动回连至该设备，如无设备，等待约8秒主耳自动进入设备配对状态，提示音：Pairing，主耳红蓝交替闪进入设备配对模式。 与设备配对连接：打开手机并开启蓝牙，刷新蓝牙列表，找到“Z7”设备，点击该设备进行配对，连接成功后耳机提示：connected，主副耳蓝灯5秒闪一下，手机上显示耳机已连接。  恢复出厂设置：如出现人为打散耳机配对后（出厂默认都已经配对完成对耳互配的），需要恢复出厂设置，连接和不连接蓝牙的状态下，连续单击6下恢复出厂设置，红蓝灯同时快闪（星粉色），按照以上顺序连接设备端即可。 关机：耳机放入充电仓合盖自动关机充电/开机状态下长按5秒手动关机（手动关机主副耳会同步关机），红灯常亮1S，耳机提示：Power Off 注意事项：1：如需独立使用其中一个耳机，只需将另一边放入充电盒，主耳将自动切换回想要使用的耳机，后续都默认此边为主耳，如需使用双耳，另一边拿起，自动回连组成对耳状态。 	常规功能：播放/暂停：音乐播放状态，双击主/副耳，主副耳蓝灯每5秒闪一下 下一曲：音乐播放状态下，轻触右耳机3下，主副耳蓝灯每5秒闪一下 上一曲：在音乐播放状态下，轻触左耳机3下，主副耳蓝灯每5秒闪一下 接听电话：来电状态下，触摸1下（左右耳均可操作）主副耳蓝灯每5秒闪一下 挂断电话：通话状态下，触摸1下（左右耳均可操作）主副耳蓝灯每5秒闪一下，提示音：嘟 拒接电话：来电时，触摸保持2秒（左右耳均可操作），提示音：嘟 启用Siri：已连接手机状态下长按2秒耳机触摸，唤醒手机语音助手，再长按2秒退出手机语音助手（左右耳均可操作） 设备断开：手机关掉蓝牙，主耳机自动进入设备配对模式，主耳红蓝灯交替闪 自动回连：电池仓开盖自动回连最后一台连接的设备，不在范围内的话8秒主耳自动进入设备配对模式 低电提示：电压低于3.3V低电提示，提示音：嘟嘟低电报警 自动关机：无连接设备超过5分钟或电池电压小于3.2V自动关机 耳机指示灯状态： 开机：蓝色LED长亮1秒后开机 关机：红色LED长亮1秒后关机 耳机互配对模式：双耳红蓝LED灯交替闪 设备待连接模式：主耳红蓝LED灯交替闪 设备已连接待机状态：连接成功后，L/R蓝灯每5秒闪一下	通话状态：L/R蓝灯每5秒闪一下 充电盒指示灯状态： 1：充电盒充电：插入USB充电线，上电4颗灯跑马一圈后显示当前电量5秒，0%-25%电量，234号灯灭，1号灯慢闪。小于50%大于25%电量，34号灯灭，2号灯慢闪，1号灯常亮；小于75%大于50%电量，4号灯灭，3号灯慢闪，12号灯常亮；小于100%大于75%电量，4号灯慢闪，123号灯常亮；100%电量，1234号灯常亮，白灯常亮； 2：充电盒给耳机充电（无外接充电器）：充电盒合盖后显示当前电量灯5秒，后转L/R耳机充电状态，左耳对应仓最左边灯，右耳对应仓最右边灯，充电过程一直对应灯常亮，耳机满电后灭灯 3：充电盒满电（插线）：充电仓四格白灯常亮 4：当前电量：开盖显示5秒当前仓电量 5：低电：最后1格白灯快闪（0.5S闪一下），一直报警至电池保护状态 操作流程：每一次使用请将耳机充满电，与其进行配对使用的设备或手机亦要保留充足的电量，将耳机开机并使其进入配对模式（主耳红蓝灯交替闪），尽量靠近待连接的手机。打开手机并开启BT功能，点击搜索按钮，搜索该设备并点击进行连接，几秒钟后连接成功，主副耳蓝灯每5秒闪一下，手机显示该设备已连接。使用手机拨打电话和听歌，可以从双耳机中正常听到声音，操作完成。	注意事项 •请勿将耳机摔落、撞击、刮擦、扭曲、敲打、碾压、投入水中等； •使用耳机时请将其远离磁体、电器和扬声器附近； •尽量避免将耳机放置于极端温度中（使用环境温度范围-5°C~40°C）； •避免将耳机暴露在潮湿的环境中。	FCC Warning This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: - Reorient or relocate the receiving antenna. - Increase the separation between the equipment and receiver. - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. - Consult the dealer or an experienced radio/TV technician for help. NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
---	---	---	---	---	--	---	---

Open-back Stereo Wireless Headset User Manual 	Overview of button functions  1. Touch: manually power on/off/pause/play/answer/hang up/move to previous and next music/enable SIRI 2. LED indicator 3. Call microphone 4. Call and noise-canceling microphone 5. Indicator on the charging box	Product Description Bluetooth version: 5.3 Working temperature: 5°C ~ 40°C Battery capacity: 80mA/h Charging period: 1.5H Total musical playtime: about 5.5 hours (in moderate volume) Chip type: JL7003 Audio decoding: AAC, SBC Loudspeaker type: 1511 (MM) full-range compound titanium speaker Frequency response: 20Hz-20KHz Standby time: 20 days Connection distance: 12m Applicable devices: Bluetooth devices that support HFP/A2DP/AVRCP/AVCTP protocols, such as mobile phones and computers, to make calls and listen to music Mobile charging box Battery capacity of the charging box: 450mA/h Charging time: 1.5H Input current: 5V/300mA Output current: 5V/50mA/h (single) Charging cycles: about 2.5 ~ 3	Details of Functions Power on: This headset will be on automatically after opening the cover of the charging box / to manually power on it, please long press "Power" 3 seconds, with the blue indicator always on for 1S and a prompt tone "Power on", then, the headset will enter automatic connection. If there is a device that has been paired and connected with it nearby, it will be automatically connected back. If there is no such device, the master earpiece will enter device pairing in about 8 seconds automatically, with a prompt tone "Pairing" and the indicator flashing in red and blue alternately.  Pairing with device: To pair with a device, please power on your mobile phone and enable "Bluetooth", refresh the device list to find out "Z7" and then click it for pairing. After successful connected, the headset will prompt "Connected", with the blue indicator on both earpieces flashing every 5 seconds and the prompt that "the headset is already connected" displayed on your mobile phone. Factory reset: For factory reset in case of manual change of pairing settings (the pairing has been completed in factory by default), please make 6 consecutive clicks to restore no matter it is connected with Bluetooth or not, then, the red and blue indicators begin to flash quickly (in pink). Next, connect to the device you want as instructed above.	Power off: Power Off The headset will be off and charged automatically after it is put into the charging box with its cover closed / to power it off when it is on, please long press "Power" 5 seconds to manually power it off (both the earpieces will be off synchronously with manual power-off); then, the red indicator will be on for 1S, with a prompt "Power Off". Cautions: 1. In case of any need to use one of the earpieces, just put the other one into the charging box, and the earpiece you want to use will be switched to automatically, and act as the master one in subsequent use by default. If you need to use both earpieces, just pick up the other one and make it connected automatically. General features: Play/pause: when the music is playing, please double click the master/secondary earpiece, with the blue indicator on both the earpieces flashing every 5 seconds Next: when the music is playing, please gently touch the right earpiece 3 times, with the blue indicator on both the earpieces flashing every 5 seconds Previous: when the music is playing, please gently touch the left earpiece 3 times, with the blue indicator on both the earpieces flashing every 5 seconds Answer a call: when there is an incoming call, please touch once (both earpieces operable), with the blue indicator on both the earpieces flashing every 5 seconds Hang up: when you are on a call, please touch once (both earpieces operable), with the blue indicator on both the earpieces flashing every 5 seconds and a prompt tone "Du" Reject a call: when there is an incoming call, touch for consecutive 2 seconds (both earpieces operable), with a prompt tone "Du" Enable Siri: long press 2 seconds (both earpieces operable) when the headset is connected with your mobile phone to enable Siri; to disable Siri, long press 2 seconds again Disconnect device: disable "Bluetooth" on your mobile phone	to make the master earpiece enter the pairing mode, with the red and blue indicators on it flashing alternately Automatic connection: after the charging box is opened, it will be connected automatically to the last device connected previously. If the device is not in the range of connection, the master earpiece will enter the pairing mode in 8 seconds automatically Low battery prompt: it will beep for low battery when the voltage is below Automatic shutdown: it will be off automatically if no device is connected in 5 minutes or the battery voltage is below 3.2V Status of indicators on the headset: Power on: the headset will be on after the blue LED indicator stays on for 1 seconds Power off: the headset will be off after the red LED indicator stays on for 1 seconds Pairing: the red and blue LED indicators on both earpieces flash alternately Waiting for connection with a device: the red and blue LED indicators on the master earpiece flash alternately Standby state after successful connection with a device: after successful connection, the L/R blue indicator flashes every 5 seconds On a call: the L/R blue indicator flashes every 5 seconds Status of indicators on the charging box: 1. During charging: after inserting the USB charging cable to power on, the 4 indicators turn on and run around, with the current battery level displayed for 5 seconds. When the battery level is within 0%~25%, all the other three indicators will be off, except indicator 1 that will flash slowly. When the battery level is within 25%~50%, both the indicators 3 and 4 will be off, with the indicator 2 flashing slowly and the indicator 1 always on; when the battery level is within 50%~75%, both the indicators 1 and 2 will be always on, with the indicator 4 off and the indicator 3 flashing slowly; when the battery level is within 75%~100%, all the three indicators will be always on, except the indicator 4 flashing slowly; when the battery level reaches 100%, all the	indicators, together with the white light, will be always on; 2. During charging the headset (without any external charger): after closing the cover of the charging box, the current battery level will be displayed for 5 seconds, and then it begins to charge the L/R earpieces. Indicators on the far left and the far right indicate the states of the L/R earpieces respectively. Both the indicators will be always on during charging, and turn off after fully charged. 3. Fully charge the charging box (with a cable): the white indicator in four bars will be always on 4. Current battery level: the current battery level of the charging box will be displayed for 5 seconds after its cover is opened 5. Low battery: the indicator will flash quickly with only the last bar turning on (every 0.5S), and the headset will keep alarming before it enters the low voltage protection mode. Steps of Operation: Please fully charge the headset before each use, and make sure the battery of the device or mobile phone to be used with the headset is also in a high level. Then, power on the headset, and make it enter the pairing mode (with the red and blue indicators on the master earpiece flashing alternately) and close to the mobile phone to be connected for pairing. Power on your mobile phone and enable "BT", then, click the search button to search for the device and click it for connection. After successful connection in several seconds, the blue indicator on both earpieces will flash every 5 seconds, and your mobile phone will display that the device has been connected. Both the earpieces will work normally when you make calls and listen to music with your mobile phone.	Attentions •Please don't drop, hit, scratch, twist, beat, roll or throw the headset into water; •Please keep the headset away from magnets, electrical appliances and speakers when using it; •Please try to avoid placing the headset in extreme temperatures (ambient temperature range: -5°C~40°C); •Please don't expose the headset to moisture.	FCC Warning This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: - Reorient or relocate the receiving antenna. - Increase the separation between the equipment and receiver. - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. - Consult the dealer or an experienced radio/TV technician for help. NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
--	--	--	--	--	--	---	--	---