SIRIUS P5

真无线蓝牙耳机
使用说明书

GravaStar
重 | 力 | 星 | 球

v1.2

产品简介

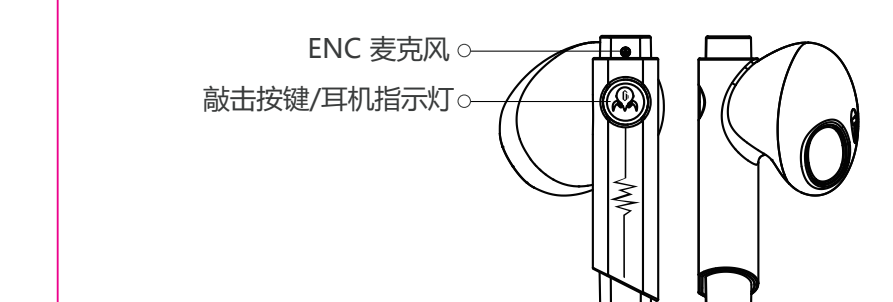

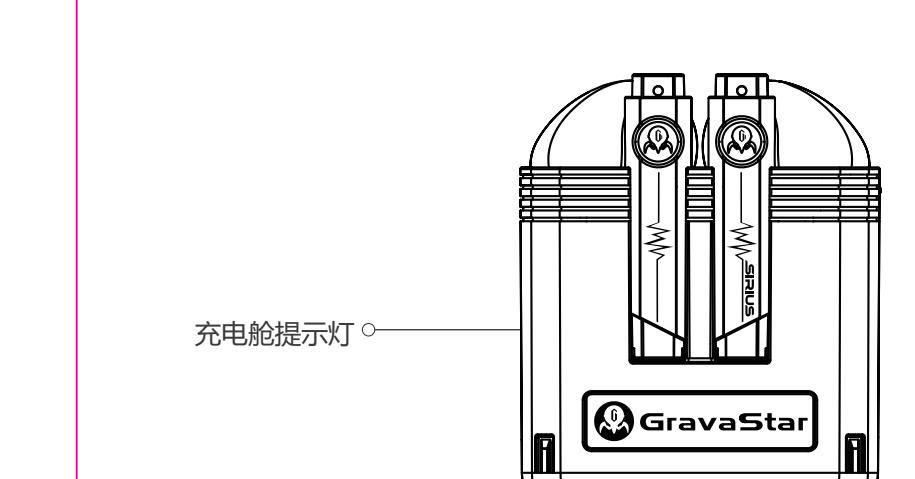

佩戴耳机

将耳机斜向下轻轻塞入耳道，以轻度摇晃头部耳机不晃动为宜（正确佩戴为LOGO朝上）。

充电操作

首次开机使用，请先取出耳机，去除耳机上的隔离膜，将充电舱及耳机充满电。
耳机低电量提醒：电量不足<=10%，每5分钟提示音 Not enough energy一声，红灯频闪（1s/2次）。



充电过程：耳机指示灯呈红色呼吸灯
充满电：耳机指示灯熄灭

基本参数

耳机基本参数

产品型号：Sirius P5
喇叭规格：12mm
降噪模式：ENC通话降噪
电池类型：锂电池
充电时间：1.5小时
耳机电池容量：45mAh
耳机重量：单耳机5g

充电舱基本参数

充电舱电池容量：500mAh
充电时长：2小时

输入参数：5V--350mA
输出参数：5V--150mA
音乐播放时间：50%音量持续8小时
待机时间：约80小时
蓝牙版本：蓝牙5.2
蓝牙协议：A2DP, AVRCP, HFP
解码格式：SBC/AAC/APTX
蓝牙连接距离：>10米
灵敏度：105dB+/- 3dB
频响范围：20Hz-20KHz

连接配对

10:00
蓝牙
开启蓝牙
开启检测
设备名称
可用设备
GravaStar Sirius P5

若要连接到蓝牙设备，请按照步骤1-4操作。

1、 把充电舱安装到外壳里，并用螺丝刀将螺丝固定
2、 将耳机充电柱保护膜撕掉，先放入充电舱关闭，再重新打开顶盖激活开机
3、 打开蓝牙搜索GravaStar Sirius P5，点击配对
4、 蓝牙连接成功/断开时提示音 Bluetooth connected/Bluetooth disconnected

快捷操作

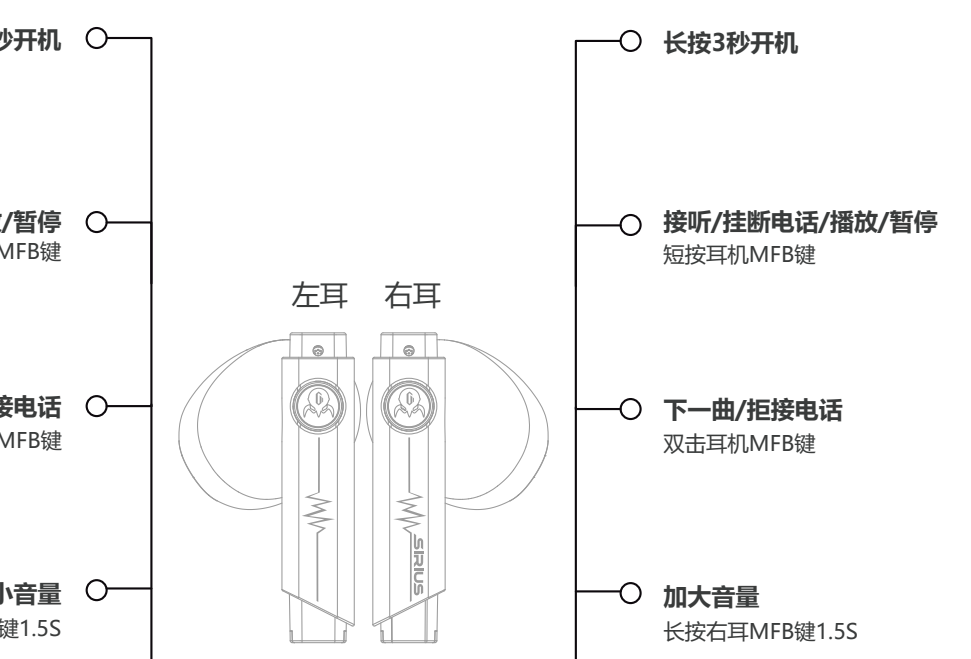

左耳：

长按3秒开机

接听/挂断电话/播放/暂停
短按耳机MFB键

上一曲/拒接电话
双击耳机MFB键

减小音量
长按左耳MFB键1.5S

激活语音助手
三击左耳MFB键

右耳：

长按3秒开机

接听/挂断电话/播放/暂停
短按耳机MFB键

下一曲/拒接电话
双击耳机MFB键

加大音量
长按右耳MFB键1.5S

游戏模式/音乐模式
三击右耳MFB键
(提示音 Music Mode/Gaming Mode,延迟48ms)

灯光提示

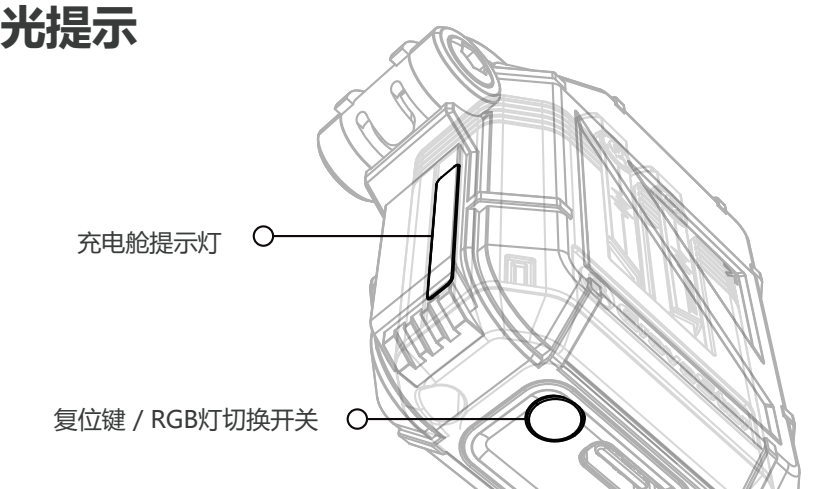

- 单击更换灯效，双击关闭灯光
- 充电舱提示灯：
  - 充电中：≤30%红色/＞30%绿色呼吸效果
  - 充满电：绿灯常亮
- 充电舱电量显示：开合盖/耳机取放
  - 红色：电量在30%以下
  - 绿色：电量在30%以上
- 耳机置于充电舱内，打开顶盖，长按充电舱底部按键5S耳机恢复出厂设置

外壳安装

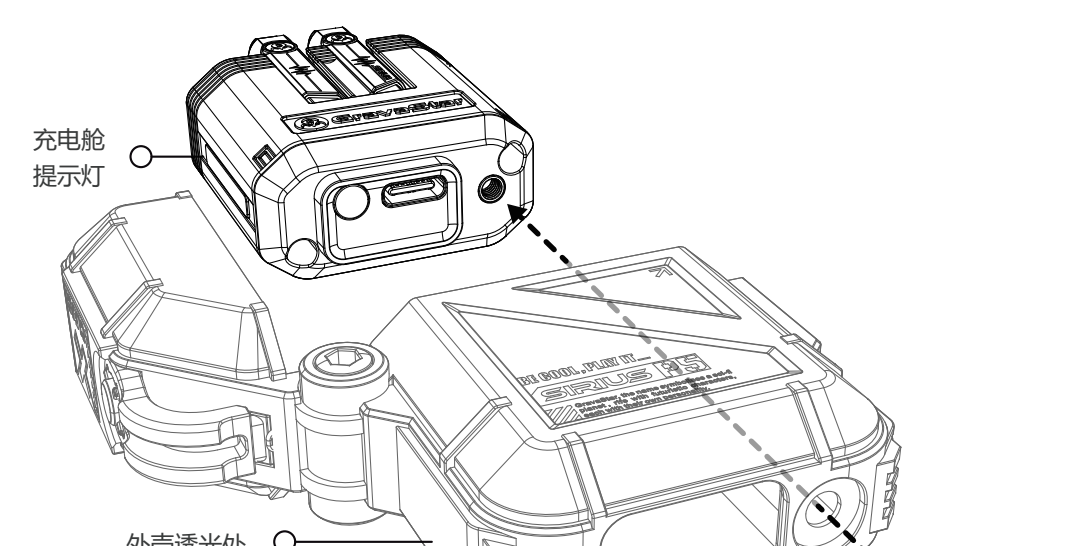

常见问题及解决方案

问题描述	造成原因	问题解决方法
不开机	电池电量耗尽	充电即可
不关机	错误操作或耳机未放充电仓	耳机放充电舱即可
耳机不充电	耳机与充电仓接触处脏污	擦拭干净
搜索不到耳机	耳机没有进入被搜索状态	将耳机进入被搜索状态

注意事项

警告

1、请勿以任何理由拆开、维修或改装耳机，否则可能会导致起火甚至彻底损坏本产品。
2、工作温度-10℃-60℃。
3、使用产品指示灯时，请避开儿童或动物的眼睛。
4、请勿在雷暴天气下使用本产品，雷暴可导致设备工作异常，并增加触电的危险。
5、请勿使用酒精或其它挥发性液体擦拭本产品。
6、请勿将本产品与液体接触。

注意

1、使用产品前请仔细阅读本使用说明书并请妥善保管。
2、首次使用时，请先将本产品充满电。
3、如果产品长期（超过2个星期）不用，请对其充电。
4、必须选择正规厂家生产且经过国家CCC认证的充电器。
5、长时间连续使用耳机有损听力，请合理控制使用时间及音量。
6、使用耳机会降低对外界声音的感知力，请不要在可能威胁到安全的环境中使用耳机。

保修卡

重力星球SIRIUS蓝牙耳机售后服务承诺：

严格按照《中华人民共和国消费者权益保护法》、《中华人民共和国产品质量法》实行售后三包服务。

服务内容如下：

在三包有效期内，您可凭购物凭证依照本规定享受免费的修理、更换、退货的权利。
1、自您签收之日起7日内，本产品出现故障：经由重力星球售后服务中心确定为产品质量问题，可享受修理、更换、退货的服务。
2、自您签收之日起1年内，本产品出现故障：经由重力星球售后服务中心确定为产品质量问题，可享受修理的服务

用户信息	用户姓名	
	联系电话	
	用户地址	
购买信息	产品名称	
	产品型号	
	购买日期	
	销售单位	
	订单编号	

耳机一拖二设备连接方法

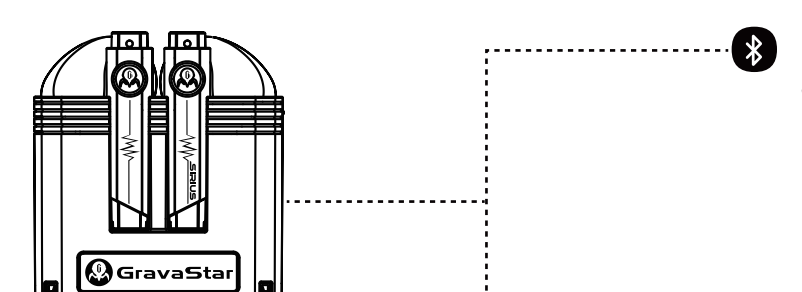

支持操作系统：
IOS Android Windows

功能：

同时连接两台智能设备，实时便捷切换使用

操作方法：

1、将A设备(例如苹果手机)打开蓝牙搜索到GravaStar Sirius P5，点击配对，配对成功后点击“断开”连接
2、将B设备(例如电脑、安卓手机)打开蓝牙搜索到GravaStar Sirius P5，点击配对，配对成功后把A设备蓝牙打开，即可实现一拖二设备。

售后服务与支持

重力星球SIRIUS蓝牙耳机售后服务承诺：

严格按照《中华人民共和国消费者权益保护法》、《中华人民共和国产品质量法》实行售后三包服务。

服务内容如下：

在三包有效期内，您可凭购物凭证依照本规定享受免费的修理、更换、退货的权利。
1、自您签收之日起7日内，本产品出现故障：经由重力星球售后服务中心确定为产品质量问题，可享受修理、更换、退货的服务。
2、自您签收之日起1年内，本产品出现故障：经由重力星球售后服务中心确定为产品质量问题，可享受修理的服务

若有售后服务需求，请联系重力星球客服

制造商：深圳市拙野创意有限公司
制造商地址：深圳市南山区粤海街道高新区社区白石路3609号深圳湾科技生态园二区9栋A座1715-1721
网址：www.gravastar.com
售后电话：400-6616-139
使用产品前请仔细阅读本说明书，并妥善保管。

合 格 证
产品型号
检 验 员
出厂日期
QC PASS

SIRIUS P5

True Wireless Earbuds
User Manual

GravaStar

v1.2

Product Info

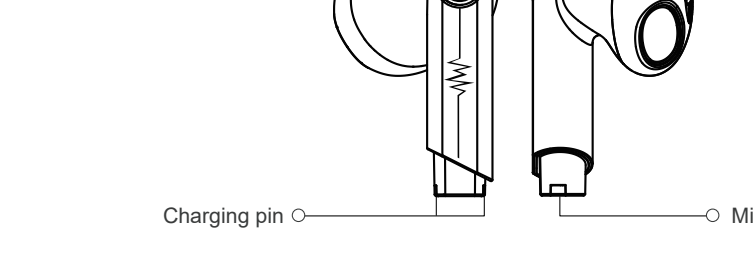

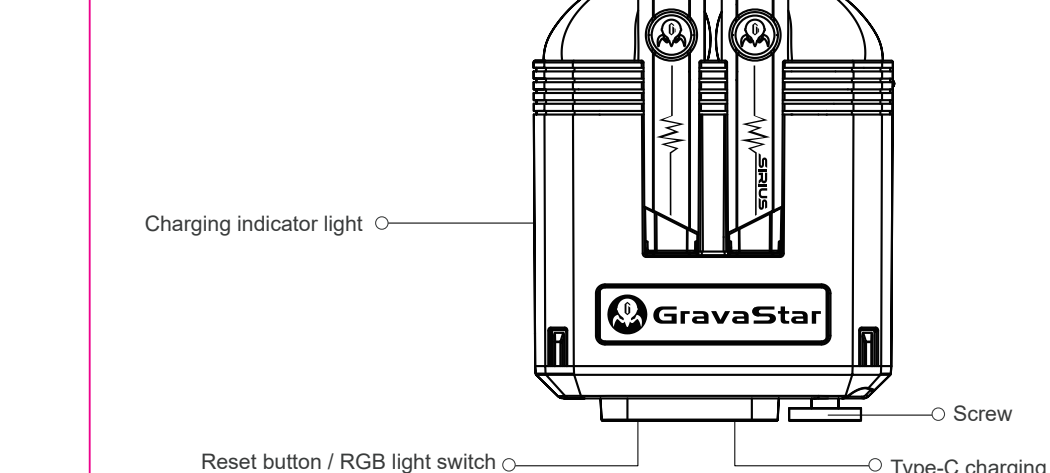

Wearing Earbuds

Put the earbuds downward gently into the ear canal, shake your head lightly and the earbuds will stay still. When you wear the earbuds correctly, the LOGO should face up).



Charging

The first time you use, please take out earbuds, remove the isolation film on the earbuds, get the charging case and earbuds fully charged first.

Low battery reminder: when the battery is lower than 10%, you will hear the cue tone “Not enough energy” in every 5 minutes, and see the red light flashes (2 times / s).

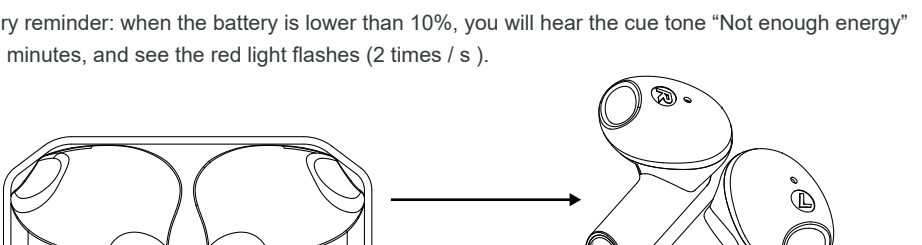

Charging: red breathing light will be on
Fully charged: the indicator light will be off

Tech Specs

Model: Sirius P5
Dynamic Driver: 12mm
Noise Canceling: Environment Noise Canceling (ENC)
Battery Type: Polymer lithium-ion battery
Earbuds Charging Time: 1.5 hours
Single Earbuds Battery Capacity: 45 mAh
Single Earbuds Weight: 5g
Charging Case Battery Capacity: 500 mAh
Charging Case Charging Time: 2 hours

Input: 5V--350mA
Output: 5V--150mA
Playtime: Up to 8 hours of listening time with full charge (50% volume)
Standby time: Around 80 hours
Bluetooth: V5.2
Bluetooth Protocol: A2DP, AVRCP, HFP
Decoding Format: SBC/AAC/APTX
Bluetooth Distance: >10m
Sensitivity: 105dB+/- 3dB
Frequency response range: 20Hz - 20KHz

Bluetooth Connection



To connect Sirius P5 with your phone or Bluetooth devices, follow steps 1-4.

1. Put Sirius P5 into the case, and screw them tight together.
2. Tear off the protective film on the earbuds, and put earbuds back into the charging case and close the lid, then open the lid to activate the earbuds and turn them on.
3. Turn on Bluetooth on your phone, find GravaStar Sirius P5 on the list, click and connect.
4. Once Bluetooth connects successfully, you will hear the cue tone Bluetooth connected, when you disconnect the Bluetooth, you will hear Bluetooth disconnected.

Controls

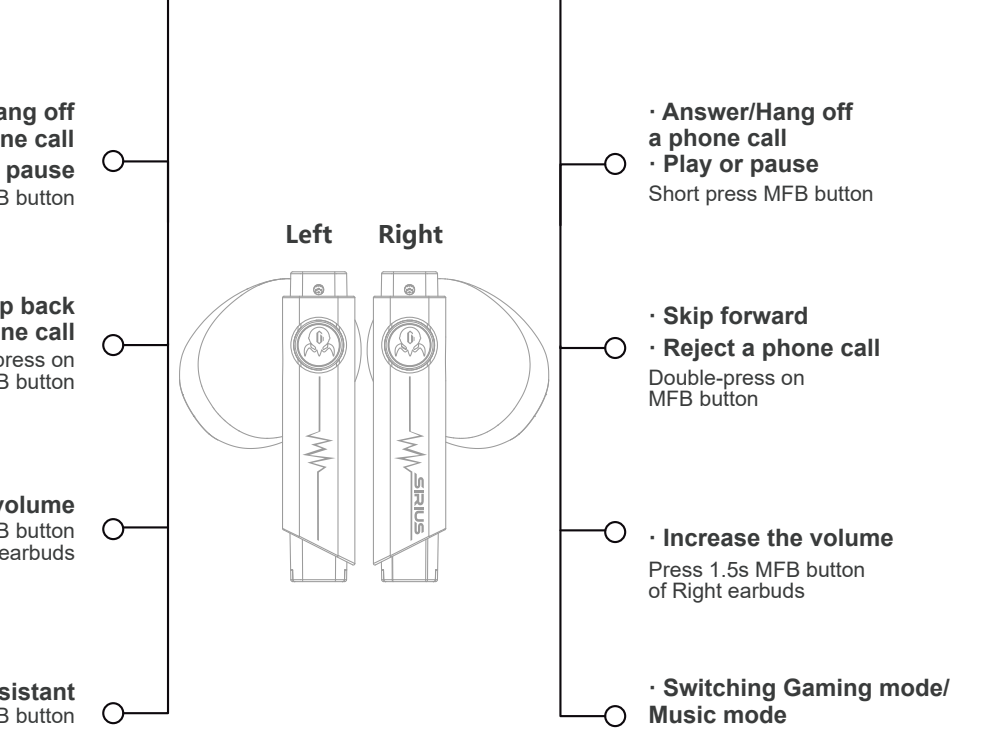

Left:

Press 3s to turn it on

· Answer/Hang off a phone call
· Play or pause
Short press MFB button

· Skip back
· Reject a phone call
Double-press on MFB button

· Decrease the volume
Press 1.5s MFB button of Left earbuds

· Activate Voice Assistant
Triple-press MFB button of Left earbuds

Right:

Press 3s to turn it on

· Answer/Hang off a phone call
· Play or pause
Short press MFB button

· Skip forward
· Reject a phone call
Double-press on MFB button

· Increase the volume
Press 1.5s MFB button of Right earbuds

· Switching Gaming mode/Music mode
Triple-press MFB button of Right earbuds
(Cue tone: Music Mode/Gaming Mode, 48ms latency)

Lights

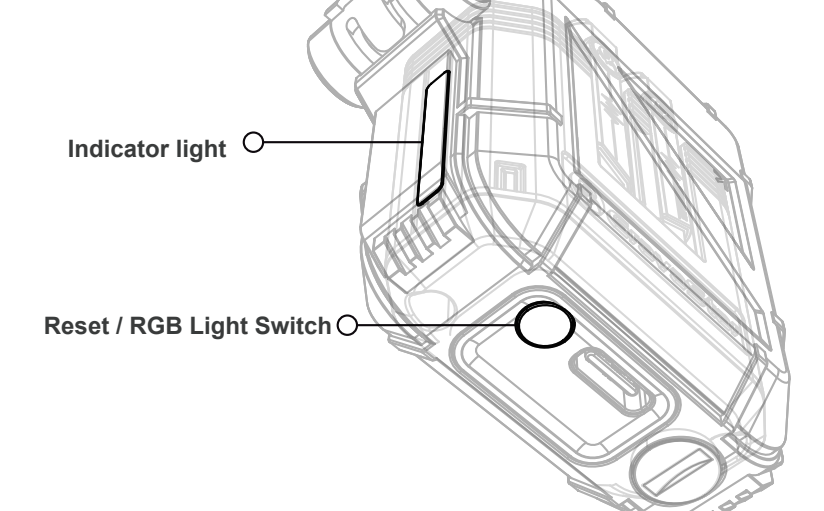

Single press to change the light color, double press to turn the light off

Indicator light:

○ Charging: The light will turn red when the battery is less than 30%. When the battery is more than 30%, the light will turn to green color with breathing effect
○ Fully charged: The light will be green and always on

Charging case battery indicator: Open or close the lid / Take out or put back earbuds

○ Red: Battery is less than 30%
○ Green: Battery is more than 30%

Reset: With earbuds in the charging case and keep the lid open, press 5s on the button of the charging case to reset.

Case Installation

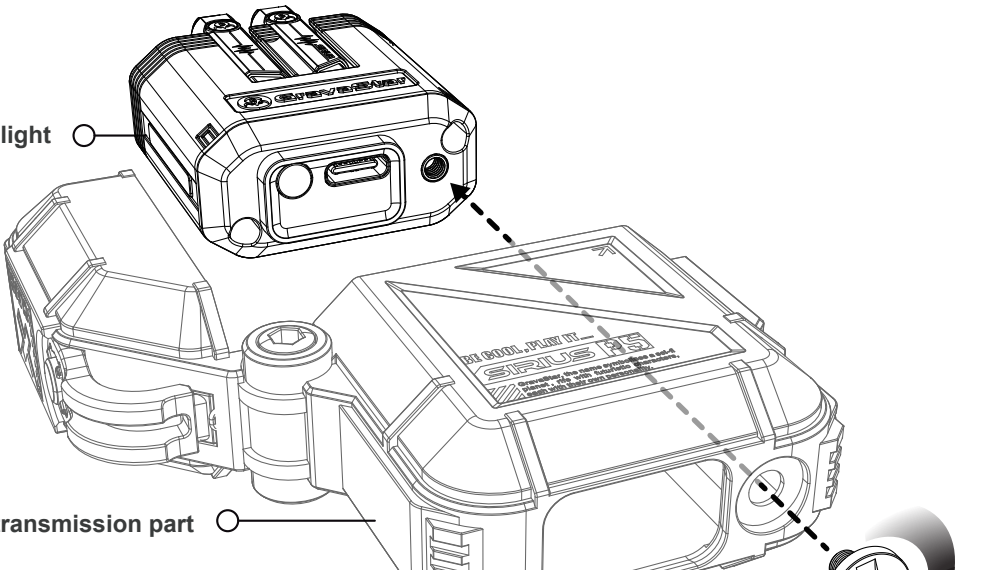

FAQs

Questions	Reasons	Solutions
Can’t turn on	Battery dead	Get earbuds charged
Can’t turn off	Misuse or didn’t put the earbuds back to the charging case	Put the earbuds back to the charging case
Earbuds are not in charging	Dirty of the connecting parts on the charging case or earbuds	Make the connecting parts clean
Can’t find earbuds by Bluetooth	Earbuds are not visible for connecting	Follow the steps of Bluetooth connecting to make it visible to the devices.

Cautions

Warnings

1. Do not disassemble, repair or modify the headset for any reason, otherwise it may lead to fire or even complete damage to the product.
2. Do not place the device in an environment where the temperature is too low or too high (below 0°C or above 45°C).
3. When using the product indicator, please avoid the eyes of children or animals.
4. Do not use the product in thunderstorm weather, thunderstorms can cause the equipment to work abnormally and increase the risk of electric shock.
5. Do not use alcohol or other volatile liquids to wipe the product.
6. Do not contact the product with liquids.

Notes

1. Please read this instruction manual carefully before using the earbuds and keep it in a safe place.
2. When using the earbuds for the first time, please fully charge the product first.
3. If the earbuds is not used for a long time (more than 2 weeks), please charge it.
4. Must choose the regular manufacturer and the national CCC certified charger.
5. Long time continuous use of earbuds is detrimental to hearing, please control use of time and volume reasonably.
6. The use of earbuds will reduce the perception of external sound, please do not use the earbuds in an environment that may threaten safety.

Connect To Two Devices

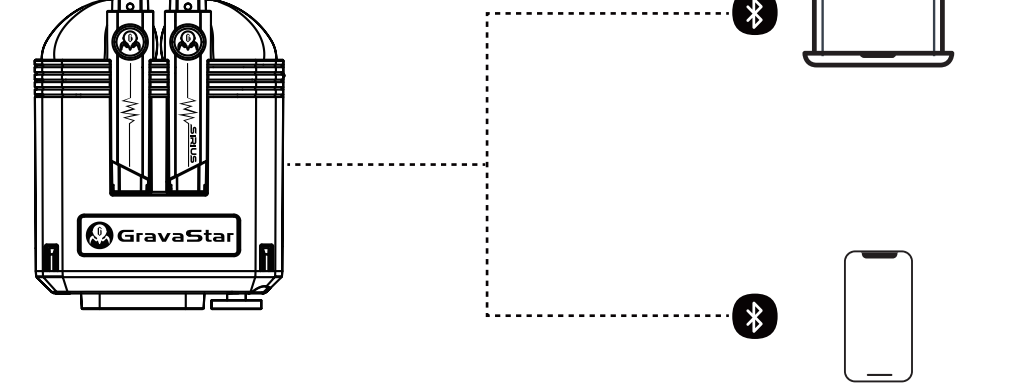

Supported Operating System:
IOS Android Windows

Function:
Connect to two Bluetooth devices at the same time, real-time switch between the devices.

How to:
1. Turn on the Bluetooth of device A (e.g. iPhone) to search GravaStar Sirius P5 in the Bluetooth list, click to connect, after the earbuds connected successfully, disconnect it.
2. Turn on Bluetooth on device B (e.g. computer, Android phone) to search GravaStar Sirius P5 in the Bluetooth list, click to connect, after the earbuds connected, than you can turn on the Bluetotoh on device A and conenct it to Sirius P5. Now all set up, you have connected the Sirius P5 to 2 devices.

Warranty and Support

Warranty Period:

1 year since the day you buy the product

Warranty:

1. Within the warranty period, from the date of your receipt, for any failure caused by the quality of the product itself, the user should contact the seller with the proof of purchase to get support. You can enjoy the repair, or replacement service.

2. If any product damage or defect is not attributable to the product quality itself, it will not be covered by the warranty. The following situations are not covered by the warranty:

a. Failure or damage caused by natural disasters, earthquakes, lightning strikes, abnormal voltages, and environmental factors.

b. Disassemble, modify or replace non-original parts by yourself or by a manufacturer who is not authorized by the original manufacturer to repair.

c. Failure to operate in accordance with the manual or damage caused by improper use of the product, such as the product being immersed in water, corroded, dropped, squeezed or exposed to abnormal temperature and humidity.

Please contact service@gravastar.com for support.

FCC regulatory conformance：

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.
(2) This device must accept any interference received, including interference that may cause undesired operation.

NOTE
This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-Consult the dealer or an experienced radio/TV technician for help

NOTE
The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user’s authority to operate the equipment.

RF Exposure

The SAR limit of USA (FCC) is 1.6 W/kg averaged over one gram of tissue. Device has also been tested against this SAR limit. (FCC ID: 2ASXF-SIRIUSP5) has also been tested with 0mm against this SAR limit.

CE

Here by, [ZhuoYe ChuangYi Co., Ltd.] declares that the radio equipment type [SIRIUS Pro] is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet
address: www.gravastar.com

Manufacturer information: Company name: ZhuoYe ChuangYi Co., Ltd.

Address: Room 1715-1721, Block A, Building 9, Shenzhen Bay Eco-Tech Park, Nanshan District, Shenzhen

Operation temperature: 0~45℃
Operation frequency range used is 2402 MHz – 2480 MHz.

GravaStar

www.gravastar.com
Customer Support:
service@gravastar.com

@GRAVASTAR1/ @GRAVASTAR_ZOEAO

FCC ID:2ASXF-SIRIUSP5
XXXXXXXXXXXXXX
CMIIT ID: XXXXXXXXXX
217-220642
RoHS

Made in China