

# CASA Suni

**HDMI™**  
HIGH DEFINITION MULTIMEDIA INTERFACE

**Bluetooth®**



## ***User Manual***

**SL5000**

5.1 Channel Soundbar

# Contents

|                                                     |           |
|-----------------------------------------------------|-----------|
| <b>1 ACCESSORIES LIST</b>                           | <b>01</b> |
| <b>2 REMOTE CONTROL</b>                             | <b>02</b> |
| <b>3 SOUNDBAR CONTROL</b>                           | <b>03</b> |
| <b>4 CONNECT TO SUBWOOFER</b>                       | <b>03</b> |
| <b>5 CONNECT TO TV VIA HDMI ARC</b>                 | <b>04</b> |
| <b>6 CONNECT TO TV VIA OPTICAL / AUX</b>            | <b>05</b> |
| <b>7 CONNECT TO BLUETOOTH®</b>                      | <b>06</b> |
| <b>8 CONNECT TO SUBWOOFER AND SURROUND SPEAKERS</b> | <b>06</b> |
| <b>9 PAIRING SUBWOOFER</b>                          | <b>07</b> |
| <b>10 PLACEMENT OPTIONS</b>                         | <b>07</b> |
| <b>11 WALL MOUNT INSTALLATION</b>                   | <b>08</b> |
| <b>12 SPECIFICATIONS</b>                            | <b>09</b> |

# CASA Suni SL5000

## User Manual



### 1 ACCESSORIES LIST



Subwoofer



surround



Soundbar



surround



Power Adaptor



Stereo 1.5m 2-RCA  
Audio Cable



HDMI Cable



Stereo RCA to  
RCA Cable(6m) L




Stereo RCA to  
RCA Cable(6m) R



Digital Optical  
Cable



Remote Control



Wall Mounted Kit



Wall Bracket




Subwoofer Power  
Cable




User Manual

## 2 REMOTE CONTROL

- 1 “**⏻**”: **Power Button**  
Press to power on / Hold for 3 seconds to power off.
- 2 “**HDMI ARC**”: **HDMI ARC**  
Press to switch to HDMI ARC channel.
- 3 “**📶**”: **BT**  
Press to switch to Bluetooth channel and enter pairing mode. Hold for 3 seconds to disconnect the current device and connect to a new device manually on your mobile phone / PC/ TV (BT ID: SL5000).
- 4 “**OPT**”: **OPT**  
Press to switch to OPTICAL channel.
- 5 “**VOL +**”: **Volume Up**
- 6 “**⏮**”: **Play / Pause**  
For BT and USB mode only.  
USB mode: Hold for 3 seconds to switch between single loop playback and list loop playback.  
Press and hold RESET for 5 seconds to restore factory mode.
- 7 “**⏮**”: **Previous**  
For BT and USB mode only: Skip to previous track.
- 8 “**⏭**”: **Next**  
For BT and USB mode only: Skip to next track.
- 9 “**VOL -**”: **Volume Down**
- 10 “**AUX**”: **AUX**  
Press to switch to AUX channel.
- 11 “**EQ**”: **EQ**  
Press to switch to EQ mode.
- 12 “**USB**”: **USB**  
Press to switch to USB channel.
- 13 “**SURROUND**”: **SURROUND**  
Press to switch to control surround volume.
- 14 “**BASS**”: **BASS**  
Press to adjust bass level.  
The Bass Can Be Adjusted To Plus Or Minus 5DB.
- 15 “**🔇**”: **Mute / Recover the volume.**

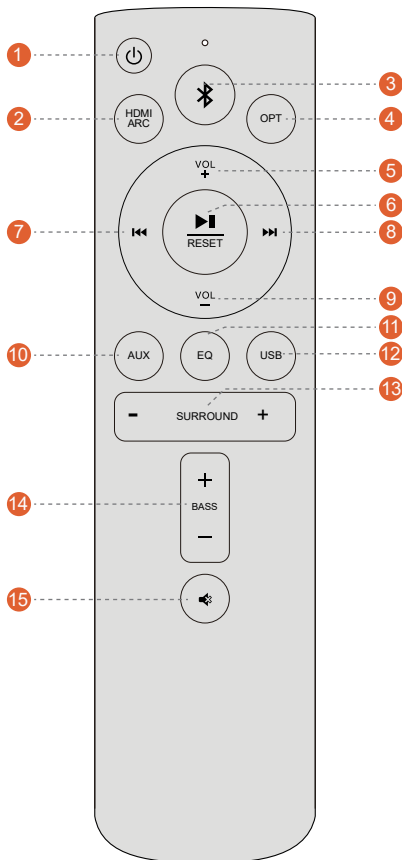


### 3 SOUNDBAR CONTROL

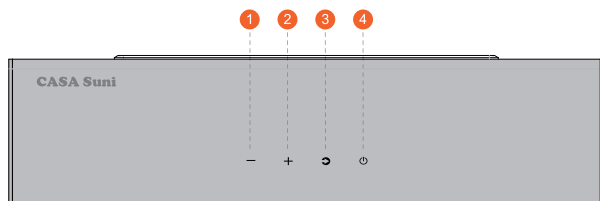


#### Control Panel

- 1 “-”: Volume Down
- 2 “+”: Volume Up
- 3 “↻”: Input Mode  
Press to switch channels:  
ARC-OPT-BT-AUX-USB.
- 4 “⏻”: Power Button  
Press to power on / Hold for  
3 seconds to power off.

### 4 CONNECT TO SUBWOOFER

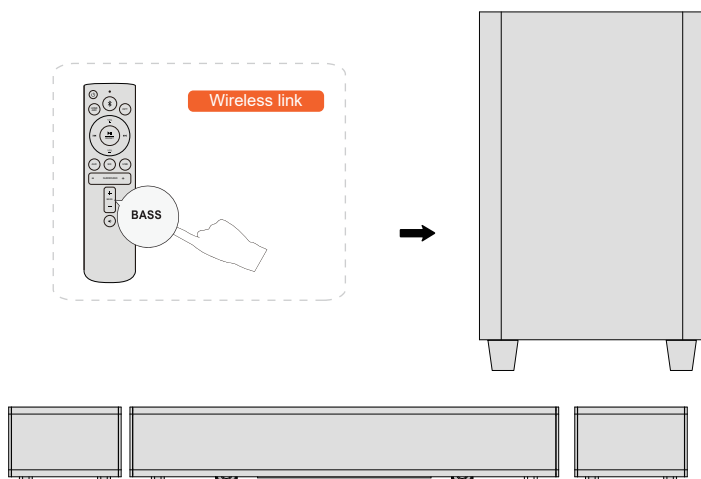

## 5 CONNECT TO TV VIA HDMI ARC

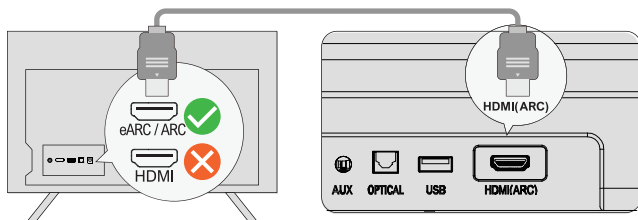


### Step 1:

Connect one end of the HDMI cable to the eARC / ARC port on the back of your TV.

### Step 2:

Then connect the other end to the HDMI(ARC) port of the soundbar.



### Step 3:

Press "ARC" button on the remote control to select "HDMI(ARC)" input.


**Note: Please turn on the "CEC" function on your TV.**

When ARC is connected, your TV remote control can control the soundbar and TV simultaneously:

❶ Turn on/off    ❷ Adjust the volume

**If there is no sound: try setting the TV audio output to PCM:** TV Settings > Home > Settings > Sound > Digital Audio Output > PCM


## 6 CONNECT TO TV VIA OPTICAL / AUX

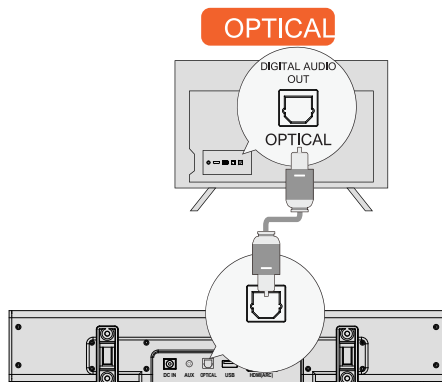

### OPTION 1: OPTICAL

- 1 Make sure the TV's port is OPTICAL OUT, connect both sides of the cable to OPTICAL, for both the TV and the soundbar.
- 2 Make sure the optical plug is inserted correctly as it shows in the picture. Do not insert the plug upside down and break the optical.

**Note:** If audio is playing from the internal TV speakers, mute or minimize the TV volume.

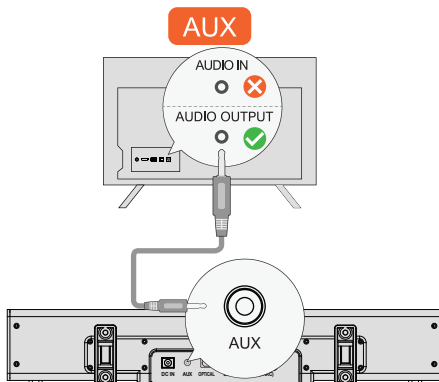

### OPTION 2: AUX

- 1 Connect the 3.5mm to 3.5mm Audio Cable to your TV's AUDIO OUT port.
- 2 Not support AUDIO IN port on TV.


**Note:** Please remember to unplug the AUX cable from TV and Soundbar when you want to switch to other mode.

**In Optical Mode:** If there is no sound, try setting the TV audio output to PCM: TV Settings > Home > Settings > Sound > Digital Audio Output > PCM

## 7 CONNECT TO BLUETOOTH®


Open your phone's Bluetooth settings, find and select "Suni SL5000" to connect the soundbar.

**Note:** If it's already in the Bluetooth mode and connected, press and hold "BT" button for 3 seconds to disconnect the current device and connect to new device manually on your mobile phone / PC / TV.

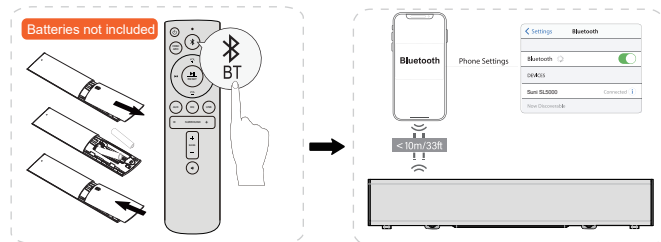


## 8 CONNECT TO SUBWOOFER AND SURROUND SPEAKERS

- 1 Use the 6m RCA-RCA cables to connect the subwoofer and surround speakers, please pay attention to match the same color interfaces on the surround speakers with the corresponding ones on the subwoofer and place the surround speakers accordingly.
- 2 Use power cable to connect your subwoofer and power port.

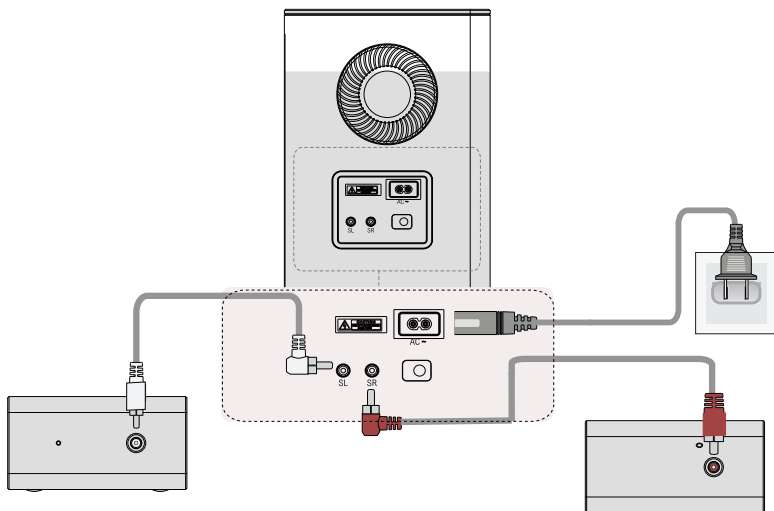


## 9 PAIRING SUBWOOFER

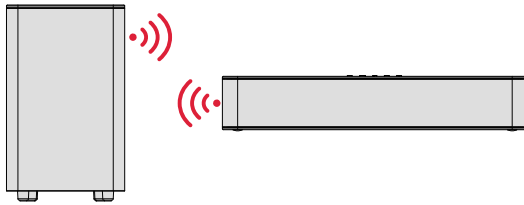

The subwoofer has been paired with the soundbar by SLB

If there is no sound coming from the subwoofer, you need to re-pair the Soundbar with the subwoofer.

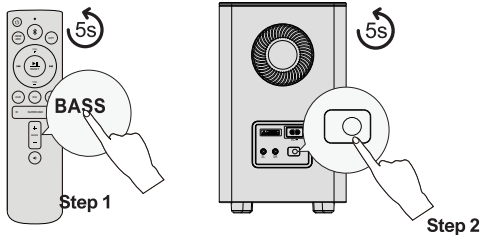

### Step 1:


Press and hold the "BASS" button on the remote control for 5 seconds, the display will show "Sub" flashing.

### Step 2:


Press and hold the ON / OFF button on subwoofer for 5 seconds, the white LED will be fast flashing. The white LED will be always on when the subwoofer is paired successfully.

## 10 PLACEMENT OPTIONS

### Full 360° Surround (Better Surround)




### Front Surround



- 1 For a better listening experience, please choose one of the two placement options shown in the illustration above based on your home environment.
- 2 The soundbar and surround speakers should be placed at or near ear level.

## 11 WALL MOUNT INSTALLATION

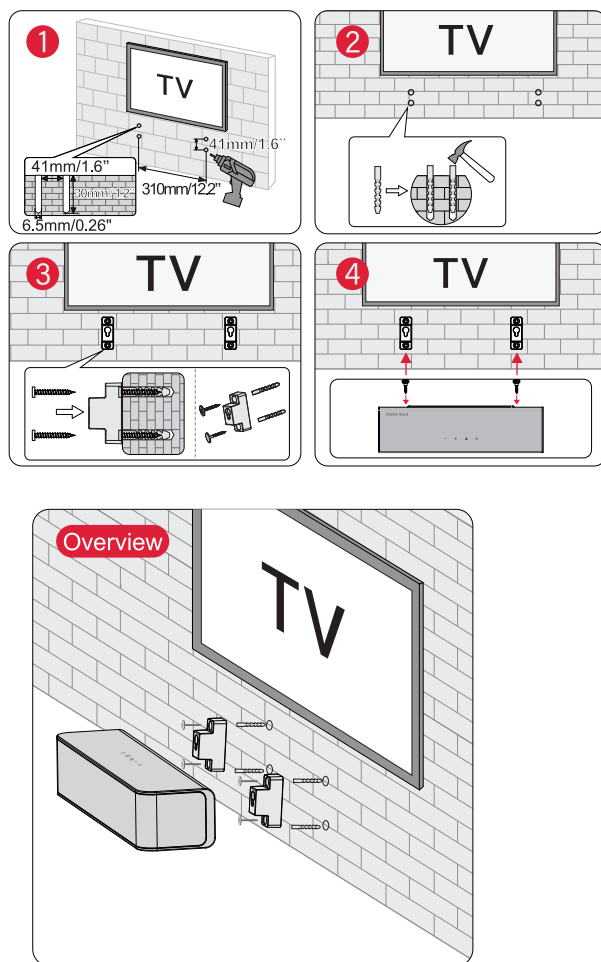

**Note:** Wall-mounted surround speakers follow the same configuration as shown in the above pictures

## 12 SPECIFICATIONS

|                              |                                                                        |
|------------------------------|------------------------------------------------------------------------|
| <b>Model Number</b>          | SL5000                                                                 |
| <b>Power Supply</b>          | AC 100-240V                                                            |
| <b>Soundbar Drivers</b>      | L/C/R Speaker (2" x 4) + Sat Speaker( 2.25" x 2) + SUB Speaker( 6.5" ) |
| <b>Frequency Response</b>    | 50-20kHz                                                               |
| <b>Standby Power</b>         | <0.5W                                                                  |
| <b>Operating Temperature</b> | 0°C - 4 °C / 32°F to 113°F                                             |
| <b>Bluetooth Version</b>     | 5.3                                                                    |

| Dimensions and Weight |                                                                  |
|-----------------------|------------------------------------------------------------------|
| <b>Soundbar</b>       | 400mm(L) x 105mm(W) x 65mm(H)                                    |
| <b>Subwoofer</b>      | 186mm(L) x 260mm(W) x 296mm(H)                                   |
| <b>Packaging</b>      | Gift Box(394 x 244 x 446mm)      Outer Carton(510 x 410 x 468mm) |
| <b>Net Weight</b>     | 14.5 kg                                                          |
| <b>Gross Weight</b>   | 11.4 kg                                                          |

## FCC STATEMENT

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

- 1) this device may not cause harmful interference, and
- 2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try correct the interference by one or more of the following measures:

- Reorient the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

The distance between user and products should be no less than 20cm

The EUT is In door use only

### \* RF warning for Portable device:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

## Marcas comerciais:

Regulamento Anatel sobre equipamentos de Radiocomunicação de Radiação Restrita(Resolução nº680):  
“Este equipamento não tem direito à proteção contra interferência prejudicial e não pode causar interferência em sistemas devidamente autorizados—Para maiores informações, consulte o site da Anatel—<https://www.gov.br/anatel/pt-br/>



The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Soundlab Technology Co., Ltd. is under license. Other trademarks and trade names are those of their respective owners.



The Adopted Trademarks HDMI, HDMI High-Definition Multimedia Interface, HDMI trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other.