

Controllers

ZonePad 8

8 zone touchscreen wall controller



Optimal Audio



FEATURES

- 8-inch tempered glass touch panel
- Durable and impact-resistant
- Simple installation
- Auto-detection of Zone controllers
- Flexible mounting options

ZonePad 8 is an elegant wall-mounted touchscreen controller, providing users with clear and intuitive access to the controls of up to eight zones within an Optimal Audio commercial audio system. With a vibrant 8-inch IPS touch display and tempered glass capacitive touch panel, ZonePad 8 offers a sophisticated and user-friendly interface, providing users with the ability to operate complex audio systems effortlessly.

ZonePad 8 enables easy selection and volume control of playback sources and microphones across eight zones from one central position, making

it ideal for dynamic commercial environments. Its seamless integration with Optimal Audio Zone controllers, powerful quad-core processor, and secure design ensures reliable and responsive control tailored to any venue's unique needs.

Power is delivered via POE from a compatible router or switch.

For venues where the installer cannot run cables, ZonePad 8 can be powered remotely and connect to a Zone controller via WIFI using the optional accessory.

APPLICATIONS



Cafes



Bars/
Restaurants



Retail



Wedding
Venues



Hotels



Education
Facilities



Houses of
Worship



Corporate
Offices



Museums



Fitness Studios



Residential




Controllers

ZonePad 8

8 zone touchscreen wall controller



Optimal Audio

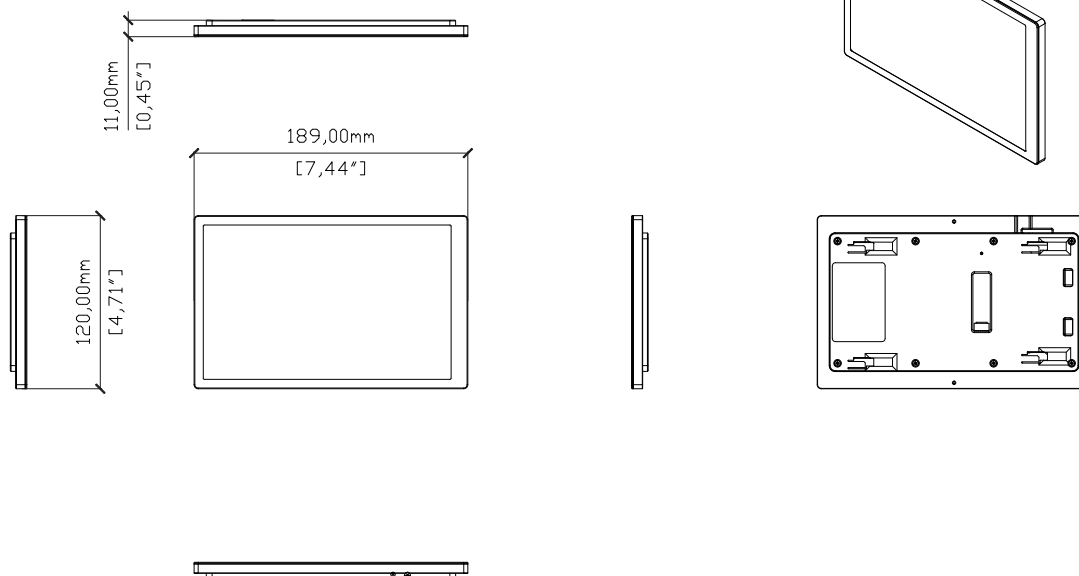

SPECIFICATIONS

TYPE	8 zone touchscreen wall controller
DISPLAY	8-Inch, IPS, Capacitive, 10 multi touch points, tempered glass, impact resistant to IK2 standard
RESOLUTION	1280 x 800, 189 DPI
WEBAPP SYSTEM CONNECTION	Ethernet via RJ45 adaptor / Wireless
POWER	POE or optional 12V adaptor
COMPUTING	Allwinner A133 Quad-Core Cortex-A53 @ 1.5GHz 2GB RAM OS – Android 14
ENCLOSURE	Satin finished ABS, UL94, V0 rated material
COLOUR	Black
MOUNTING SYSTEM	Supplied with surface mount plate, compatible with single gang EU, US, and UK back boxes
DIMENSIONS	(W) 189mm x (H) 119mm x (D) 15mm (W) 7.44" x (H) 4.68" x (D) 0.59"
WEIGHT	0.32kg (0.70 lbs)



Finish



Weight

optimal-audio.co.uk

© 2025. Optimal Audio Group Ltd.

FCC Warning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 25mm between the radiator and your body.