

ARGOMTECH.



 Works with Android
Find Hub

 Works with
Apple Find My

GEOTRACK SMART TAG

USER GUIDE


Introduction

Thank you for choosing the GeoTrack Smart Tag, a next-generation personal tracking accessory designed for convenience, reliability, and peace of mind. Whether you want to keep track of your keys, bags, luggage, or other valuables, GeoTrack integrates seamlessly with both Google Find Hub on Android™ and Apple Find My on iOS.

Packaging Content

- GeoTrack Dual Model Smart Tag
- Lanyard Strap
- CR2032 Battery (Pre-installed)
- Quick Start Guide

Product Overview



1. Lanyard (Included Accessory): Allows you to attach the device to keys, bags, or other personal items.
2. Button: Multi-function control used for powering off, factory reset, and reactivating the device after standby timeout.
3. Battery Compartment: The back casing can be opened to replace the CR2032 battery.
4. Lock/Unlock Icons: Show how to rotate the cover to open or securely close the battery compartment.

Getting Started – Quick Setup

Pairing with Android™

1. Make sure your phone is running Android 9 or later. Older versions of Android are not supported.
2. Download and install the Google Find Hub app from the Google Play Store. This app is required to connect and manage your GeoTrack Smart Tag on Android.
3. Place the Smart Tag close to your Android phone (within 20 cm).
4. Press the back button once until you hear a beep – the device powers on and enters pairing mode.
5. Make sure BT is enabled on your phone.
6. Open the Find Hub app – a pop-up notification will appear.
7. Tap Connect → Agree and Continue → Open Application to complete setup.
8. In the app, use the settings icon to rename your Smart Tag and assign an item type (e.g., keys, bag, luggage).

Pairing with iOS

1. Make sure your iPhone is running the latest version of iOS.
2. Open the built-in Apple Find My app. This app comes pre-installed on all Apple devices and is required to connect and manage your GeoTrack Smart Tag.
3. Place the Smart Tag next to your iPhone (within 20 cm).
4. Press the back button once until you hear a beep – the device powers on and enters pairing mode.
6. Make sure BT is enabled on your device.
7. Open the Find My app.
8. Tap Items → Add Item → Other Supported Item.
9. Follow the on-screen prompts:
 - Tap Continue
 - Name your Finder
 - Choose an emoji
 - Tap Finish to confirm
10. Two short beeps confirm successful pairing.


Important Note: Pairing must be completed within 10 minutes of activation. If the process times out, the Smart Tag will emit four beeps and switch to standby mode. To restart pairing, remove and reinsert the battery (see Battery Replacement section).

When pairing with a new phone, the Smart Tag must first be removed from its current Find My app account. Only after removal can it be successfully registered to another device.

Battery Replacement

The GeoTrack Smart Tag uses a CR2032 coin-cell battery. When the Find My app shows low power, replace it as follows:

1. Turn the tag over to the back.
2. Press the tag firmly with both hands.
3. Rotate the inner cover counterclockwise until the pointer aligns with the unlock (🔓) icon.
4. Remove the cover and take out the old battery.
5. Insert a new CR2032 with the (+) side facing up.
6. Replace the cover and rotate clockwise until aligned with the lock (🔒) icon.
7. Ensure the cover is fully closed to keep water resistance.
8. Press the back button once — a short beep confirms it's powered on.

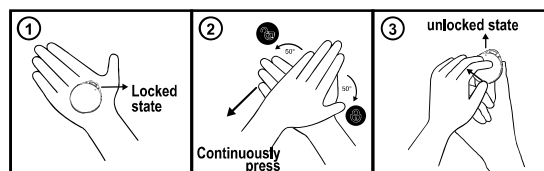

Installing the Lanyard

The GeoTrack Smart Tag comes with a lanyard strap for easy attachment to your keys, bags, or other belongings. To install the lanyard:

1. Locate the lanyard slot at the top of the Smart Tag.
2. Insert the thin looped cord of the lanyard through the slot.
3. Pass the thicker end of the lanyard (the end with the plastic holder) through the thin cord loop.
4. Pull the thicker end until the loop tightens securely around the slot.
5. Your lanyard is now installed and the Smart Tag is ready to be attached to keyrings, zippers, or bag handles.

Functions

- Power Off: Quickly press the back button 3 times, then press and hold for 3 seconds (4 beeps confirm).
- Factory Reset: Quickly press the back button 5 times, then press and hold for 5 seconds until a long beep confirms reset.
- Battery Replacement: Press and rotate the top cover about 50° to open, then replace the CR2032 coin battery.
- Remove from App: Always remove the Smart Tag from Google Find Hub or Apple Find My before pairing with a new phone.
- Standby Timeout: If pairing is not completed within 10 minutes, the Smart Tag enters standby mode. Simply short press the Smart Tag button to restart.

Key Features

- Dual compatibility with Google Find Hub App (Android) and Apple Find My App (iOS).
- Global Network Location: Even beyond BT range, real-time location updates are available through the Find Networks.
- Proximity Search: BT 5.0 Low Energy for fast, power-efficient locating.
- Privacy Protection: Location data is never stored on the tag; end-to-end encryption ensures only you have access.
- Smart Alerts: Unknown tracker notifications and anti-stalking alerts for iOS and Android.
- Audible Locator: 70 dB alert for easy locating.
- Compact Design: Includes lanyard for attaching to keys, bags, luggage, and more.

Specifications

Works with Apple Find My & Google Find Hub • BT 5.0 Low Energy (BLE) • Range $\geq 40\text{m}$ (131ft) open space • Operating Frequency: 2.402 - 2.480 GHz ISM band • Buzzer: Max 70dB $\pm 3\text{dB}$ • Battery: CR2032 (3.0V/220mAh), replaceable • Battery Life: 8–12 months • Size: 37,1 $\times$ 32,2 $\times$ 8,8mm • Weight: 8–10g (w/o lanyard) • Material: PC+ABS • IPX5 Water-resistant • Operating Temp: -10°C~+50°C • Humidity: $\leq 95\%$ RH • Max. RF Power: 4 dBm • Certifications: FCC/CE.

Battery Disclaimer

The GeoTrack Smart Tag uses a replaceable CR2032 coin-cell battery. Keep batteries out of reach of children—ingestion can cause severe injury or death within hours. If swallowed or inserted, seek immediate medical help. Do not recharge, burn, expose above 100°C, or mix old and new batteries. Dispose of used cells responsibly per local recycling rules.

Battery life varies by use, conditions, and settings; under typical use, it lasts about 8–12 months. Frequent buzzer use, continuous searching, or extended Find Network activity will shorten life.

To maximize battery performance:

- Use the 70 dB buzzer only when needed.
- Limit Find Network searches—proximity via BT 5.0 is more efficient.
- Operate within -10°C to +50°C (14°F to 122°F).
- Replace promptly when alerts appear, using only high-quality CR2032 cells as instructed.

Battery Safety Instructions

This product contains a replaceable and non-rechargeable DC 3V CR2032 coin battery, please attention below warnings:

- Remove and immediately recycle or dispose of used batteries according to local regulations and keep away from children. Do NOT dispose of batteries household trash or incinerate.
- Even used batteries may cause severe injury or death.
- Call a local poison control center for treatment information.
- Non-rechargeable batteries are not to be recharged.
- Do not force discharge, recharge, disassemble, heat above 100°C or incinerate.

Doing so may result in injury due to venting, leakage or explosion resulting in chemical burns.

- Ensure the batteries are installed correctly according to polarity (+ and -).
- Do not mix old and new batteries, different brands or types of batteries, such as alkaline, carbon-zinc, or rechargeable batteries.
- Remove and immediately recycle or dispose of batteries from equipment not used for an extended period of time according to local regulations.
- Always completely secure the battery compartment. If the battery compartment does not close securely, stop using the product, remove the batteries, and keep them away from children.

Disclaimer: This is neither an anti-theft nor an anti-lost device. This device provides the last detected location.

 WARNING	
• INGESTION HAZARD: This product contains a button cell or coin battery. • DEATH or serious injury can occur if ingested. • A swallowed button cell or coin battery can cause Internal Chemical Burns in as little as 2 hours. • KEEP new and used batteries OUT OF REACH of CHILDREN. • Seek immediate medical attention if a battery is suspected to be swallowed or inserted inside any part of the body.	

Legal Notices & Certifications

Find Hub helps you find and connect to what matters in a single, secure place.

Find your belongings quickly and safely – even if your devices are offline.

Plus, seamlessly and securely share your location with friends & family for peace of mind. All of your device location information remains private and safely stored.

This product has been certified by Google to meet Find Hub network accessory specifications. Google is not responsible for the operation of this product.

Google is also not responsible for ensuring that the product complies with any applicable safety standards or other requirements.

To use the Apple Find My app to locate this item, the latest version of iOS, iPadOS, or macOS is recommended.

Use of the Works with Apple badge means that a product has been designed to work specifically with the technology identified in the badge and has been certified by the product manufacturer to meet Apple Find My network product specifications and requirements.

Apple is not responsible for the operation of this device or use of this product or its compliance with safety and regulatory standards. Apple, Apple Find My, Apple Watch, Find My, iPhone, iPad, iPadOS, Mac, macOS and watchOS are trademarks of Apple Inc., registered in the U.S. and other countries. IOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license.

Trademarks & Disclaimers

This product has been certified by Google to meet Find Hub network accessory specifications. Google is not responsible for the operation of this product. Google is also not responsible for ensuring that the product complies with any applicable safety standards or other requirement.

Google and Android are trademarks of Google LLC.

To use the Apple Find My app to locate this item, the latest version of iOS, iPadOS, or macOS is recommended. Use of the Works with Apple badge means that a product has been designed to work specifically with the technology identified in the badge and has been certified by the product manufacturer to meet Apple Find My network product specifications and requirements. Apple is not responsible for the operation of this device or use of this product or its compliance with safety and regulatory standards.

Apple, Apple Find My, Apple Watch, Find My, iPhone, iPad, iPadOS, Mac, macOS and watchOS are trademarks of Apple Inc., registered in the U.S. and other countries. IOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license.

FCC Warning

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is

encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

Exemption Clause

The GeoTrack Smart Tag provides location, proximity, and alert data for personal convenience only. It is not intended for safety-critical, medical, emergency, or security use, and should not replace professional safety equipment, certified GPS devices, or child monitoring systems. Sole reliance on this product for personal safety, asset recovery, or emergencies may result in serious consequences.

Performance may be affected by signal interference, building structures, network coverage, weather, or battery status. Location data is approximate and should be used only as a reference. The Smart Tag must not be the sole method of locating people, pets, or valuables in situations involving risk of injury, loss, or theft.

ArgomTech is not responsible for inaccuracies, delays, loss of connectivity, or damages from misuse or reliance in critical scenar-

ios. By using the GeoTrack Smart Tag, you agree that ArgomTech is not liable for direct, indirect, incidental, or consequential damages. Please review ArgomTech's Privacy Policy and User Agreement for details on data use and protection.

Legal Information

Arbitration Agreement – By using this product, you agree that any dispute, claim, or controversy arising out of or relating to this Smart Tag, its use, warranty, or service shall be resolved exclusively through binding arbitration, rather than in court. This includes, without limitation, disputes concerning the interpretation, enforcement, or scope of this arbitration agreement.

Arbitration Process:

- Arbitration shall be conducted by a neutral arbitrator in accordance with the rules of a recognized arbitration body.
- All arbitration proceedings shall be held in the United States.
- Each party shall bear its own legal costs, including attorneys' fees. Administrative costs and arbitrator's fees shall be allocated in accordance with the applicable arbitration rules. ArgomTech will not be responsible for reimbursing the other party's costs.

Class Action Waiver – You agree that any arbitration or proceeding shall be limited to the dispute between you and the company individually. To the fullest extent permitted by law, no arbitration or proceeding shall be joined with any other, and you waive any right to participate in a class action or consolidated claim.

Severability – If any part of this arbitration agreement is found to be invalid or unenforceable, the remaining provisions shall continue in full force and effect.

Warranty Clause

ArgomTech is committed to the service philosophy of “Creating value for customers.” We provide a 1-year limited warranty for the GeoTrack Smart Tag. If the device experiences malfunction or quality-related issues under normal use during this period, warranty service will be provided free of charge after confirmation by our technicians.

Warranty Exclusions:

- A. Damage caused by accidents, misuse, or human error (including loss of the device).
- B. Unauthorized testing, repairs, modifications, or disassembly.
- C. Damage resulting from use with incompatible accessories or equipment.
- D. Natural wear and tear, aging of materials, or cosmetic damage that does not affect functionality.
- E. Damage caused by exposure beyond specified operating limits (e.g., water immersion beyond IPX5 rating, extreme temperatures, or improper battery replacement).
- F. Damage due to force majeure events (such as natural disasters).

For full details, please refer to ArgomTech’s official Warranty Policy.

Contact Us

For product support, warranty service, or general inquiries, please visit our official website www.argomtech.com. There you'll find resources to assist with setup, troubleshooting, and warranty information. To reach our customer service team directly, scroll to the bottom of the page and select “Contact Us.”