

Model: 376WB

Weather Alert

- Long press “ALERT” button to switch to weather alert mode.
 - Once receives bad weather information, “ALERT” will flash on the LCD screen and the device will alarm. Short Press any button to play voice, long press button “BAND” to exit alert mode.
- if long press alert button shows no signal, then repress the alert button to exit, if have any emergency status, long press alert to scan weather broadcast directly, no need power on.


Flashlight

The flashlight have 3 modes, short press 1 time to open dipped beam, press 2 times to open far beam, press 3 times to open mixed beam, press 4 times to turn off.

Phone Charging

The standard port can be used to charge USB devices. It has the capacity to charge 5000 mAh when fully charged. Also you can charge phones by using AAA batteries.

This 5000 mAh power bank support 1.5A charger

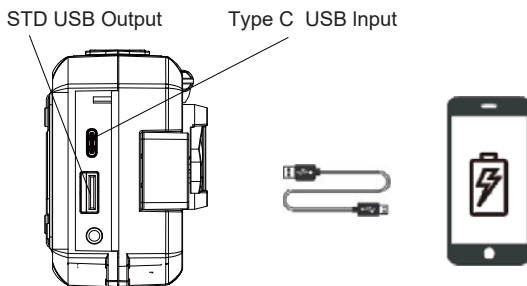

Power the Device

Before powering the radio, make sure you read the safety instructions.


1. USB—Type-C

- To charge the radio, insert the supplied USB cable into the USB power source. Plug the USB connector into the input port on the side of the radio.
- The 4 charging indicator will flash blue as the battery charges, and it will be blue when it was fully charged. It takes 2 - 3 hours for the internal 21700 5000 mAh Li-ion battery. When completely charged, the battery will deliver 40-50 hours of radio play (depending on the sound volume) or 45-60 hours of flashlight time.
- It's advised to turn off the radio when the device is charging.

2. Hand Crank Dynamo

- The radio can also be charged by quickly rotating the handle on the bottom of the device and activating the generator.
- The handle can be rotated either clockwise or counter-clockwise. The red LED also light up when the handle is being rotated.
- Spin the handle for 3 to 5 minutes at the speed of 130-150 RPM when using the radio for the first time. One minute of winding gives 5 minutes of radio play (at medium volume) or 30 minutes of light.

Hand crank

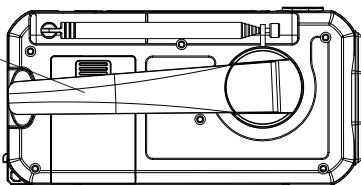

3. Solar Powered

The battery of radio can be charged by the solar panel which is on the top of the emergency radio. Please place the radio in clear sunlight to charge as efficiently as possible.


- The red LED indicator should light up when the radio received enough sunlight to start charging up.
- The effect of charging depends on the sun rays. The stronger light makes the better effect.
- Kindly note that the solar panel is mostly used for maintaining the battery instead of full charging battery.

3. AAA Dry Batteries

Remove the battery compartment cover which is on the bottom of the device, then insert 3 AAA batteries into the compartment. The symbol displayed on the LCD screen battery level will be converted to AAA.


NOTE:

- Ensure the negative(-) end is placed against the spring.
- There is a priority to use AAA dry batteries.
- Remove the AAA dry batteries when they are not in use.
- In any condition, press the key “Reset”, the unit will revert back to the original.

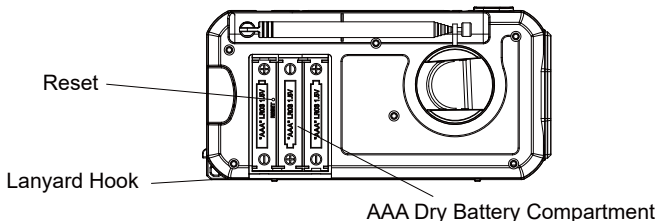

Earphone Jack

You can insert the 3.5mm earphone jack to enjoy your leisure time listening to the radio.

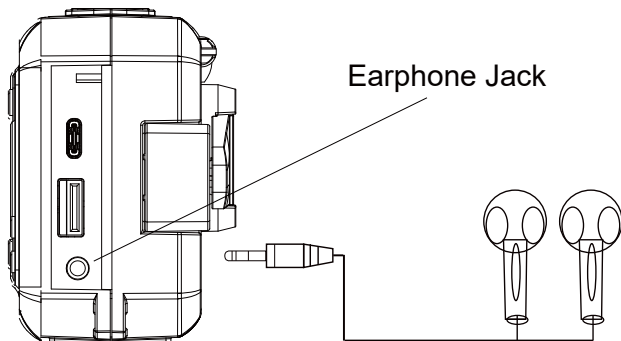


SOS Alarm

If you press the SOS button with 3-5 seconds, the alarm sound will still be emitted from the speaker and the LCD screen will be closed.

Read Light

Open the solar panel above 5 degree, then the read light will turn on automatical

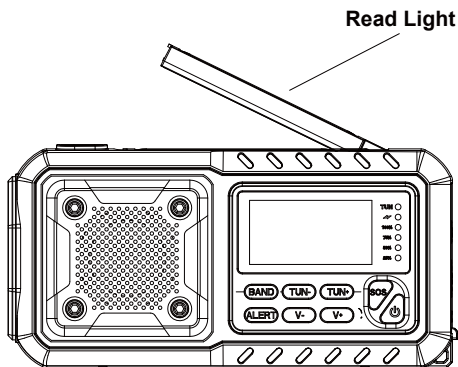

Specifications

Frequency	FM: 87~108MHz AM: 520~1710KHz WB: 162.40~162.55MHz
Item	153*47*77mm 6.02*1.85*3.03in
Item weight	351g
Maximum	1.5W
Working	2.7-4.2V
Battery	5000mAh/3.7V Li-ion
Flashlight	1W

Warranty

The device has a full 12- month warranty against manufacturing defects from the date of purchase

Safety Instructions

- When radio first use or sits idle for more than 60 days, please placed under strong solar light (daylight>86000LUX) for 30 minutes or quickly hand crank for one minute to activate the battery.
- Dropping this radio can cause injury or damage. The unit will not resist strong impact or contact with corrosive liquids.
- To prevent the risk of fire or electric shock, do not expose the radio to rain or moisture.
- To prevent electric shock, do not open the case. Only qualified personnel may carry out repairs.
- Please do not allow children access to the radio when it is charging.
- When using this device, please do not over-discharge, so as not to reduce the service life of the battery in the machine, or even damage the rechargeable battery .
- To clean radio surface use a soft and damp cloth. Do not use alcohol or other liquids containing corrosive ingredients to clean this product.
- Unit is not waterproof, only water-resistant. Do not submerge in water.

Packing List

Multi-Functional Radio x1
Type-C USB Cable x1
Waterproof Bag x1
Packing Box x1

User Manual x1
Compass x1
Lanyard x1

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Thank you for choosing our product!

- If you have any questions or problems regarding our products, please feel free to contact us.
- We will provide professional supports to you within 24 hours.
- Any advice is welcome! We will keep improving products according to your valuable advice.



AM FM WB Radio



MADE IN CHINA



User Manual

Multi-Functional Emergency Radio

Model: 376WB