



承 认 书

SPECIFICATION FOR APPROVAL

客户名称 Customer Name	菱微电子		
客户项目名 Customer Project Name	T10S	盛邦尔料号 Surbaner P/N	160180-02014
客户编码 Customer P/N	/	工作频段 Working Band	2400-2500MHz
产品描述 Product description	BT-1 天线/FPC/26.40*11.65*0.12MM/三代端子/0.81 黑色线, L=65MM		
版本号 Version	V01		
设计人信息/Designer Information			
射频工程师 RF Engineer	林德友	研发主管 R&D Diretor	周洪亮
结构工程师 ME Engineer	张宇龙		

盛邦尔审批/Surbaner Approval				客户批准/Customer Approval	
	制作 Prepared By	审核 Checked By	批准 Approval By	审核 Checked By	批准 Approval By
签章 Signature	黄舒淇				
日期 Date	2026. 05. 28				

修订履历/Change Log				
版本 Version	修订内容 Change Description	责任人 Person in Charge	核准 Approval By	日期 Date
V01	首次发行	张宇龙	林德友	2026. 05. 28

地址: 深圳市宝安区航城街道宝星智荟城 8 栋 1 楼 103-107 号 TEL: 0755-82790675 FAX: 0755-82809726

Address: No. 103-107, Building 8, Baosheng Zhihui City, Hangcheng Street, Bao'an District, Shenzhen City

SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.

目录/Catalogue

序号 No.	项目 Item	页码 Page No.
1	图纸或实物图片 Drawing or Product Image	3
2	技术参数 Technical Parameter	4
3	射频性能测试报告 RF Performance Test Report	5-9

地址：深圳市宝安区航城街道宝星智荟城 8 栋 1 楼 103-107 号 TEL: 0755-82790675 FAX: 0755-82809726

Address: No. 103-107, Building 8, Baosheng Zhihui City, Hangcheng Street, Bao'an District, Shenzhen City


SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.

www.surbaner.com.cn

2 / 9

FM: SBR-QR-RD-37 REV: A2

一. 产品图纸或实物图片/Drawing or Product Image

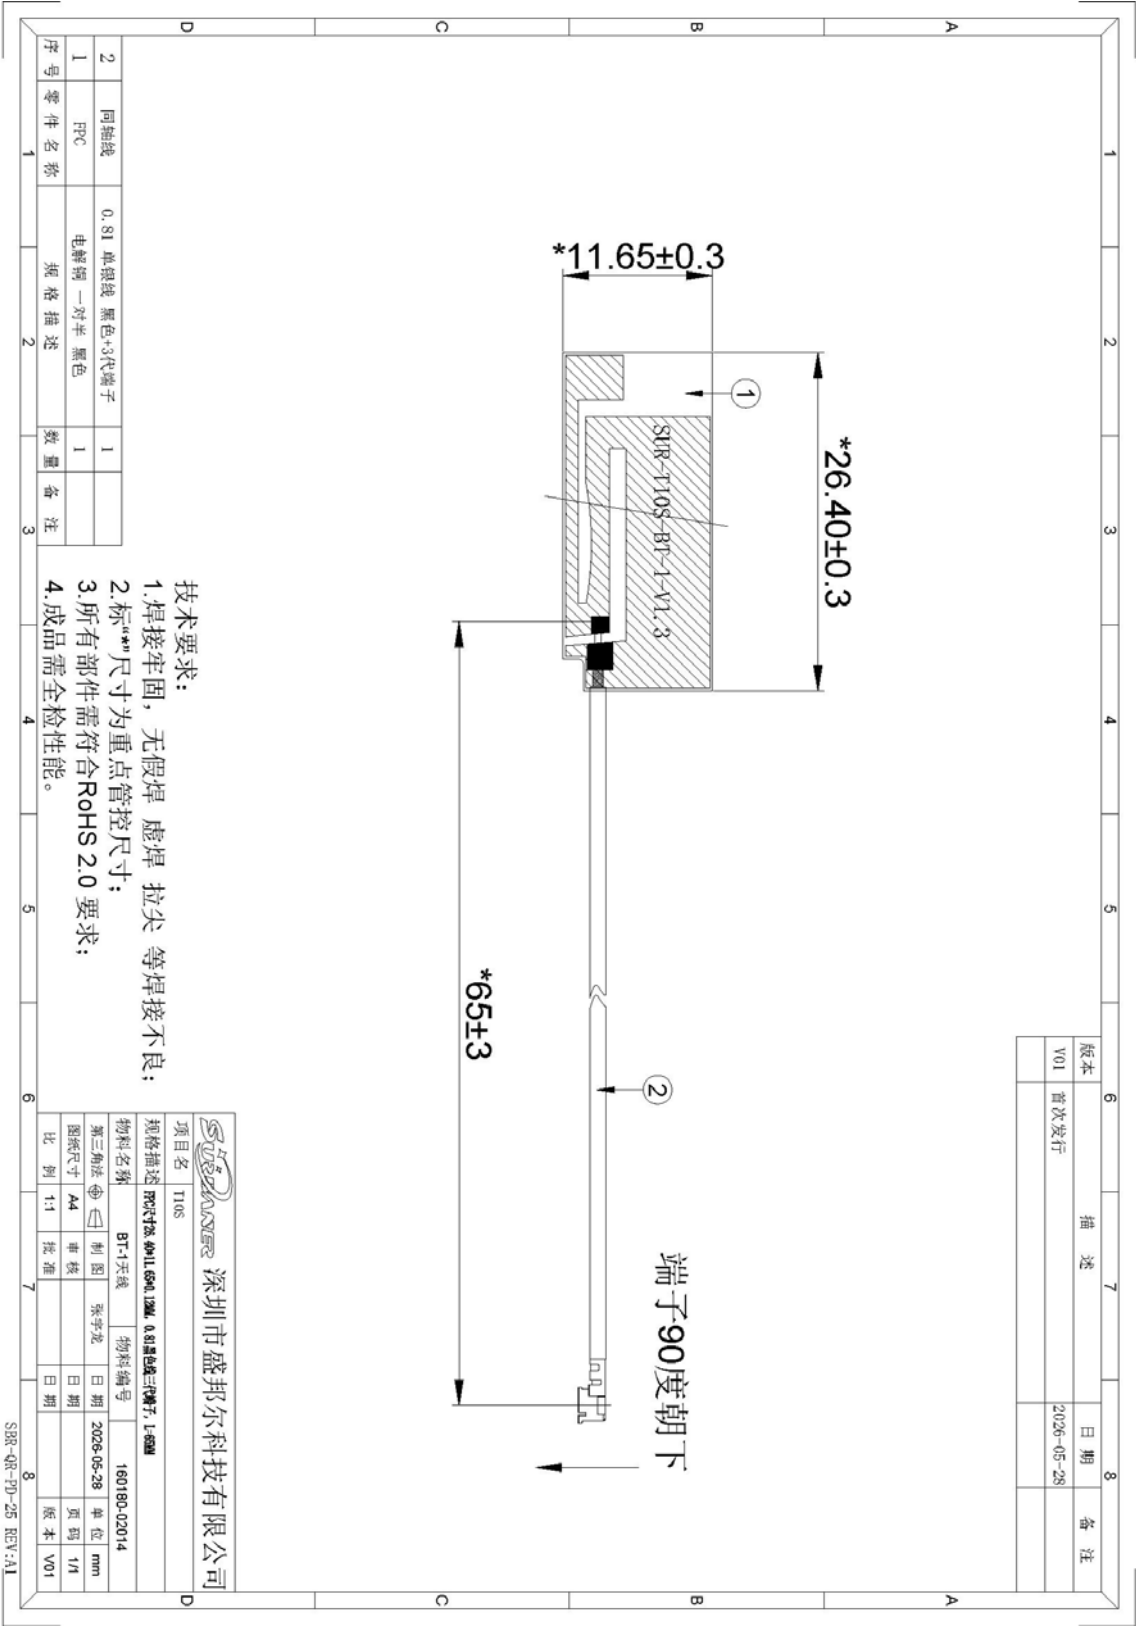

地址: 深圳市宝安区航城街道宝星智荟城8栋1楼103-107号 TEL: 0755-82790675 FAX: 0755-82809726

Address: No. 103-107, Building 8, Baosheng Zhihui City, Hangcheng Street, Bao'an District, Shenzhen City

SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.

二. Technical Parameter /技术参数

1. Antenna/天线		
No/序号	Part Name/项目	SPEC/规格
1	Frequency Range/ 频率范围	2400-2500MHz
2	Impendence/阻抗	50 ohm nominal
3	Gain/增益	$\geq 1.5\text{dBi}$
4	Polarization/极化	LINE
5	Efficiency/效率	$\geq 58\%$ AVG
6	RF Cable/射频连接线	0.81 黑色线, L=65MM
7	RF Connector/连接器	三代端子
2. Environmental Characteristics/环境特性		
No/序号	Part Name/项目	SPEC/规格
1	Operation Humidity /工作湿度	5~95%不冷凝
2	Operating Temperature /工作温度	-20~+60°C
3	Store Temperatuer /工作储存温度	-30~+70°C

地址：深圳市宝安区航城街道宝星智荟城8栋1楼103-107号 TEL: 0755-82790675 FAX: 0755-82809726

Address: No. 103-107, Building 8, Baosheng Zhihui City, Hangcheng Street, Bao'an District, Shenzhen City

SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.

www.surbaner.com.cn

4 / 9

FM: SBR-QR-RD-37 REV: A2

射频性能测量报告

RF Performance Test Report

客户名称 Customer Name	菱微电子	项目名称 Project Name	T10S	盛邦尔料号 Surbaner P/N	160180-02014
频段 Band	2400-2500MHz	测试日期 Test Date	2026/05/28	测试人 Inspector	林德友

天线测试设备简介

Antenna Test Equipment Introduction

测试天线输入特性使用 Agilent E5071C and Agilent 5062A 矢量网络分析仪；辐射特性利用 Satimo 三维近场暗室进行测试，并分别使用 8960 E5515 和 Agilent E4438C 进行了分析。暗房的测试坐标如下：

Test of antenna input characteristics using Agilent E5071C and Agilent 5062A vector network analyzer; The radiation pattern of the antenna are tested using the Satimo starlab 3D near field Anechoic Chamber, and the instrument is used to agilent8960 E5515 and Agilent E4438C. The test coordinates of the darkroom are as follows:

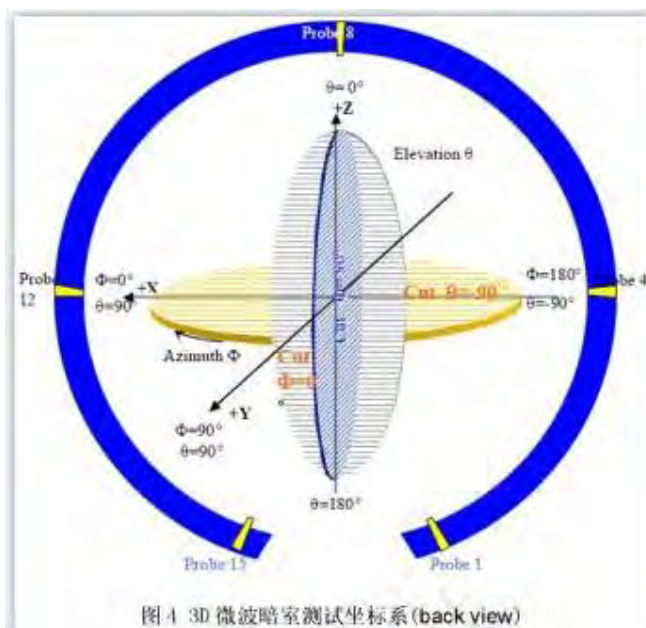


图4 3D 微波暗室测试坐标系(back view)

1. S11 参数测量/S11 Parameter-VSWR

使用一根 50Ω 同轴电缆连接到天线，然后该电缆连接到网络分析仪测量 S11 参数，被测量产品远离金属至少 20 厘米。

Measuring Method is a 50Ω coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the S11 parameter, Keeping this fixture away from metal at least 20cm.

2. Product Overview & Environmental Treatment

Antenna



地址：深圳市宝安区航城街道宝星智荟城 8 栋 1 楼 103-107 号 TEL: 0755-82790675 FAX: 0755-82809726

Address: No. 103-107, Building 8, Baosheng Zhihui City, Hangcheng Street, Bao'an District, Shenzhen City

SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.

www.surbaner.com.cn

6 / 9


FM: SBR-QR-RD-37 REV: A2

Test System

Sequence Number	Test Item	equipment
S parameter	VSWR	Agilent 5071C & Agilent 5062A
OTA Test	TRP&TIS	Agilent 8960 E5515C& Agilent 4438C&CMW500 &CMW270 ETS&SATIMO
Gain & Efficiency	Gain & Efficiency	ETS&SATIMO Agilent 5071C




Antenna Matching Network

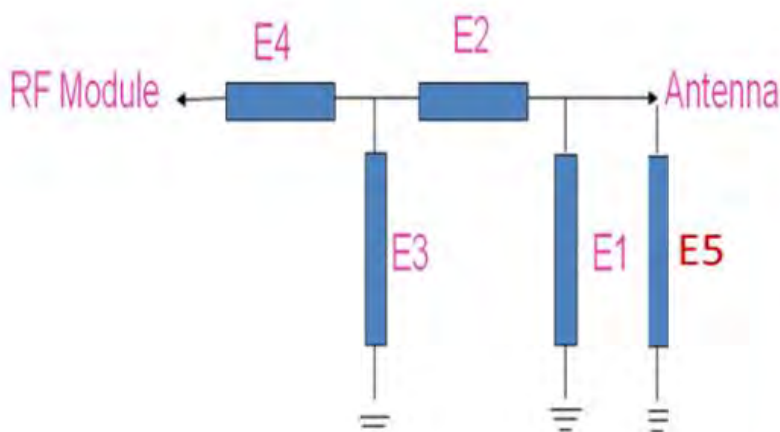

Element	Value
E1	N/A
E2	N/A
E3	N/A
E4	N/A
E5	N/A

PCB 板端原始匹配未改动

S11 Parameter-隔离度

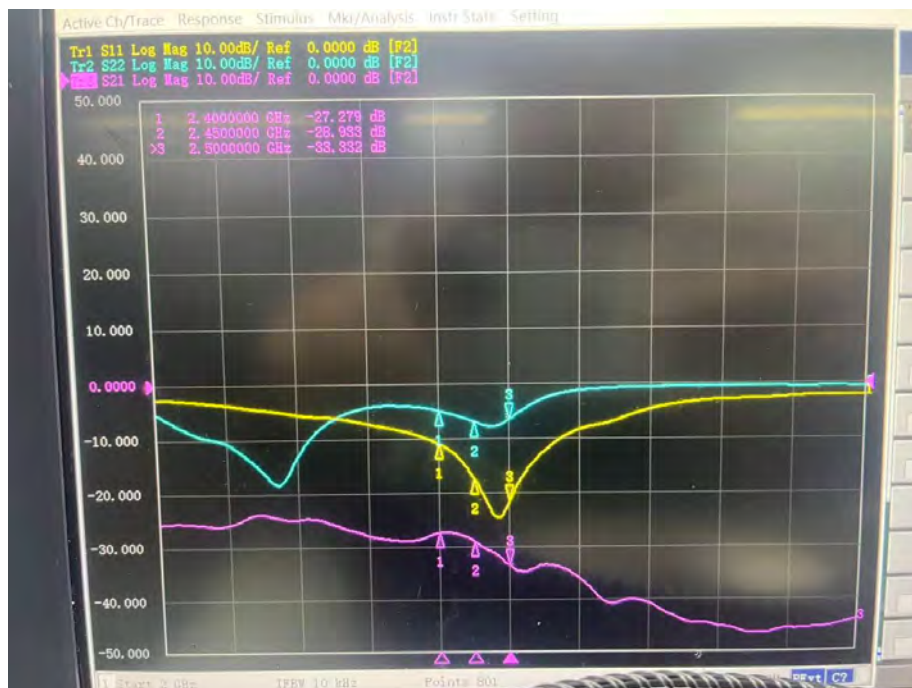

Gain & Efficiency


Frequency (MHz)	Efficiency (%)	Peak GAIN (dBi)
2400	50.4%	2.06
2410	51.7%	2.22
2420	54.9%	2.62
2430	56.3%	2.81
2440	54.3%	2.67
2450	56.6%	3.03
2460	61.8%	3.68
2470	63.1%	3.91
2480	61.7%	3.75
2490	63.8%	3.83
2500	63.4%	4.15

地址：深圳市宝安区航城街道宝星智荟城8栋1楼103-107号 TEL: 0755-82790675 FAX: 0755-82809726

Address: No. 103-107, Building 8, Baosheng Zhihui City, Hangcheng Street, Bao'an District, Shenzhen City

SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.

2D Pattern

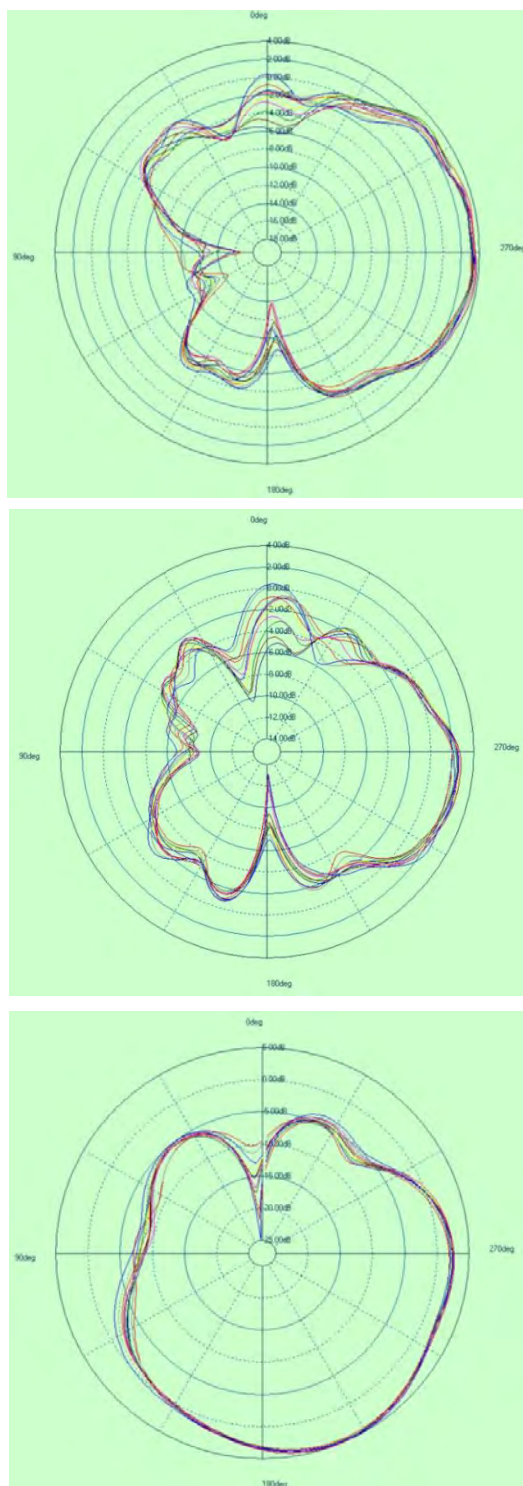

地址：深圳市宝安区航城街道宝星智荟城 8 栋 1 楼 103-107 号 TEL: 0755-82790675 FAX: 0755-82809726

Address: No. 103-107, Building 8, Baosheng Zhihui City, Hangcheng Street, Bao'an District, Shenzhen City

SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.

www.surbaner.com.cn

9 / 9

FM: SBR-QR-RD-37 REV: A2