



- **Transcript:** Add specialized terms or jargon that appear frequently in your meetings.
- **Summary:** Customize terms used in your summaries to align with your company's language or key concepts.

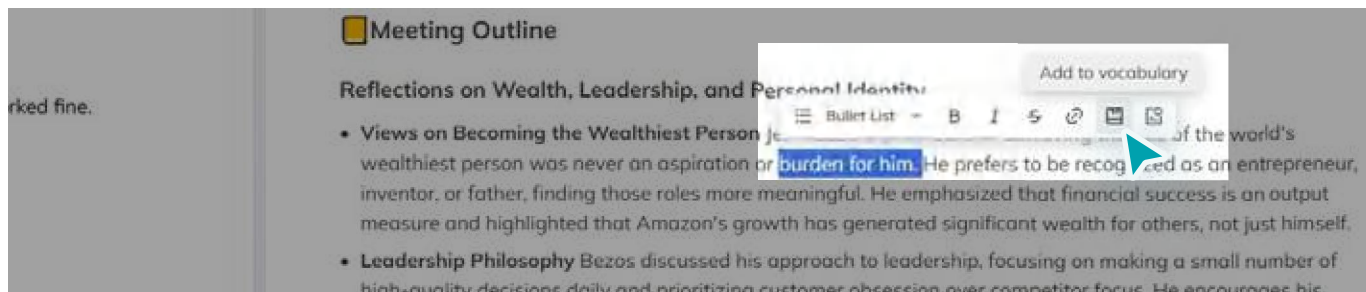

Tailoring your vocabulary ensures that HiNotes recognizes industry-specific terms, names, and abbreviations. This results in more precise transcriptions and relevant summaries that better reflect the context of your meetings or discussions.


How to Add Custom Vocabulary

- Go to the **Vocabulary Settings** section in HiNotes.
- Here, you can input or import specific terms that will be recognized in future transcriptions and summaries.

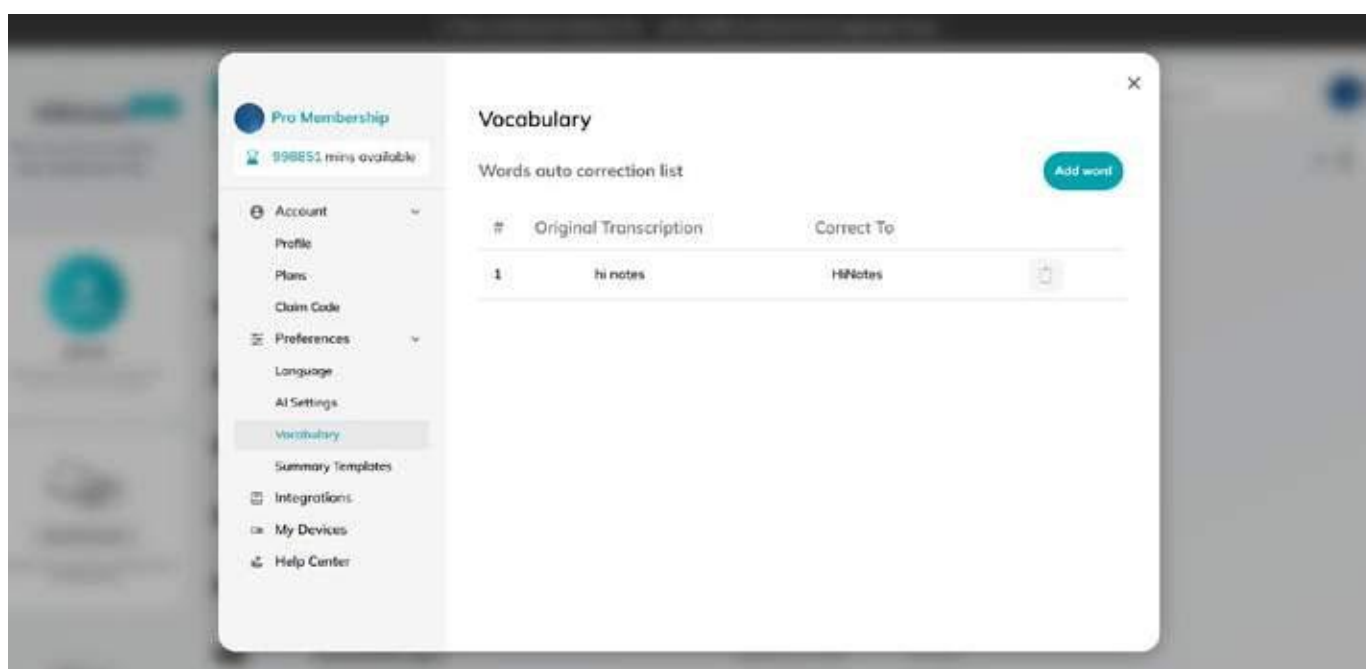

Manage Note

- On the top-right corner of your note, click the **three dots** ... to access additional management options. From here, you can export, copy, translate and re-summarize your notes.

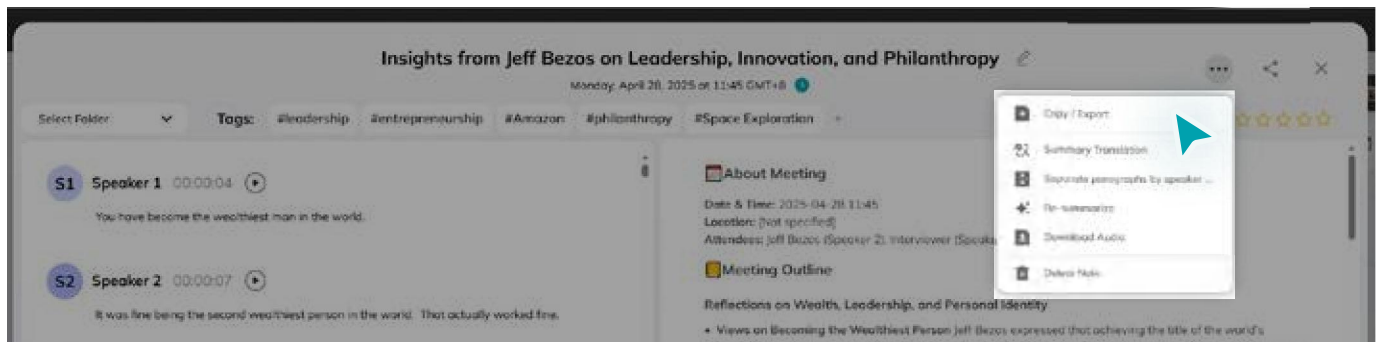

Copy and Export


Copy the note to your clipboard, allowing you to easily paste it elsewhere (e.g., in emails or documents).

Export your note to various formats:

- For Membership, it supports export to **txt** format.
- For Pro Membership, it supports export to **txt, word, pdf, Markdown, csv, and srt**.


NOTES:

Different content types support different formats. For example, **summary** doesn't support **.csv** and **.srt** formats.

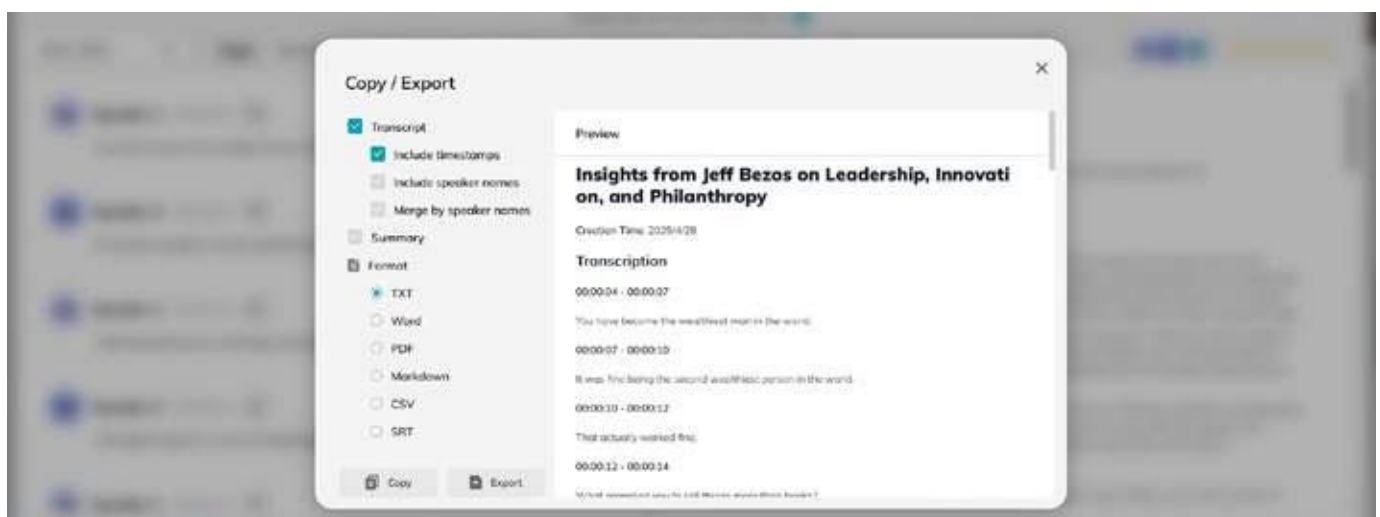

Translate Summary


If you need to translate the summary, just choose the translation option, and click your target language.

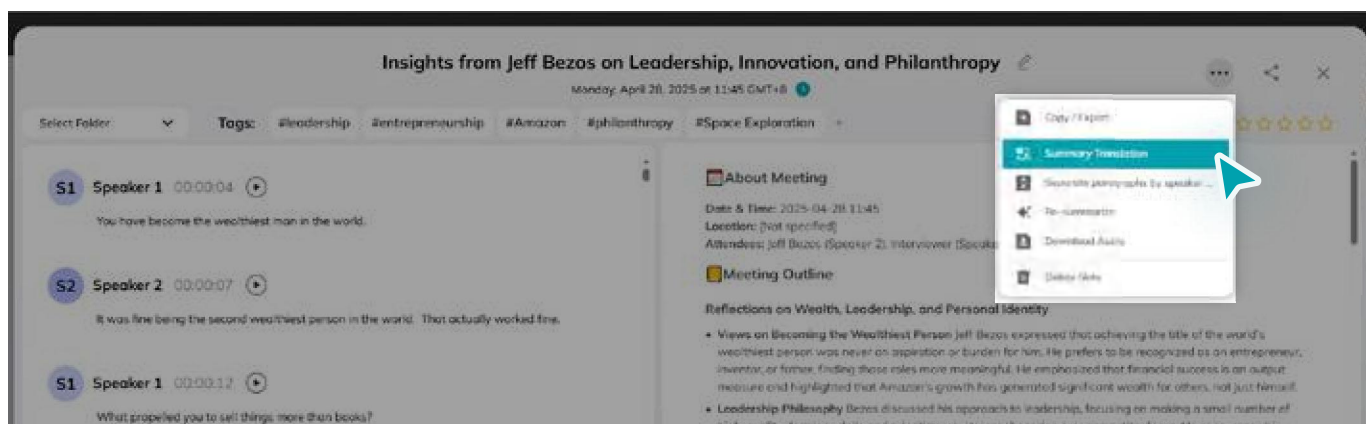

Re-summarize


If your summary isn't quite good, you can **re-summarize** it to get the perfect result. This function is available to all users, giving you more flexibility to create summaries that are just right.

Just follow the on-screen steps to finish.

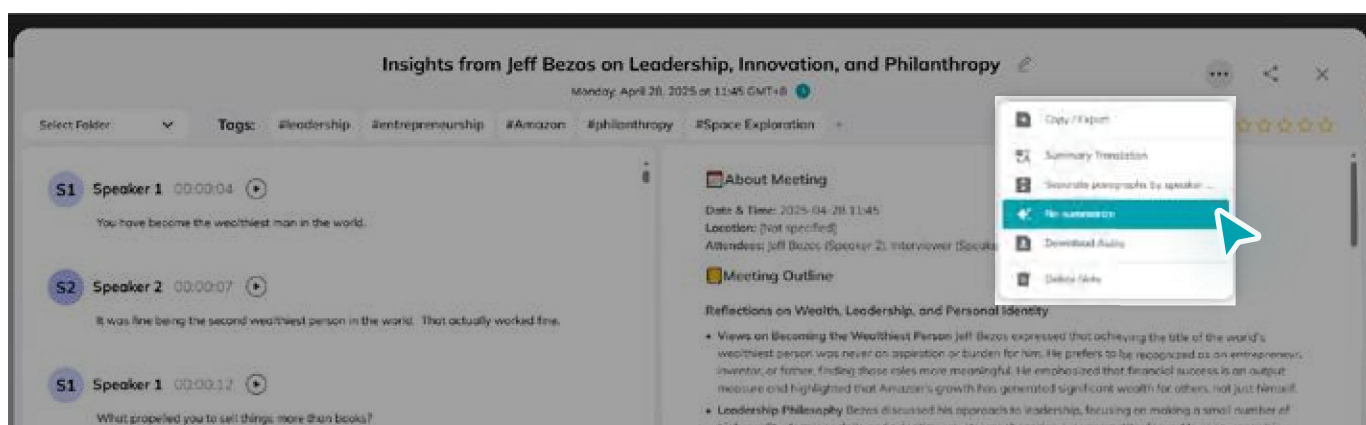

Download Audio


You can download the audio of the note directly to your computer.

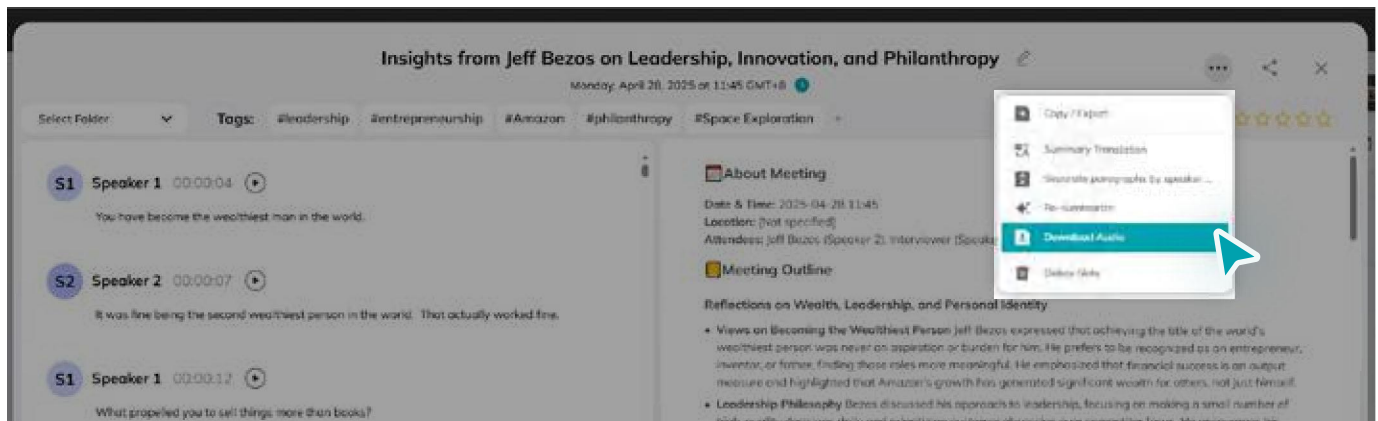

Share Summary

HiNotes integrates with many third-party platforms, including **Notion**, **Microsoft OneNote**, **Google Docs**, and several social media apps. You can choose to share your notes across these platforms for better organization and enhanced team collaboration.

To share, simply click the **share button** in the upper-right corner of the note and choose the target platform you want to share with.

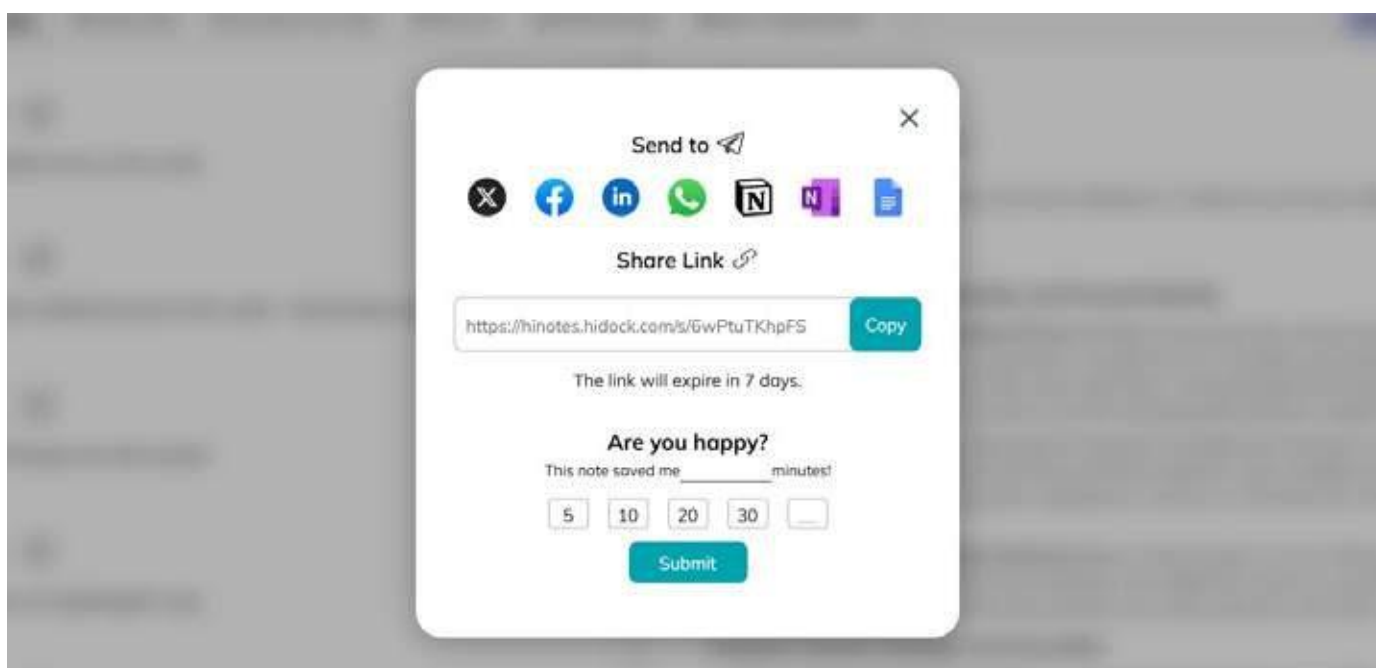

BATTERY

CHARGE P1

Simply plug the USB-C cable to any computer or phone charger.

CHECK P1 BATTERY LEVEL

1.  Connect P1 to your computer.
2.  Open HiNotes app.
3. Go to xxx, the battery level is displayed on the P1 device icon.

CHARGING TIME

1. It takes 2 hours to fully charge P1 from 0 to 100%.

NOTES:

- A full charge powers the P1 for up to 8 hours in room mode.
- Room mode means P1 works stand alone without connect to any computer or mobile devices.


CARE AND MAINTENANCE

FIRMWARE OTA


By utilizing OTA capabilities, HiDock P1 ensures that its firmware remains up-to-date with the latest performance enhancements and compatibility improvements. You can confidently rely on HiDock P1 to provide seamless connectivity and functionality across various devices.

You can update the firmware when connected to the HiNotes app and an update is available. Follow the app instructions.


1.  Connect P1 to HiNotes.
2. When you login HiNotes, you will see a prompt about new firmware availability. Simply click the "**Learn more**" button.

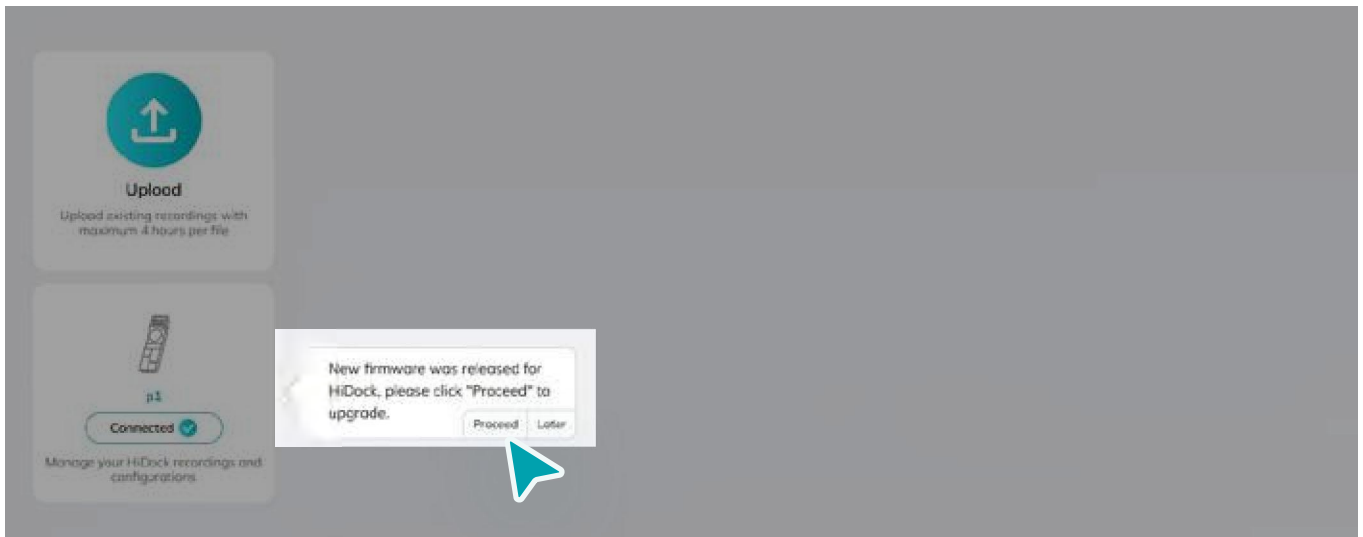


3. It will provide you with the change list of the new firmware. Just click the "**Proceed**" button to start the updating process.

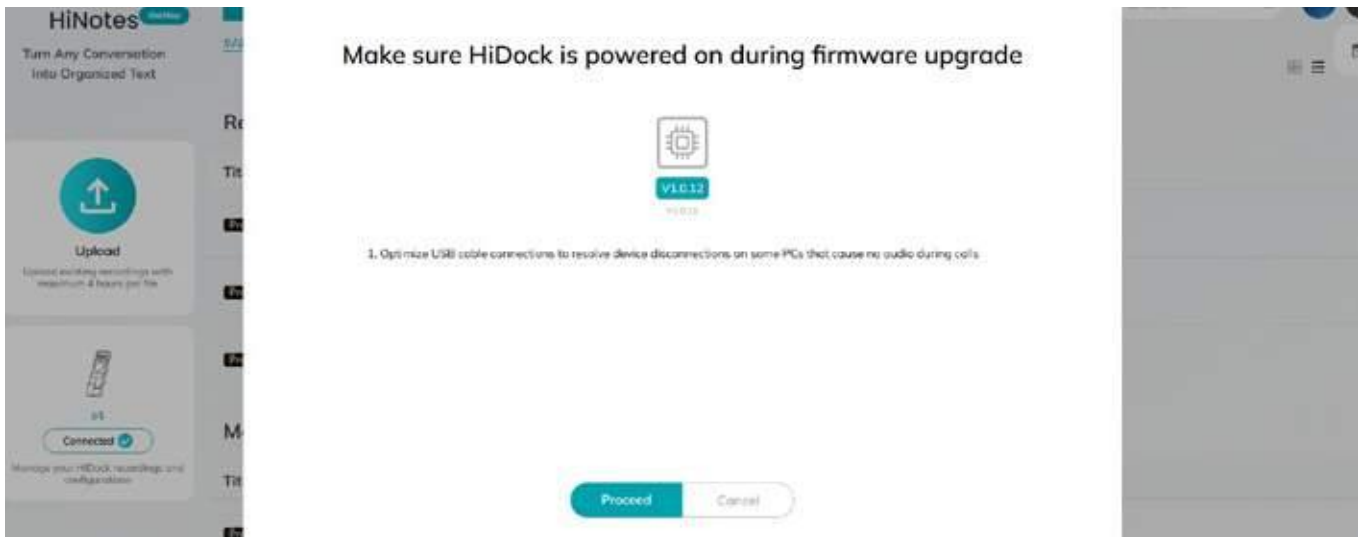


4. After uploading the firmware to the device, it will start to update, and you will see the **YELLOW** ring LED indicator flashing on P1 device.

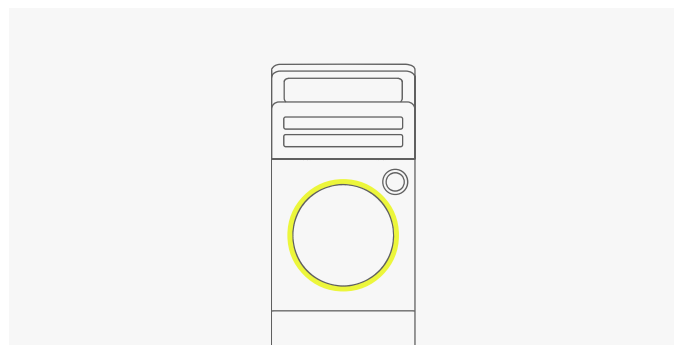

5. When the update is finished, you will receive a prompt with Congratulations on HiNotes. P1 will automatically restart.

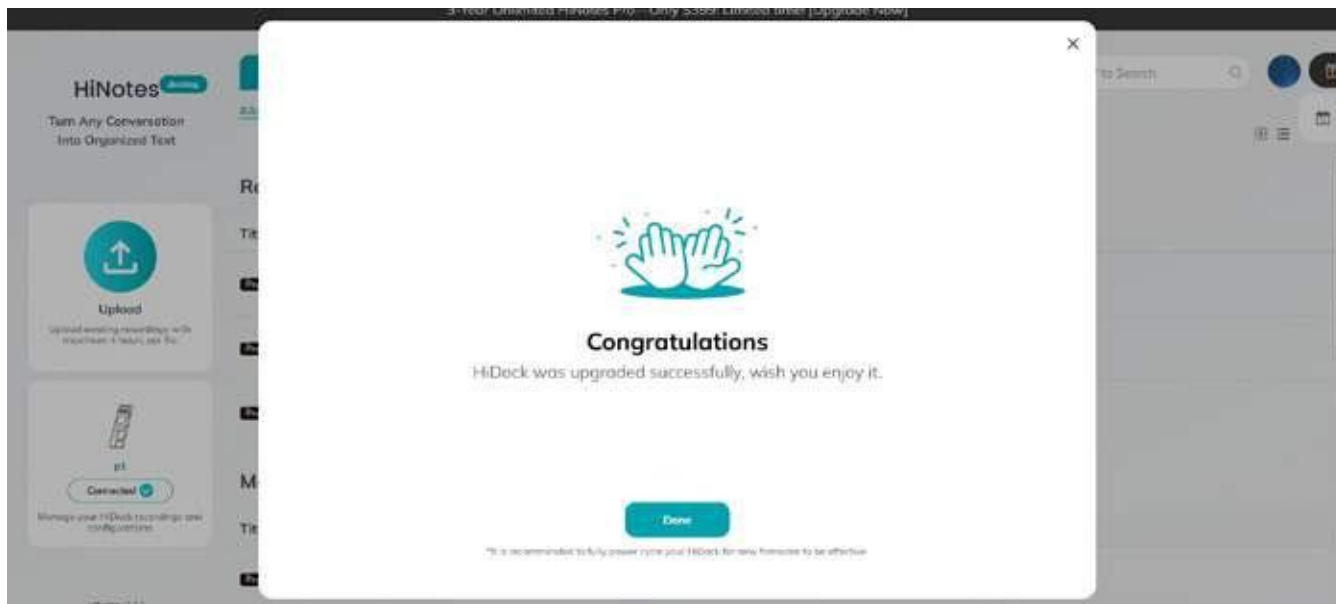

6. You can go back to the "Connected -> Configuration" page to double-check if the firmware version is the latest one.

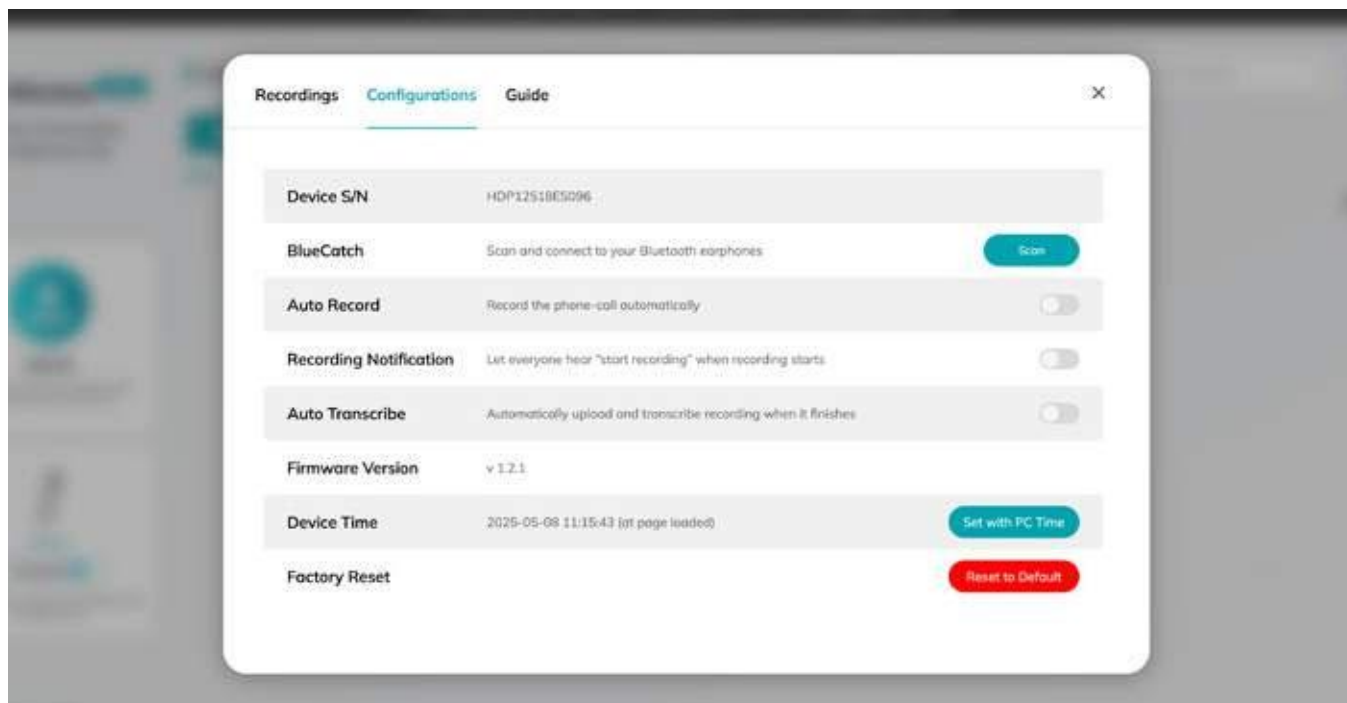

💡 NOTES:

- It may take about **3 minutes** to finish updating. During the update, please do not power off the device.

STORE THE PRODUCT

When you're not using the product, power off to help preserve battery life.

When storing the product for an extended period of time (more than 4 weeks), make sure they are stored at room temperature and the battery level is greater than 40% (See page [xx about how to check the battery level](#)).

REPLACEMENT PARTS AND ACCESSORIES

Replacement parts and accessories can be ordered through HiDock customer service.

Contact us: support@hidock.com

LIMITED WARRANTY

The P1 is covered by a limited warranty. Visit our website at <https://www.hidock.com/pages/warranty-policy> for details.

VIEW THE DEVICE SERIAL NUMBER

The serial number is located on the bottom side of the device. Just scan the QRCode, you will get the serial number.



TIP:

- The serial number is also located on the carton outer label.
- You can also get the serial number on HiNotes.

SPECIFICATION

Compatibility	
Device	Laptops, Computer
Compatibility	macOS, Windows
App	Zoom, Teams, Google Meet, Discord, FaceTime, WhatsApp, etc.
Modes	Call Mode / Room Mode / Whisper Mode *Can work standalone.
Connectivity	
Connectivity	Bluetooth 5.3
Battery	600mAh lithium polymer
Recording Capability	8H continuous recording
Local Storage	64GB
Audio	
AI-based Bi-directional Noise Canceling	For both far-end and near-end
Noise-canceling Type	Keyboard clicking, dog barking, street noise, background noise, kitchen noise, etc.
Sound Quality	2 * 16 ECM Mics Max 1546 kbps high-quality recording

SPECIFICATION

Dimension and Weight	
Sound Quality	126 x 38 x 15.8 mm
Weight	72g
Color	Space Gray / Star White