


ZSE42 Water Leak Sensor 700

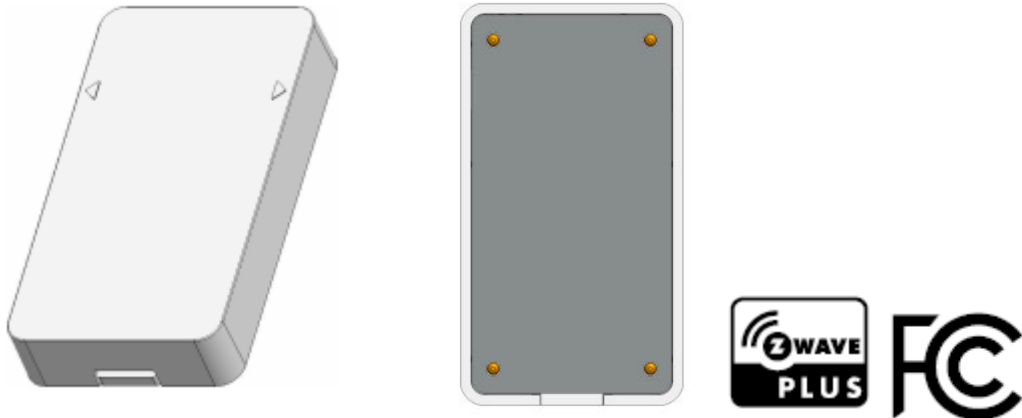

SPECIFICATIONS

Model: ZSE42

Battery: CR2302 *1pc

Signal (Frequency): 908.42 MHz

Range: Up to 100 feet line of sight

Temperature Range: 32-104° F (0-40° C) For indoor use.

Approval: FCC/Z-Wave Plus Certified

FCC ID: 2AZ2VZSE42

- * Z-Wave Water Leak Detector: Protect your home from water damage.
- * 700 series chip. You will get 50% faster wireless communication, enhanced encryption, 2 years of battery life.
- * SmartStart QR for simplest possible device installation. Make your home really intelligent and safe.
- * Mini Size Z-Wave Door Sensor.
- * Home Automation: Work with Z-wave hub: SmartThings, Vera, Hubitat, Fibaro Home Centre, HomeSeer, Open Z-Wave, etc..

FCC Caution.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio

communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

***RF warning for Portable device:**

.....

.....