


1. Antenna Description

Antenna plate	Rod antenna
Market name/Model name	WS8858
Antenna Max. Gain	0dBi
Frequency Range	865.0-930.0MHz
Connect Type	Integer antenna
VSWR	≤3

Manufacturer: ShenZhen XinErSheng Technology Co.,Ltd

Address: 3/F, Building D, No.96 Lingxia Road, Fenghuang Fourth Industrial Zone, Fuyong, Bao'an District, Shenzhen, China

2. Picture of antenna

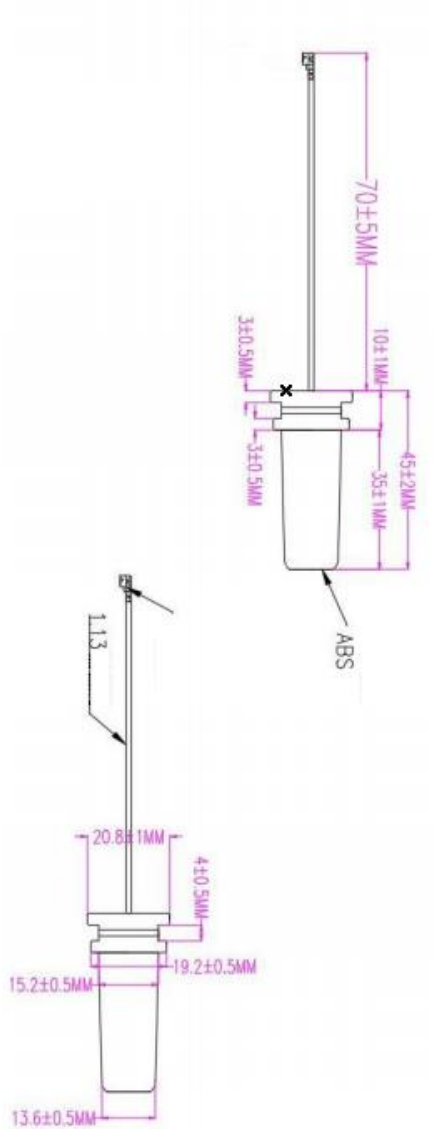


3. Antenna Radiation Pattern

Radiation pattern—865MHz

Total Average Gain: -0.33dBi


Phi	0	45	90	135	180	235	270	315
Gain	-0.75	-0.33	-0.46	-0.62	-0.58	-0.45	-0.97	-0.83

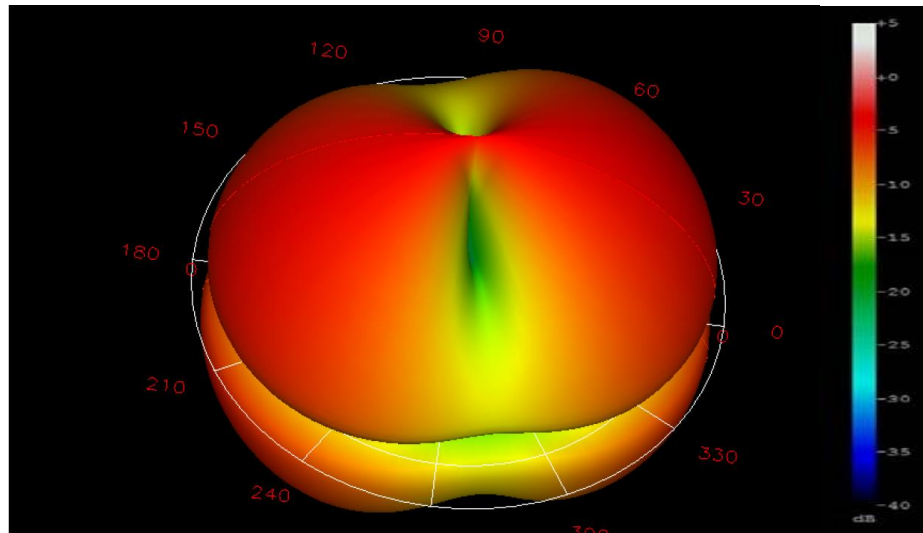

Radiation pattern—900MHz

Total Average Gain: 0.00dBi

Phi	0	45	90	135	180	235	270	315
Gain	-0.41	0.00	-0.12	-0.28	-0.23	-0.11	-0.54	-0.42

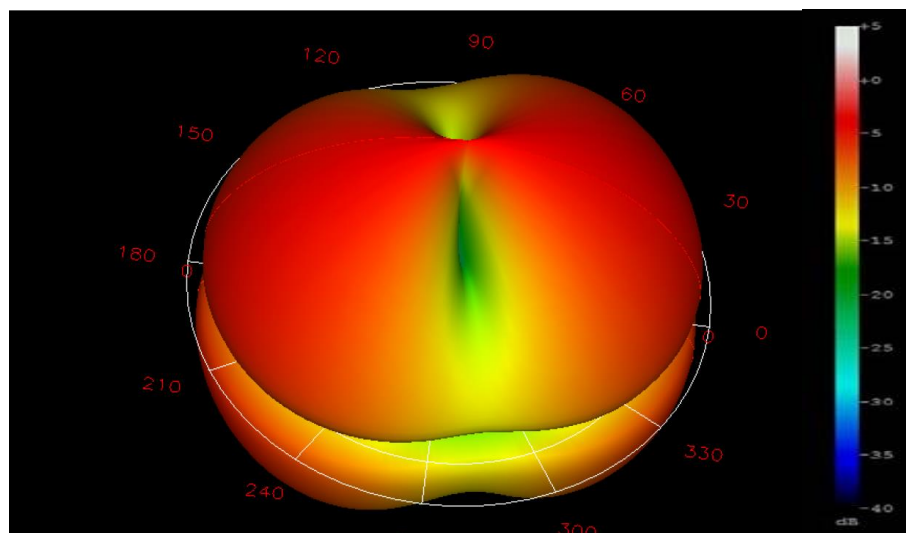

Radiation pattern—930MHz

Total Average Gain: -0.06dBi

Phi	0	45	90	135	180	235	270	315
Gain	-0.63	-0.06	-0.32	-0.49	-0.44	-0.25	-0.80	-0.69

