


|                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                       |                                             |                                                 |                                                                                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|-------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Prüfbericht-Nr.:</b><br><i>Test report no.:</i>                                                                                                                                                                                                                                                                                                                                                                                                                   | <b>CN24Y0QT 001</b>                                                                                                                                                                                                                                                                   | <b>Auftrags-Nr.:</b><br><i>Order no.:</i>   | 168474698                                       | Seite 1 von 17<br><i>Page 1 of 17</i>                                                 |
| <b>Kunden-Referenz-Nr.:</b><br><i>Client reference no.:</i>                                                                                                                                                                                                                                                                                                                                                                                                          | N/A                                                                                                                                                                                                                                                                                   | <b>Auftragsdatum:</b><br><i>Order date:</i> | 2024-03-19                                      |                                                                                       |
| <b>Auftraggeber:</b><br><i>Client:</i>                                                                                                                                                                                                                                                                                                                                                                                                                               | Xiamen Ampace Technology Limited<br>No.600 Hongtang Road, Tongxiang High-tech Zone, Torch High-tech District, Xiamen City, Fujian 361106, China                                                                                                                                       |                                             |                                                 |                                                                                       |
| <b>Prüfgegenstand:</b><br><i>Test item:</i>                                                                                                                                                                                                                                                                                                                                                                                                                          | Portable Power Station                                                                                                                                                                                                                                                                |                                             |                                                 |                                                                                       |
| <b>Bezeichnung / Typ-Nr.:</b><br><i>Identification / Type no.:</i>                                                                                                                                                                                                                                                                                                                                                                                                   | Andes 1500 X (X = A to Z or blank, difference on the model name and appearance colors only for marketing purpose, no technical difference)                                                                                                                                            |                                             |                                                 |                                                                                       |
| <b>Auftrags-Inhalt:</b><br><i>Order content:</i>                                                                                                                                                                                                                                                                                                                                                                                                                     | Test Report                                                                                                                                                                                                                                                                           |                                             |                                                 |                                                                                       |
| <b>Prüfgrundlage:</b><br><i>Test specification:</i>                                                                                                                                                                                                                                                                                                                                                                                                                  | CFR47 FCC Part 15: Subpart C Section 15.247<br>RSS-247 Issue 3 August 2023<br>RSS-Gen Issue 5 February 2021                                                                                                                                                                           |                                             |                                                 |                                                                                       |
| <b>Wareneingangsdatum:</b><br><i>Date of sample receipt:</i>                                                                                                                                                                                                                                                                                                                                                                                                         | 2024-05-29                                                                                                                                                                                                                                                                            | Please refer to Photo Document              |                                                 |                                                                                       |
| <b>Prüfmuster-Nr.:</b><br><i>Test sample no.:</i>                                                                                                                                                                                                                                                                                                                                                                                                                    | A003723392-005~006                                                                                                                                                                                                                                                                    |                                             |                                                 |                                                                                       |
| <b>Prüfzeitraum:</b><br><i>Testing period:</i>                                                                                                                                                                                                                                                                                                                                                                                                                       | 2024-06-14 - 2024-07-11                                                                                                                                                                                                                                                               |                                             |                                                 |                                                                                       |
| <b>Ort der Prüfung:</b><br><i>Place of testing:</i>                                                                                                                                                                                                                                                                                                                                                                                                                  | Refer to Section 2.1                                                                                                                                                                                                                                                                  |                                             |                                                 |                                                                                       |
| <b>Prüflaboratorium:</b><br><i>Testing laboratory:</i>                                                                                                                                                                                                                                                                                                                                                                                                               | TÜV Rheinland<br>(Shenzhen) Co., Ltd.                                                                                                                                                                                                                                                 |                                             |                                                 |                                                                                       |
| <b>Prüfergebnis*:</b><br><i>Test result*:</i>                                                                                                                                                                                                                                                                                                                                                                                                                        | Pass                                                                                                                                                                                                                                                                                  |                                             |                                                 |                                                                                       |
| <b>geprüft von:</b><br><i>tested by:</i>                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                    |                                             | <b>genehmigt von:</b><br><i>authorized by:</i>  |  |
| <b>Datum:</b><br><i>Date:</i>                                                                                                                                                                                                                                                                                                                                                                                                                                        | 2024-07-18                                                                                                                                                                                                                                                                            |                                             | <b>Ausstellungsdatum:</b><br><i>Issue date:</i> | 2024-07-18                                                                            |
| <b>Stellung / Position:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                          | Sachverständige(r)/Expert                                                                                                                                                                                                                                                             |                                             | <b>Stellung / Position:</b>                     | Sachverständige(r)/Expert                                                             |
| <b>Sonstiges /</b><br><i>Other:</i>                                                                                                                                                                                                                                                                                                                                                                                                                                  | FCC ID: 2BB9O-ANDES1500<br>IC: 32540-ANDES1500, HVIN: Andes 1500                                                                                                                                                                                                                      |                                             |                                                 |                                                                                       |
| <b>Zustand des Prüfgegenstandes bei Anlieferung:</b><br><i>Condition of the test item at delivery:</i>                                                                                                                                                                                                                                                                                                                                                               | Prüfmuster vollständig und unbeschädigt<br><i>Test item complete and undamaged</i>                                                                                                                                                                                                    |                                             |                                                 |                                                                                       |
| <b>* Legende:</b><br><i>* Legend:</i>                                                                                                                                                                                                                                                                                                                                                                                                                                | P(ass) = entspricht o.g. Prüfgrundlage(n)    F(ail) = entspricht nicht o.g. Prüfgrundlage(n)    N/A = nicht anwendbar    N/T = nicht getestet<br>P(ass) = passed a.m. test specification(s)    F(ail) = failed a.m. test specification(s)    N/A = not applicable    N/T = not tested |                                             |                                                 |                                                                                       |
| <b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b><br><i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i> |                                                                                                                                                                                                                                                                                       |                                             |                                                 |                                                                                       |

**Prüfbericht-Nr.: CN24Y0QT 001**  
**Test report no.:**

Seite 2 von 17  
Page 2 of 17

**Anmerkungen**  
*Remarks*

|   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | <p>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.</p> <p>Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</p> <p><i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 2 | <p>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: <a href="http://go.tuv.com/digital-signature">go.tuv.com/digital-signature</a></p> <p><i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: <a href="http://go.tuv.com/digital-signature">go.tuv.com/digital-signature</a></i></p> |
| 3 | <p>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben.</p> <p>Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</p> <p><i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i></p> <p><i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 4 | <p>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</p> <p><i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i></p>                                                                                                                                                                                                                                                                                       |

**Prüfbericht - Nr.: CN24Y0QT 001**  
Test Report No.:

Seite 3 von 17  
Page 3 of 17

## ***Test Summary***

**5.1.1 ANTENNA REQUIREMENT**

RESULT: Pass

**5.1.2 RADIATED SPURIOUS EMISSION**

RESULT: Pass

**5.1.3 CONDUCTED EMISSION ON AC MAINS**

RESULT: Pass

## **Contents**

|              |                                                          |           |
|--------------|----------------------------------------------------------|-----------|
| <b>1</b>     | <b>GENERAL REMARKS .....</b>                             | <b>5</b>  |
| <b>1.1</b>   | <b>COMPLEMENTARY MATERIALS .....</b>                     | <b>5</b>  |
| <b>2</b>     | <b>TEST SITES .....</b>                                  | <b>6</b>  |
| <b>2.1</b>   | <b>TEST FACILITIES .....</b>                             | <b>6</b>  |
| <b>2.2</b>   | <b>LIST OF TEST AND MEASUREMENT INSTRUMENTS.....</b>     | <b>6</b>  |
| <b>2.3</b>   | <b>TRACEABILITY .....</b>                                | <b>7</b>  |
| <b>2.4</b>   | <b>CALIBRATION .....</b>                                 | <b>7</b>  |
| <b>2.5</b>   | <b>MEASUREMENT UNCERTAINTY.....</b>                      | <b>7</b>  |
| <b>2.6</b>   | <b>LOCATION OF ORIGINAL DATA.....</b>                    | <b>7</b>  |
| <b>2.7</b>   | <b>STATUS OF FACILITY USED FOR TESTING.....</b>          | <b>7</b>  |
| <b>3</b>     | <b>GENERAL PRODUCT INFORMATION .....</b>                 | <b>8</b>  |
| <b>3.1</b>   | <b>PRODUCT FUNCTION AND INTENDED USE.....</b>            | <b>8</b>  |
| <b>3.2</b>   | <b>RATINGS AND SYSTEM DETAILS .....</b>                  | <b>8</b>  |
| <b>3.3</b>   | <b>INDEPENDENT OPERATION MODES .....</b>                 | <b>10</b> |
| <b>3.4</b>   | <b>NOISE GENERATING AND NOISE SUPPRESSING PARTS.....</b> | <b>10</b> |
| <b>3.5</b>   | <b>SUBMITTED DOCUMENTS.....</b>                          | <b>10</b> |
| <b>4</b>     | <b>TEST SET-UP AND OPERATION MODES .....</b>             | <b>11</b> |
| <b>4.1</b>   | <b>PRINCIPLE OF CONFIGURATION SELECTION .....</b>        | <b>11</b> |
| <b>4.2</b>   | <b>TEST OPERATION AND TEST SOFTWARE.....</b>             | <b>11</b> |
| <b>4.3</b>   | <b>SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT .....</b> | <b>11</b> |
| <b>4.4</b>   | <b>COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE .....</b>   | <b>11</b> |
| <b>4.5</b>   | <b>TEST SETUP DIAGRAM .....</b>                          | <b>12</b> |
| <b>5</b>     | <b>TEST RESULTS .....</b>                                | <b>14</b> |
| <b>5.1</b>   | <b>TRANSMITTER REQUIREMENT &amp; TEST SUITES .....</b>   | <b>14</b> |
| <b>5.1.1</b> | <i>Antenna Requirement .....</i>                         | <i>14</i> |
| <b>5.1.2</b> | <i>Radiated Spurious Emission .....</i>                  | <i>15</i> |
| <b>5.1.3</b> | <i>Conducted Emission on AC Mains.....</i>               | <i>16</i> |
| <b>6</b>     | <b>PHOTOGRAPHS OF THE TEST SET-UP .....</b>              | <b>17</b> |
| <b>7</b>     | <b>LIST OF TABLES.....</b>                               | <b>17</b> |

# 1 General Remarks

## 1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results.

Appendix B: Photographs of Test Set-up.

## 2 Test Sites

### 2.1 Test Facilities

**1. TÜV Rheinland (Shenzhen) Co., Ltd.**

No.362, Huanguan Middle Road, Songyuansha Community, Guanhu Subdistrict, Longhua District, Shenzhen 518110, Guangdong, China

A2LA Certificate Number: 5162.01

FCC Accreditation Designation No.: CN1260

ISED wireless device testing laboratory: 25069

**2. EST Technology Co., Ltd.**

Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China

A2LA Certificate Number: 4366.01

FCC Accreditation Designation No.: CN1215

ISED wireless device testing laboratory: 9405A

Note: TÜV Rheinland (Shenzhen) Co., Ltd. Subcontracts test item Conducted Emission to EST Technology Co., Ltd. The tests at the test sites have been conducted under the supervision of a TÜV engineer.

### 2.2 List of Test and Measurement Instruments

**Table 1: List of Test and Measurement Equipment**

**TÜV Rheinland (Shenzhen) Co., Ltd.**

| <b>Unwanted Emission Testing (TS9975)</b> |                     |                   |                   |                  |                   |
|-------------------------------------------|---------------------|-------------------|-------------------|------------------|-------------------|
| <b>Equipment</b>                          | <b>Manufacturer</b> | <b>Model</b>      | <b>Serial No.</b> | <b>Cal. Date</b> | <b>Cal. until</b> |
| EMI Test Receiver                         | R&S                 | ESR 7             | 102021            | 2023-07-26       | 2024-07-25        |
| Signal Analyzer                           | R&S                 | FSV 40            | 101439            | 2023-07-26       | 2024-07-25        |
| System Controller Interface               | R&S                 | SCI-100           | S10010038         | N/A              | N/A               |
| Filterbank                                | R&S                 | Wlan              | 100759            | 2023-07-26       | 2024-07-25        |
| OSP                                       | R&S                 | OSP 120           | 102040            | N/A              | N/A               |
| Pre-amplifier                             | R&S                 | SCU08F1           | 08320031          | 2023-07-26       | 2024-07-25        |
| Amplifier                                 | R&S                 | SCU-18F           | 180070            | 2023-07-26       | 2024-07-25        |
| Amplifier                                 | R&S                 | SCU40A            | 100475            | 2023-07-26       | 2024-07-25        |
| Trilog Broadband Antenna (30 MHz - 7 GHz) | Schwarzbeck         | VULB 9162         | 193               | 2022-08-07       | 2024-08-06        |
| Double-Ridged Antenna (1 -18 GHz)         | ETS-LINDGREN        | 3117              | 00218717          | 2022-08-07       | 2024-08-06        |
| Wideband Ridged Horn Antenna (18-40 GHz)  | Steatite            | QMS-00880         | 19067             | 2022-08-28       | 2024-08-27        |
| Active Loop Antenna                       | Schwarzbeck         | FMZB 1513         | 302               | 2022-08-07       | 2024-08-06        |
| Test software                             | R&S                 | EMC32 (V10.60.10) | N/A               | N/A              | N/A               |
| Control PC                                | Dell                | OptiPlex 7050     | 36NV9P2           | N/A              | N/A               |

**Prüfbericht - Nr.: CN24Y0QT 001**  
*Test Report No.:*

Seite 7 von 17  
 Page 7 of 17

|                          |           |        |              |            |            |
|--------------------------|-----------|--------|--------------|------------|------------|
| 3m Semi-Anechoic Chamber | Albatross | SAC-3m | APC17151-SAC | 2024-06-21 | 2025-06-20 |
|--------------------------|-----------|--------|--------------|------------|------------|

#### EST Technology Co., Ltd.

#### Conducted Emission

| Equipment                | Manufacturer    | Model No.    | Serial No. | Last Cal.     | Next Cal.     |
|--------------------------|-----------------|--------------|------------|---------------|---------------|
| EMI Test Receiver        | Rohde & Schwarz | ESCI3        | EST-E035   | Jun. 11, 2024 | Jun. 10, 2025 |
| Artificial Mains Network | Rohde & Schwarz | ENV216       | EST-E002   | Jun. 11, 2024 | Jun. 10, 2025 |
| Pulse Limiter            | Rohde & Schwarz | ESH3-Z2      | EST-E003   | Jun. 11, 2024 | Jun. 10, 2025 |
| Test Software            | Audix           | e3-6.111221a | N/A        | N/A           | N/A           |

## 2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

## 2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

## 2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

**Table 2: Measurement Uncertainty**

| Parameter                  | Uncertainty (k=2) |
|----------------------------|-------------------|
| RF output power, conducted | ± 0.99 dB         |
| All emissions, radiated    | ± 4.17 dB         |
| Conducted Emission         | ± 3.44 dB         |

## 2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

## 2.7 Status of Facility Used for Testing

The EST Technology Co., Ltd. Test facility located at Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at No.362, Huanguan Middle Road, Songyuansha Community, Guanhu Subdistrict, Longhua District, Shenzhen 518110, Guangdong, China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

## 3 General Product Information

### 3.1 Product Function and Intended Use

The product is Portable Power Station which supports 2.4GHz Band Wi-Fi and Bluetooth dual mode wireless functions.

Note: This product contains transmitter module, FCC ID: 2AC7Z-ESP32WROVER; IC: 21098-ESP32WROVER with additional type of antenna, since these changed, Radiated Spurious Emissions (RF output power spot check before RSE testing), Conducted Emissions and EMF are arranged re-testing, and the other conducted measurement test data can be referred to test report RKS170517002-00A, RKS170517002-00B, RSHD200715001-08A and RSHD200715001-08B issued by Bay Area Compliance Laboratories Corp. (Kunshan).

For details refer to the User Manual, Technical Description and Circuit Diagram.

### 3.2 Ratings and System Details

**Table 3: Technical Specification of EUT**

| General Information of EUT                            | Value                                                                                                                                                                                                                                      |
|-------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Kind of Equipment                                     | Portable Power Station                                                                                                                                                                                                                     |
| Type Designation                                      | Andes 1500 X (X = A to Z or blank, difference on the model name and appearance colors only for marketing purpose, no technical difference)                                                                                                 |
| FCC ID                                                | 2BB9O-ANDES1500                                                                                                                                                                                                                            |
| IC                                                    | 32540-ANDES1500                                                                                                                                                                                                                            |
| HVIN                                                  | Andes 1500                                                                                                                                                                                                                                 |
| Input                                                 | AC 120V, 60Hz (1800W) or DC 11-60V, 12A (600W)                                                                                                                                                                                             |
| Output                                                | Output1: AC (*4) 120V 60Hz (2400W); AC (*4) 120V 60Hz (1800W, Bypass mode)<br>Output2: Car Charger (*1)+DC 5521(*2)12.6V/9.5A(120W)<br>Output3:USB-A (*4): 5V/3A 9V/2A 12V/1.5A (18W); USB-C (*2): 5V/3A 9V/3A 12V/3A 15V/3A 20V/5A (100W) |
| Battery Capacity                                      | 1462Wh (32.65Ah, 44.8V)                                                                                                                                                                                                                    |
| <b>Technical Specification of Bluetooth dual mode</b> |                                                                                                                                                                                                                                            |
| Operating Frequency                                   | 2402 - 2480 MHz                                                                                                                                                                                                                            |
| Type of Modulation                                    | GFSK, $\pi/4$ -DQPSK, 8DPSK                                                                                                                                                                                                                |
| Channel Number                                        | BR & EDR mode:79 channels, Low Energy mode:40 channels                                                                                                                                                                                     |
| Channel Separation                                    | BR & EDR mode:1 MHz, Low Energy mode:2 MHz                                                                                                                                                                                                 |
| Data Rate                                             | BR & EDR mode: 1Mbps, 2Mbps, 3Mbps<br>Low Energy mode: 1Mbps                                                                                                                                                                               |
| Antenna Type                                          | Metal Antenna                                                                                                                                                                                                                              |
| Antenna Gain                                          | Max. 4.26 dBi (Provided by the Client)                                                                                                                                                                                                     |
| <b>Technical Specification of 2.4GHz Wi-Fi</b>        |                                                                                                                                                                                                                                            |
| Operating Frequency                                   | 2412 - 2462 MHz for 802.11b/g/n(HT20)<br>2422 - 2452 MHz for 802.11n(HT40)                                                                                                                                                                 |

|                    |                                                                                                  |
|--------------------|--------------------------------------------------------------------------------------------------|
| Type of Modulation | DSSS(DBPSK/DQPSK/CCK)<br>OFDM(BPSK/QPSK/16QAM/64QAM)                                             |
| Data Rate          | 1/2/5.5/11 Mbps for 802.11b<br>6/9/12/18/24/36/48/54 Mbps for 802.11g<br>MCS0 ~ MCS7 for 802.11n |
| Channel Number     | 11 channels for 802.11b/g/n(HT20)<br>7 channels for 802.11n(HT40)                                |
| Channel Separation | 5 MHz                                                                                            |
| Antenna Type       | Metal Antenna                                                                                    |
| Antenna Gain       | Max. 4.26 dBi (Provided by the Client)                                                           |

**Table 4: RF Channel and Frequency of Bluetooth BR & EDR**

| RF Channel | Frequency (MHz) | RF Channel | Frequency (MHz) | RF Channel | Frequency (MHz) | RF Channel | Frequency (MHz) |
|------------|-----------------|------------|-----------------|------------|-----------------|------------|-----------------|
| 0          | 2402.00         | 20         | 2422.00         | 40         | 2442.00         | 60         | 2462.00         |
| 1          | 2403.00         | 21         | 2423.00         | 41         | 2443.00         | 61         | 2463.00         |
| 2          | 2404.00         | 22         | 2424.00         | 42         | 2444.00         | 62         | 2464.00         |
| 3          | 2405.00         | 23         | 2425.00         | 43         | 2445.00         | 63         | 2465.00         |
| 4          | 2406.00         | 24         | 2426.00         | 44         | 2446.00         | 64         | 2466.00         |
| 5          | 2407.00         | 25         | 2427.00         | 45         | 2447.00         | 65         | 2467.00         |
| 6          | 2408.00         | 26         | 2428.00         | 46         | 2448.00         | 66         | 2468.00         |
| 7          | 2409.00         | 27         | 2429.00         | 47         | 2449.00         | 67         | 2469.00         |
| 8          | 2410.00         | 28         | 2430.00         | 48         | 2450.00         | 68         | 2470.00         |
| 9          | 2411.00         | 29         | 2431.00         | 49         | 2451.00         | 69         | 2471.00         |
| 10         | 2412.00         | 30         | 2432.00         | 50         | 2452.00         | 70         | 2472.00         |
| 11         | 2413.00         | 31         | 2433.00         | 51         | 2453.00         | 71         | 2473.00         |
| 12         | 2414.00         | 32         | 2434.00         | 52         | 2454.00         | 72         | 2474.00         |
| 13         | 2415.00         | 33         | 2435.00         | 53         | 2455.00         | 73         | 2475.00         |
| 14         | 2416.00         | 34         | 2436.00         | 54         | 2456.00         | 74         | 2476.00         |
| 15         | 2417.00         | 35         | 2437.00         | 55         | 2457.00         | 75         | 2477.00         |
| 16         | 2418.00         | 36         | 2438.00         | 56         | 2458.00         | 76         | 2478.00         |
| 17         | 2419.00         | 37         | 2439.00         | 57         | 2459.00         | 77         | 2479.00         |
| 18         | 2420.00         | 38         | 2440.00         | 58         | 2460.00         | 78         | 2480.00         |
| 19         | 2421.00         | 39         | 2441.00         | 59         | 2461.00         | /          | /               |

**Table 5: RF Channel and Frequency of Bluetooth LE**

| RF Channel | Frequency (MHz) | RF Channel | Frequency (MHz) | RF Channel | Frequency (MHz) | RF Channel | Frequency (MHz) |
|------------|-----------------|------------|-----------------|------------|-----------------|------------|-----------------|
| 0          | 2402            | 10         | 2422            | 20         | 2442            | 30         | 2462            |
| 1          | 2404            | 11         | 2424            | 21         | 2444            | 31         | 2464            |
| 2          | 2406            | 12         | 2426            | 22         | 2446            | 32         | 2466            |
| 3          | 2408            | 13         | 2428            | 23         | 2448            | 33         | 2468            |
| 4          | 2410            | 14         | 2430            | 24         | 2450            | 34         | 2470            |
| 5          | 2412            | 15         | 2432            | 25         | 2452            | 35         | 2472            |
| 6          | 2414            | 16         | 2434            | 26         | 2454            | 36         | 2474            |
| 7          | 2416            | 17         | 2436            | 27         | 2456            | 37         | 2476            |

|   |      |           |             |    |      |           |             |
|---|------|-----------|-------------|----|------|-----------|-------------|
| 8 | 2418 | 18        | 2438        | 28 | 2458 | 38        | 2478        |
| 9 | 2420 | <b>19</b> | <b>2440</b> | 29 | 2460 | <b>39</b> | <b>2480</b> |

**Table 6: RF Channel and Frequency of 2.4GHz Wi-Fi**

| RF Channel | 802.11 b/g/n(HT20) | 802.11 n(HT40)  |
|------------|--------------------|-----------------|
|            | Frequency (MHz)    | Frequency (MHz) |
| <b>01</b>  | <b>2412</b>        |                 |
| 02         | 2417               |                 |
| <b>03</b>  | 2422               | <b>2422</b>     |
| 04         | 2427               | 2427            |
| 05         | 2432               | 2432            |
| <b>06</b>  | <b>2437</b>        | 2437            |
| 07         | 2442               | 2442            |
| 08         | 2447               | 2447            |
| <b>09</b>  | 2452               | <b>2452</b>     |
| 10         | 2457               |                 |
| <b>11</b>  | <b>2462</b>        |                 |

### 3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Bluetooth BR & EDR wireless transmitting (Low / Middle / High Channel)
- B. On, Bluetooth LE wireless transmitting (Low / Middle / High Channel)
- C. On, 2.4GHz Wi-Fi wireless transmitting (Low / Middle / High Channel)
- D. On, Normal working+Bluetooth+2.4GHz Wi-Fi
- E. Off

### 3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

### 3.5 Submitted Documents

- Application Form
- ID Label and Location Info
- Schematics
- Operation Description
- Block Diagram
- PCB Layout

## 4 Test Set-up and Operation Modes

### 4.1 Principle of Configuration Selection

**Radio Spectrum:** The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

**Emission:** The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

### 4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013.

According to clause 3.1, all tests were performed on model Andes 1500 in this report.

### 4.3 Special Accessories and Auxiliary Equipment

Table 7: List of Accessories and Auxiliary Equipment

| Items          | Manufacturer                     | Model          | Remark                                |
|----------------|----------------------------------|----------------|---------------------------------------|
| Laptop         | Lenovo                           | T480           | SN: PF-16A6N8<br>Provided by test lab |
| Decoy load     | N/A                              | 4xLC-CMTPD     | Provided by test lab                  |
| Decoy load     | N/A                              | 2xLC-CFTPD     | Provided by test lab                  |
| Resistive load | N/A                              | 2xLC-CE_FCC    | Provided by test lab                  |
| Bulbs          | N/A                              | 6x300W         | Provided by test lab                  |
| Router         | TP-LINK                          | 802.11n Router | Provided by test lab                  |
| iPad           | Apple                            | iPad air       | Provided by test lab                  |
| Extra Battery  | Xiamen Ampace Technology Limited | Extra Battery  | Provided by Manufacturer              |

| Items           | Description                | Remark               |
|-----------------|----------------------------|----------------------|
| Type-C-Cable *2 | 1.2m, Shielded, Detachable | Provided by test lab |
| USB Cable * 4   | 1.2m, Shielded, Detachable | Provided by test lab |
| Car socket      | 1m, Unshielded, Detachable | Provided by test lab |
| DC 5521         | 1m, Unshielded, Detachable | Provided by test lab |
| AC Cable        | 1.3m, Shielded, Detachable | Provided by test lab |

### 4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

## 4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)



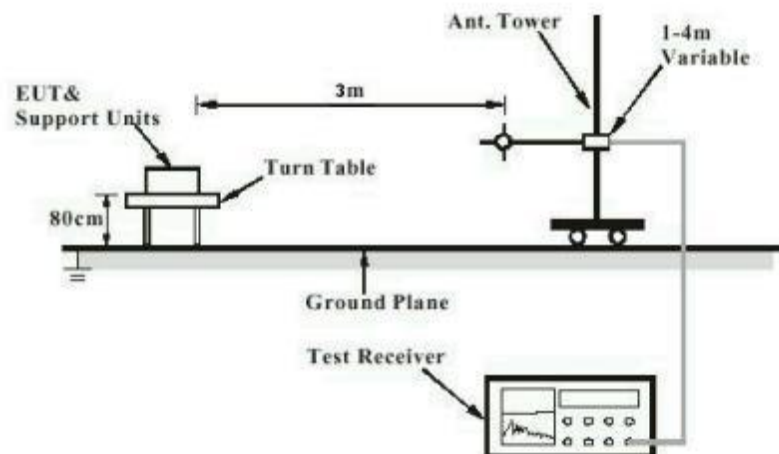



Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

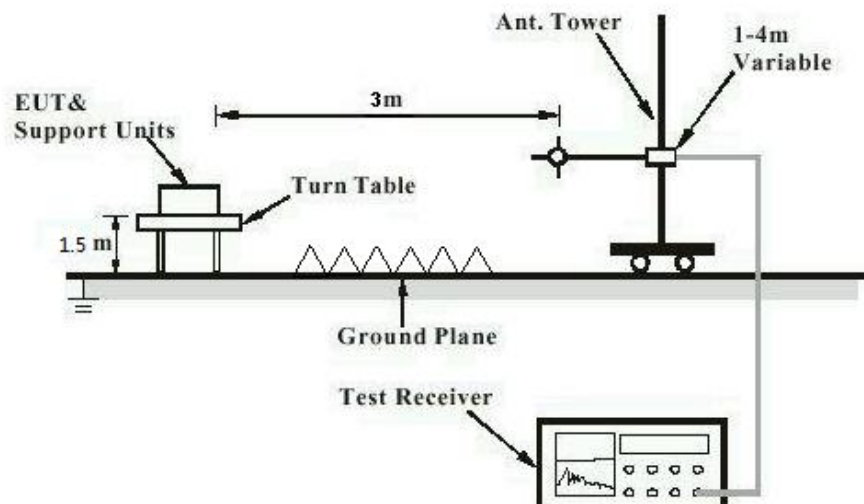

### Diagram of Measurement Configuration for Mains Conduction Measurement

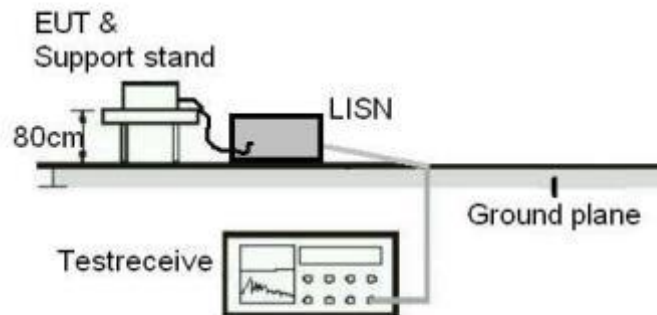

### Diagram of Measurement Configuration for Conducted Transmitter Measurement

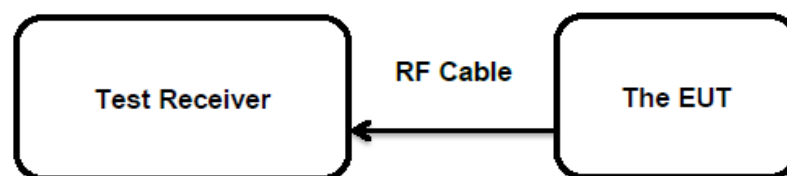

## 5 Test Results

### 5.1 Transmitter Requirement & Test Suites

#### 5.1.1 Antenna Requirement

RESULT:

Pass

**Test Specification**

Test standard : FCC Part 15.247(b)(4) and Part 15.203  
RSS-Gen Section 6.8

According to the manufacturer declared, the EUT has a Metal antenna, the directional gain of antenna is 4.26dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: CN24Y0QT 001  
Test Report No.:Seite 15 von 17  
Page 15 of 17

## 5.1.2 Radiated Spurious Emission

RESULT:

Pass

### Test Specification

|                   |                                                               |
|-------------------|---------------------------------------------------------------|
| Test standard     | : FCC Part 15.247(d) & FCC Part 15.205<br>RSS-247 Clause 3.3  |
| Basic standard    | : ANSI C63.10: 2013                                           |
| Limits            | : Refer to 15.209(a) of FCC part 15.247(d)<br>RSS-Gen Table 5 |
| Kind of test site | : 3m Semi-anechoic Chamber                                    |

### Test Setup

|                      |                            |
|----------------------|----------------------------|
| Date of testing      | : 2024-06-14 to 2024-07-11 |
| Input voltage        | : Fully charged battery    |
| Operation mode       | : A, B, C                  |
| Test channel         | : Low / Middle / High      |
| Ambient temperature  | : Refer to test result     |
| Relative humidity    | : Refer to test result     |
| Atmospheric pressure | : 101 kPa                  |

### Remark:

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN24Y0QT 001  
Test Report No.:Seite 16 von 17  
Page 16 of 17

### 5.1.3 Conducted Emission on AC Mains

**RESULT:****Pass****Test Specification**

|                             |                                                |
|-----------------------------|------------------------------------------------|
| Test standard               | : FCC Part 15.107(b)<br>ICES-003 Section 3.2.1 |
| Basic standard              | : ANSI C63.4: 2014                             |
| Frequency range             | : 0.15 – 30MHz                                 |
| Classification of equipment | : Class A                                      |
| Limits                      | : FCC Part 15.107(b)<br>ICES-003 Table 1       |
| Kind of test site           | : Shielded Room                                |

**Test Setup**

|                      |                 |
|----------------------|-----------------|
| Date of testing      | : 2024-07-09    |
| Input voltage        | : AC 120V, 60Hz |
| Operation mode       | : D             |
| Earthing             | : Not connected |
| Ambient temperature  | : 24.2 °C       |
| Relative humidity    | : 53 %          |
| Atmospheric pressure | : 101.1 kPa     |

For the measurement records, refer to the appendix A.

## 6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix B.

## 7 List of Tables

|                                                               |    |
|---------------------------------------------------------------|----|
| Table 1: List of Test and Measurement Equipment.....          | 6  |
| Table 2: Measurement Uncertainty .....                        | 7  |
| Table 3: Technical Specification of EUT .....                 | 8  |
| Table 4: RF Channel and Frequency of Bluetooth BR & EDR ..... | 9  |
| Table 5: RF Channel and Frequency of Bluetooth LE .....       | 9  |
| Table 6: RF Channel and Frequency of 2.4GHz Wi-Fi.....        | 10 |
| Table 7: List of Accessories and Auxiliary Equipment.....     | 11 |