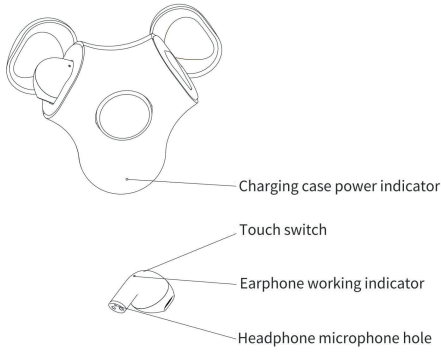


Product icon:  Packing: 1. Wireless bluetooth headphone-----1 Pairs 2. Charing case-----1 Set 3. USB Type-C Charing cable-----1 PC 4. User manual-----1 PC	Product Specification: Product Model No: 25258 Bluetooth version: Bluetooth V5.3 Battery specs: Earbuds 3.7V 28mAh; Charging case 3.7V 250mAh Support model: HFP/ HSP/ A2DP/ AVRCP Sensitivity: 113dB +3dB S.P.L at 1KHz Transmission distance: 10M(The surroundings without any major abstacles) Playing time: About 5 hours Talking time: About 3 hours Standby time: About 50 hours Charging time: Charging case around 2 hours, headsets around 1.5 hours Charging case recharge cycles: About 2.5 times Function operation instructions: Power on: Take the headset out of the charging compartment to automatically power on, or press and hold the left and right headset multi-function buttons for 2 seconds to power on. Power off: Put the earphones into the charging compartment to automatically shut down, or press and hold the left and right earphone multi-function buttons for 5 seconds to shut down. Reboot: When pairing successfully,the earbuds preferentially enter the connected state. After being turned on a second time,they will automaticially connect to the paired device. Play/Pause: In standby mode, click the left and right earphone multi-function buttons to play music directly, and click the left and right earphone multi-function buttons to pause playback during playback. Switch songs: when playing music, double-click the multi-function button of the left earphone to switch to the previous song; double-click the multi-function button of the right earphone for 2 seconds to switch to the next song.	Volume increase and decrease: triple-click the right earphone multi-function button to increase the volume step by step, triple-click the left earphone multi-function button to decrease the volume step by step. Calls Answering: When the phone calls, click the left and right earphone multi-function keys to answer the call. Call Hang up: When the phone is on a call, click the left and right earphone multi-function keys to hang up the call. Calls Rejected: When the phone calls, long press the left and right earphone multi-function keys to reject the call. Low Battery Prompt: When the battery of your earbuds is low, the low battery tone will be play once every 1 minute until your earbuds are powered off. Pairing Method: Common pairing method 1.Take it out from the charging compartment or press and hold the left and right earphone multi-function buttons for 3 seconds to turn it on, the red and blue lights flash alternately, enter the paired ear search pairing state, and the paired ear is automatically paired. Flashes alternately, the pair of ear is flashing blue slowly, and the sound of successful pairing of the pair is played at the same time. 2.Open the bluetooth in mobile phone or other devices. If it is Andriod mobile phone or devices, pls click the optional “ Search for bluetooth device”, if it is IOS system mobile phone or device, it will automaticially pairing. When search the bluetooth model No, click to pairing, when the pairing successful, the headset will sound prompt	successful connection. come into connection standby satus, after pairing successful, the right headset is the right channel and the left handset is the left channel. 3.The headsets also can paired with mobile phone separately. The operation method can refer as above step 2 operation method. Charing Operation: 1. Plug one end of the USB Type-C charging cable into the USB port of the charging compartment, and plug the other end into the charger to charge the charging compartment. The red LED will flash, and the red LED will light up when fully charged. 2. Charge the earphones: Put the earphones into the charging compartment to automatically charge the earphones. The indicator light of the earphones is red when charging, and turns off when fully charged. Common troubleshooting: 1.Can’ t charge the headset when put into the charging case? Answer: Whether the earphone are put into place, whether the charging thimble of the charging case is in good contact with the charging point of the earphones, and whether the surface of the charging thimble and the charging contacts of the earphone are dirty? 2 .Only one earphone has sound when connected to the phone? Answer: Make sure the earphones are paired each other before pairing with the phone, otherwise only single earphone is connected to the mobile phone. Tips: When you use the bluetooth headset to listen the music or talk, pls pay attention to adjust the volume properly, so as not to effect the hearing of excessive volume.	FCC Statement: This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: 1)this device may not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try correct the interference by one or more of the following measures: - Reorient the receiving antenna. - Increase the separation between the equipment and receiver. - Connect the equipment into and outlet on a circuit different from that to which the receiver is connected. - Consult the dealer or an experienced radio/TV technician for help. Changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.
---	---	---	---	--