


Radiated Emission Test Result

Memo : 11AX40 5230MHz

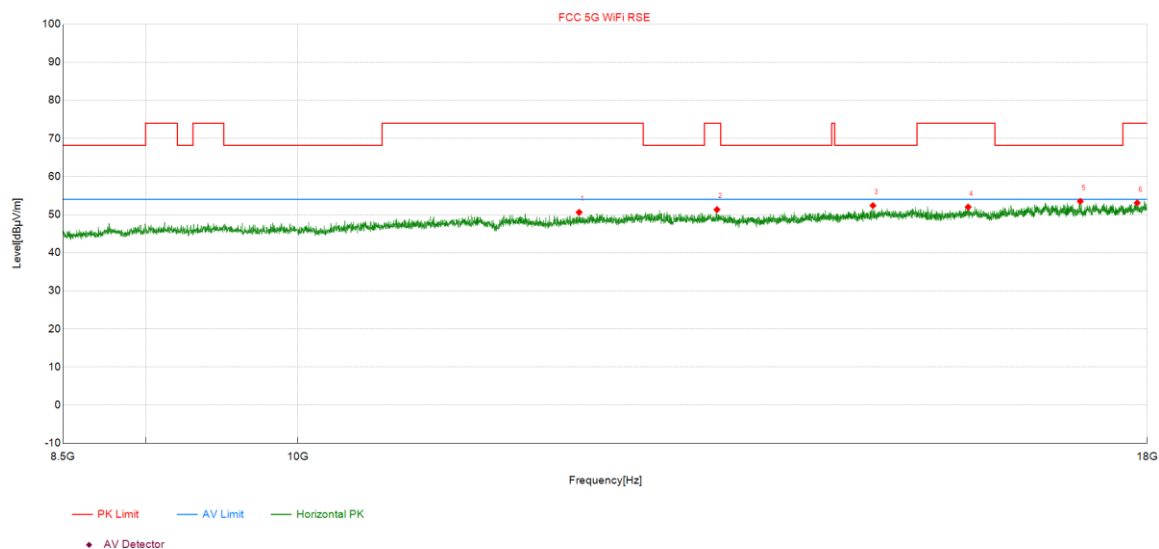

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	12149.19	50.33	50.61	0.28	74.00	23.39	Peak	HORIZONTAL
2	13365.19	50.06	51.32	1.26	74.00	22.68	Peak	HORIZONTAL
3	14888.75	48.93	52.38	3.45	68.20	15.82	Peak	HORIZONTAL
4	15902.88	47.30	51.98	4.68	74.00	22.02	Peak	HORIZONTAL
5	17186.56	47.18	53.51	6.33	68.20	14.69	Peak	HORIZONTAL
6	17876.50	45.93	53.08	7.15	74.00	20.92	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AX40 5755MHz

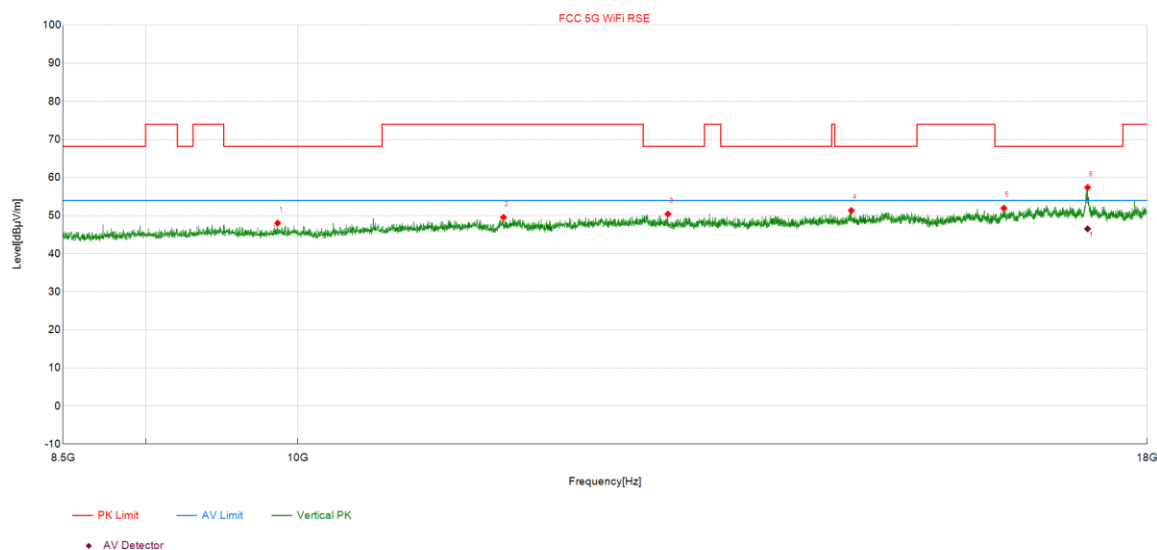

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	9860.88	50.01	48.04	-1.97	68.20	20.16	Peak	VERTICAL
2	11529.31	48.77	49.55	0.78	74.00	24.45	Peak	VERTICAL
3	12918.69	48.30	50.41	2.11	68.20	17.79	Peak	VERTICAL
4	14667.88	47.14	51.36	4.22	68.20	16.84	Peak	VERTICAL
5	16300.69	45.81	51.98	6.17	68.20	16.22	Peak	VERTICAL
6	17273.25	49.79	57.41	7.62	68.20	10.79	Peak	VERTICAL
		38.91	46.53	7.62	54.00	7.47	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AX40 5755MHz

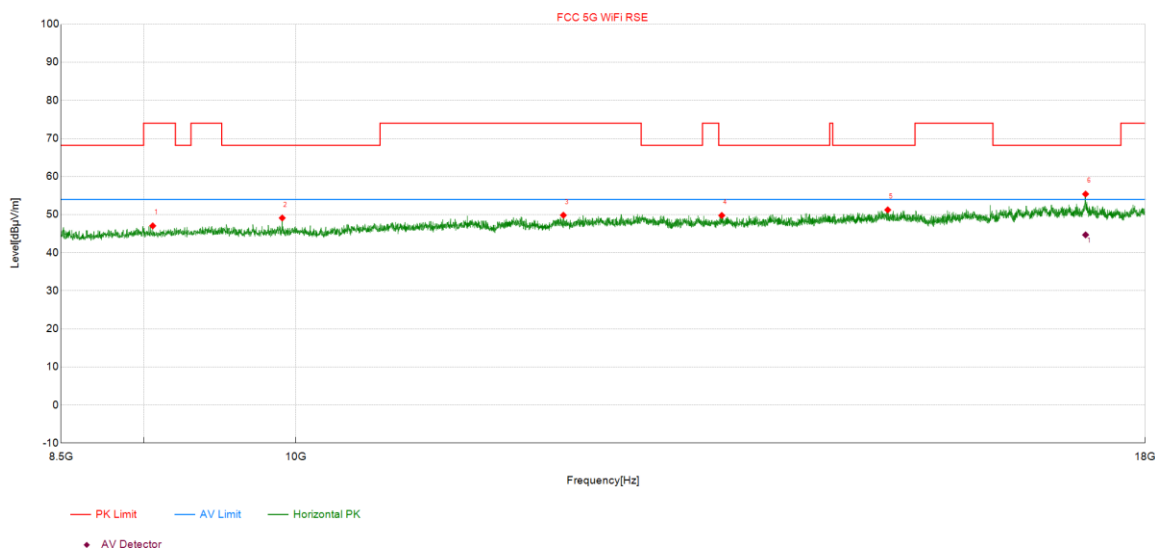

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	9056.94	50.56	47.06	-3.50	74.00	26.94	Peak	HORIZONTAL
2	9906.00	51.01	49.12	-1.89	68.20	19.08	Peak	HORIZONTAL
3	12034.00	48.85	49.85	1.00	74.00	24.15	Peak	HORIZONTAL
4	13428.13	47.53	49.79	2.26	68.20	18.41	Peak	HORIZONTAL
5	15063.31	46.38	51.25	4.87	68.20	16.95	Peak	HORIZONTAL
6	17273.25	47.78	55.40	7.62	68.20	12.80	Peak	HORIZONTAL
		37.07	44.69	7.62	54.00	9.31	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AX40 5795MHz

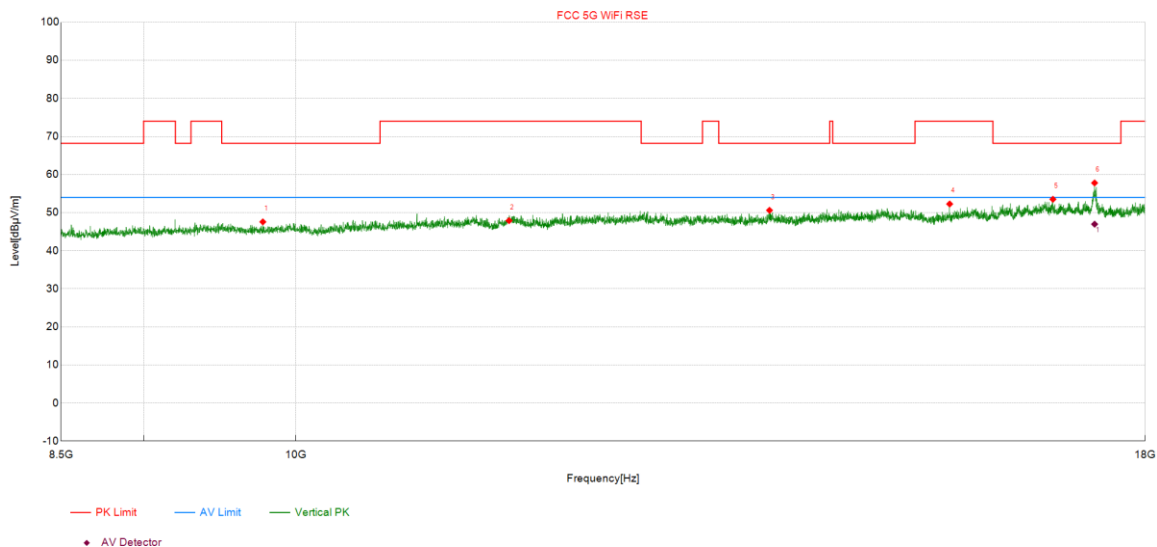

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	9774.19	49.77	47.58	-2.19	68.20	20.62	Peak	VERTICAL
2	11590.00	47.10	47.90	0.80	74.00	26.10	Peak	VERTICAL
3	13879.38	48.24	50.61	2.37	68.20	17.59	Peak	VERTICAL
4	15722.38	47.01	52.27	5.26	74.00	21.73	Peak	VERTICAL
5	16887.31	46.18	53.51	7.33	68.20	14.69	Peak	VERTICAL
6	17381.31	50.16	57.80	7.64	68.20	10.40	Peak	VERTICAL
		39.33	46.97	7.64	54.00	7.03	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AX40 5795MHz



Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	9471.38	51.49	48.68	-2.81	74.00	25.32	Peak	HORIZONTAL
2	11249.06	48.96	49.56	0.60	74.00	24.44	Peak	HORIZONTAL
3	12712.06	48.75	50.70	1.95	68.20	17.50	Peak	HORIZONTAL
4	14758.13	46.10	50.31	4.21	68.20	17.89	Peak	HORIZONTAL
5	16787.56	44.98	52.48	7.50	68.20	15.72	Peak	HORIZONTAL
6	17381.31	47.09	54.73	7.64	68.20	13.47	Peak	HORIZONTAL
		37.19	44.83	7.64	54.00	9.17	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AX80 5210MHz

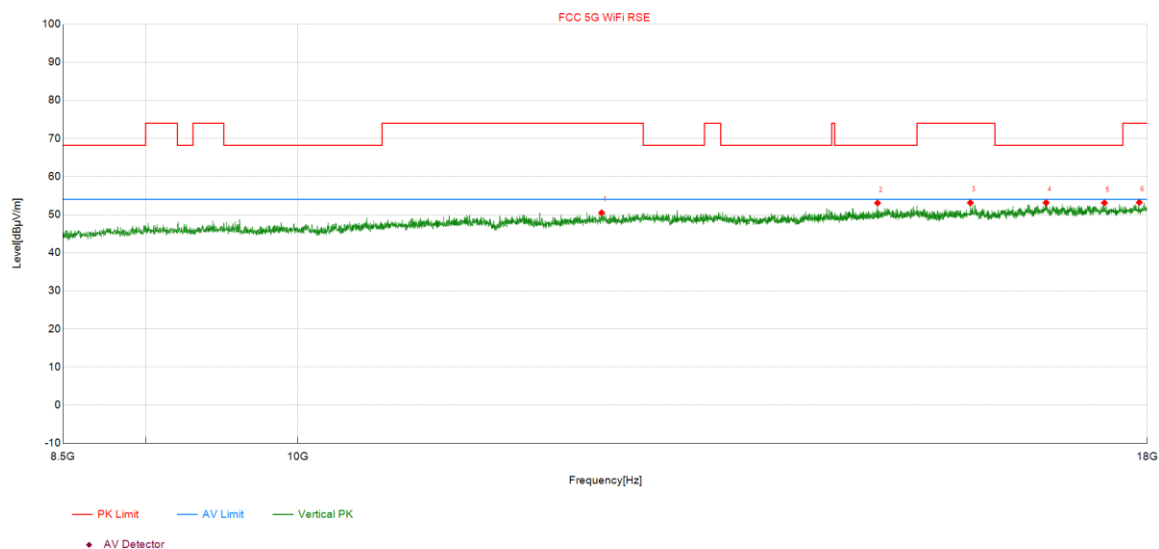

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	12339.19	49.88	50.49	0.61	74.00	23.51	Peak	VERTICAL
2	14936.25	49.46	53.05	3.59	68.20	15.15	Peak	VERTICAL
3	15927.81	48.35	53.12	4.77	74.00	20.38	Peak	VERTICAL
4	16784.00	46.67	53.14	6.47	68.20	15.06	Peak	VERTICAL
5	17476.31	46.32	53.09	6.77	68.20	15.11	Peak	VERTICAL
6	17902.63	46.02	53.20	7.18	74.00	20.80	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AX80 5210MHz



Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	12129.00	50.84	51.05	0.21	74.00	22.95	Peak	HORIZONTAL
2	13317.69	50.42	51.56	1.14	74.00	22.44	Peak	HORIZONTAL
3	15235.50	48.64	52.37	3.73	68.20	15.83	Peak	HORIZONTAL
4	15968.19	48.67	53.51	4.84	74.00	20.49	Peak	HORIZONTAL
5	17329.06	46.29	53.06	6.77	68.20	15.14	Peak	HORIZONTAL
6	17962.00	46.24	53.26	7.02	74.00	20.74	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AX80 5775MHz

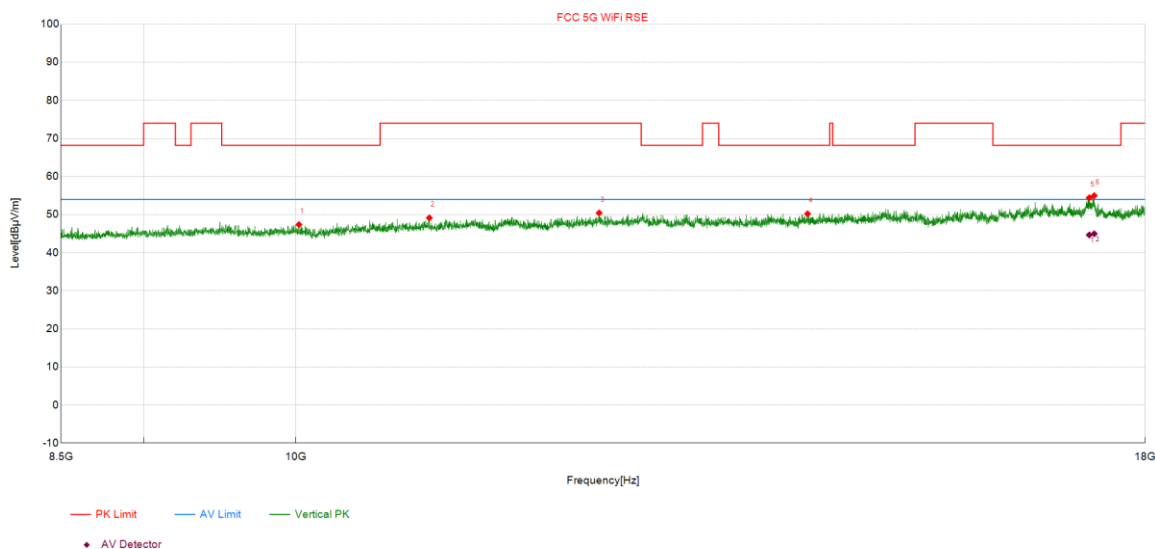

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	10021.19	49.33	47.38	-1.95	68.20	20.82	Peak	VERTICAL
2	10967.63	49.07	49.15	0.08	74.00	24.85	Peak	VERTICAL
3	12335.63	48.82	50.44	1.62	74.00	23.56	Peak	VERTICAL
4	14249.88	46.81	50.21	3.40	68.20	17.99	Peak	VERTICAL
5	17317.19	46.61	54.42	7.81	68.20	13.78	Peak	VERTICAL
		36.86	44.67	7.81	54.00	9.33	Average	VERTICAL
6	17376.56	47.33	54.99	7.66	68.20	13.21	Peak	VERTICAL
		37.32	44.98	7.66	54.00	9.02	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AX80 5775MHz

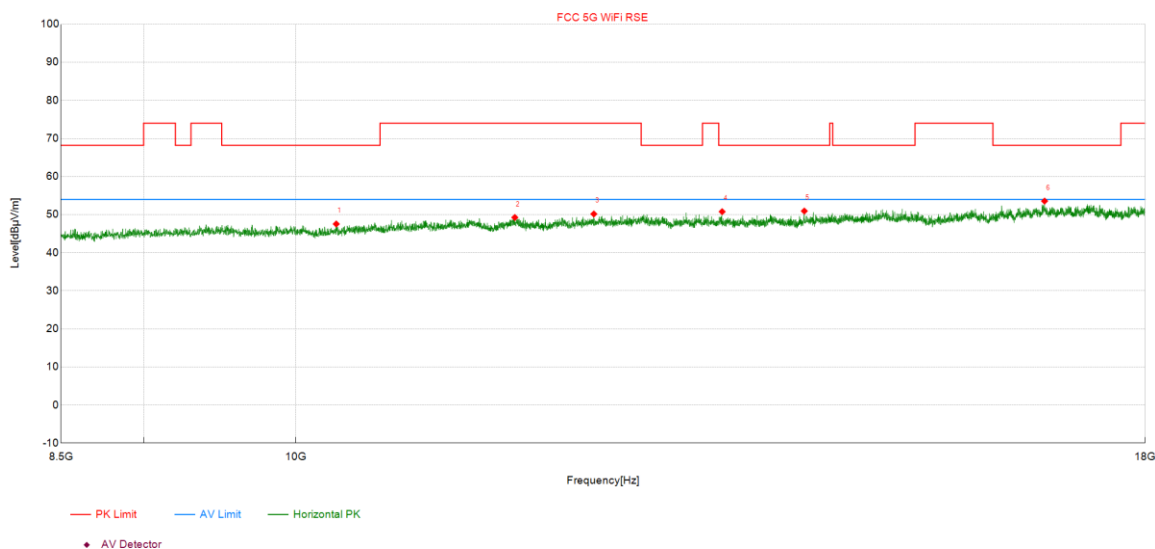

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	10283.63	48.82	47.55	-1.27	68.20	20.65	Peak	HORIZONTAL
2	11636.19	48.51	49.26	0.75	74.00	24.74	Peak	HORIZONTAL
3	12290.50	48.42	50.17	1.75	74.00	23.83	Peak	HORIZONTAL
4	13431.69	48.54	50.78	2.24	68.20	17.42	Peak	HORIZONTAL
5	14217.81	47.73	50.94	3.21	68.20	17.26	Peak	HORIZONTAL
6	16789.94	46.06	53.56	7.50	68.20	14.64	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

3) For Radiated Emission test (18GHz -40GHz)

Radiated Emission Test Result(Worst case)

Memo : 11A 5825MHz

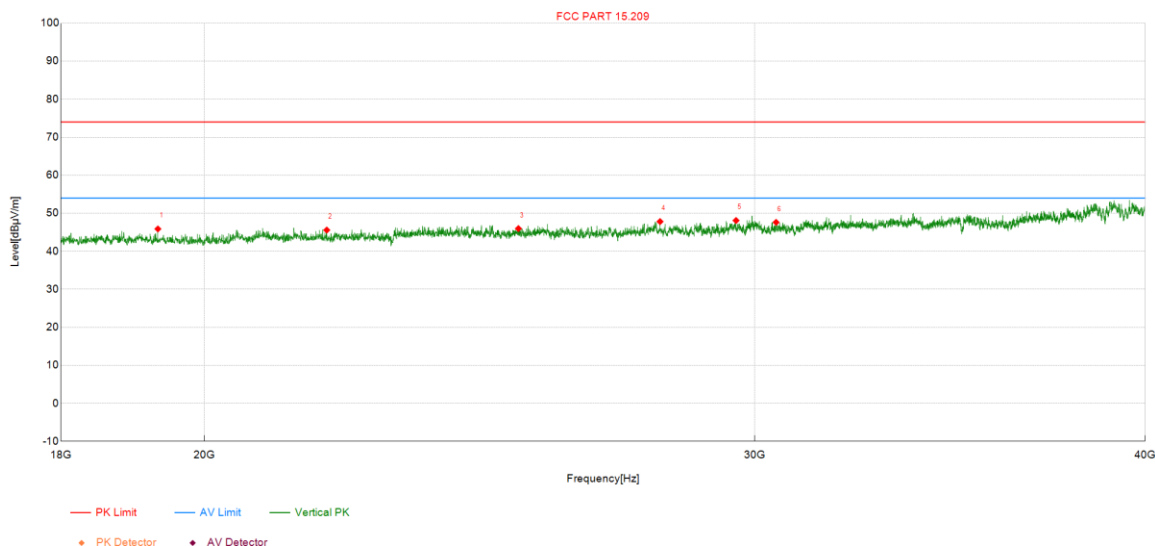

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	19331.00	60.82	45.88	-14.94	74.00	28.12	Peak	VERTICAL
2	21891.25	59.81	45.58	-14.23	74.00	28.42	Peak	VERTICAL
3	25210.50	59.06	45.97	-13.09	74.00	28.03	Peak	VERTICAL
4	27982.50	61.08	47.81	-13.27	74.00	26.19	Peak	VERTICAL
5	29594.00	61.29	48.09	-13.20	74.00	25.91	Peak	VERTICAL
6	30479.50	60.53	47.61	-12.92	74.00	26.39	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11A 5825MHz

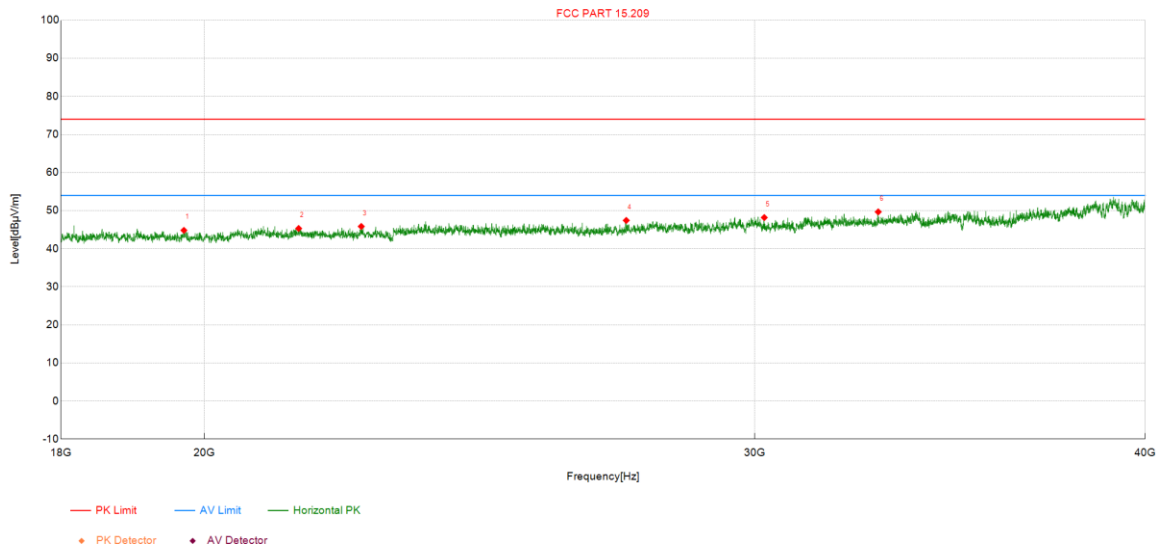

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	19705.00	59.83	44.83	-15.00	74.00	29.17	Peak	HORIZONTAL
2	21443.00	59.83	45.32	-14.51	74.00	28.68	Peak	HORIZONTAL
3	22455.00	59.47	45.85	-13.62	74.00	28.15	Peak	HORIZONTAL
4	27295.00	60.87	47.43	-13.44	74.00	26.57	Peak	HORIZONTAL
5	30215.50	61.24	48.19	-13.05	74.00	25.81	Peak	HORIZONTAL
6	32861.00	61.14	49.68	-11.46	74.00	24.32	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

4) For Radiated Emission test (30MHz -1GHz)

Radiated Emission Test Result(Worst case)

Memo : 11A 5825MHz

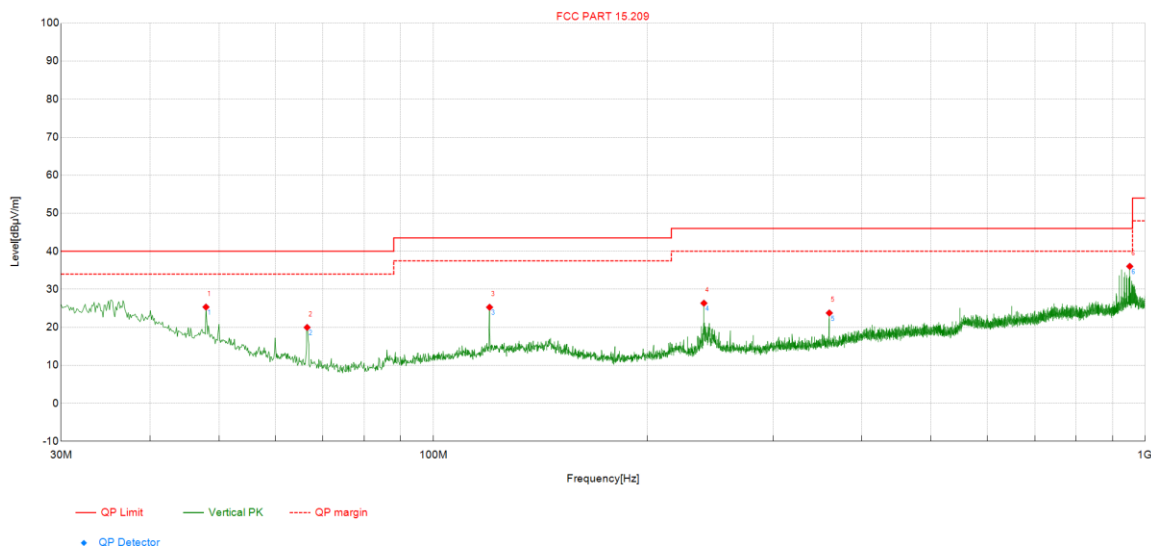


Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	47.95	46.07	25.33	-20.74	40.00	14.67	Peak	VERTICAL
2	66.50	46.96	19.97	-26.99	40.00	20.03	Peak	VERTICAL
3	119.97	48.41	25.28	-23.13	43.50	18.22	Peak	VERTICAL
4	240.01	48.40	26.35	-22.05	46.00	19.65	Peak	VERTICAL
5	360.04	42.57	23.77	-18.80	46.00	22.23	Peak	VERTICAL
6	951.50	42.45	36.03	-6.42	46.00	9.97	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11A 5825MHz

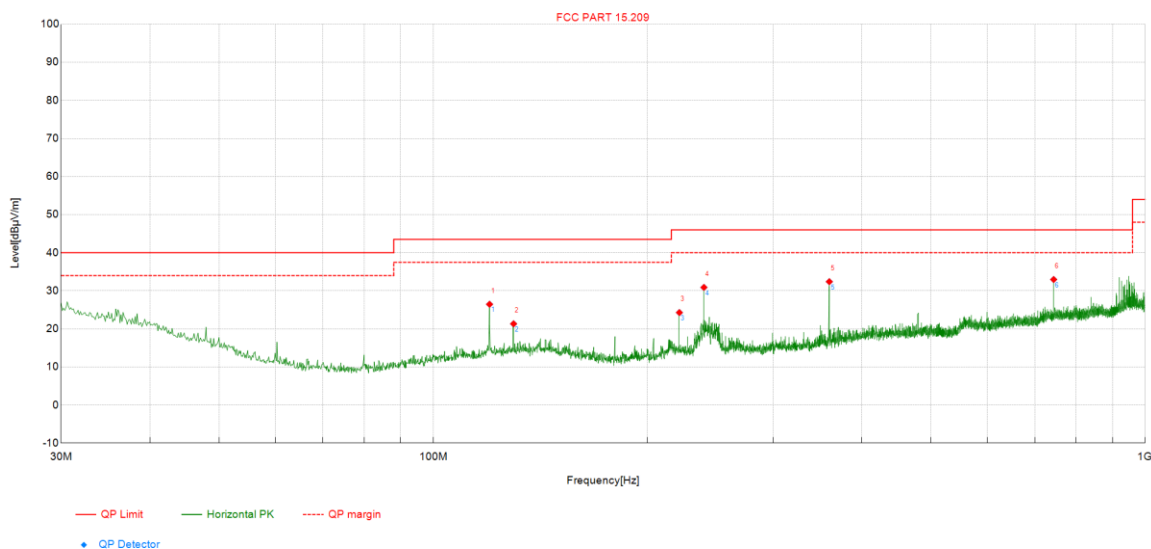

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	119.97	49.60	26.47	-23.13	43.50	17.03	Peak	HORIZONTAL
2	129.67	43.71	21.34	-22.37	43.50	22.16	Peak	HORIZONTAL
3	221.70	45.85	24.29	-21.56	46.00	21.71	Peak	HORIZONTAL
4	240.01	52.95	30.90	-22.05	46.00	15.10	Peak	HORIZONTAL
5	360.04	51.20	32.40	-18.80	46.00	13.60	Peak	HORIZONTAL
6	743.92	42.63	32.97	-9.66	46.00	13.03	Peak	HORIZONTAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. Margin = Result Level - Limit.

5) For Radiated Emission test (Below 30MHz)

Radiated Emission Test Result(Worst case)

Memo : 11A 5825MHz

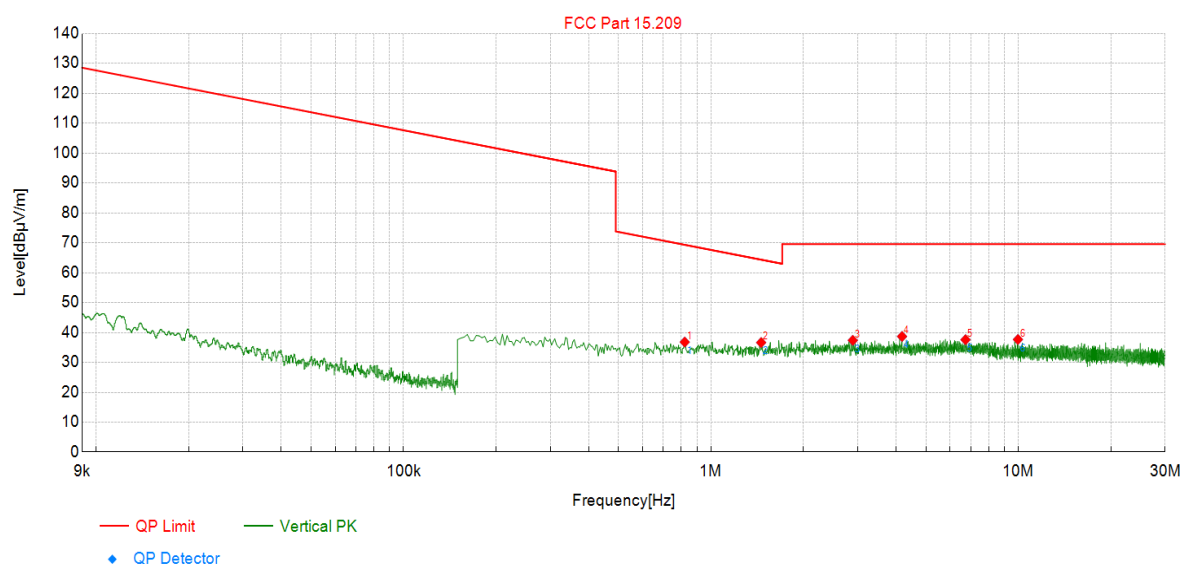

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	0.82	16.53	36.81	20.28	69.31	32.50	Peak	VERTICAL
2	1.46	16.58	36.64	20.06	64.34	27.70	Peak	VERTICAL
3	2.89	17.22	37.38	20.16	69.54	32.16	Peak	VERTICAL
4	4.18	18.35	38.67	20.32	69.54	30.87	Peak	VERTICAL
5	6.73	17.27	37.58	20.31	69.54	31.96	Peak	VERTICAL
6	9.96	17.46	37.67	20.21	69.54	31.87	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

9. Band Edge Compliance

9.1. Block diagram of test setup

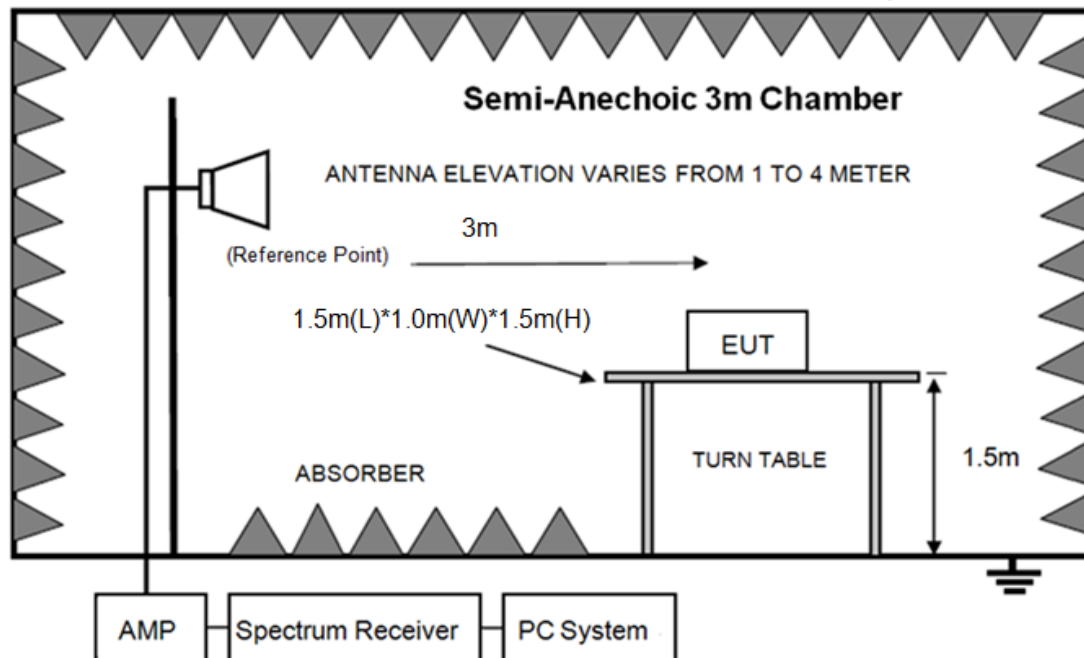

9.2. Limit

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm / MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm / MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm / MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range shall comply with 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges; 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges; 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.
- (5) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (6) The provisions of §15.205 apply to intentional radiators operating under this section.

27 dBm/MHz Limit=95.2+EIRP [dBm]=95.2-27=122.2 dBμV/m

16.5 dBm/MHz Limit=95.2+EIRP [dBm]=95.2-27=110.8 dBμV/m

10 dBm/MHz Limit=95.2+EIRP [dBm]=95.2-27=105.2 dBμV/m

-27 dBm/MHz Limit=95.2+EIRP [dBm]=95.2-27=68.2 dBμV/m

9.3. Test procedure

Same with clause 8.3 except change investigated frequency range.

Remark: All restriction band have been tested, and only the worst case is shown in report.

9.4. Test result


Pass. (See below detailed test result)

Environment Parameter	Selected Values During Tests
Relative Humidity	58.5%
Atmospheric Pressure:	100.4kPa
Temperature	23.1°C
Test Date	2026-07-05

Test Mode	Channel	Puw(dBm)	Verdict
11A	LCH	<Limit	PASS
	HCH	<Limit	PASS
11N20	LCH	<Limit	PASS
	HCH	<Limit	PASS
11N40	LCH	<Limit	PASS
	HCH	<Limit	PASS
11AC20	LCH	<Limit	PASS
	HCH	<Limit	PASS
11AC40	LCH	<Limit	PASS
	HCH	<Limit	PASS
11AC80	CH42	<Limit	PASS
	CH155	<Limit	PASS
11AX20	LCH	<Limit	PASS
	HCH	<Limit	PASS
11AX40	LCH	<Limit	PASS
	HCH	<Limit	PASS
11AX80	CH42	<Limit	PASS
	CH155	<Limit	PASS

Radiated Emission Test Result

Memo : 11A 5180MHz

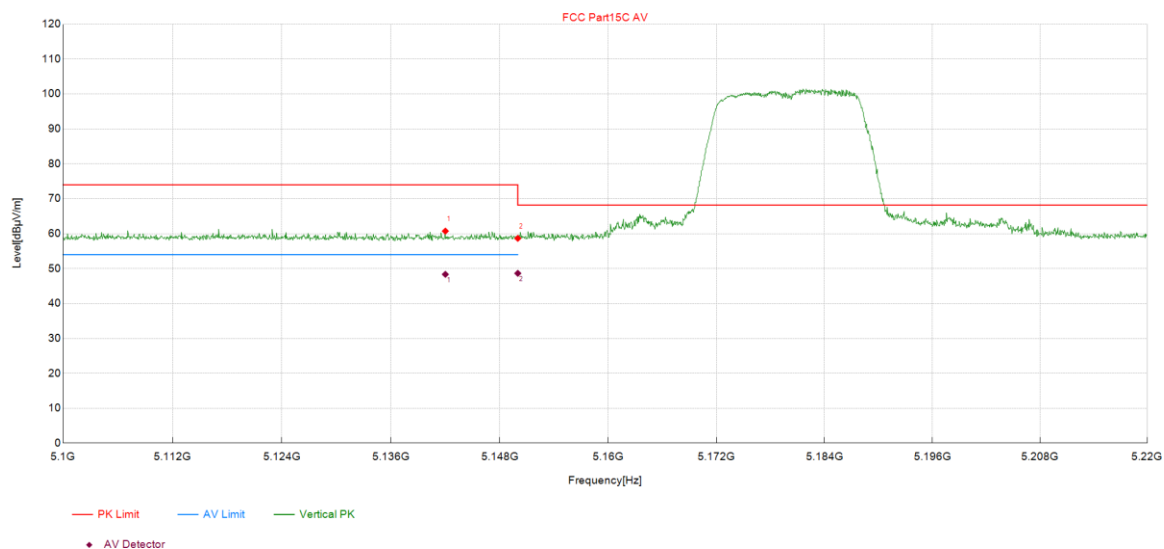

Item	Freq.	Read Level	Result Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	dB/m	(dBμV/m)	(dB)		
1	5142.00	52.86	60.74	7.88	74.00	13.26	Peak	VERTICAL
		40.48	48.36	7.88	54.00	5.64	Average	VERTICAL
2	5150.00	50.77	58.67	7.90	68.20	9.53	Peak	VERTICAL
		40.75	48.65	7.90	54.00	5.35	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11A 5180MHz

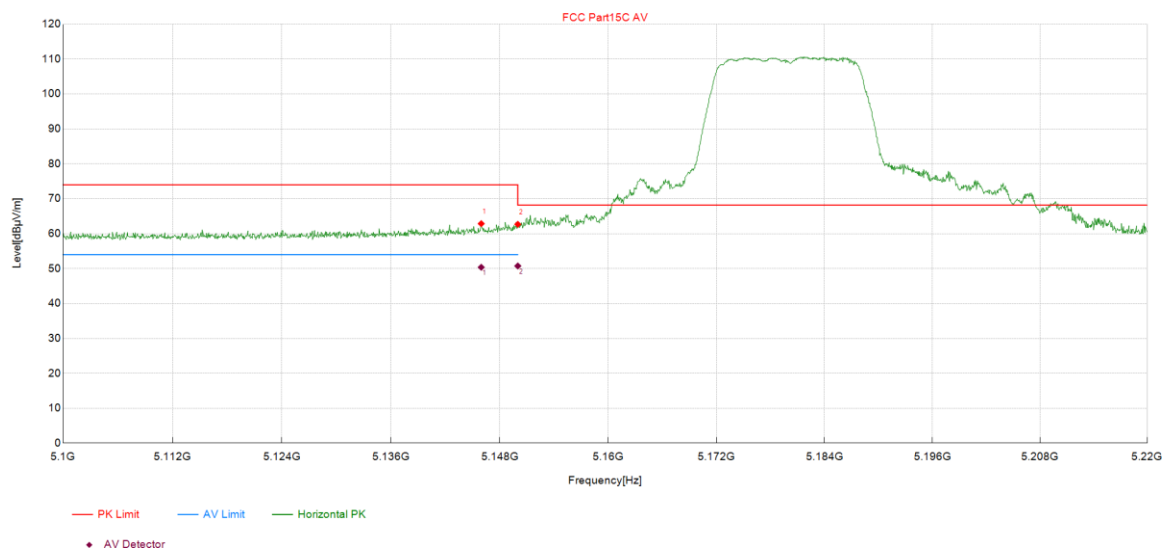

Item	Freq.	Read Level	Result Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	dB/m	(dBμV/m)	(dB)		
1	5145.96	54.98	62.87	7.89	74.00	11.13	Peak	HORIZONTAL
		42.49	50.38	7.89	54.00	3.62	Average	HORIZONTAL
2	5150.00	54.79	62.69	7.90	68.20	5.51	Peak	HORIZONTAL
		42.86	50.76	7.90	54.00	3.24	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11A 5240MHz

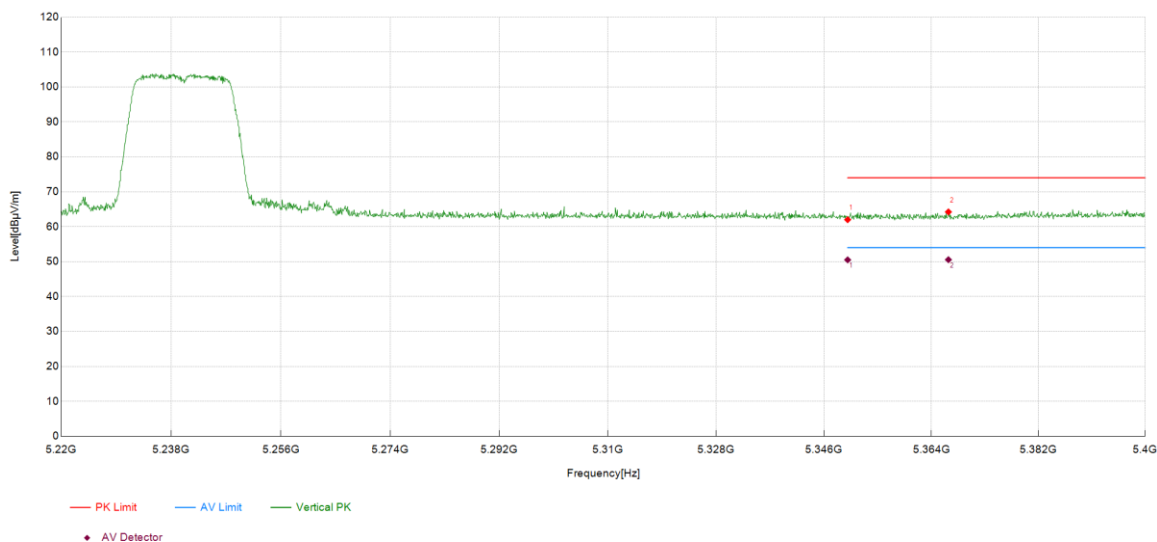

Item	Freq.	Read Level	Result Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	dB/m	(dBμV/m)	(dB)		
1	5350.00	54.09	62.00	7.91	74.00	12.00	Peak	VERTICAL
		42.59	50.50	7.91	54.00	3.50	Average	VERTICAL
2	5366.88	56.20	64.23	8.03	74.00	9.77	Peak	VERTICAL
		42.52	50.55	8.03	54.00	3.45	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11A 5240MHz

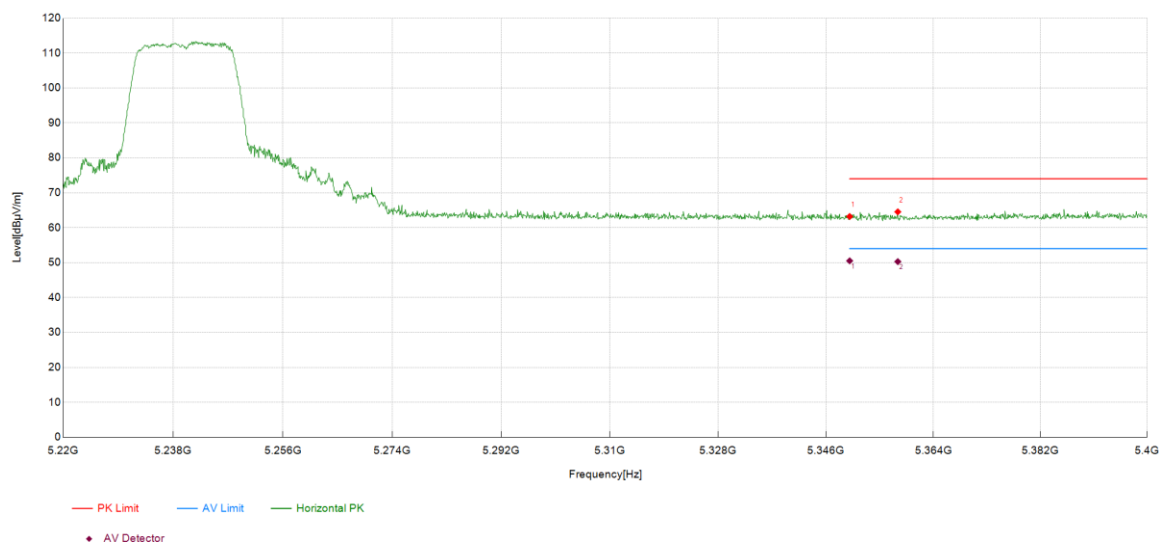

Item	Freq.	Read Level	Result Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	dB/m	(dBμV/m)	(dB)		
1	5350.00	55.30	63.21	7.91	74.00	10.79	Peak	HORIZONTAL
		42.60	50.51	7.91	54.00	3.49	Average	HORIZONTAL
2	5358.06	56.57	64.54	7.97	74.00	9.46	Peak	HORIZONTAL
		42.31	50.28	7.97	54.00	3.72	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11A 5745MHz

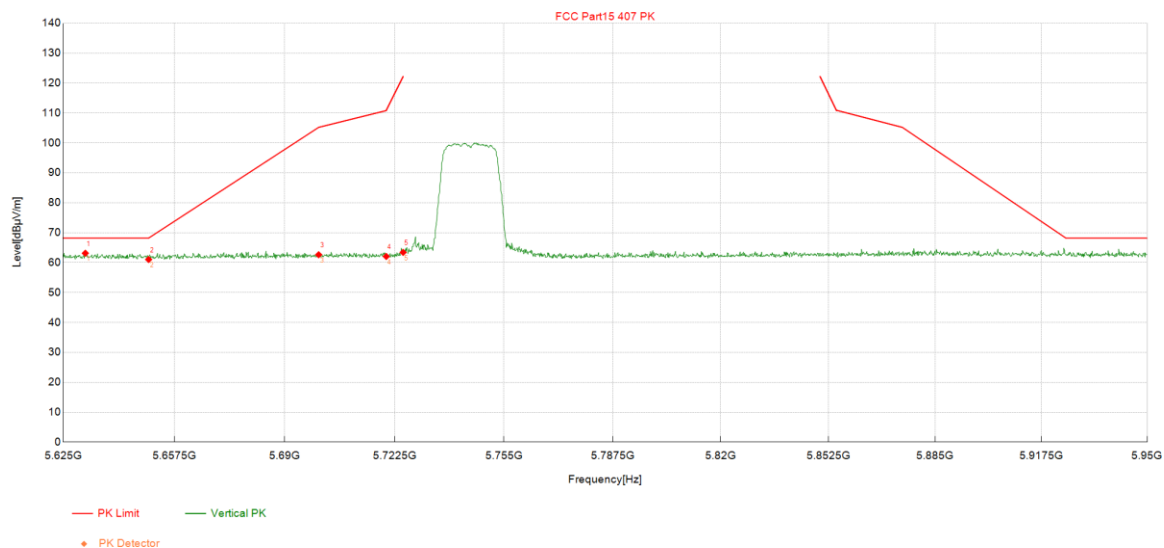

Item	Freq.	Read Level	Result Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	dB/m	(dBμV/m)	(dB)		
1	5631.50	54.77	63.14	8.37	68.20	5.06	Peak	VERTICAL
2	5650.00	52.64	61.04	8.40	68.22	7.18	Peak	VERTICAL
3	5700.00	54.22	62.64	8.42	105.22	42.58	Peak	VERTICAL
4	5720.00	53.62	62.05	8.43	111.04	48.99	Peak	VERTICAL
5	5725.00	54.98	63.42	8.44	-	-	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11A 5745MHz

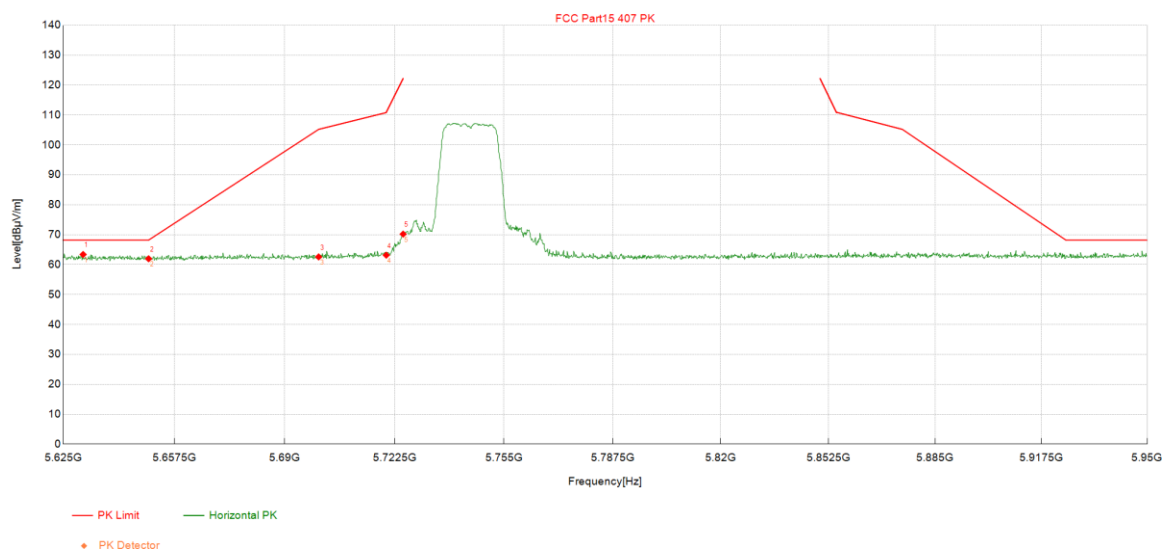

Item	Freq.	Read Level	Result Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	dB/m	(dBμV/m)	(dB)		
1	5630.85	55.02	63.38	8.36	68.20	4.82	Peak	HORIZONTAL
2	5650.00	53.55	61.95	8.40	68.22	6.27	Peak	HORIZONTAL
3	5700.00	54.16	62.58	8.42	105.22	42.64	Peak	HORIZONTAL
4	5720.00	54.72	63.15	8.43	111.04	47.89	Peak	HORIZONTAL
5	5725.00	61.75	70.19	8.44	-	-	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11A 5825MHz

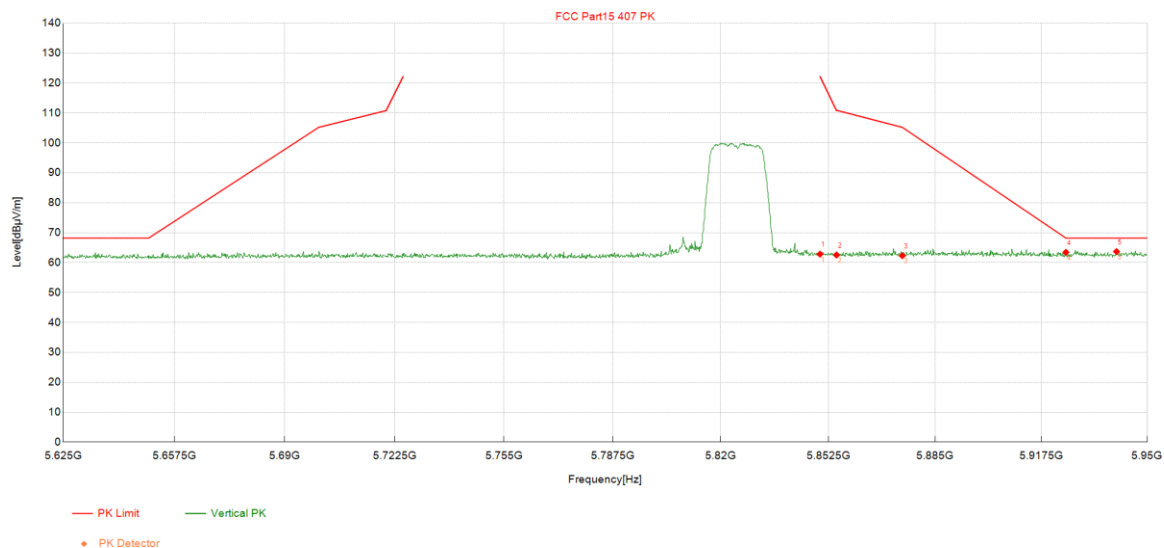

Item	Freq.	Read Level	Result Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	dB/m	(dBμV/m)	(dB)		
1	5850.00	53.97	62.83	8.86	122.06	59.23	Peak	VERTICAL
2	5855.00	53.71	62.55	8.84	110.87	48.32	Peak	VERTICAL
3	5875.00	53.55	62.31	8.76	105.13	42.82	Peak	VERTICAL
4	5925.00	54.74	63.43	8.69	68.20	4.77	Peak	VERTICAL
5	5940.58	55.01	63.70	8.69	68.20	4.50	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11A 5825MHz

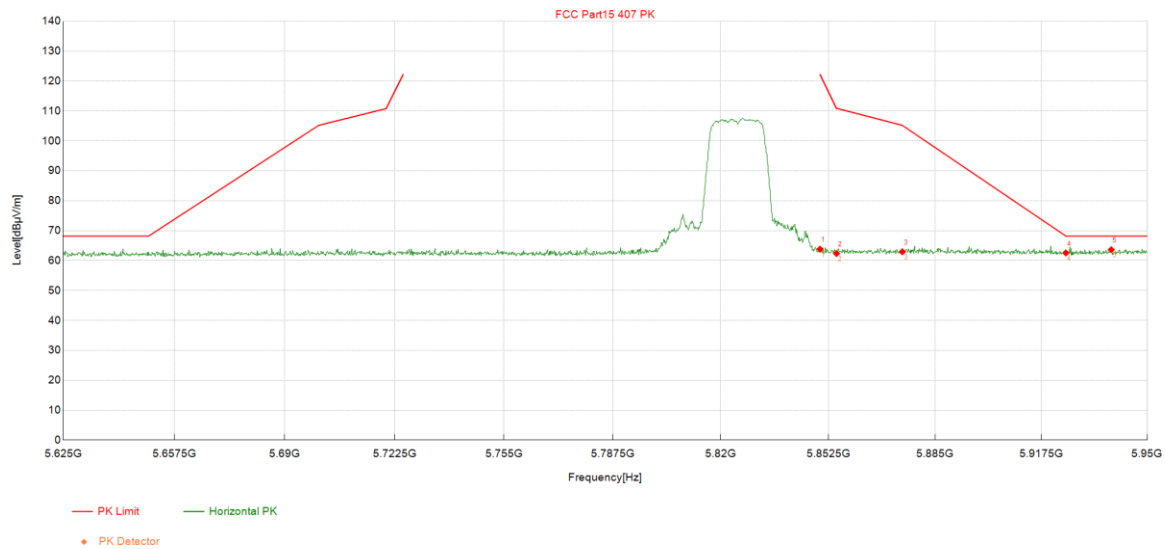

Item	Freq.	Read Level	Result Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	dB/m	(dBμV/m)	(dB)		
1	5850.00	54.96	63.82	8.86	122.06	58.24	Peak	HORIZONTAL
2	5855.00	53.53	62.37	8.84	110.87	48.50	Peak	HORIZONTAL
3	5875.00	54.19	62.95	8.76	105.13	42.18	Peak	HORIZONTAL
4	5925.00	53.89	62.58	8.69	68.20	5.62	Peak	HORIZONTAL
5	5938.95	54.95	63.64	8.69	68.20	4.56	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N20 5180MHz

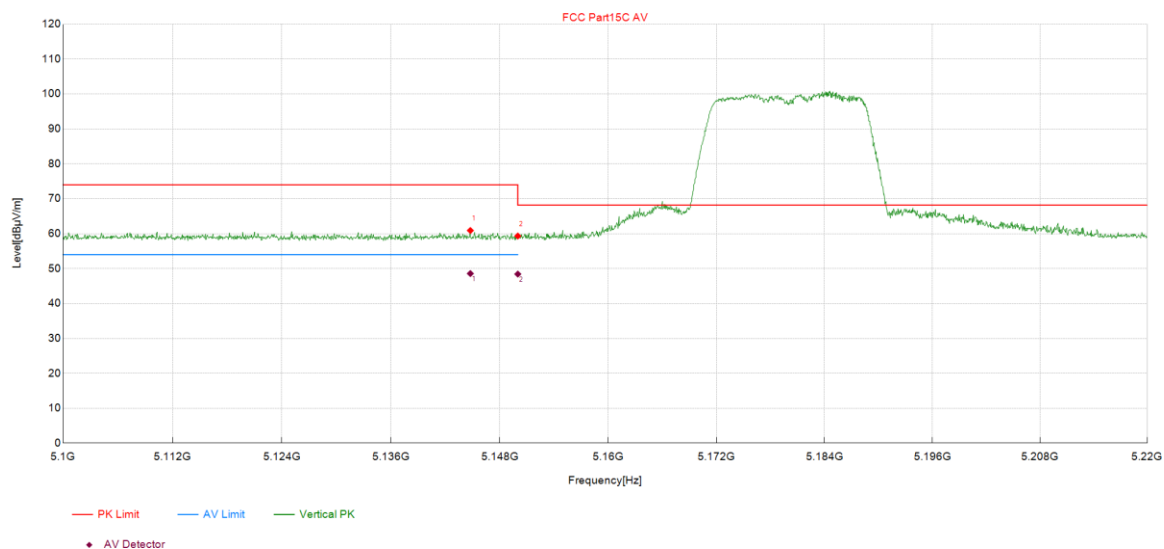

Item	Freq.	Read Level	Result Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	dB/m	(dBμV/m)	(dB)		
1	5144.76	53.03	60.91	7.88	74.00	13.09	Peak	VERTICAL
		40.70	48.58	7.88	54.00	5.42	Average	VERTICAL
2	5150.00	51.43	59.33	7.90	68.20	8.87	Peak	VERTICAL
		40.53	48.43	7.90	54.00	5.57	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N20 5180MHz

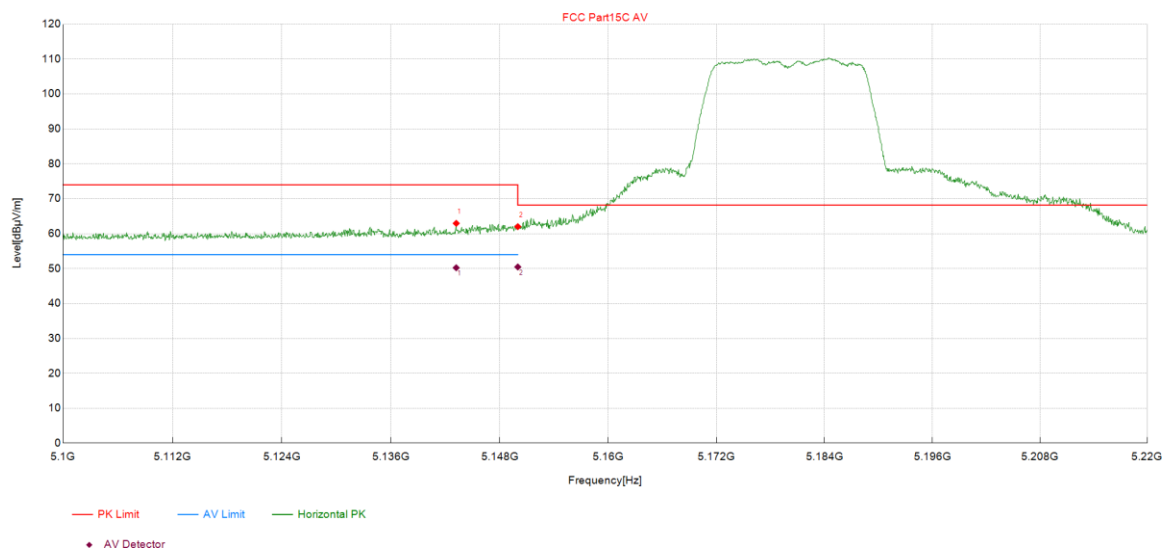

Item	Freq.	Read Level	Result Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	dB/m	(dBμV/m)	(dB)		
1	5143.20	55.08	62.96	7.88	74.00	11.04	Peak	HORIZONTAL
		42.36	50.24	7.88	54.00	3.76	Average	HORIZONTAL
2	5150.00	54.11	62.01	7.90	68.20	6.19	Peak	HORIZONTAL
		42.57	50.47	7.90	54.00	3.53	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N20 5240MHz

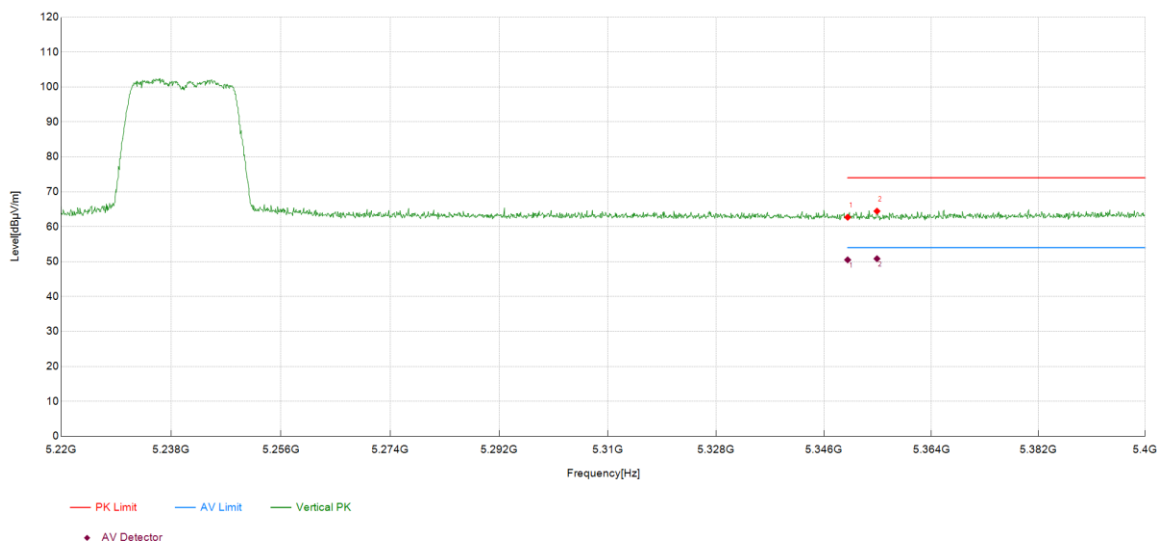

Item	Freq.	Read Level	Result Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	dB/m	(dBμV/m)	(dB)		
1	5350.00	54.79	62.70	7.91	74.00	11.30	Peak	VERTICAL
		42.59	50.50	7.91	54.00	3.50	Average	VERTICAL
2	5354.91	56.51	64.45	7.94	74.00	9.55	Peak	VERTICAL
		42.89	50.83	7.94	54.00	3.17	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N20 5240MHz

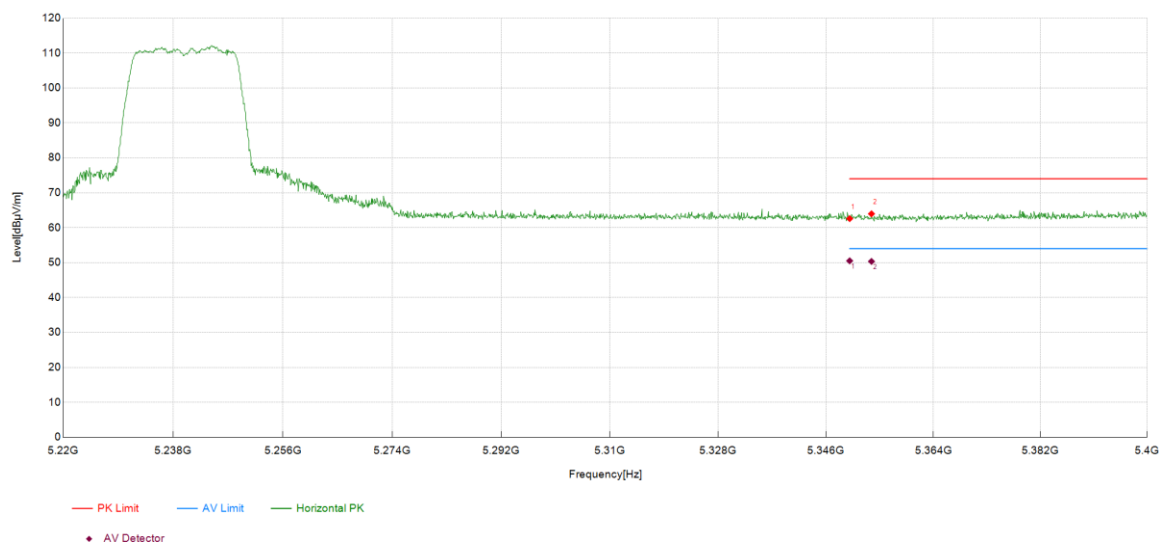

Item	Freq.	Read Level	Result Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	dB/m	(dBμV/m)	(dB)		
1	5350.00	54.69	62.60	7.91	74.00	11.40	Peak	HORIZONTAL
		42.60	50.51	7.91	54.00	3.49	Average	HORIZONTAL
2	5353.65	56.03	63.97	7.94	74.00	10.03	Peak	HORIZONTAL
		42.40	50.34	7.94	54.00	3.66	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N20 5745MHz

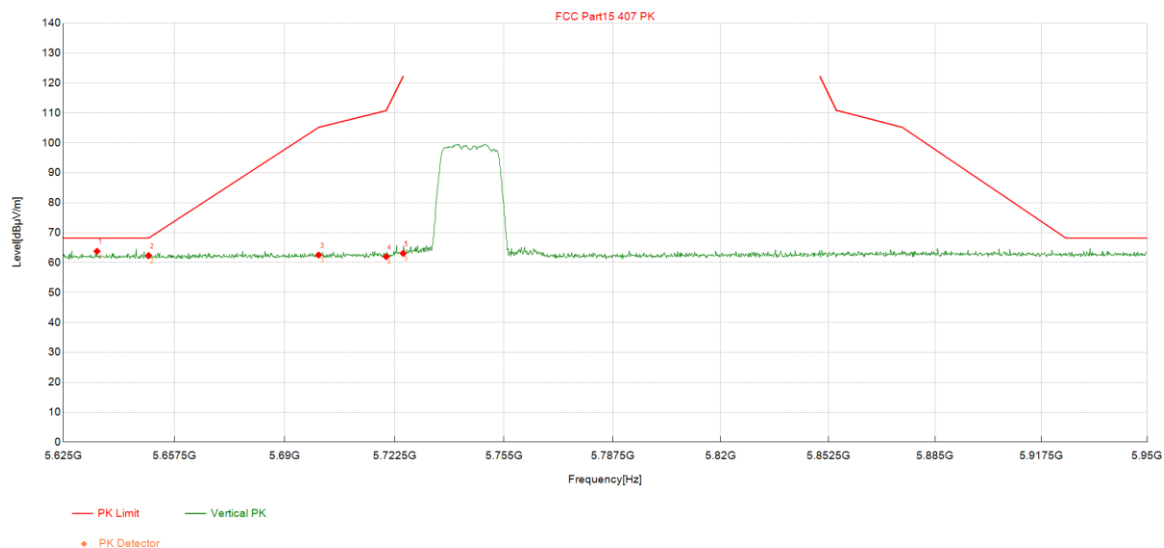

Item	Freq.	Read Level	Result Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	dB/m	(dBμV/m)	(dB)		
1	5634.91	55.43	63.80	8.37	68.20	4.40	Peak	VERTICAL
2	5650.00	53.97	62.37	8.40	68.22	5.85	Peak	VERTICAL
3	5700.00	54.11	62.53	8.42	105.22	42.69	Peak	VERTICAL
4	5720.00	53.54	61.97	8.43	111.04	49.07	Peak	VERTICAL
5	5725.00	54.65	63.09	8.44	-	-	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N20 5745MHz

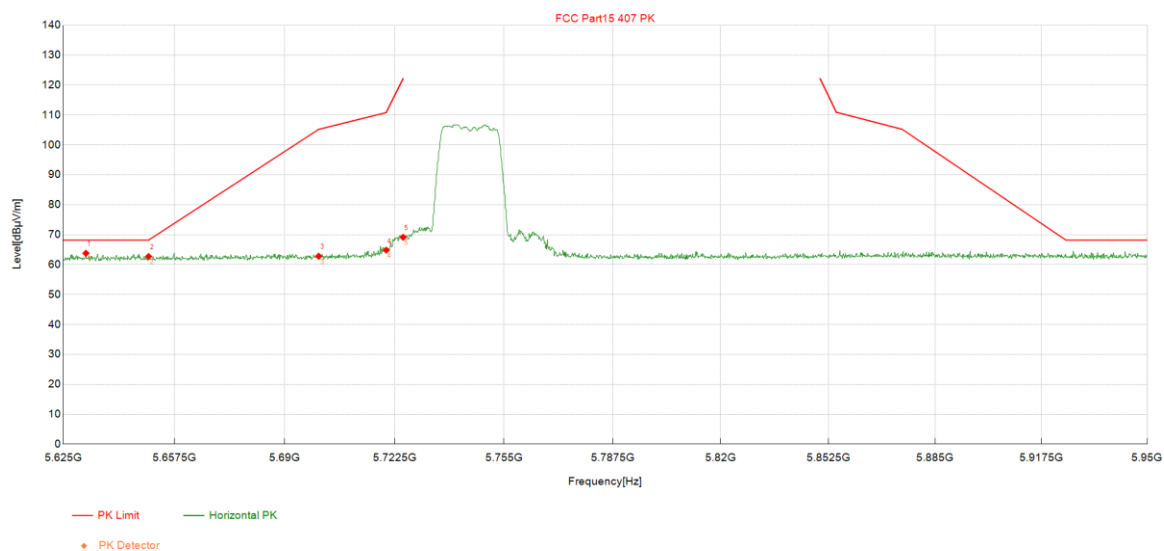

Item	Freq.	Read Level	Result Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	dB/m	(dBμV/m)	(dB)		
1	5631.66	55.42	63.79	8.37	68.20	4.41	Peak	HORIZONTAL
2	5650.00	54.31	62.71	8.40	68.22	5.51	Peak	HORIZONTAL
3	5700.00	54.38	62.80	8.42	105.22	42.42	Peak	HORIZONTAL
4	5720.00	56.40	64.83	8.43	111.04	46.21	Peak	HORIZONTAL
5	5725.00	60.70	69.14	8.44	-	-	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N20 5825MHz

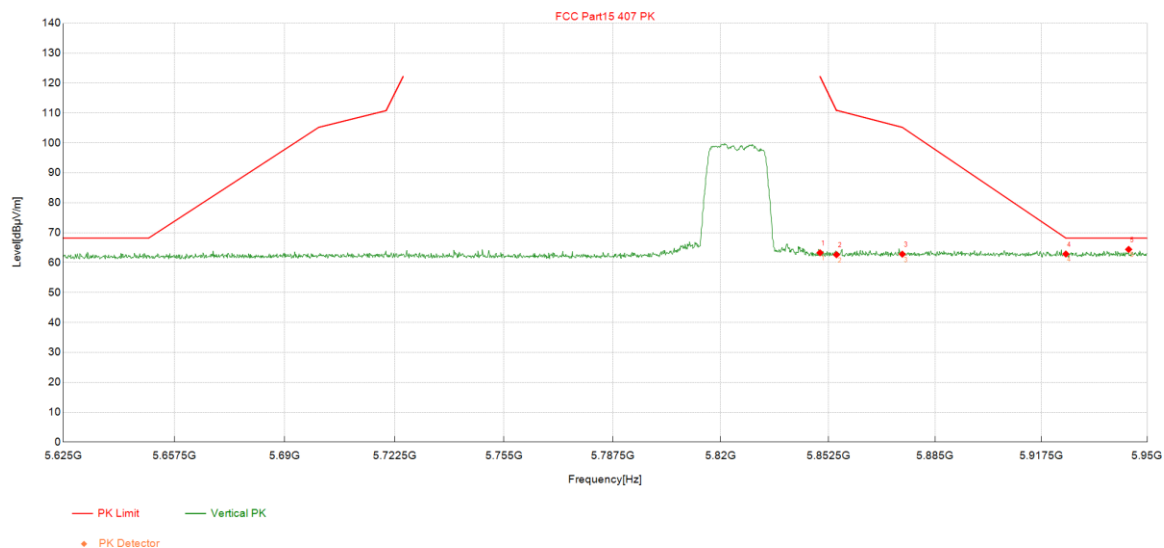

Item	Freq.	Read Level	Result Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	dB/m	(dBμV/m)	(dB)		
1	5850.00	54.43	63.29	8.86	122.06	58.77	Peak	VERTICAL
2	5855.00	53.81	62.65	8.84	110.87	48.22	Peak	VERTICAL
3	5875.00	54.06	62.82	8.76	105.13	42.31	Peak	VERTICAL
4	5925.00	54.19	62.88	8.69	68.20	5.32	Peak	VERTICAL
5	5944.31	55.71	64.41	8.70	68.20	3.79	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N20 5825MHz

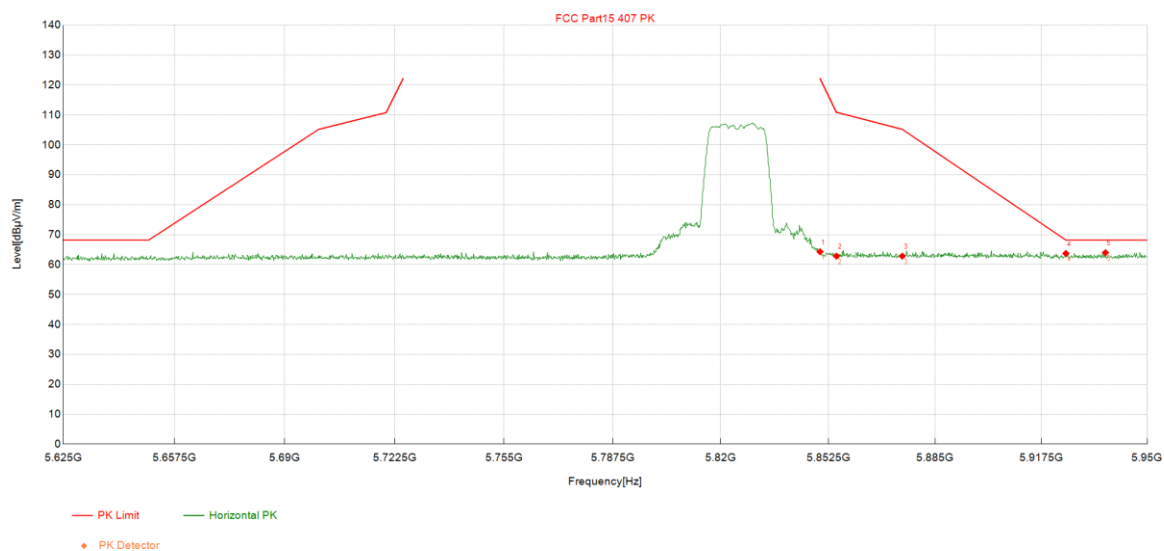

Item	Freq.	Read Level	Result Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	dB/m	(dBμV/m)	(dB)		
1	5850.00	55.45	64.31	8.86	122.06	57.75	Peak	HORIZONTAL
2	5855.00	53.99	62.83	8.84	110.87	48.04	Peak	HORIZONTAL
3	5875.00	54.09	62.85	8.76	105.13	42.28	Peak	HORIZONTAL
4	5925.00	55.05	63.74	8.69	68.20	4.46	Peak	HORIZONTAL
5	5937.16	55.30	63.99	8.69	68.20	4.21	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N40 5190MHz

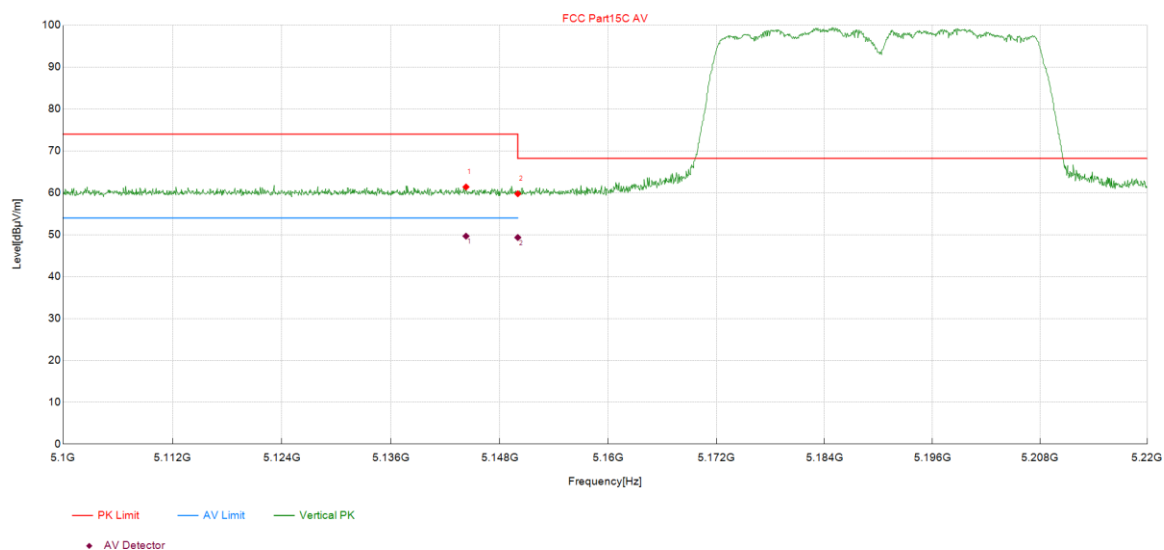

Item	Freq.	Read Level	Result Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	dB/m	(dBμV/m)	(dB)		
1	5144.28	53.51	61.39	7.88	74.00	12.61	Peak	VERTICAL
		41.77	49.65	7.88	54.00	4.35	Average	VERTICAL
2	5150.00	51.86	59.76	7.90	68.20	8.44	Peak	VERTICAL
		41.43	49.33	7.90	54.00	4.67	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N40 5190MHz

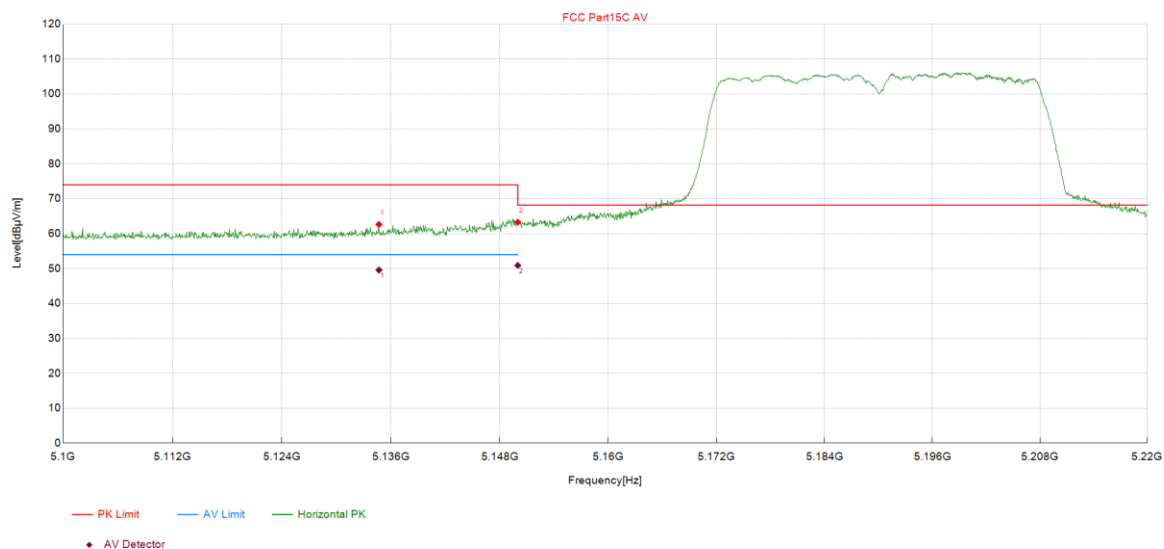

Item	Freq.	Read Level	Result Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	dB/m	(dBμV/m)	(dB)		
1	5134.68	54.79	62.64	7.85	74.00	11.36	Peak	HORIZONTAL
		41.74	49.59	7.85	54.00	4.41	Average	HORIZONTAL
2	5150.00	55.40	63.30	7.90	68.20	4.90	Peak	HORIZONTAL
		43.03	50.93	7.90	54.00	3.07	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N40 5230MHz

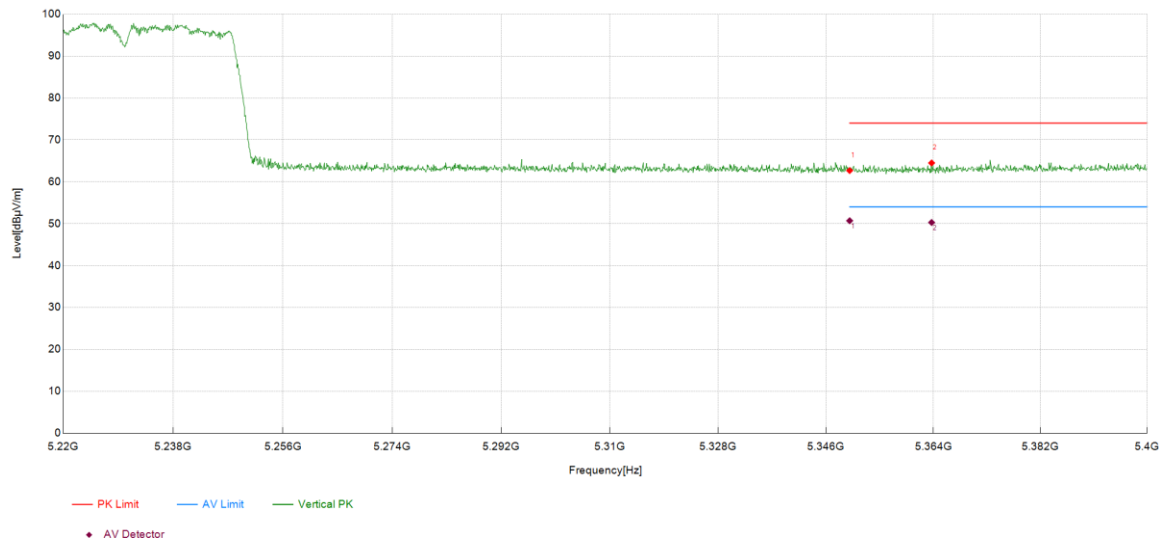

Item	Freq.	Read Level	Result Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	dB/m	(dBμV/m)	(dB)		
1	5350.00	54.77	62.68	7.91	74.00	11.32	Peak	VERTICAL
		42.79	50.70	7.91	54.00	3.30	Average	VERTICAL
2	5363.73	56.48	64.49	8.01	74.00	9.51	Peak	VERTICAL
		42.28	50.29	8.01	54.00	3.71	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N40 5230MHz

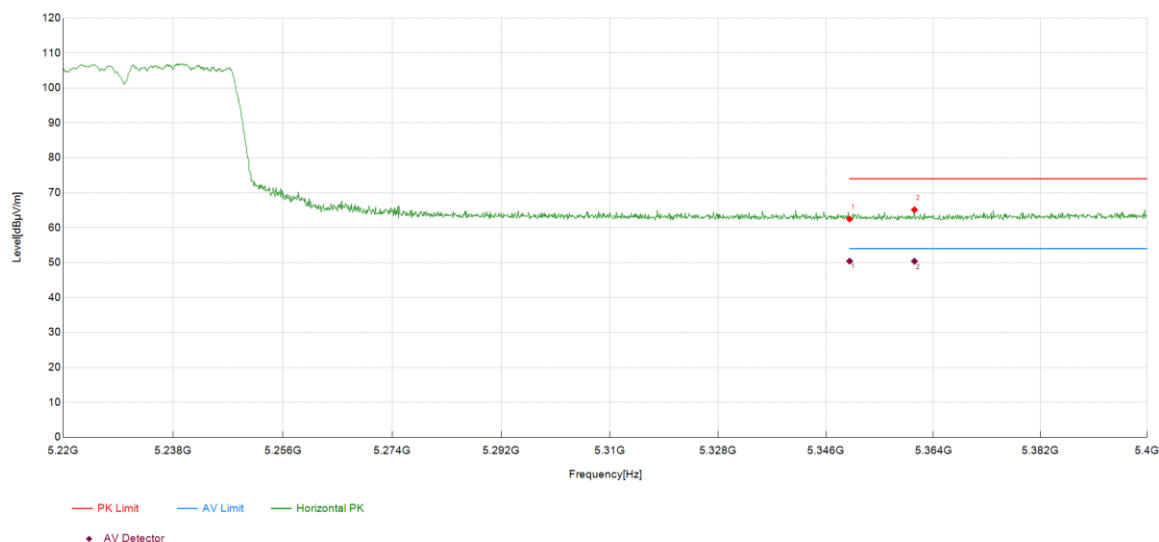

Item	Freq.	Read Level	Result Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	dB/m	(dBμV/m)	(dB)		
1	5350.00	54.56	62.47	7.91	74.00	11.53	Peak	HORIZONTAL
		42.52	50.43	7.91	54.00	3.57	Average	HORIZONTAL
2	5360.85	57.14	65.13	7.99	74.00	8.87	Peak	HORIZONTAL
		42.41	50.40	7.99	54.00	3.60	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N40 5755MHz

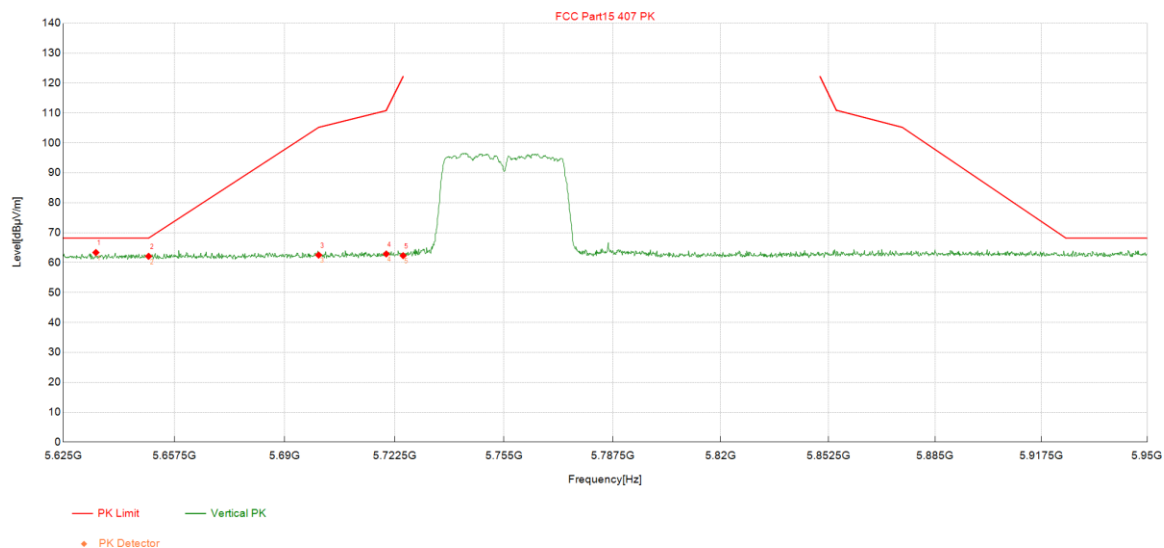

Item	Freq.	Read Level	Result Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	dB/m	(dBμV/m)	(dB)		
1	5634.59	55.00	63.37	8.37	68.20	4.83	Peak	VERTICAL
2	5650.00	53.71	62.11	8.40	68.22	6.11	Peak	VERTICAL
3	5700.00	54.10	62.52	8.42	105.22	42.70	Peak	VERTICAL
4	5720.00	54.47	62.90	8.43	111.04	48.14	Peak	VERTICAL
5	5725.00	53.90	62.34	8.44	-	-	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N40 5755MHz

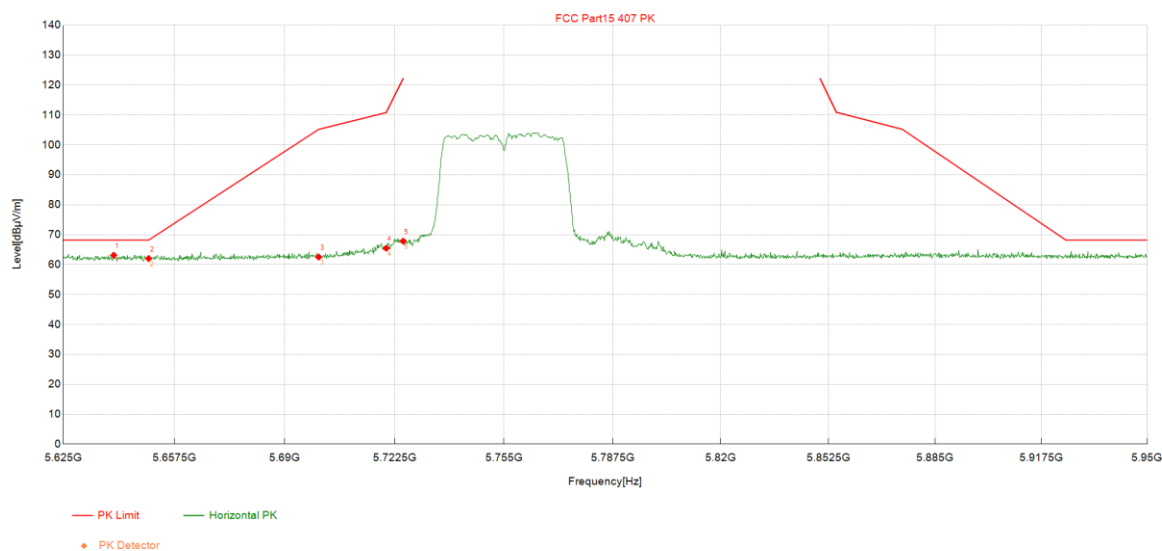

Item	Freq.	Read Level	Result Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	dB/m	(dBμV/m)	(dB)		
1	5639.79	54.76	63.14	8.38	68.20	5.06	Peak	HORIZONTAL
2	5650.00	53.63	62.03	8.40	68.22	6.19	Peak	HORIZONTAL
3	5700.00	54.12	62.54	8.42	105.22	42.68	Peak	HORIZONTAL
4	5720.00	57.04	65.47	8.43	111.04	45.57	Peak	HORIZONTAL
5	5725.00	59.41	67.85	8.44	-	-	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N40 5795MHz

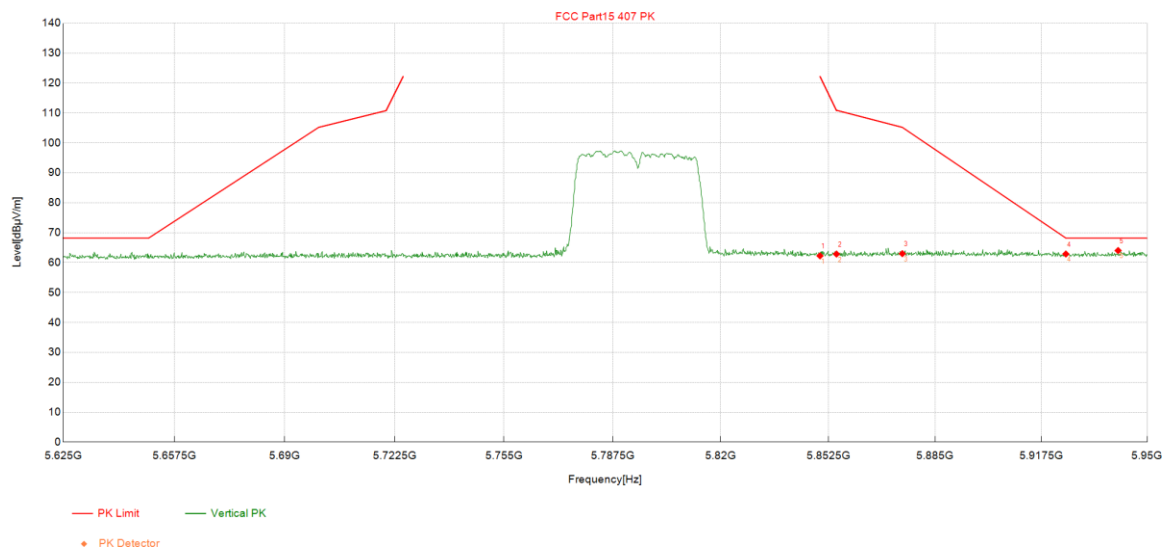

Item	Freq.	Read Level	Result Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	dB/m	(dBμV/m)	(dB)		
1	5850.00	53.40	62.26	8.86	122.06	59.80	Peak	VERTICAL
2	5855.00	54.02	62.86	8.84	110.87	48.01	Peak	VERTICAL
3	5875.00	54.23	62.99	8.76	105.13	42.14	Peak	VERTICAL
4	5925.00	54.19	62.88	8.69	68.20	5.32	Peak	VERTICAL
5	5941.06	55.34	64.03	8.69	68.20	4.17	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N40 5795MHz

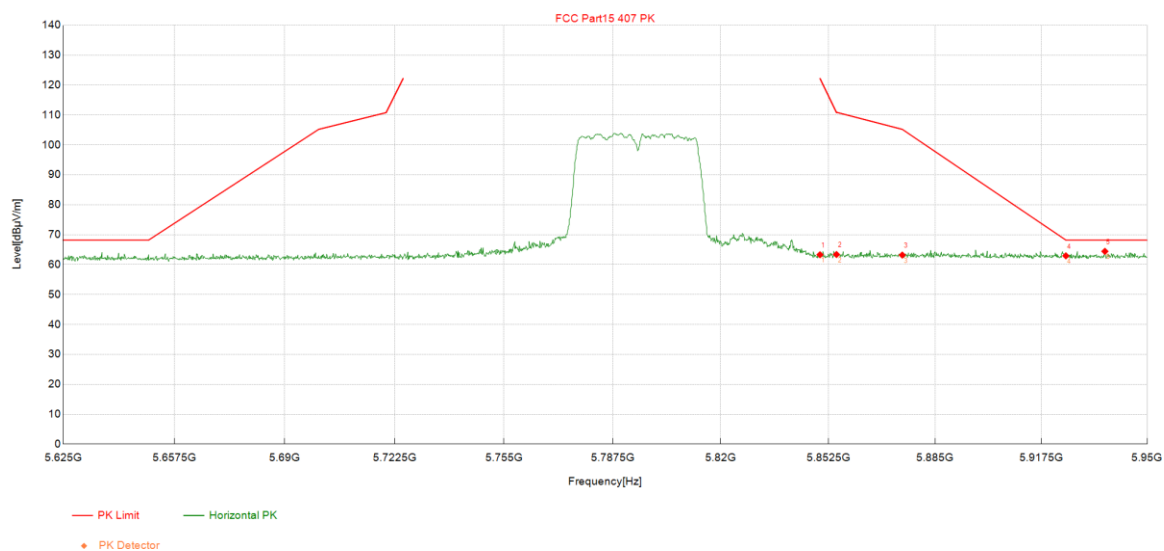

Item	Freq.	Read Level	Result Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	dB/m	(dBμV/m)	(dB)		
1	5850.00	54.44	63.30	8.86	122.06	58.76	Peak	HORIZONTAL
2	5855.00	54.54	63.38	8.84	110.87	47.49	Peak	HORIZONTAL
3	5875.00	54.43	63.19	8.76	105.13	41.94	Peak	HORIZONTAL
4	5925.00	54.24	62.93	8.69	68.20	5.27	Peak	HORIZONTAL
5	5937.00	55.74	64.43	8.69	68.20	3.77	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.