

COMPATIBILITY:

iPad Air 11-inch (M3 2025 / M2 2024),

iPad Air 10.9-inch (4th/5th Gen),

iPad Pro 11-inch (2nd /3rd /4th Gen).



Magic Keyboard

Model:IK01U

TABLE OF CONTENTS

COMPATIBILITY 1

SETUP 2

SHORTCUT MAP 3

SHORTCUT MAP 4

TOUCHPAD FUNCTION 4

TOUCHPAD FUNCTION 5

INSTALLATION AND REMOVAL 6

CHARGING 6

TROUBLESHOOTING 7

PRODUCT SPECS 8


FCC CAUTION 8

COMPATIBILITY

Compatible with iPadOS 13 (and newer). We recommend updating your iPadOS to **16** for best performance.


To check your iPad system version:

- 1. Go to Settings  > General > About > Software Version.
- 2. Upgrade your version to iPadOS **16** or above to use the touchpad function correctly.

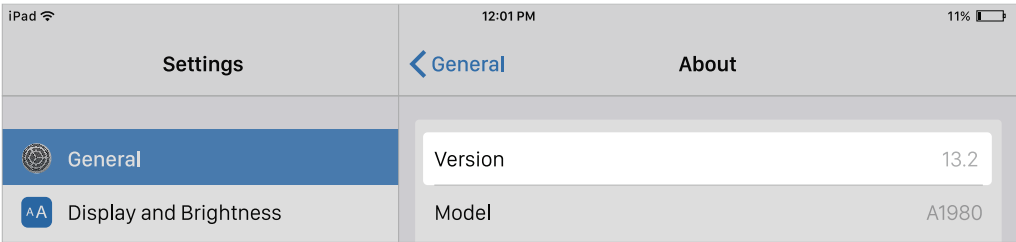

To upgrade your iPadOS to the latest version:

- 1. Open your device's Settings  > General > Software Update.


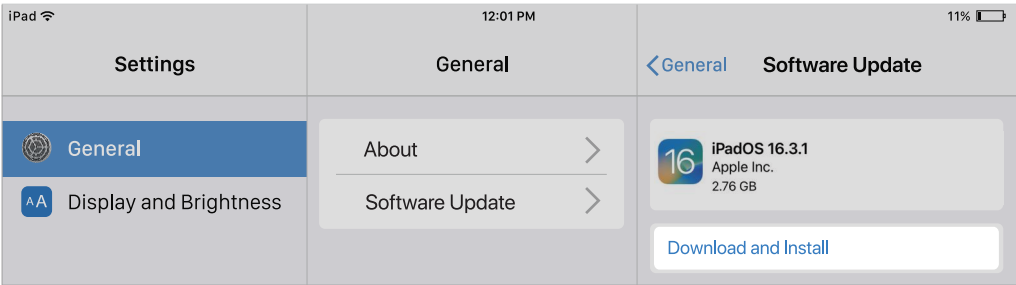


- 2. Tap Download and Install.
- * If you see Resume Download, tap that instead.

SETUP

To pair with your iPad:

1. Long Press  for 2 seconds, the Power indicator will be on for 3 seconds
2. The Bluetooth indicator light will start to blink. If it doesn't, hold down the  button for 2 seconds.
3. Go to the Settings app and turn on Bluetooth. (The device is connected when the Bluetooth indicator stops flashing.)

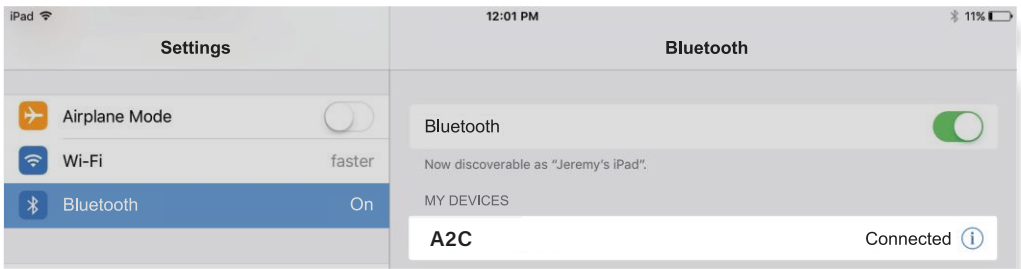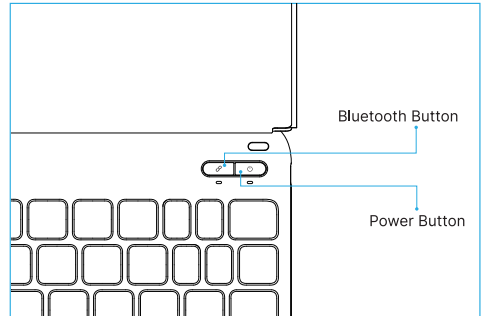


4. In the Bluetooth section of the Settings app, select '**A2C**' under '**MY DEVICES**'.

5. Tap '**Pair**' in the pop-up window as shown.


***Note: To pair with new devices, repeat steps 1-5.**

The pairing process is complete when you see the '**Connected**' indicator.

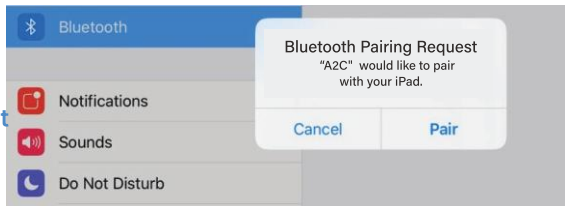


If your system is 13.3.1, please follow the steps to enable touchpad function:

1. Go to Settings  > Accessibility > Touch.
2. Make sure **Assistive Touch** option is turned On.

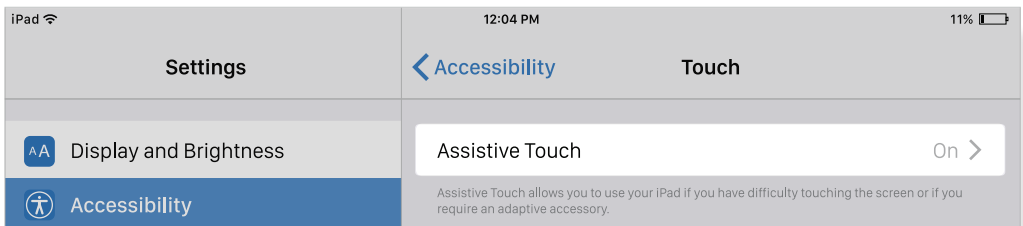

SHORTCUT MAP

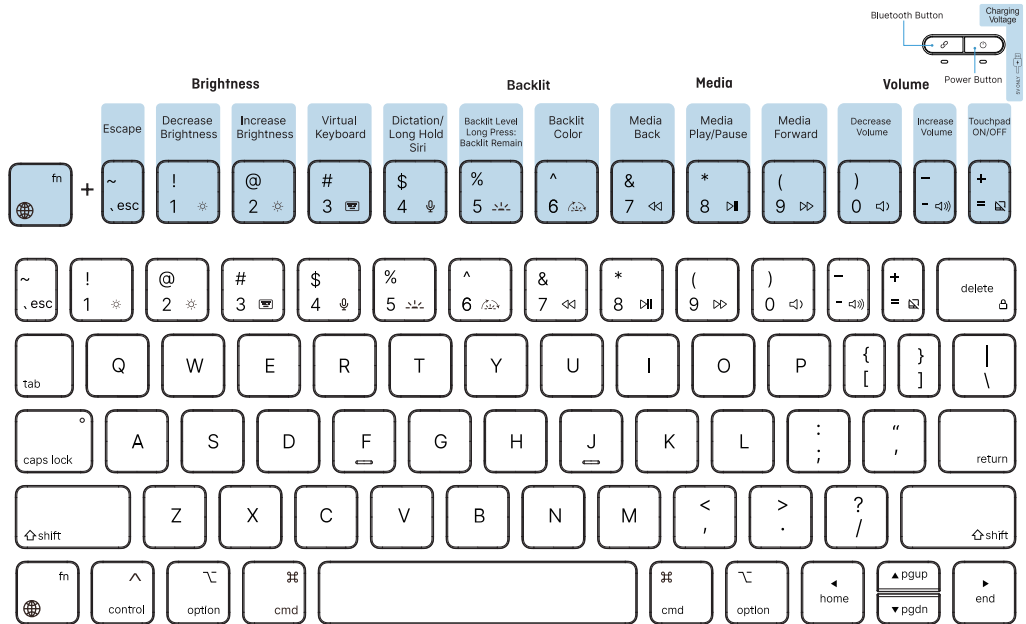

Keyboard

⌘ + ⌏ = Lock Screen

⌘ + ⌘ = Disable the trackpad

⌘ + R + L = Reset the keyboard

⌘ + % 5 = Backlight Brightness (low, medium, high, off)

⌘ + ^ 6 = Change backlight color

System

⌘ + H = Go to Home Screen

⌘ + H = Go to Home Screen

⌘ + Q = Quick Note

⌘ + A = Show Dock

⌘ + C = Control Center

⌘ + N = Notification Center

⌘ + M = Show Keyboard Shortcuts

⌘ + S = Siri

⌘ + ⌘ + A = Show App Library

⌘ + ⌘ + ⌘ = Screenshots

⌘ + ⌘ + ⌘ + \$ 4 = Screenshots and Markup

⌘ + ⌘ + D = Show Dock

⌘ + ⌘ = Search

⌘ + ⌘ = Switch App

Multitasking

⌘ + ⌘ = App Switcher

⌘ + ⌘ = Show All Windows

⌘ + ⌘ = Previous App

⌘ + ⌘ = Next App

Split View

⌘ + ⌘ + ⌘ = Tile Window Left

⌘ + ⌘ + ⌘ = Tile Window Right

⌘ + ⌘ = Next Window

⌘ + F = Enter Fullscreen

Slide Over

⌘ + ⌘ + ⌘ = Move to Left Slide Over

⌘ + ⌘ + ⌘ = Move to Right Slide Over

⌘ + ⌘ = Show Slide Over

Edit

⌘ + ⌘ = Jump to last word

⌘ + ⌘ = Jump to next word

⌘ + ⌘ = Jump to top of the page

⌘ + ⌘ = Jump to bottom of the page

⌘ + ⌘ = Jump to begin of the line

⌘ + ⌘ = Jump to end of the line

⌘ + ⌘ = Switch language and typewritingspace

⌘ + A = Select All

⌘ + X = Cut

⌘ + C = Copy

⌘ + V = Paste

⌘ + Z = Undo Typing

⌘ + F = Find

⌘ + D = Dictation

⌘ + E = Emoji

Format

 +  = Bold

 +  = Italic

 +  = Underline

Symbol

 +  = ®

 +  = ©

 +  = ≠

 +  = ≥

 +  = ≤

 +  = ÷

 +  = Δ

 +  = Π

 +  = √

 +  = Ω

 +  = ≈

 +  = μ


 +  = β

 +  = Σ

 +  = ∞

TOUCHPAD FUNCTION

Notice: Make sure bluetooth connected and touchpad function turned on!



Tap

Tap with a single finger until it feels a little touch feeling.




Tap and Hold

Tap and hold with a single finger.




Drag

Tap and hold an item, then swipe your finger across the trackpad to move it.




Awake

Click the touchpad or press any key on the keyboard.




Open Program Expansion Dock

Swipe the pointer across the bottom of the screen with one finger.




Go To Home Screen

Swipe the pointer across the bottom of the screen with one finger, and when the Dock appears, swipe the pointer across the bottom of the screen again.



View Slide Over


Use one finger to swipe the pointer past the right edge of the screen. To hide Slide Over, swipe right again.



Open Notification Center


Use one finger to move the pointer to select the status icons at the top left, then click.

Or, use one finger to move the pointer past the top of the screen near the middle.




Open Control Center

Use one finger to move the pointer to select the status icons at the top right, then click.
Or, select the status icons at the top right, then swipe up with one finger.




Move Left Or Right

Swipe left or right with two fingers.




Move Up Or Down

Swipe up or down with two fingers.



Open Searching From Home Screen

Swipe down with two fingers.




Zoom

Place two fingers close together, open to enlarge, or pinch to zoom out.




Secondary click

Click with two fingers to show the quick actions menu for items like icons on the Home Screen, messages in a mailbox, and the Camera button in Control Center.
Or, you can press the Control key while you click the trackpad.




Open "Today" View

When the Home or Lock screen is visible, swipe right with two fingers.



Go To Home Screen

Swipe up with three fingers.



Open APP Switcher

Swipe up with three fingers, pause and lift your finger.



Shift Between The Open APP

Swipe left or right with three fingers.

INSTALLATION AND REMOVAL

Installation:



Gently attach the iPad to the back cover.

Removal:



Pull up to remove the iPad from the back cover.



01





02



03

If you want to hold the iPad in the cover, fold the cover, makes it easy to carry.

CHARGING

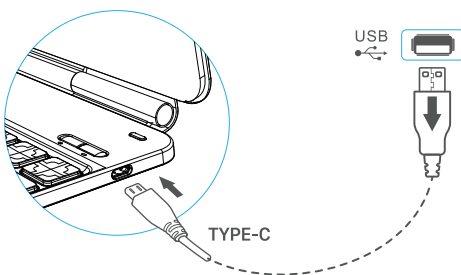

TYPE-C

1. Switch on the keyboard (if battery light is flashing, please charge the keyboard).
2. Plug the charging cable (included) into the keyboard and power adapter (not included, iPad or iPhone power adapter recommended);
 - a) Please use a charger with a charging voltage $<5V$. Battery indicator turns Amber when keyboard is charging;
 - b) Battery indicator turns Green when charging is complete.



iPad adapters


TROUBLESHOOTING

If the keyboard is not working correctly, please check the following:

1. The Bluetooth function on the iPad (or other Bluetooth devices) is enabled;
2. The Bluetooth keyboard is within 33 feet;
3. The Bluetooth keyboard is charged;
4. Make sure the keyboard is turned on (the battery indicator is illuminated);
5. Press the key  and check the Bluetooth status;
6. Make sure a keyboard has already paired via Bluetooth.


If you are encountering unwanted cursor move when typing, or some keys like 7,8,9,U,O,J,K,L cannot be entered, please Turn OFF AssistiveTouch> Mouse Keys as follows:

1. On your iPad, go to Settings > Accessibility and select Touch.
2. Select AssistiveTouch, then select Mouse Keys.
3. Turn Off Mouse Keys

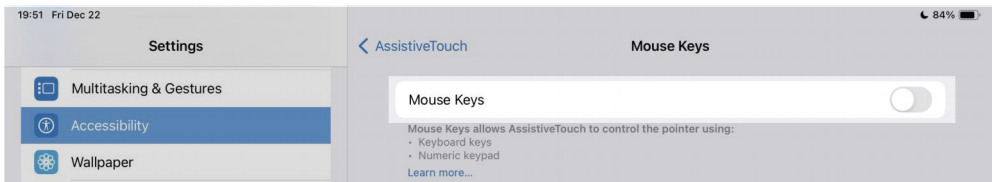

If you don't need auto-correction or punctuation, please follow these steps:

1. Open Settings app > General > Keyboard > **Hardware Keyboard**;
2. Toggle **OFF** Auto-Capitalization, Auto-Correction, and "." shortcut (please refer to the picture below).

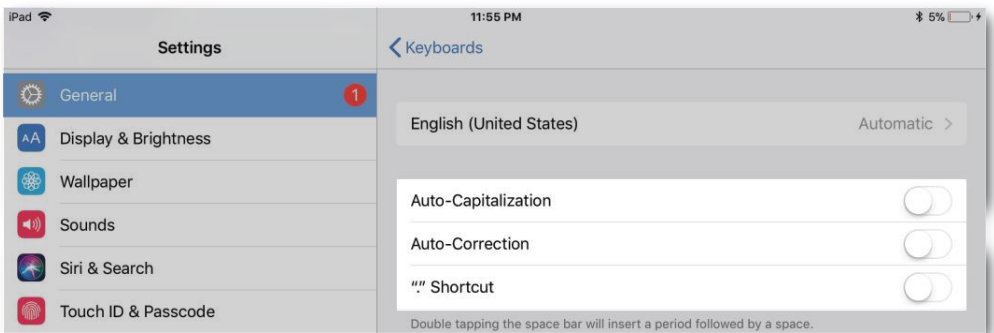

If Bluetooth disconnection or connection failure occurs, please try the following methods:

1. Change Environment:
Check for nearby high-power interference devices and try using the keyboard in a different environment.
2. Restart the Keyboard:
Press and hold the keyboard power button for 3 seconds to turn the keyboard on or off.

3. Repair the iPad:

- ① Remove all Bluetooth devices on your iPad.
- ② Switch off the Bluetooth function and reboot the iPad and the keyboard.
- ③ Turn on the Bluetooth function on your iPad.
- ④ Repeat the steps described on page 2 and 3 to pair the keyboard.

4. Repair the iPad:

- ① Make sure the keyboard is powered on and charged.
- ② Press and hold the C + R + L keys for 3 seconds to reset the keyboard.
- ③ Repeat the steps described on page 2 and 3 to pair the keyboard.

 +  +  = Reset the keyboard

PRODUCT SPECS

Operating distance: 10 meters (33 feet)

Modulation System: GFSK

Working voltage: 3.0-4.2V

Working current: 0.88-200mA

Sleeping current: < 125μA

Charging current: < 800mA

Continuous working time without backlight: 60 hours

Charging time: < 2.5 hours

Charging voltage: 5V

Key's life span: > 5 million strokes

Operating temperature: -10 ± 55°C

Maintenance: Please preserve the keyboard under normal temperature and recharge under normal voltage.

FCC CAUTION

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/TV technician for help.

*RF warning for Portable device:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.