

Keyboard Case for iPad Model: IK04

Compatible With

iPad Air 13" M3/M2

iPad Pro 12.9" 6/5/4/Generation



For warranty registration and product support:

TABLE OF CONTENTS

COMPATIBILITY 1

SETUP 2

SHORTCUT MAP 3

TOUCHPAD FUNCTION 4

TOUCHPAD FUNCTION 5

INSTALLATION AND REMOVAL 5

CHARGING 6

TROUBLESHOOTING 6

TROUBLESHOOTING 7

PRODUCT SPECS 7

IC CAUTION 8


FCC CAUTION 8

COMPATIBILITY

Compatible with iPadOS 13 (and newer). We recommend updating your iPadOS to **16** for best performance


To check your iPad system version:

1. Go to Settings  > General > About > Software Version.
2. Upgrade your version to iPadOS **16** or above to use the touchpad function correctly.

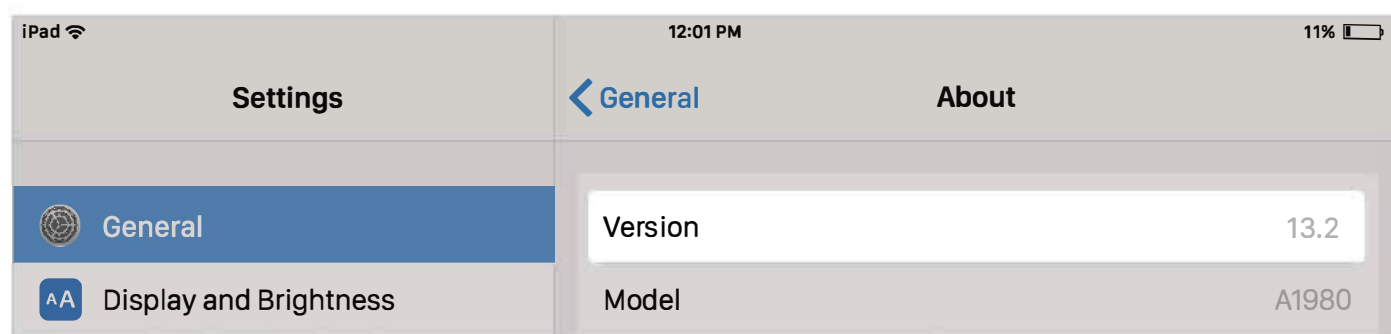

To upgrade your iPadOS to the latest version:

1. Open your device's Settings  > General > Software Update.

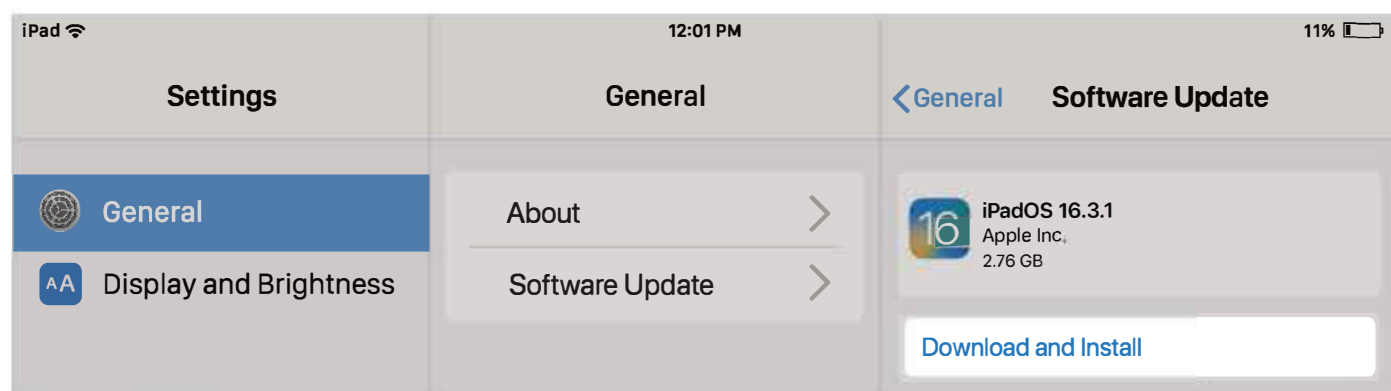



2. Tap Download and Install.

* If you see Resume Download, tap that instead.

SETUP

Topair with your iPad:


1. Long Press  for 2 seconds, the Power indicator will be on for 3 seconds
2. The Bluetooth indicator light will start to blink. If it doesn't, hold down the  button for 2 seconds.
3. Go to the Settings app and turn on Bluetooth. (The device is connected when the Bluetooth indicator stops flashing.)

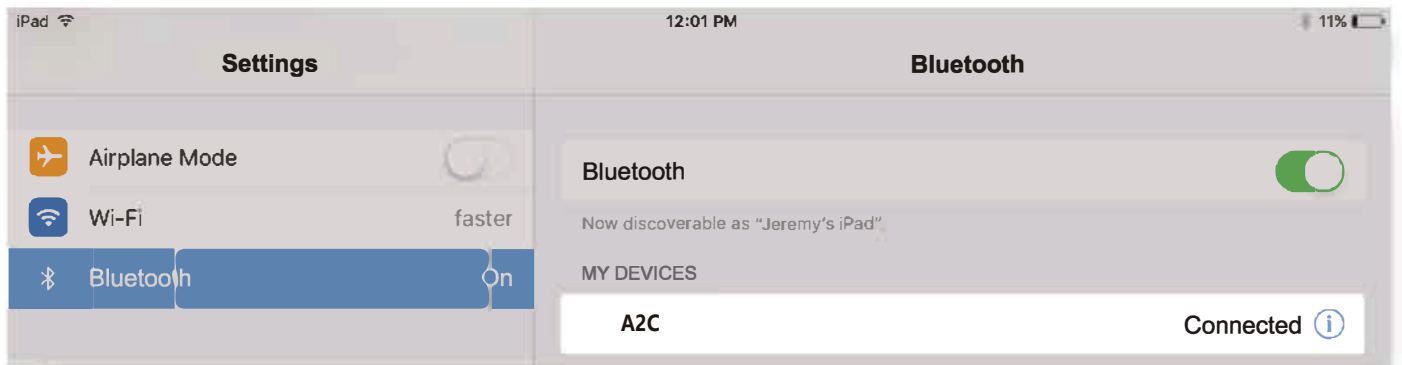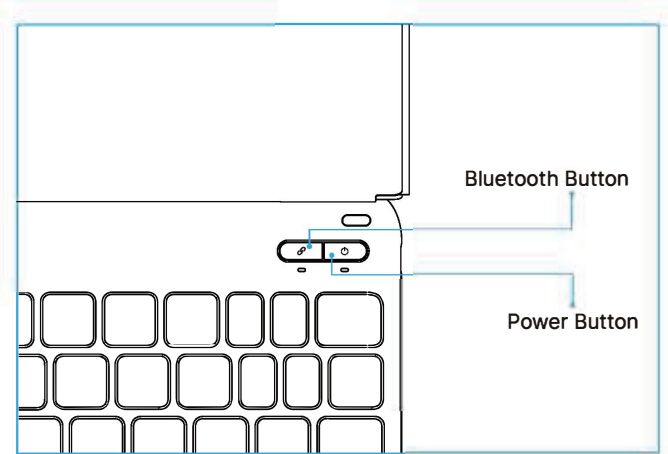

4. In the Bluetooth section of the Settings app, select '**Typecase EDGE**' under '**MY DEVICES**'.

5. Tap '**Pair**' in the pop-up window as shown.


***Note: To pair with new devices, repeat steps 1- 5.**

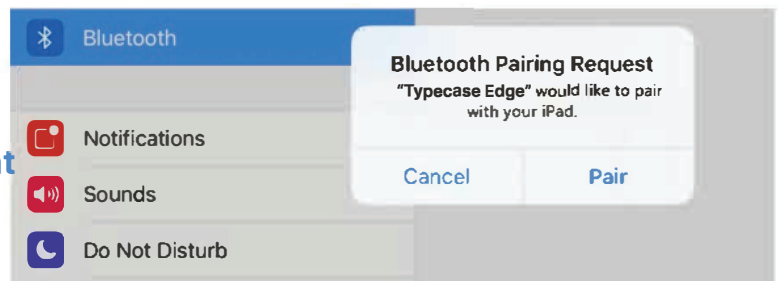

The pairing process is complete when you see the '**Connected**' indicator.


If your system is 13.3.1, please follow the steps to enable touchpad function:

1. Go to Settings  > Accessibility > Touch.
2. Make sure **Assistive Touch** option is turned On.

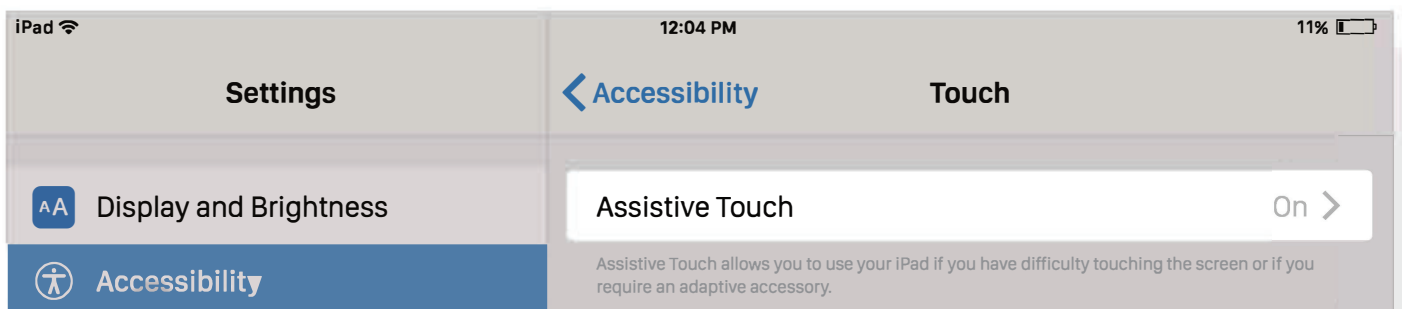

SHORTCUT MAP

Notice: Long Press  **in any app to view available shortcuts.**

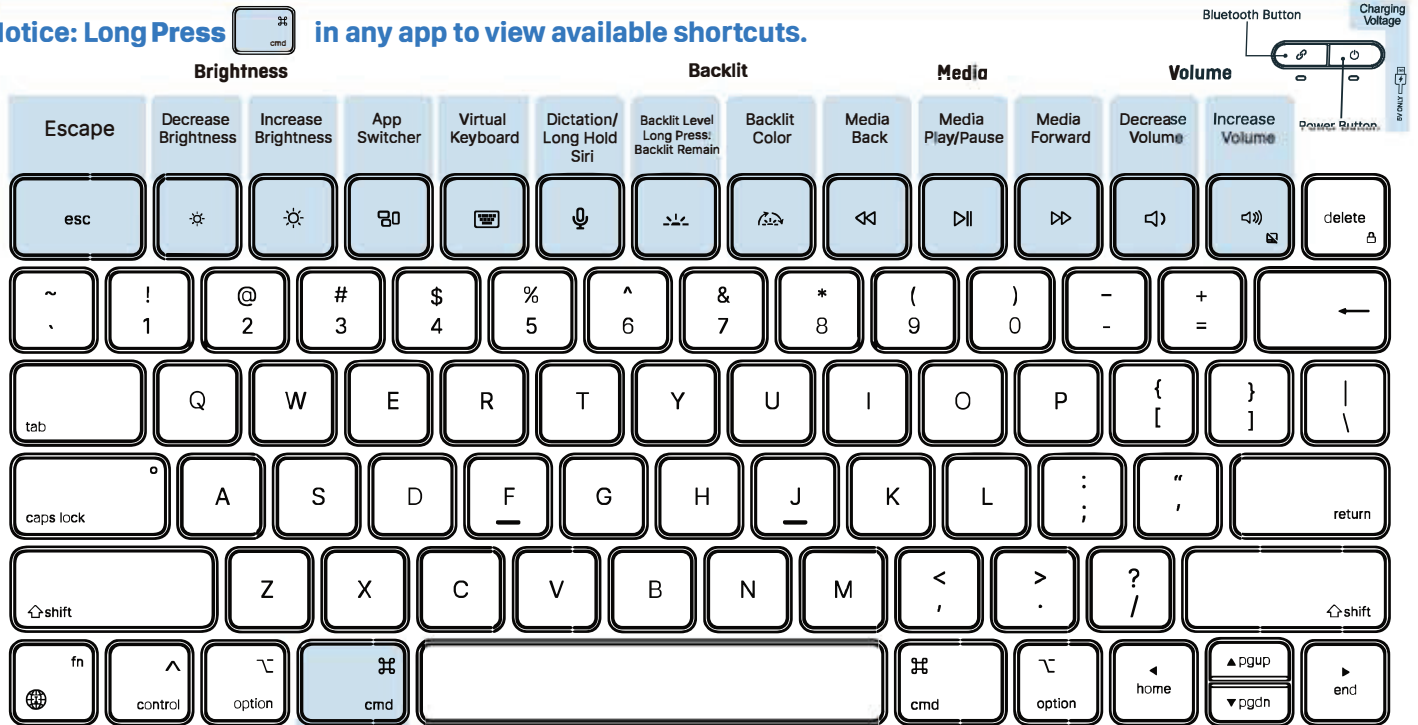

Keyboard

-  +  = Lock Screen
-  +  = Disable the trackpad
-  +  +  = Reset the keyboard

Long Press-App specific shortcut shows up (e.g. when you are in an App, hold this key and you will see all the shortcuts that can be used in this App)

-  = Backlight Brightness (low, medium, high, off)
-  = Change backlight color

System

-  +  = Go to Home Screen
-  +  = Go to Home Screen
-  +  = Quick Note
-  +  = Show Dock
-  +  = Control Center
-  +  = Notification Center
-  +  = Show Keyboard Shortcuts
-  +  = Siri
-  +  +  = Show App Library
-  +  +  = Screenshots
-  +  +  = Screenshots and Markup
-  +  +  = Show Dock

Format

-  +  = Bold

-  +  = Italic
-  +  = Underline

Multitasking

-  +  = App Switcher
-  +  = Show All Windows
-  +  = Previous App
-  +  = Next App

Split View

-  +  +  = Tile Window Left
-  +  +  = Tile Window Right

Slide Over


-  +  +  = Move to Left Slide Over
-  +  +  = Move to Right Slide Over
-  +  = Show Slide Over
-  +  +  = Next Slide Over Window

Symbol

-  +  = ©
-  +  = ☺
-  +  = ≠
-  +  = Δ
-  +  = Ω
-  +  = β
-  +  = π
- + = ≈
- + = μ
- + = ∞
- + = Ω
- + = ≈
- + = μ
- + = ∞

TOUCHPAD FUNCTION

Notice: Make sure bluetooth connected and touchpad function turned on!




Tap

Tap with a single finger until it feels a little touch feeling.




Tap and Hold

Tap and hold with a single finger.




Drag

Tap and hold an item, then swipe your finger across the trackpad to move it.




Awake

Click the touchpad or press any key on the keyboard.




Open Program Expansion Dock

Swipe the pointer across the bottom of the screen with one finger.




Go To Home Screen

Swipe the pointer across the bottom of the screen with one finger, and when the Dock appears, swipe the pointer across the bottom of the screen again.




View Slide Over

Use one finger to swipe the pointer past the right edge of the screen. To hide Slide Over, swipe right again.




Open Notification Center

Use one finger to move the pointer to select the status icons at the top left, then click.
Or, use one finger to move the pointer past the top of the screen near the middle.




Open Control Center

Use one finger to move the pointer to select the status icons at the top right, then click.
Or, select the status icons at the top right, then swipe up with one finger.




Move Left Or Right

Swipe left or right with two fingers.




Move Up Or Down

Swipe up or down with two fingers.




Open Searching From Home Screen

Swipe down with two fingers.




Zoom

Place two fingers close together, open to enlarge, or pinch to zoom out.




Secondary click

Click with two fingers to show the quick actions menu for items like icons on the Home Screen, messages in a mailbox, and the Camera button in Control Center.
Or, you can press the Control key while you click the trackpad.




Open "Today" View

When the Home or Lock screen is visible, swipe right with two fingers.




Go To Home Screen

Swipe up with three fingers.



Open APP Switcher

Swipe up with three fingers, pause and lift your finger.




Shift Between The Open APP


Swipe left or right with three fingers.

INSTALLATION AND REMOVAL

Installation:

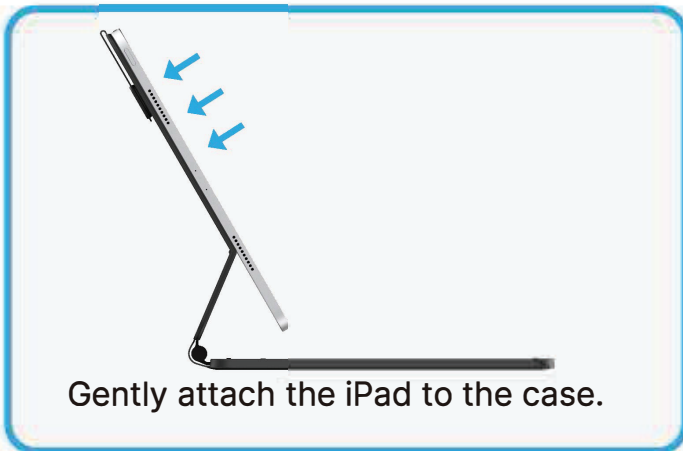

Removal:

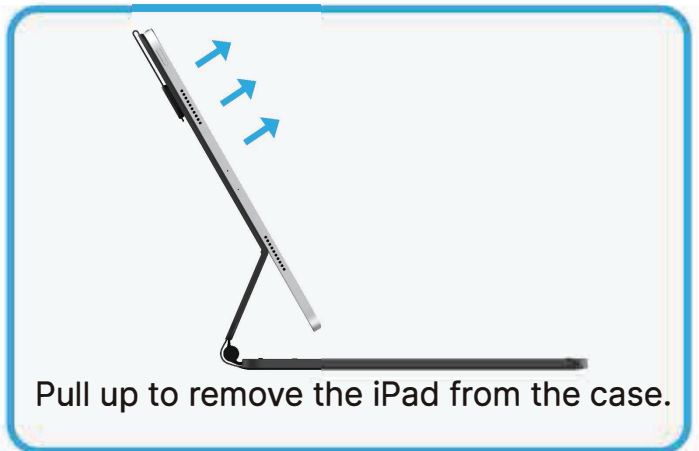

01




02



03

If you want to hold the iPad in the case, fold the case, makes it easy to carry.

CHARGING

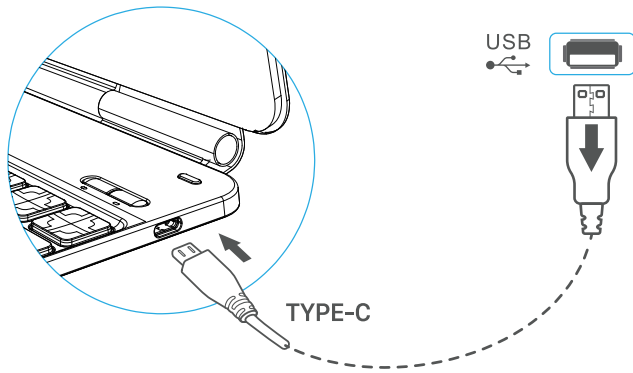

iPad adapters

1. Switch on the keyboard (if battery light is flashing, please charge the keyboard).
2. Plug the charging cable (included) into the keyboard and power adapter (not included, iPad or iPhone power adapter recommended);
 - a) Battery indicator turns Amber when keyboard is charging;
 - b) Battery indicator turns Green when charging is complete.


TROUBLESHOOTING

If the keyboard is not working correctly, please check the following:

1. The Bluetooth function on the iPad (or other Bluetooth devices) is enabled;
2. The Bluetooth keyboard is within 33 feet;
3. The Bluetooth keyboard is charged;
4. Make sure the keyboard is turned on (the battery indicator is illuminated);
5. Press the key  and check the Bluetooth status;
6. Make sure a keyboard has already paired via Bluetooth.

If you are encountering unwanted cursor move when typing, or some keys like 7,8,9,U,O,J,K,L cannot be entered, please Turn OFF AssistiveTouch> Mouse Keys as follows:


1. On your iPad, go to Settings > Accessibility and select Touch.
2. Select AssistiveTouch, then select Mouse Keys.
3. Turn Off Mouse Keys

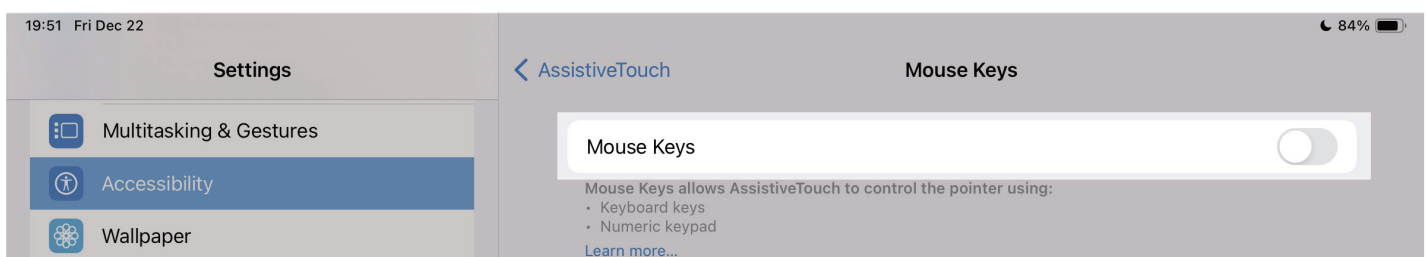

TROUBLESHOOTING

If you have unwanted auto-correction or punctuation, please follow these steps:

1. Open Settings app > General > Keyboard > **Hardware Keyboard**;
2. Toggle **OFF** Auto-Capitalization, Auto-Correction, and "." shortcut (please refer to the picture below).

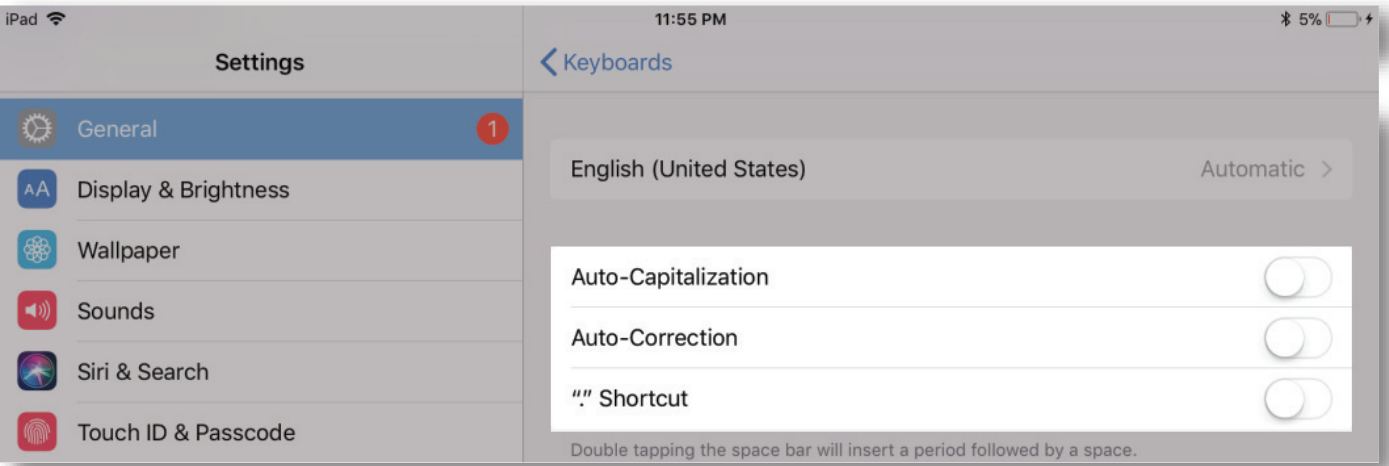

If Bluetooth pairing fails, please try the following steps:

1. Remove all Bluetooth devices on your iPad;
2. Switch off the Bluetooth function on your iPad;
3. Reboot the iPad;
4. Turn on the Bluetooth on your iPad;
5. Switch the keyboard off and on;
6. Repeat the steps described on page 2 and 3 to pair the keyboard.

PRODUCT SPECS

Operating distance: 10 meters (33 feet)

Modulation System: GFSK

Working voltage: 3.0-4.2V

Working current: 0.88-3.85mA

Sleeping current: < 125µA

Charging current: 500-800mA

Continuous working time without backlight: 60 hours

Charging time: < 5 hours

Charging voltage: 5V

Key's life span: > 5 million strokes

Operating temperature: -10 ±55°C

Maintenance: Please preserve the keyboard under normal temperature and recharge under normal voltage.

IC CAUTION

ISED Canada Statement:

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence exempt RSS(s). Operation is subject to the following two conditions:

- 1) this device may not cause interference and
- 2) this device must accept any interference, including interference that may cause undesired operation of the device.

Radiation Exposure: This equipment complies with Canada radiation Exposure limits set forth for an uncontrolled environment to maintain compliance with IC's RF Exposure guidelines. This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

Déclaration du Canada:

Ce dispositif contient un (S) émetteur (S)/ récepteur (S) exempté (S) de licence qui respecte l' innovation, Science et développement économique Canada a exempté le ou les RSS de licence. L' exploitation est soumise aux deux conditions suivantes:

- 1) cet appareil ne doit pas causer d' interférences et
- 2) ce dispositif doit accepter toute interférence, y compris toute interférence pouvant entraîner un fonctionnement indésirable du dispositif.

Exposition au rayonnement: cet équipement est conforme au rayonnement Canada

Les limites d' exposition fixées pour un environnement non contrôlé afin de maintenir la conformité avec les lignes directrices d' exposition aux RF d' IC. Ce dispositif et ses antennes ne doivent pas être co-localisés ni fonctionner en conjonction avec une autre antenne ou un autre émetteur.

FCC CAUTION

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

*RF warning for Portable device:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.