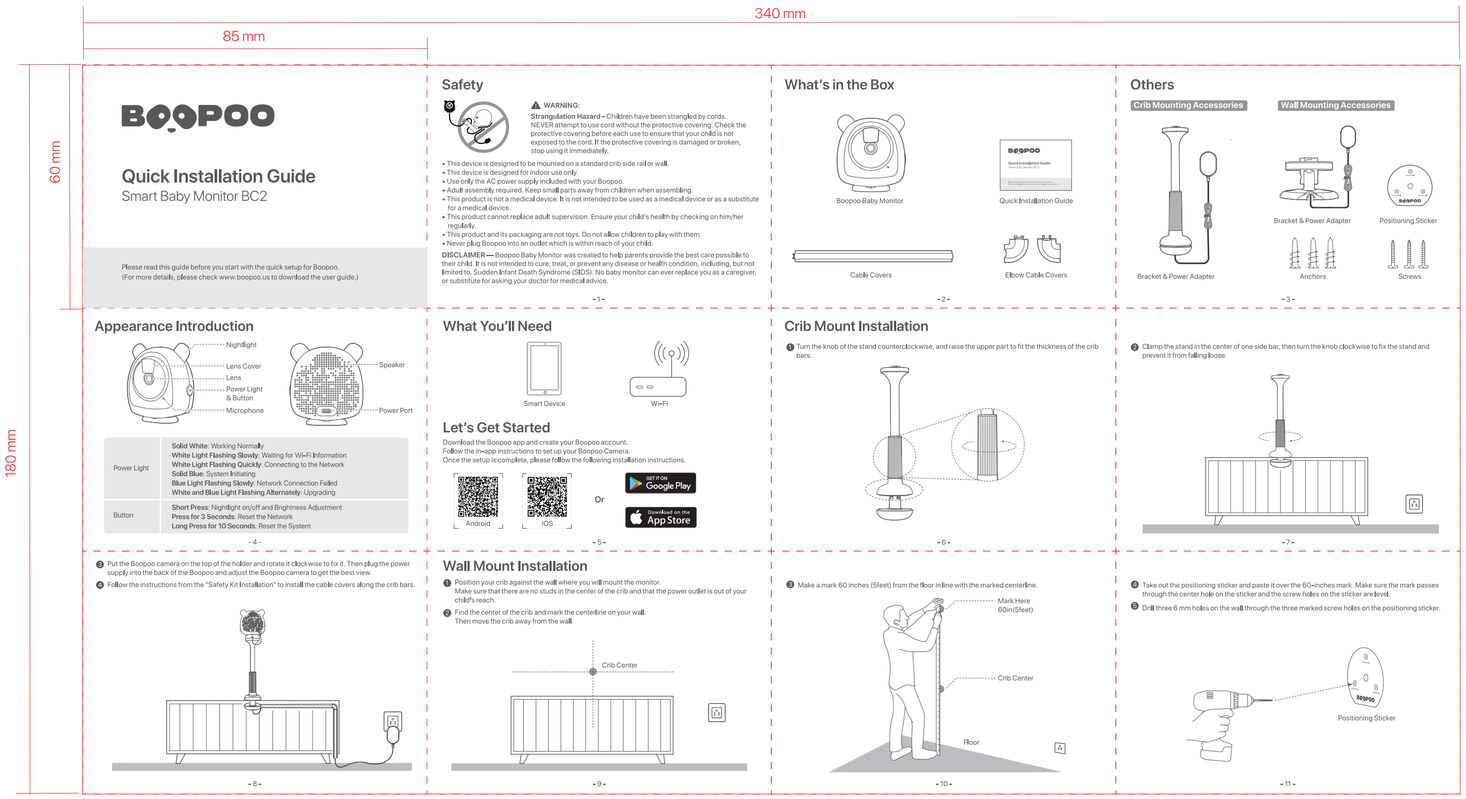

BOOPOO

Quick Installation Guide

Smart Baby Monitor BC2

Please read this guide before you start with the quick setup for Boopoo.
(For more details, please check www.boopoo.us to download the user guide.)

- 1 -

Safety

WARNING:

Strangulation Hazard – Children have been strangled by cords. NEVER attempt to use cord without the protective covering. Check the protective covering before each use to ensure that your child is not exposed to the cord. If the protective covering is damaged or broken, stop using it immediately.

- This device is designed to be mounted on a standard crib side rail or wall.
- This device is designed for indoor use only.
- Use only the AC power supply included with your Boopoo.
- Adult assembly required. Keep small parts away from children when assembling.
- This product is not a medical device. It is not intended to be used as a medical device or as a substitute for a medical device.
- This product cannot replace adult supervision. Ensure your child's health by checking on him/her regularly.
- This product and its packaging are not toys. Do not allow children to play with them.
- Never plug Boopoo into an outlet which is within reach of your child.

DISCLAIMER — Boopoo Baby Monitor was created to help parents provide the best care possible to their child. It is not intended to cure, treat, or prevent any disease or health condition, including, but not limited to, Sudden Infant Death Syndrome (SIDS). No baby monitor can ever replace you as a caregiver, or substitute for asking your doctor for medical advice.

- 1 -

What's in the Box

- 2 -

Others

Crib Mounting Accessories

Wall Mounting Accessories

- 3 -

Appearance Introduction

Power Light	**Solid White:** Working Normally **White Light Flashing Slowly:** Waiting for Wi-Fi Information **White Light Flashing Quickly:** Connecting to the Network **Solid Blue:** System Initiating **Blue Light Flashing Slowly:** Network Connection Failed **White and Blue Light Flashing Alternately:** Upgrading
Button	**Short Press:** Nightlight on/off and Brightness Adjustment **Press for 3 Seconds:** Reset the Network **Long Press for 10 Seconds:** Reset the System

- 4 -

What You'll Need

Let's Get Started

Download the Boopoo app and create your Boopoo account.
Follow the in-app instructions to set up your Boopoo Camera.
Once the setup is complete, please follow the following installation instructions.

Android iOS Or GET IT ON Google Play Download on the App Store

- 5 -

Crib Mount Installation

❶ Turn the knob of the stand counterclockwise, and raise the upper part to fit the thickness of the crib bars.

- 6 -

❷ Clamp the stand in the center of one side bar, then turn the knob clockwise to fix the stand and prevent it from falling loose.

- 7 -

❸ Put the Boopoo camera on the top of the holder and rotate it clockwise to fix it. Then plug the power supply into the back of the Boopoo and adjust the Boopoo camera to get the best view.

❹ Follow the instructions from the "Safety Kit Installation" to install the cable covers along the crib bars.

- 8 -

Wall Mount Installation

❶ Position your crib against the wall where you will mount the monitor.
Make sure that there are no studs in the center of the crib and that the power outlet is out of your child's reach.

❷ Find the center of the crib and mark the centerline on your wall.
Then move the crib away from the wall.

- 9 -

❸ Make a mark 60 inches (5feet) from the floor inline with the marked centerline.

- 10 -

❹ Take out the positioning sticker and paste it over the 60-inches mark. Make sure the mark passes through the center hole on the sticker and the screw holes on the sticker are level.

❺ Drill three 6 mm holes on the wall through the three marked screw holes on the positioning sticker.

- 11 -

❻ Insert anchors into the holes drilled on the wall.



- 12 -

❼ Put the base bracket on the wall, making sure it is aligned with the anchors.
Insert the screws through the holes on the base bracket into the anchors and tighten to secure the bracket.



- 13 -

❽ Place the bottom of the camera closely against the top of the bracket and rotate it clockwise until it is firmly secured in place.
Plug the power supply into the back of the Boopoo and adjust the bracket to a suitable monitoring angle. Once the Wall Mount is secured, wipe down the wall below to remove any dust from the drilling process.

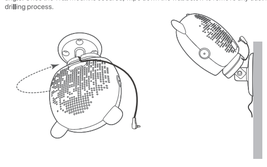

- 14 -

Safety Kit Installation

❶ Peel off the tape backing on the cable cover. Slide the cable cover until the top aligns with the connection point on the bracket base. Snap the top of the cable cover. Gently pull on the cable to make sure the cable is completely tucked in. Firmly adhere the cable cover to the wall.



- 15 -

❷ Repeat step 1 with remaining cable covers, connect each cable cover to the bottom of the previous one until the bottom of the cover is level with the wall outlet.

- 16 -

❸ Choose the left or right elbow cable cover depends on the direction of your wall outlet.
Tuck the cable in, remove the backing and adhere to the wall.

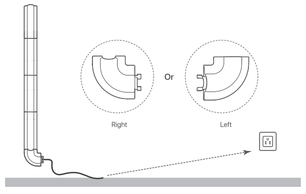

- 17 -

❹ Install the remaining cable covers horizontally along the wall following the same process as before.

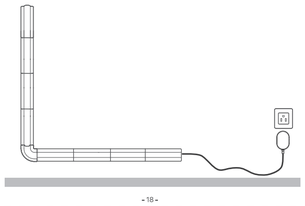

- 18 -

❺ Put the power supply into the outlet. Once the power light turns on, you're ready to go.

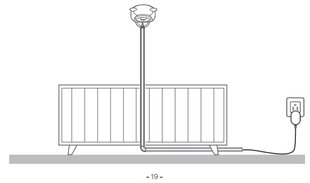

- 19 -

Limited Warranty

For information on Boopoo's Limited Warranty visit:
https://www.boopoo.us/warranty

Compliance

FC CE RoHS COMPLIANT

- 20 -

FCC Compliance Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

— Reorient or relocate the receiving antenna.
— Increase the separation between the equipment and receiver.
— Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
— Consult the dealer or an experienced radio/TV technician for help.

- 21 -

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.
This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

Caution:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

WEEE Compliance Statement

This product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to European directive 2014/19/EU in order to be recycled or dismantled to minimize its impact on the environment.

User has the choice to give his/her product to a competent recycling organization or to the retailer when he/she buys new electrical or electronic equipment.

- 22 -

CE Mark Warning

This is a Class B product, in a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures. This equipment should be installed and operated with minimum distance 20 cm between the radiator and your body.

EU Declaration Of Conformity

Hereby, Boopoo Technology LLC., 8 The Green, Suite B, Dover, DE, declares that the radio equipment ModelBC2 is in compliance with Directive 2014/53/EU.
The full text of the EU declaration of conformity is available at the following internet address:
https://www.boopoo.us/legal/compliance

The emissions are maintained within the band of operation under all conditions of normal operation.

- 23 -