




15.6" Touch Screen PC-ARM

Model : JD156B

Views & Dimensions

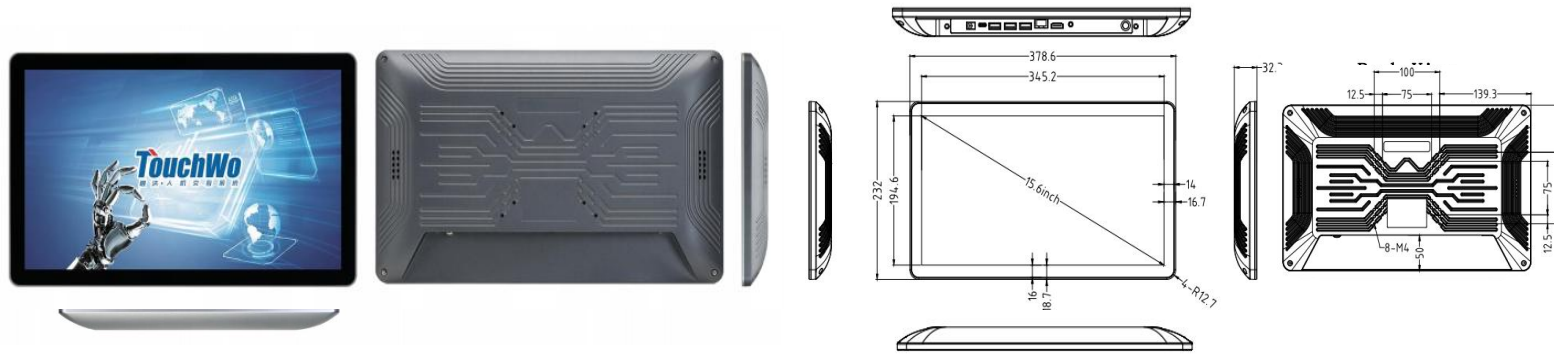

Features

- **Stylish Appearance**

New casting mold design , thickness only 27mm

Optical bonded PCAP

- Wall mounted/desktop stand/embedded etc

- **Full Aluminum Chassis**

Corrosion and oxidation resistance

- Surface IP65 waterproof





Tech Specs				
LCD Panel	Screen diagonal	15.6 inch	Touch technology	PCAP
	Physical resolution	1920*1080	Response time	<5ms
	Aspect ratio	16:9	Touch points	10 points standard
	Display active screen size (mm)	345.2 (W) *194.6 (H)	Touch effective recognition	>1.5mm
	Colours displayed	16.7M	Scanning Frequency	200Hz
	Brightness (cd/m2)	250	Scanning accuracy	4096 * 4096
	Contrast	800:1	Working Current/Voltage	180Ma/DC+5V±5%
	Visual Angle H/V (°)	175/175	Surface Hardness	Mohs class 7 explosion-proof glass
	Backlight Lifetime (hours)	LED 15,000		
	Refrash Rate	60 Hz		

Operation Environment	Operation Temperature	0℃-50℃	Machine(cm)	37.86 (W) ×23.2 (H) ×32.3 (T)
	Operation Humidity	10% - 80%	Package(cm)	52.5 (W) ×31.5 (H) ×10.5 (T)
	Storage Temperature	-5℃-60℃	Net weight	1.68kg
	Storage Humidity	10% - 85%	Gross weight	2.41kg

Android System	CPU	Rockchip RK3568	Rockchip RK3288/RK3399	Rockchip RK3588
	Graphic GPU	ARM G52 2EE	Mali-T864	Mali-G610
	Audio	-	-	-
	Memory	4G (2G optional)	4G (2G optional)	4G (8G optional)
	Storage	32G eMMC	16G/32G eMMC	64G/128G eMMC
	Network	10/100/1000M RJ45, 802.11a/b/g/n/ac Wifi		
		Android 11	Android 7.1 / 9	Android 12
Power supply parameters	Power Input	110-240V AC 50/60Hz	Manual	* 1
	Power Output	DC 12V3A	Wall mount bracket	* 1
	Standby power consumption	≤0.5W	WIFI antenna	* 1
	Overall power consumption	<25W	Power Adapter&cable	* 1




Included in the Delivery

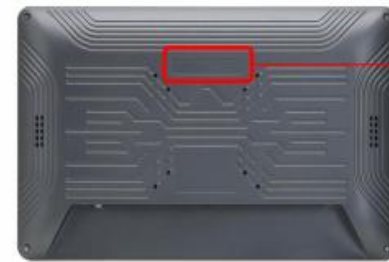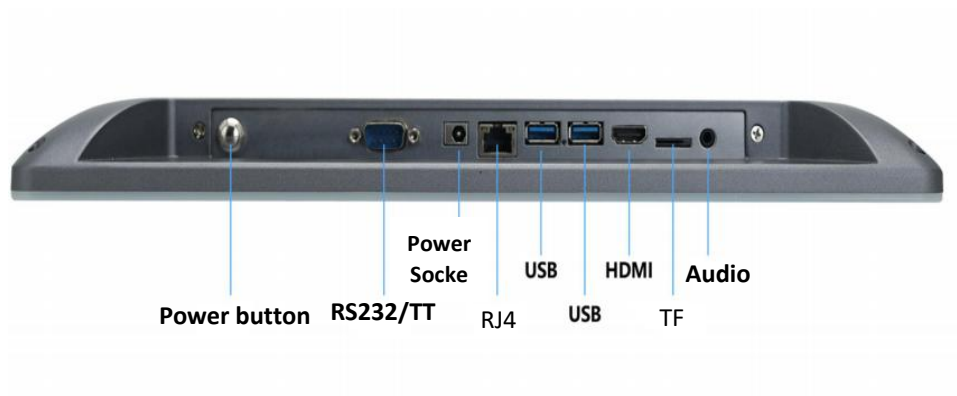

customize logo

RJ45 Ports	* 1	USB	* 2	Type-C	* 1	TF	* 1
Power Socket	* 1	HDMI out	* 1	Audio in&out	* 1	RS232/TTL	* 1

Use Case

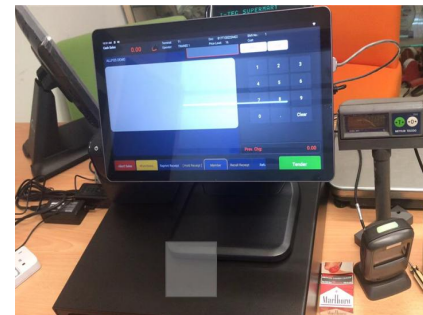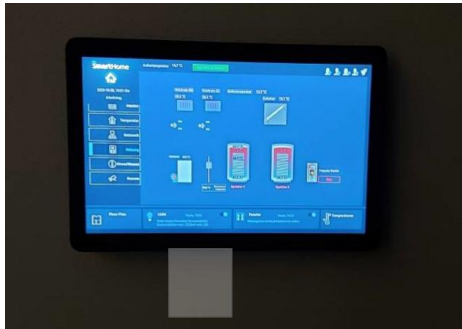

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception,

which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum 20cm distance between the radiator and your body: Use only the supplied antenna.