


Football Eye

USER GUIDE



Note: All pictures and illustrations are for reference only.
The actual product may differ due to continuous
product enhancements.

1. Introduction

Thank you for purchasing our product. Please read this guide thoroughly before use and retain it for future reference. This device is designed to deliver reliable performance with features such as high-definition imaging, motion tracking, human detection, and cloud storage. Proper setup and maintenance will ensure optimal functionality and longevity.

2. Important Maintenance Instructions

Lens Care: Gently clean the camera lens with a soft, dry cloth to remove dust or smudges. Avoid abrasive materials that could scratch the surface.

Connection Check: Inspect all cables and ports periodically to ensure secure connections and prevent intermittent issues.

Weather Protection: This device is designed for **indoor use only** and is **not waterproof or weatherproof**. Do not install it outdoors, in bathrooms, or in any damp location where it could be exposed to water splashes or sprays.

Storage: When not in use, store the device in a cool, dry place away from direct sunlight.

Damage Inspection: Regularly check for physical damage such as cracks or compromised seals. If any issues are found, discontinue use and contact support.

3. Packing List



Camera



Charging Cable



Wall-Mounting Kit




User Manual

Note:

The USB power adapter is a common standard accessory in the market. This product is NOT provided and can be purchased separately if necessary. Power adapter specification is DC 5V/1A.

4. Product Overview

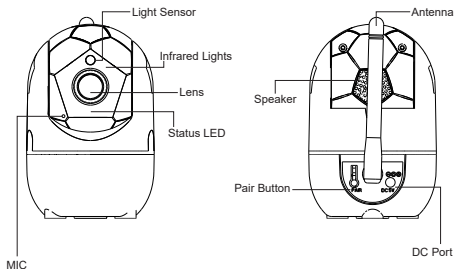

Infrared Lights: Integrated infrared LEDs enable clear night vision

Lens: 2MP camera lens

MIC: Built-in microphone for audio capture

Speaker: Built-in speaker for audio communication

Antenna: High-gain antenna for wireless connection

Status LED: Indicator showing device status

Light Sensor: Ambient light levels detection

Pair Button: Press and hold for 3 seconds to enter pairing mode


DC Port: 5V/1A power input port

5. Installation


The camera can be placed on flat surfaces such as desks, dining tables, and coffee tables, or it can be fixedly installed on walls.

Wall-Mounted Installation

1. Using a pencil, mark the wall through the holes on the mounting bracket. At the marked positions, drill two holes approximately 5 mm (15/64 in) in diameter and 30 mm (1.18 in) deep.
2. Insert two plastic wall anchors into the drilled holes.
3. Align the mounting base with the wall anchors, ensuring the flange faces outward. Insert the screws through the base and tighten them into the wall anchors using a Phillips screwdriver (Figure 1).
4. Align the groove at the bottom of the camera with the raised alignment guide on the mounting base, then rotate the camera 90 degrees clockwise until it audibly clicks and locks firmly into place (Figure 2).



(Figure 1)



(Figure 2)

Note:

1. Ensure the mounting surface is structurally sound and capable of bearing a load of at least three times the total weight of the camera.
2. To prevent injury and ensure stable operation, the device must be securely anchored to the wall or ceiling in strict accordance with these installation instructions.

6. Get Started

Download VTimes Smart App

Scan the QR code provided in the product manual. Alternatively, you can search for 'VTimes Smart' directly in the Apple App Store or Google Play Store.



VTimes Smart



Scan to Download

Note: This device supports 2.4GHz Wi-Fi ONLY.

1. Please disable "Smart Connect" or "Dual-Band Integration" in your router settings.
2. Ensure the 2.4GHz network and 5GHz network are configured with separate Wi-Fi names (SSIDs), e.g., Home_2.4GHz and Home_5GHz. This prevents the router from steering IoT devices to high-frequency bands.

7. Pairing Method

- (1). Power on the device and wait for the self-start to complete. Make sure it's placed in an area with a strong Wi-Fi signal.
- (2). Press and hold the PAIR button 3s. You will hear 'Reset successful'.
- (3). Open the VTimes Smart app to the home screen. Ensure your phone's Bluetooth is on and grant the app the necessary permissions.
- (4). Tap the  button in the upper right corner, select 'Add Device' to enter the Add interface.
- (5). After the search is complete, a discovered device will be displayed. Directly tap the product icon for 'Smart Camera VT67'.
- (6). Confirm the 2.4GHz Wi-Fi information, enter the correct password, and tap 'Next'.
- (7). Wait for the addition to succeed, then tap the 'Done' button to return to the app home screen, where your device will now be visible.

Note:

1. You will need to reset the device in the following situations before re-pairing:
 - Changing the Wi-Fi network or updating the Wi-Fi password after initial pairing.

- The camera was powered off before being properly removed from the app.
 - You need to pair the camera with a new app account.
2. Reset Method: Press and hold the camera's PAIR button for 3 seconds. The device will restart and restore factory settings. You can then perform the pairing process again.

8. Features

1080P Video Streaming

Experience exceptional clarity with 1080P resolution that captures fine details like facial features and license plates, ensuring you never miss a single detail with crystal-clear image quality.

Smart Detection

The device utilizes an AI-powered smart detection system to enhance monitoring accuracy and reduce false alarms. The system includes the following core functions:

Motion Detection: Continuously monitors for movement, serving as the foundational alert mechanism.

Human Detection: The AI algorithm distinguishes human forms from other moving objects, prioritizing alerts for person-related activity.

Motion Tracking: Upon detecting a moving person, the camera can automatically track the movement to keep the target within the frame.

Playback

The intuitive playback feature allows you to easily review past events by scrolling through a timeline or filtering recordings by date and event type within the app.

Preset Points

You can set specific guardian positions as presets. The camera can then automatically patrol between these points or rotate to a preset position when an event is triggered.

Pan and Tilt

The motorized pan-and-tilt mechanism offers extensive horizontal and

vertical coverage. This allows you to remotely control the camera's viewing direction via the app for active monitoring.

Privacy Mode

When enabled, this feature completely disables both video and audio capture. Use this mode to ensure total privacy in your personal space.

Siren

An integrated, high-decibel siren can be manually activated via the app or set to trigger automatically upon detecting potential threats, helping to deter intruders.

Night Vision

With infrared night vision capabilities, the camera provides round-the-clock monitoring, delivering clear black-and-white images in total darkness and in low-light conditions.

One/Two-Way Audio

Featuring built-in microphone and speaker, the camera enables real-time communication, allowing you to listen and speak directly through the mobile app.

Cloud Storage

The device supports cloud storage services, providing you with complete control and remote access to your recorded data.

9. Technical Information

Connectivity	Wi-Fi 2.4 GHz
Resolution	1080P (1920 × 1080)
Night Vision	Infrared
Input Power	DC 5V 1A
Pan-Tilt Angle Range	Horizontal: 318° Vertical: 120°
Weight	180g
Dimension	68 × 68 × 105 mm
Operating Temperature	+32F~+95F(0°C~35°C)

10. FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

FCC RF Radiation Exposure Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter. "To comply with FCC RF exposure compliance requirements, this grant is applicable to only Mobile Configurations. The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter."

Videotimes Technology (Hubei) Co.,Ltd
B5-1, B5-2, Electronic Information Industry Park, Wuxue, Huanggang,
Hubei, China

WARNING



Strangulation Hazard: Children have STRANGLED in cords. Keep this cord out of the reach of children (more than 3 ft (0.9 m) away). Do not remove this tag.

AVERTISSEMENT

DANGER D'ÉTRANGLEMENT: Des enfants se sont ÉTRANGLÉS avec des cordons électriques. Garde le cordon électrique hors de la portée des enfants (à plus de 0.9m/3 pi du lit d'enfant). Ne pas enlever cette étiquette.

Risk Group 1
WARNING IR emitted from this product. Do not stare at operating lamp
Product tested against EN62471



Made in China/Ver1.2