智能眼镜中英文说明书（双模式）

尺寸：40mm×175mm　　PS：重点字体已标注红色,印刷出来也需是红色。

双模式智能眼镜

（M10-1 使用说明）

1.长按电源键**2S**开机

2.按电源键**3次**下一曲

3.按电源键**2次**上一曲

4.按电源键**2秒**模式切换
（普通模式/语音模式）

•声明

首先对您使用本公司的产品表示感谢!在使用之前请先详细阅读此说明书，正确使用此产品。为了更好的服务,本用户手册的内容可能变更。因为产品的性能和功能而发生的变更将不做另行通知。

•产品简介

多功能智能眼镜采用蓝牙芯片,兼容主流品牌手机和平板电脑等蓝牙设备,支持aptX音频解码技术,达到CD级高品质音质,持久续航,左右双喇叭,开放式定向发音,无障碍接收外界声音,可时刻获取周围环境信息,安全、智能、健康、 便捷。

多功能智能眼镜,本产品是具有立体声音响功能的蓝牙眼镜,操作简便，美观实用，便于携带。

•包装清单

智能眼镜、智能眼镜充电线、使用说明书、眼镜清洁布

按键功能概述

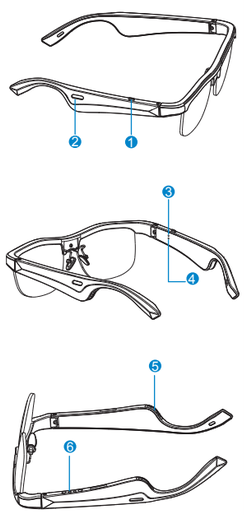

❶ 开机/关机/下一曲/上一曲/播放/暂停/接电话/挂断电话/语音助手/导航/拍照功能

❷ 背部出音口

❸ LED指示灯

❹ 麦克风

❺ 扬声器

❻ 磁吸充电口

•温馨提示

感谢你对我公司产品的信任，启用双模式将大幅提升耗电量，但可享受语音操控的便捷，启用双模式纯语音款可以解放双手AI智能唤醒（噪音大于68分贝时会误操作）。

请在电量充足时使用，以优化您的体验。若出现低电报警请及时给该产品充电使用。

产品参数

镜架材质：TR90/五金
镜片材质：PC
镜片规格：透明渐变、墨镜、老花镜片等(多种选择)
蓝牙协议：V5.3
充电时间：1.5小时
使用时间：3小时以上
待机时间：180小时(蓝牙连接状态)
电池容量：120mAh
声　　道：双喇叭、立体声
充电电压和电流：DC5V/1A
最大充电电流达150mAh

温馨提示：长期不使用时，每2个月对该产品至少充电一次。

开关机与配对

1、开机与配对：
打开手机等蓝牙设备,长按电源键2秒,眼镜语音提示【开机】,蓝灯闪3下转红蓝灯交替；与蓝牙设备连接成功后,指示灯熄灭。

(手机进行蓝牙连接请参考倒数第二页示意图)

2、关机：
①长按电源键5秒,语音提示【关机】,红灯闪3下即与手机断开连接。
②自动关机：无配对或无设备连接时3分钟自动关机。

电量提示

1、低电提示：内置电池电压低于3.4V后出现低电报警，每120S报警一次，红灯5s闪一次，3.1V自动关机。
2、充电中：红灯长亮。
3、充电完成：红灯熄灭。

按键模式功能操作

1、接打电话
• 接听电话：单按电源键接听电话；
• 挂断电话：单按电源键挂断电话；
• 拒绝来电：长按2秒电源键拒绝来电；
• 取消呼叫：单按电源键取消电话呼叫；

2、欣赏音乐
• 精准选歌：连按4次电源键唤醒语音助手后说，播放音乐（如上海滩）,即可调用并播放手机里面的歌曲；
• 随机放歌：连按4次电源键唤醒语音助手后说，播放音乐，即可调用并随机播放手机里面的歌曲；
• 播放下一曲：连按3次电源键；
• 播放上一曲：连按2次电源键；
• 暂停播放：单按电源键。

3、播放音乐与拨打电话之间切换：
• 当在听音乐过程中需要拨打电话时,先单按电源键将音乐暂停，然后连按4次电源键唤醒语音助手后即可拨打电话。

4、导航：
• 开启导航：先暂停音乐，连按4次电源键唤醒语音功能，然后进行语音操作，帮我导航到** 地方；
• 关闭导航：连按4次电源键唤醒语音助手后说，退出导航。

5、拍照功能：
• 打开相机状态下,单按电源键即可拍照。

6、超距离回连：
• 耳机超出蓝牙范围，耳机断开，回到连接范围自动回连，当超过180秒没有回到连接范围内自动关机。

7、来电报号：
• 来电状态下自动播报当前来电号码。

语音模式功能操作

温馨提示：语音唤醒开启后会有误触为正常现象，当前音量过大时语音识别会有概率唤醒失败可多说几次命令词唤醒。

模式切换顺序说明：开机默认普通模式-语音模式，2个模式可按顺序重复切换。

1、模式切换：开机/连接设备状态时，长按电源键2秒进行模式切换
(普通模式/语音模式)；
2、唤醒语音助手：无通话状态下连按4次电源键可唤醒语音助手；
(语音助手昵称:“小杰小杰/小杰同学”)
3、播放音乐：“播放音乐”,语音识别；
4、暂停播放：“停止播放”,语音识别；
5、播放上一曲：“上一首”,语音识别；
6、播放下一曲：“下一首”,语音识别；
7、音量加：“增大音量”,语音识别；
8、音量减：“减小音量”,语音识别；
9、接听电话：“接听电话”,语音识别；
10、拒接来电：“挂断电话”,语音识别；

产品使用提示

1.使用本产品前请仔细阅读说明书，并保留本说明书。
2.首次使用，请先将本产品充满电。
3.如果产品长期（超过两周）不充电，使用前请对其充电。

警告

1.请勿以任何理由拆除或维修改装本产品，否则可能会导致起火，电子击穿甚至彻底损坏本产品。
2.请勿将设备置于温度过低或过高（0℃以下或45℃以上）环境下。
3.请勿将产品接触腐蚀性液体及浸泡在液体里。
4.不能将眼镜放在阳光下长时间曝晒，否则容易变形、老化、折断。
5.请勿将充电线磁吸端靠近金属物体，防止磁吸金属物体后引起的短路危险。

重要安全信息

1.在使用本产品前,请先阅读所有安全信息以确保正确和安全使用。
2.使用未经原制造商认可的电源，充电器或电池，可能引发火灾，爆炸或其他危险。
3.请使用本制造商认可且与此型号设备配套的配件。
4.请在温度0℃~35℃范围内使用本产品,并在温度-20℃- 45℃范围内存放设备及其配件。当环境温度过高或过低时,可能会引发设备故障。
5.若设备使用不可拆卸的内置电池,请勿自行更换电池,以免损坏电池或设备,电池只能由授权服务中心更换。
6.如充电完毕,请断开充电器与本设备的连接,并从电源插座上拔掉充电器。连续充电时间请勿超过12小时。
7.请保持设备干燥。
8.若设备或其他任何部件不能正常工作,请勿自行维修产品。
9.连接其他设备时,请参考使用说明书的连接方法,不要随意连接不配套的设备。

⚠ 为避免听力受损,请勿长时间使用高音量。

使用警告

请遵循相关法律法规,不要在以下环境使用。
• 如加油站，油库，化学仓库附近等存储有易燃易爆物或化学品的环境,严禁使用设备。
• 请勿在医院手术室、急诊室、深切治疗部等场所使用此设备; 为避免干扰医疗仪器工作，使用此设备时请远离心脏起搏器、助听器、植入耳蜗等医用设备，请保持此设备和起搏器之间超过15厘米的距离。
• 若要在个人医疗设备附近使用此设备,请咨询医师和设备制造商。
• 请遵守有关驾车时使用此设备的所有安全警告和规定。
• 雷雨天气时，为避免雷击事故，请勿在室外使用。
• 充电时，请勿边充电边通话。
• 请勿在浴室等高湿度的地方对产品进行充电，否则会导致触电，人身伤害，起火和充电器损坏。
• 请遵守在任何环境里明确禁止使用的相关法律规定。

产品保修凭证

产品保修期内出现非人为损坏的性能故障可以享受下列三包服务：
• 自收货之日起7日内,产品出现非人为损坏的性能故障,用户可选择退回货款或者更换同型号同规格的产品。
• 自收货之日起15日内,产品出现非人为损坏的性能故障,用户可选择更换同型号同规格的产品。
• 自收货之日起一年内,产品出现非人为损坏的性能故障，用户可寄商家维修。

属于下列情况不在“三包”服务范围之内：
• 未经授权的维修、误用、碰撞、疏忽、滥用、进液、事故、改动或撕毁、涂改产品标贴、封条。
• 超过“三包”服务有效期的。
• 因火灾、水灾、雷击等不可抗力造成的损坏。
• 因人为原因导致的产品性能故障。
• 未按产品说明书要求使用而造成损坏的。

蓝牙连接示意图

① 进入设置

② 选择蓝牙选项



③
确保蓝牙开关处于 ON状态
搜索设备名：**U10-1**
点击蓝牙名进入连接



④ 蓝牙连接成功

保修卡

尊敬的用户，本保修卡是您将来申请保修的凭证，请您配合销售商填写并妥善保管备用。

用户信息	用户姓名	
	联系电话	
	通讯地址	
	电子邮箱	
	邮政编码	
产品信息	产品名称	
	产品型号	
	产品条码	
销售商信息	名　　称	
	地　　址	
	联系电话	
	邮政编码	
	销售日期	
	发票号码	
备注		

Dual Mode Smart Glasses

(M10-1 Instruction Manual)

1.Long press the power button for 2S to boot.

2.Press the power button 3 times to the next song.

3.Press the power button twice to the previous song.

4.Press the power button for 2S to switch modes
(Normal mode / Voice mode).

• Disclaimer

First of all,thank you for using out products! Please read this manual before using and use this product correctly.For the better service,changes due to the performance and functionality of the product will be revised without notice.Open-ear smart audio glasses.This product is a Bluetooth speaker withstereo function,easy to operate, stylish and practical,easy too carry.

• Product Introduction

Multifunctional smart glasses use Bluetooth chips, compatible with mainstream brand mobile phones and tablets and other Bluetooth devices, support aptX audio decoding technology, achieve CD-level high-quality sound quality, long-lasting battery life, left and right double speakers, open directional pronunciation, and barrier-free reception of external sounds. The surrounding environment information can be obtained at all times, which is safe, intelligent, healthy and convenient.

• Packing List

Audio glasses,Glasses charging cable, Instruction manual,Glasses cleaning cloth.

Key Function Overview

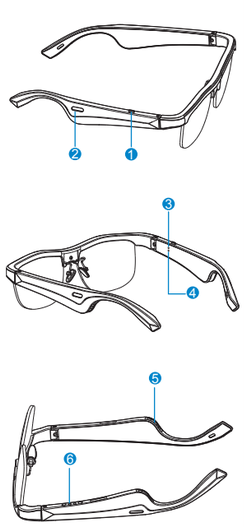

❶ Power on / Off / Next song / Previous song / Play / Pause / Pick up / Hang up / Voice assistant/ Navigation / Photo function

❷ Back sound outlet

❸ LED Indicator

❹ Microphones

❺ Speakers

❻ Magnetic charging port

• Warm Prompt

Thank you for your trust in our products, enabling dual-mode will significantly increase power consumption, but you can enjoy the convenience of voice control, enabling dual-mode pure voice models can free your hands AI intelligent wake-up (noise greater than 68 decibels will be misused).

Please use it when the power is sufficient to optimize your experience. If there is a low battery alarm, please charge the product in time to use it.

Product Parameters

Frame Material: TR90/Metals
Lens Material: PC
Lens Color: Transparent gradient, Sunglasses, Presbyopic lenses, etc. (a variety of options)
Bluetooth Protocol: V5.3
Charging Time: 1.5H
Use Time: 3H
Standby Time: 180H(Bluetooth connection)
Battery Capacity: 120mAh
Sound Channel: Double speakers, Stereo sound
Charging Voltage And Current: DC5V/1A
The maximum charging current is 150mAh

• Warm Prompt

When not in use for a long time,charge the battery at least once every 2 months.

Switch machine / Pairings

① Open the cell phone and other bluetooth devices, long press the power button for 2 seconds, the glasses voice prompts [Power on], the blue light flashes 3 to red and blue lights alternately; and bluetooth devices connected to the success of the lights go out.
(Please refer to the diagram on the last page for the Bluetooth connection of the cell phone.)

② **Turn off:** Long press the power button for 5 seconds, the voice prompts [shutdown], the red light flashes 3 times that is disconnected from the phone.
③ **Automatic shutdown:** No pairing or no device connection for 3 minutes automatically shut down.

Battery level indication

① **Low battery tip:** Low battery alarm occurs after the built-in battery voltage is lower than 3.4V, alarm every 120S, red light flashes once in 5s, and 3.1V automatically shuts down the machine.
② **Charging in progress:** The red light is on for a long time.
③ **Complete charging:** Red light off.

Keystroke mode

① **Receiving calls**
- Answer a call: Single press the power button to answer a call.
- Hanging up a call: Single press the power button to hang up a call.
- Rejecting a call: Long press the power button for 2 seconds to reject the call.
- Canceling a call: Single press the power button to cancel the phone call.

② **Enjoy music.**
- Precise song selection : Press the power button 4 times to wake up the voice assistant and then say, play music (e.g. Shanghai Tang), you can call and play the songs inside the phone.
- Randomly play a song: Press the power button 4 times in a row to wake up the voice assistant and say, play music, you can call and randomly play the songs inside the phone.
- Play the next song: Press the power button 3 times in a row.
- Play the previous song: Press the power button 2 times in a row.
- Pause playback: Single press the power button.

③ **Switch between playing music and making a call.**
- When you need to make a call while listening to music, first press the power button to pause the music, and then press the power button 4 times to wake up the voice assistant to make a call.

④ **Navigation.**
- Turn on the navigation: First pause the music, press the power button 4 times to wake up the voice function, and then do the voice operation, help me navigate to ** place.
- Close navigation: Press the power button 4 times to wake up the voice assistant and then say, exit navigation.

⑤ **Photo Function**.
- When the camera is turned on, press the power button to take a picture.

⑥ **Super distance connect back**.
- The headset is out of Bluetooth range, the headset is disconnected, back to the connection range automatically back to connect, when more than 180 seconds did not return to the connection range automatically shut down.

⑦ **Incoming call number broadcasting.**
- Incoming call state automatically broadcast the current caller number.

Voice mode

Warm tips:Voice wake-up will have a false touch after the opening of the normal phenomenon, the current volume is too high when the voice recognition will have the probability of wake-up failure can be said a few times to wake up the command word.

(Mode switching order description: power on default normal mode - voice mode, the 2 modes can be repeated in order to switch.)

①**Mode switching:**Long press the power button for 2 seconds to switch modes (Normal mode/Voice mode) when powering on/connecting the device.
②**Wake up the voice assistant:** No call state press the power button 4 times to wake up the voice assistant (Voice assistant nickname: "Xiaojie Xiaojie / Xiaojie students").
③**Play music:**"Play music",voice recognition.
④**Pause playback:**"Stop playback", voice recognition.
⑤**Play the previous song:**"Previous", voice recognition.
⑥**Play the next song:**"The next song", voice recognition.
⑦**Volume up:**"Increase the volume", voice recognition.
⑧**Volume down:**"Reduce the volume", voice recognition.
⑨**Answer the phone:**"Answer the phone", voice recognition.
⑩**Reject the call:**"Hang up the phone", voice recognition.

Tips for use

1.Please read the instructions carefully before using this product and keep this manual.
2.For the first time,please fully charge this glasses.
3.If the glasses does not charge for a long period of time (more than two weeks),charge it before use.

Warning

1.Do not dismantle or repair this product for any reason,as this may result in fire. Electronic breakdown or even complete damage to the product.
2.Do not place the device in an environment where the temperature is too low or too high (below 0°C or above 45°C).
3.Do not contact the product with corrosive liquids or immerse them in liquids.
4.Do not expose the glasses to the sun for a long time,otherwise it will be easily deformed, broken and broken.
5. Do not place the magnetic end of the charging cable close to metal objects to prevent the risk of short circuit caused by magnetically attracting metal objects.

Safety information

1. Before using this product, please read all safety information to ensure correct and safe use.
2. Using a power supply, charger or battery not approved by the original manufacturer may cause fire, explosion or other hazards.
3. Please use the accessories approved by the manufacturer and matched with this model of equipment.
4.Use accessories approved by this manufacturer and compatible with this model.Please use the device within the temperature range of 0°C-35°C,and store the device and its accessories within the temperature range of -20°C - 55°C.When the ambient temperature is too high or too low,it may cause equipment failure.
5.If the device uses a non-removable internal battery,do not replace the battery yourself to avoid damaging the battery or device.The battery can only be replaced by an authorized service center.
6.If charging is complete .disconnect the charger from the device the unplug the charger from the power outlet.Do not charge more than 12 hours.
7. Please keep the device dry.
8. If the equipment or any other parts do not work properly, please do not repair the product by yourself.
9. When connecting other devices, please refer to the connection method in the instruction manual, and do not connect unsuitable devices at will.

Use of Warnings

Please follow the relevant laws and regulations and do not use headphones in the following environments.
• Such as gas stations,oil depots,chemical warehouses and other environments where flammable and explosive substances or chemicals are stored,Use of the device is strictly prohibited.
• Do not use this device in hospital operating rooms, emergency rooms, intensive care units, etc.; in order to avoid interfering with the work of medical equipment, please keep away from pacemakers, hearing aids, cochlear implants and other medical equipment when using this device, please keep this More than 15 cm between the device and the pacemaker.
• To use this device near personal medical equipment, consult your physician and device manufacturer.
• Follow all safety warnings and regulations regarding the use of this device while driving.
• During thunderstorms, do not use it outdoors in order to avoid lightning accidents.
• When charging, do not make a call while charging.
• Do not charge the product in a place with high humidity such as a bathroom, or it may cause electric shock, personal injury, fire and damage to the charger.
• Please comply with the relevant legal provisions that are expressly prohibited in any environment.

Warranty certificate

During the product warranty period, non-human-damaged performance failures can enjoy the following three-guarantee services:

• Within 7 days from the date of receipt, if the product has a performance failure that is not artificially damaged, the user can choose to return the payment or replace the product with the same model and specification.
• Within 15 days from the date of receipt, the user can choose to replace the product with the same model and specification if the product has a performance failure that is not artificially damaged.
• Within one year from the date of receipt of the product, if the product has a performance failure that is not artificially damaged, the user can send it to the merchant for repair.

Warranty card

Dear users, this warranty card is the proof of your future warranty application, please cooperate with the seller to fill out and keep it in a safe place.

User Information	User name	
	Contact number	
	Mail address	
	E-mail address	
	Postal code	
Products Information	Product name	
	Product model	
	Product bar code	
Sellers Information	Name	
	Address	
	Contact number	
	Postal code	
	Sale date	
	Invoice number	
Note		

Bluetooth connection schematic

①
Go to settings



②
Select the Bluetooth option



③
Make sure the Bluetooth switch is ON, search for the device name: **U10-1** , click the Bluetooth name to enter the connection.



④
The bluetooth connection is successful.

FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
•Reorient or relocate the receiving antenna.
•Increase the separation between the equipment and receiver.
•Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
•Consult the dealer or an experienced radio/TV technician for help.
Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

RF Exposure Information
The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.