




JPL-Icon 300-RB Bluetooth Headset

User Guide

ICON
BY JPL

We Hear Your Vision

Headset overview

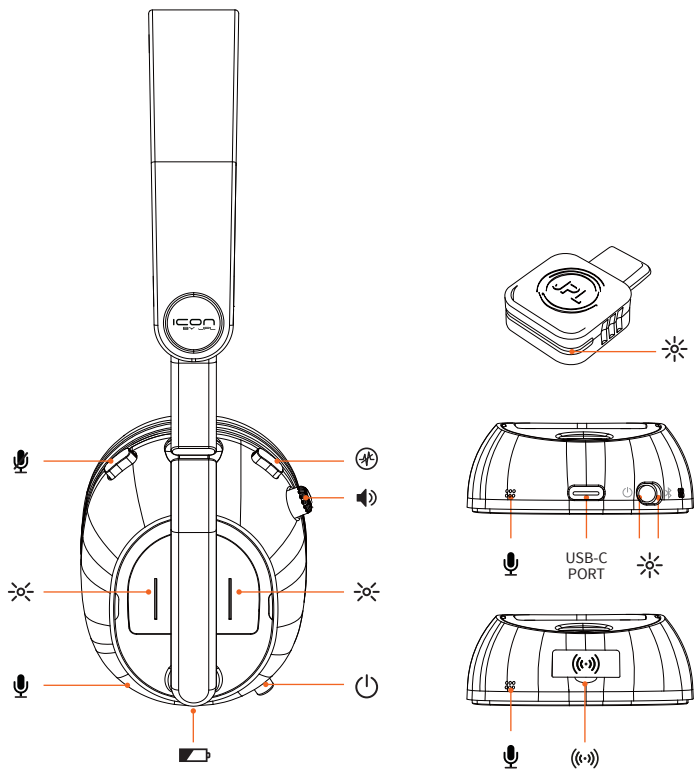

Icon	Headset control
	Mute
	ANC
	Volume
	DND indicator lights
	LED indicator lights
	Internal microphone
	Charge port
	Power on/off
	Bluetooth dongle

	Mute
	ANC
	Volume
	DND indicator lights
	LED indicator lights
	Internal microphone
	Charge port
	Power on/off
	Bluetooth dongle

How to charge your headset




Your headset should have enough power to pair and make a few calls directly out of the box.

Low battery level: The headset will give a voice prompt “Low battery” every 30 minutes and is also indicated by a flashing red LED light located at the side of the power button.

Headset charging: The headset can be charged using the USB-C cable supplied with the headset. Simply connect the USB-C jack into the USB-C port located on the base of the right-hand microphone speaker housing and then connect the USB-C /A adapter into your PC, laptop or directly into a USB wall socket.


It takes approximately 2 hours to fully charge. When fully charged the battery life can be up to 55 hours dependant on how you choose to use your headset.


The battery level LED on the headset will display as solid red while charging and solid blue when the battery is fully charged.

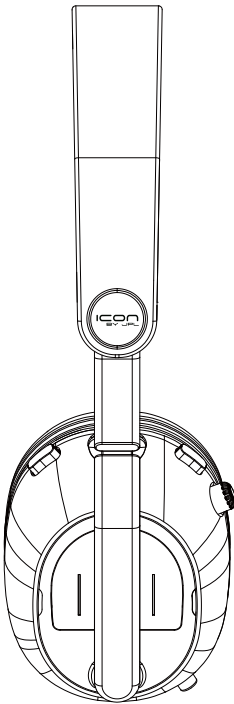

Right-hand side speaker housing

Battery level LED indicator




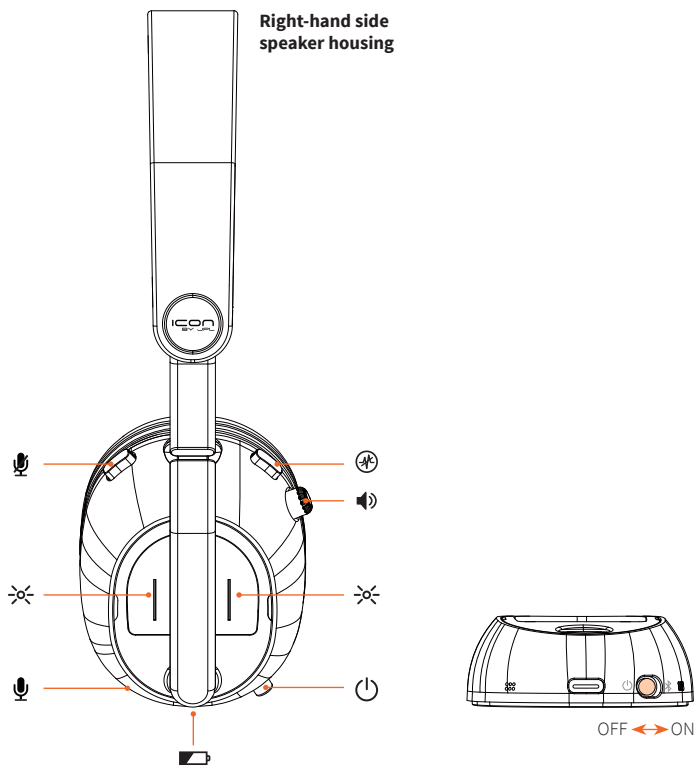


Power on/off

Slide the on/off switch to the On or Off position to power the headset on or off.

How to connect

ICON
BY JPL



Pair to a computer

Plug the supplied BT dongle (found in the handy storage drawer located in the base of the left-hand speaker housing) into a USB-C port on your PC or laptop. The JPL-Icon 300-RB and BT dongle are pre-paired and ready to use.

If for whatever reason the pairing is not automatic, switch the headset to “ON”, pairing will start after 6 seconds.

The dongle will flash red and blue while pairing.



The Bluetooth range is 10 metres (33 feet). If you are out of range you will hear a voice prompt saying “Out of range”.

If there is no Bluetooth connection when pairing, the headset will stay in pairing mode for 5 minutes and then power off.

Pair to a smartphone


To pair your headset to your mobile phone, slide the **on/off** switch to the Bluetooth position and hold it there until the LED at the side of the switch flashes and you hear the voice prompt say “Pairing” in your headset.

Go to the Bluetooth menu on your mobile phone and select JPL-Icon 300-RB from the list of available devices.

Pair to active devices

The JPL-Icon 300-RB can be paired with two active devices. Six devices can be stored in its memory.

USB-C Dongle overview

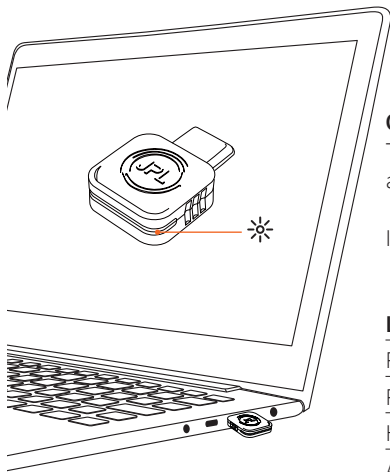

Overview

The JPL-Icon 300-RB BT Dongle is a Bluetooth host device that allows Bluetooth headsets to be paired with it.

It features a visible reflector that displays red, blue, or purple light.


LED Status indicator	LED colour and action
Power on	Red LED on
Pairing mode	Red & Blue toggle -> 1 min time out
Headset paired	Blue LED on
A2DP mode	Purple LED on & off (flashing)
A2DP play	Purple LED on & off (flashing)
HFP mode	Blue LED on & off (fast flashing)

Pairing

When the dongle is in pairing mode, the dongle LED will flash blue and red. If pairing is successful, the blue LED will be displayed.

How to make a call

ICON
BY JPL

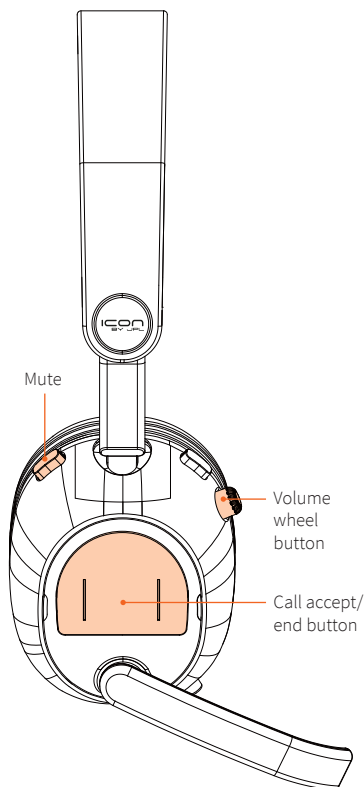

Start a call

Short press the call accept button to open the line, select the person you would like to call via your softphone if connected to your computer, or from your contacts list if connected to your mobile phone.

Cancel a call

When dialling, short press the call accept/end button before the opposite side pick up.

Answer/accept a call

When there is an incoming call, short press the call accept/end button.

Reject/end a call

When there is an incoming call, long press the call accept/end button for 3 seconds.

Last number redial

Short press the call accept/end button twice.

New incoming call during a call, end the current call and pick up new call

Short press the call accept/end button.

New incoming call during a call, reject new call and keep on the current call

Short press the call accept/end button twice.

Hang up / end call

During the call, short press the call accept/end button.

Volume up

Scroll the wheel clockwise.

Volume down


Scroll the wheel anti-clockwise.

Mute

During a call, short press the Mute button.

How to play music

ICON
BY JPL

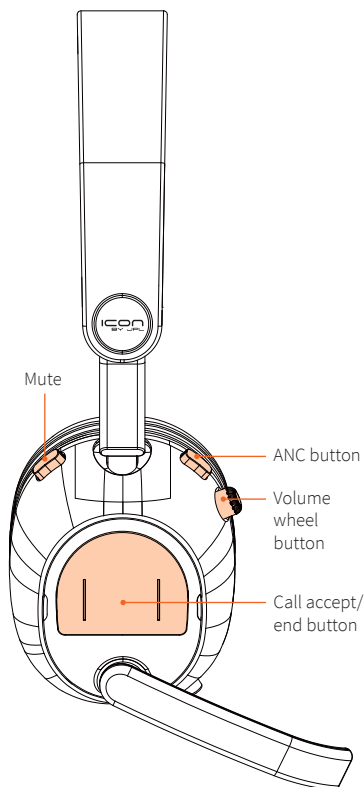

Play music

First enable Bluetooth on your device, then put your headset in pairing mode. Next, select your JPL-Icon 300-RB headset from the list of available devices in your device's Bluetooth settings to connect, start playing music from your desired app. If connected but no sound is playing, check your device's settings to ensure that media audio is enabled for the headset.

Pause music

When music is playing, short press the volume wheel button.

Play music

When music is paused, short press the volume wheel button.

Play next track

When music is playing, short press the volume wheel button twice.

Play previous track

When music is playing, short press the volume wheel button three times.

Volume up

Scroll the wheel clockwise.

Volume down

Scroll the wheel anti-clockwise.

Auto on/off music

The headset will play music while the headset is on your head, and the music will pause when you take the headset off of your head.

ANC on/off/hear-thru

Short press the ANC button, the voice prompt will say "ANC on" in your headset.


Hear-thru technology amplifies surrounding sounds so that you hear conversations or announcements if needed while wearing the headset.

DND indicator light

ICON
BY JPL


DND indicator light

The DND LED lights on your JPL-Icon 300-RB headset light up red when you are on a call to indicate to colleagues that you are on a call and should not be disturbed. More info needed please

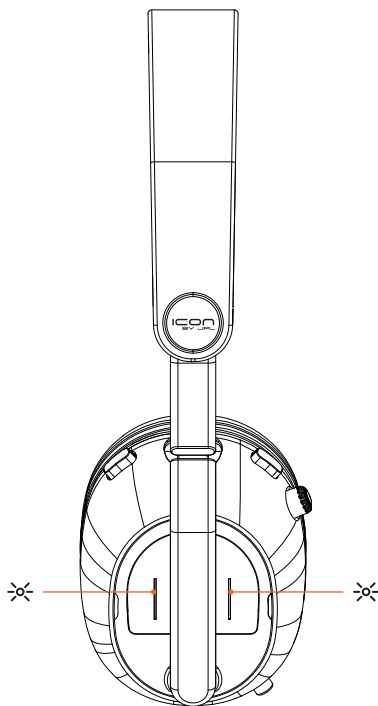

Mute via the microphone boom

ICON
BY JPL

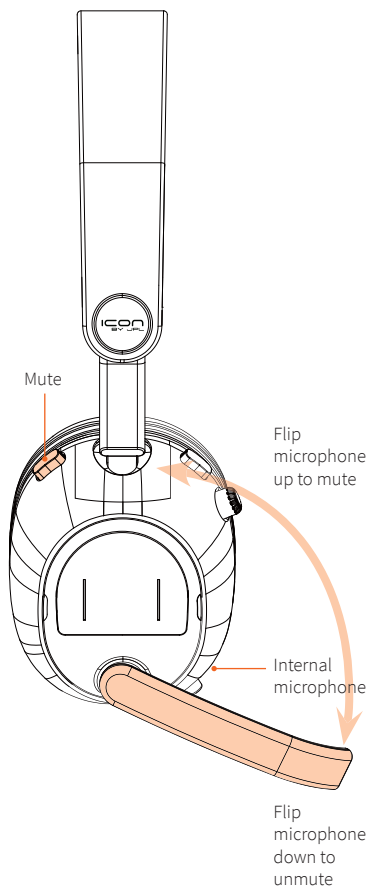

To mute the microphone during a call

Flip up the microphone boom arm to align with the headband, you will be able to hear the conversation but the caller on the other end of the call will not be able to hear you.

To unmute the microphone during a call

Flip down the microphone boom arm to align with the side of your mouth, the caller on the other end of the call will now be able to hear you.

Switch to internal microphones

Flip up the microphone boom arm to align with the headband and then press the "mute button".


Not sure of how this works?????????

How to answer a call when listening to music

ICON
BY JPL

Incoming call while listening to music

Need someone to explain this please

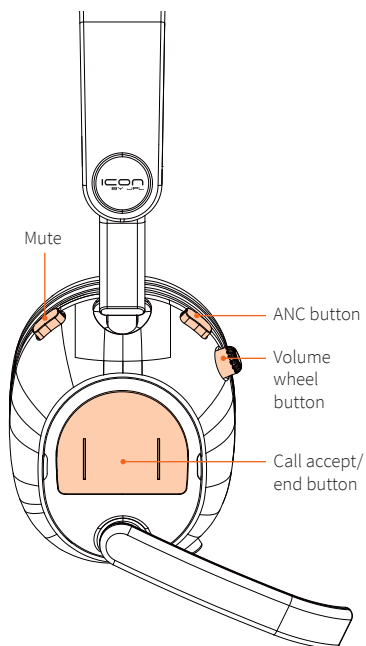

Battery care

Always store your JPL-Icon 300-RB in the felt pouch supplied.

To help prevent the deterioration of the battery capacity or lifetime you should avoid storing the headset in extreme hot or cold environments.

The recommended storage temperature is between -20°C and 55°C (-4°F and 131°F).

Do not store the headset without charging for periods of 2 months or more.

Headset Hygiene

Replacing the cushion pads on your headset should be a regular occurrence, like changing the oil in your car. Not only does changing the pads have hygienic merit, but it also helps to preserve the original sound intended. Even if the pads are clean, they become compressed as they age, and this alters the effective acoustic space. As a guide, ear cushions should be replaced every 3 months or replaced if the headset is passed on to a new staff member.

FCC Caution: This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1) This device may not cause harmful interference, and
- 2) this device must accept any interference received, including interference that may cause undesired operation.

15.105 Information to the user.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a

residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC RF Exposure Warning Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment can be used in portable exposure conditions.

REGISTERED ADDRESS

UK Office: JPL Telecom Limited, Unit 1, Church Close Business Park, Todber, Sturminster Newton, Dorset, DT10 1JH, UK

EMEA Office: JPL Telecom B.V. Naritaweg 148, 1043 CA, Amsterdam, NETHERLANDS

USA Office: JPL Telecom LLC, 445 W Merritt Ave, Merritt Island, FL 32953, USA

Registered in England No. 5250754

www.jpotele.com

