

TEST REPORT

Applicant: MEFERI TECHNOLOGIES CO.,LTD.
Address: 5F, A5, Tianfu Software Park, No. 1129, Century City Road, High-tech Zone, 610000, Chengdu, Sichuan, China
Equipment Type: Mobile Computer
Model Name: ME63(refer to section 2.3)
Brand Name: MEFERI
FCC ID: 2A9LJ-ME63
Test Standard: 47 CFR Part 15 Subpart E (refer to section 3.1)
Sample Arrival Date: Aug. 20, 2025
Test Date: Aug. 21, 2025 - Oct. 14, 2025
Date of Issue: Dec. 01, 2025

ISSUED BY:

Shanghai Tejet Communications Technology Co., Ltd. Testing Center



Prepared by: Zhang Rujie

Reviewed by: Hai Su

Approved by: Zhang Yanqing
(Laboratory Manager)

Zhang Rujie

Hai Su

Zhang Yanqing

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Dec. 01, 2025</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Test Laboratory	4
1.2	Test Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	General Description for Equipment under Test (EUT)	5
2.4	Technical Information	6
2.5	Channel List	8
3	SUMMARY OF TEST RESULTS	12
3.1	Test Standards	12
3.2	Test Verdict	12
4	GENERAL TEST CONFIGURATIONS	13
4.1	Test Environments	13
4.2	Test Equipment List	13
4.3	Test Software List	13
4.4	Measurement Uncertainty	14
4.5	Decision Rule	15
4.6	Description of Test Setup	15
5	TEST ITEMS	18
5.1	RF Output Power	18
5.2	Emission Bandwidth and 6 dB Bandwidth	20
5.3	Power Spectral density (PSD)	21
5.4	Conducted Emission	22
5.5	Radiated Spurious Emissions and Band Edge (Restricted-band)	23

ANNEX A	TEST RESULT	28
A.1	RF Output Power	28
A.2	Emission Bandwidth & 99% Bandwidth	39
A.3	6 dB Bandwidth	43
A.4	Power Spectral Density	44
A.5	Conducted Emission.....	55
A.6	Radiated Spurious Emissions and Band Edge (Restricted-band).....	57
ANNEX B	TEST SETUP PHOTOS	296
ANNEX C	EUT EXTERNAL PHOTOS.....	296
ANNEX D	EUT INTERNAL PHOTOS.....	296

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shanghai Tejet Communications Technology Co., Ltd. Testing Center
Address	1-2/F., Building 1, No.222, Xuanlan Road, Xuanqiao, Pudong New District, Shanghai, China

1.2 Test Location

Name	Shanghai Tejet Communications Technology Co., Ltd. Testing Center
Location	1-2/F., Building 1, No.222, Xuanlan Road, Xuanqiao, Pudong New District, Shanghai, China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1352.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	MEFERI TECHNOLOGIES CO.,LTD.
Address	5F, A5, Tianfu Software Park, No. 1129,Century City Road, High-tech Zone,610000, Chengdu, Sichuan, China

2.2 Manufacturer Information

Manufacturer	MEFERI TECHNOLOGIES CO.,LTD.
Address	5F, A5, Tianfu Software Park, No. 1129,Century City Road, High-tech Zone,610000, Chengdu, Sichuan, China

2.3 General Description for Equipment under Test (EUT)

EUT Name	Mobile Computer
Model Name Under Test	ME63
Series Model Name	ME63P, ME63T, ME63H, ME63L, ME63S, ME63J, ME63_EEA, ME63_ROW
Description of Model name differentiation	All models are identical to each other construction and critical components, but only differ in colors and sales channels.
Sample Number	SC-SH2580050-S11(conducted) SC-SH2580050-S03(radiated) SC-SH2580050-S05(radiated)
Hardware Version	V1.0
Software Version	ME63_EN_GE_V01_Q3_H01
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Technical Information

Network and Wireless connectivity	2G Network GSM/GPRS/EDGE 850/1900 3G Network WCDMA Band 2/4/5 4G Network LTE FDD Band 2/4/5/7/12/13/17/19/25/26/66/71 LTE TDD Band 38/41/42/43 5G Network FDD NR n2/n5/n7/n25/n66/n71 TDD NR n38/n41/n77/n78 ENDC DC_2A_n77A, DC_2A_n78A, DC_5A_n41A, DC_5A_n77A, DC_5A_n78A, DC_7A_n77A, DC_7A_n78A, DC_26A_n41A, DC_26A_n78A, DC_38A_n78A, DC_41A_n77A, DC_41A_n78A, DC_66A_n77A, DC_66A_n78A, DC_71A_n41A, DC_71A_n77A, DC_71A_n78A Bluetooth 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20/40), 802.11ax(HE20/40) 5G WIFI 802.11a, 802.11n(HT20/40), 802.11ac(VHT20/40/80/160), 802.11ax(HE20/40/80/160) 6G WIFI 802.11ax(HE20/40/80/160) GPS, GLONASS, BDS, Galileo, NFC
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Frequency Range	U-NII-1: 5150 MHz to 5250 MHz, U-NII-2A: 5250 MHz to 5350 MHz, U-NII-2C: 5470 MHz to 5725 MHz, U-NII-3: 5725 MHz to 5850 MHz
Modulation technology	OFDM, OFDMA
Modulation Type	1024QAM, 256QAM, 64QAM, 16QAM, BPSK, QPSK
Transfer Rate (Mbps) (Single RF path)	802.11a: 54/ 48/ 36/ 24/ 18/ 12/ 9/ 6 Mbps 802.11n: up to 150 Mbps 802.11ac: up to VHT-MCS9 802.11ax: up to 1201 Mbps
Channel Bandwidth	802.11a: 20 MHz 802.11n: 20 MHz, 40 MHz 802.11ac: 20 MHz, 40 MHz, 80 MHz, 160 MHz 802.11ax: 20 MHz, 40 MHz, 80 MHz, 160 MHz
Maximum Output Power	U-NII-1: 16.01 dBm U-NII-2A: 16.39 dBm U-NII-2C: 16.06 dBm U-NII-3: 15.97 dBm
Antenna System (eg., MIMO, Smart Antenna)	N/A
Categorization as Correlated or Completely Uncorrelated	N/A
Antenna	Main Antenna
	PIFA Antenna

Type	Aux. Antenna	
Antenna Gain	Main Antenna	U-NII-1: 5150 MHz to 5250 MHz: 1.28 dBi U-NII-2A: 5250 MHz to 5350 MHz: 1.28 dBi U-NII-2C: 5470 MHz to 5725 MHz: 1.28 dBi U-NII-3: 5725 MHz to 5850 MHz: 1.28 dBi
	Aux. Antenna	U-NII-1: 5150 MHz to 5250 MHz: 1.96 dBi U-NII-2A: 5250 MHz to 5350 MHz: 1.96 dBi U-NII-2C: 5470 MHz to 5725 MHz: 1.96 dBi U-NII-3: 5725 MHz to 5850 MHz: 1.96 dBi
About the Product		The equipment is Mobile Computer, intended for used with information technology equipment.

Mode	Antenna		
	Main Antenna	Aux. Antenna	MIMO
802.11a	√	√	--
802.11n20	√	√	--
802.11n40	√	√	--
802.11ac20	√	√	--
802.11ac40	√	√	--
802.11ac80	√	√	--
802.11ac160	√	√	--
802.11ax20	√	√	--
802.11ax40	√	√	--
802.11ax80	√	√	--
802.11ax160	√	√	--
Note: All the configurations were tested, but only the worst data was shown in this report.			

802.11ax RU configuration table								
Mode	Full RU (SU)	RU_26	RU_52	RU_106	RU_242	RU_484	RU_996	RU_996 *2
802.11ax20	√	√	√	√	√	--	--	--
802.11ax40	√	√	√	√	√	√	--	--
802.11ax80	√	√	√	√	√	√	√	--
802.11ax160	√	√	√	√	√	√	√	√

2.5 Channel List

20 MHz		40 MHz		80 MHz		160 MHz	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
36	5180	38	5190	42	5210	50	5250
40	5200	46	5230	58	5290	114	5570
44	5220	54	5270	106	5530		
48	5240	62	5310	122	5610		
52	5260	102	5510	138	5690		
56	5280	110	5550	155	5775		
60	5300	118	5590				
64	5320	126	5630				
100	5500	134	5670				
104	5520	142	5710				
108	5540	151	5755				
112	5560	159	5795				
116	5580						
120	5600						
124	5620						
128	5640						
132	5660						
136	5680						
140	5700						
149	5745						
153	5765						
157	5785						
161	5805						
165	5825						

The Lowest frequency, the middle frequency and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11a/n(HT20)/ac(VHT20)/ax(HE20)

U-NII-1 (5150 - 5250 MHz)			U-NII-2A (5250 - 5350 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
36	Low	5180	52	Low	5260
44	Mid	5220	60	Mid	5300
48	High	5240	64	High	5320

U-NII-2C (5470 - 5725 MHz)			U-NII-3 (5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
100	Low	5500	149	Low	5745
116	Mid	5580	157	Mid	5785
140	High	5700	165	High	5825

For 802.11n(HT40)/ac(VHT40)/ax(HE40)

U-NII-1 (5150 - 5250 MHz)			U-NII-2A (5250 - 5350 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
38	Low	5190	54	Low	5270
46	High	5230	62	High	5310

U-NII-2C (5470 - 5725 MHz)			U-NII-3 (5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
102	Low	5510	151	Low	5755
118	Mid	5590	159	High	5795
134	High	5670			

For 802.11ac(VHT80)/ax(HE80)

U-NII-1 (5150 - 5250 MHz)			U-NII-2A (5250 - 5350 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
42	Mid	5210	58	Mid	5290

U-NII-2C (5470 - 5725 MHz)			U-NII-3 (5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
106	Low	5530	155	Mid	5775
122	High	5610			

For 802.11ac(VHT160)/ax(HE160)

U-NII-2A (5250 - 5350 MHz)			U-NII-2C (5470 - 5725 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
50	Mid	5250	114	Mid	5570

Note: Preliminary tests were performed in different data rate in above table to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Modulation Type	U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
				Channel	Channel	Channel	Channel
RF Output Power	11a	6	BPSK	48/44/36	64/60/52	140/116/100	165/157/149
	11n(20 MHz)	6.5		48/44/36	64/60/52	140/116/100	165/157/149
	11n(40 MHz)	13.5		46/38	62/54	134/118/102	159/151
	11ac(20 MHz)	6.5		48/44/36	64/60/52	140/116/100	165/157/149
	11ac(40 MHz)	13.5		46/38	62/54	134/118/102	159/151
	11ac(80 MHz)	29.3		42	58	122/106	155
	11ac(160 MHz)	58.3		N/A	50	114	N/A
	11ax(20 MHz)	8.6		48/44/36	64/60/52	140/116/100	165/157/149
	11ax(40 MHz)	17.2		46/38	62/54	134/118/102	159/151
	11ax(80 MHz)	36.0		42	58	122/106	155
	11ax(160 MHz)	72.1		N/A	50	114	N/A
Emission Bandwidth & 99% Occupied Bandwidth	11a	6	BPSK	48/44/36	64/60/52	140/116/100	165/157/149
	11n(20 MHz)	6.5		48/44/36	64/60/52	140/116/100	165/157/149
	11n(40 MHz)	13.5		46/38	62/54	134/118/102	159/151
	11ac(20 MHz)	6.5		48/44/36	64/60/52	140/116/100	165/157/149
	11ac(40 MHz)	13.5		46/38	62/54	134/118/102	159/151
	11ac(80 MHz)	29.3		42	58	122/106	155
	11ac(160 MHz)	58.3		N/A	50	114	N/A
	11ax(20 MHz)	8.6		48/44/36	64/60/52	140/116/100	165/157/149
	11ax(40 MHz)	17.2		46/38	62/54	134/118/102	159/151
	11ax(80 MHz)	36.0		42	58	122/106	155
	11ax(160 MHz)	72.1		N/A	50	114	N/A
6 dB bandwidth	11a	6	BPSK	N/A	N/A	N/A	165/157/149
	11n(20 MHz)	6.5		N/A	N/A	N/A	165/157/149
	11n(40 MHz)	13.5		N/A	N/A	N/A	159/151
	11ac(20 MHz)	6.5		N/A	N/A	N/A	165/157/149
	11ac(40 MHz)	13.5		N/A	N/A	N/A	159/151
	11ac(80 MHz)	29.3		N/A	N/A	N/A	155
	11ac(160 MHz)	58.3		N/A	50	114	N/A
	11ax(20 MHz)	8.6		N/A	N/A	N/A	165/157/149
	11ax(40 MHz)	17.2		N/A	N/A	N/A	159/151
	11ax(80 MHz)	36.0		N/A	N/A	N/A	155
	11ax(160 MHz)	72.1		N/A	N/A	N/A	N/A
Power Spectral Density	11a	6	BPSK	48/44/36	64/60/52	140/116/100	165/157/149
	11n(20 MHz)	6.5		48/44/36	64/60/52	140/116/100	165/157/149
	11n(40 MHz)	13.5		46/38	62/54	134/118/102	159/151
	11ac(20 MHz)	6.5		48/44/36	64/60/52	140/116/100	165/157/149
	11ac(40 MHz)	13.5		46/38	62/54	134/118/102	159/151
	11ac(80 MHz)	29.3		42	58	122/106	155
	11ac(160 MHz)	58.3		N/A	50	114	N/A
	11ax(20 MHz)	8.6		48/44/36	64/60/52	140/116/100	165/157/149

	11ax(40 MHz)	17.2		46/38	62/54	134/118/102	159/151
	11ax(80 MHz)	36.0		42	58	122/106	155
	11ax(160 MHz)	72.1		N/A	50	114	N/A
Radiated Spurious Emissions	11a	6	BPSK	48/44/36	64/60/52	140/116/100	165/157/149
	11n(20 MHz)	6.5		48/44/36	64/60/52	140/116/100	165/157/149
	11n(40 MHz)	13.5		46/38	62/54	134/118/102	159/151
	11ac(20 MHz)	6.5		48/44/36	64/60/52	140/116/100	165/157/149
	11ac(40 MHz)	13.5		46/38	62/54	134/118/102	159/151
	11ac(80 MHz)	29.3		42	58	122/106	155
	11ac(160 MHz)	58.3		N/A	50	114	N/A
	11ax(20 MHz)	8.6		48/44/36	64/60/52	140/116/100	165/157/149
	11ax(40 MHz)	17.2		46/38	62/54	134/118/102	159/151
	11ax(80 MHz)	36.0		42	58	122/106	155
	11ax(160 MHz)	72.1		N/A	50	114	N/A
Band Edge (Restricted- band)	11a	6	BPSK	48/36	64/52	140/100	165/149
	11n(20 MHz)	6.5		48/36	64/52	140/100	165/149
	11n(40 MHz)	13.5		46/38	62/54	134/102	159/151
	11ac(20 MHz)	6.5		48/36	64/52	140/100	165/149
	11ac(40 MHz)	13.5		46/38	62/54	134/102	159/151
	11ac(80 MHz)	29.3		42	58	122/106	155
	11ac(160 MHz)	58.3		N/A	50	114	N/A
	11ax(20 MHz)	8.6		48/36	64/52	140/100	165/149
	11ax(40 MHz)	17.2		46/38	62/54	134/102	159/151
	11ax(80 MHz)	36.0		42	58	122/106	155
	11ax(160 MHz)	72.1		N/A	50	114	N/A

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart E	Unlicensed National Information Infrastructure Devices
2	KDB Publication 789033 D02v02r01	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
3	ANSI C63.10-2020	American National Standard for Testing Unlicensed Wireless Devices

3.2 Test Verdict

No.	Description	FCC Part No.	RSS Part No.	Test Result	Verdict
1	Antenna Requirement	15.203	N/A	--	Pass ^{Note1}
2	RF Output Power	15.407(a)	N/A	ANNEX A.1	Pass
3	Emission Bandwidth & 99% Occupied Bandwidth	15.407(a)	N/A	ANNEX A.2	Pass
4	6 dB bandwidth	15.407(e)	N/A	ANNEX A.3	Pass
5	Power Spectral Density	15.407(a)	N/A	ANNEX A.4	Pass
6	Conducted Emission	15.207	N/A	ANNEX A.5	Pass
7	Radiated Spurious Emissions and Band Edge (Restricted-band)	15.407(b)	N/A	ANNEX A.6	Pass

Note ¹: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note ²: Under all normal operating conditions specified in the user manual, frequency stability can keep radiation within the operating frequency band.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	50% to 59%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+23.2°C to +25.1°C
Working Voltage of the EUT	NV (Normal Voltage)	3.8V

4.2 Test Equipment List

Description	Manufacturer	Model	Equipment No.	Cal. Date	Cal. Due
Spectrum Analyzer	KEYSIGHT	N9020A	BH-EMC-L066	2025.02.12	2026.02.11
Spectrum Analyzer	KEYSIGHT	N9010B	BH-EMC-L099	2025.02.12	2026.02.11
Signal Generator	Anritsu	MG3710E	BH-EMC-L131	2025.02.12	2026.02.11
Wideband Radio Communication Tester	R&S	CMW500	BH-EMC-L094	2025.02.11	2026.02.10
EMI Receiver	KEYSIGHT	N9038A	BH-EMC-L015	2025.07.04	2026.07.03
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519 B	BH-EMC-L067	2024.03.11	2027.03.10
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	BH-EMC-L008	2024.03.11	2027.03.10
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	BH-EMC-L044	2024.03.11	2027.03.10
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400-KF	BH-EMC-L061	2024.03.11	2027.03.10
Anechoic Chamber	YiHeng	9m*6m*6m	BH-EMC-L001	2024.04.18	2027.04.17
EMI Receiver	KEYSIGHT	N9038A	BH-EMC-L127	2025.02.12	2026.02.11
LISN	SCHWARZBECK	NSLK 8127	BH-EMC-L011	2025.02.11	2026.02.10
10dB Limiter	SCHWARZBECK	VTSD 9561-F	BH-EMC-L014	2025.02.11	2026.02.10
Shielded Room	YiHeng	5m*4m*3.2m	BH-EMC-L006	2024.02.22	2027.02.21

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable Test Setup
BL410R	BALUN	V2.1.1.496	N/A	The section 4.6.1
BL410E	BALUN	V21.919	N/A	The section 4.6.2&4.6.3&4.6.4&4.6.5

4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.4 %
RF output power, conducted	0.41 dB
Power Spectral Density, conducted	1.73 dB
Unwanted Emissions, conducted	1.73 dB
All emissions, radiated	3.70 dB
Temperature	0.82 °C
Humidity	4.1 %

4.5 Decision Rule

- ☐ No Need
☒ Use General conformity decision rule (Consider uncertainty or not ☒No ☐Yes)
☐ Use Special Conformity Decision Rule (Consider uncertainty or not ☐No ☐Yes)


4.6 Description of Test Setup

4.6.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5 dB used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

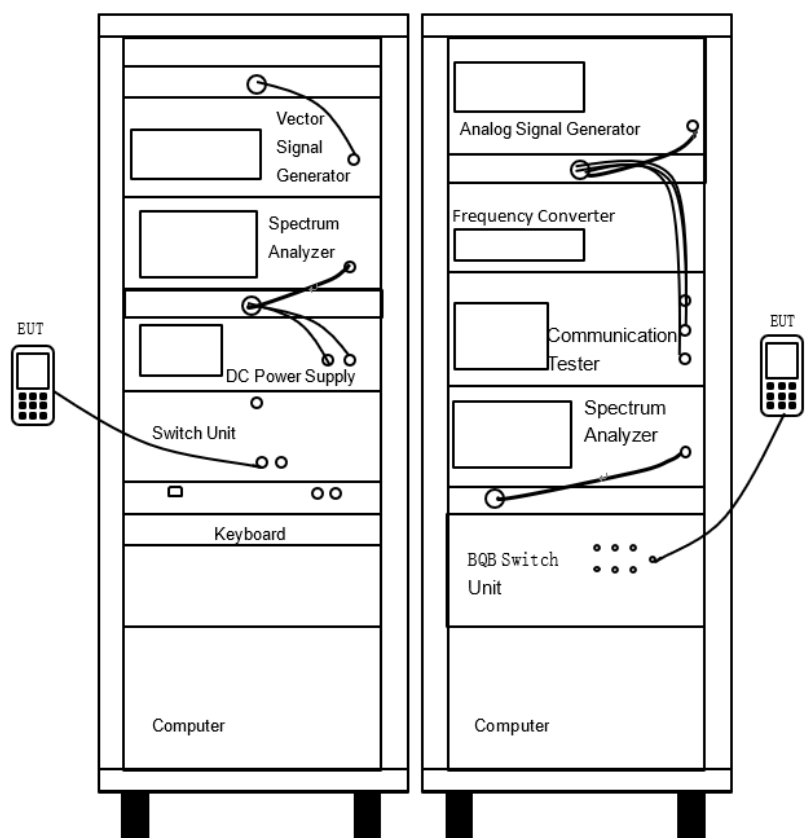


(Diagram 1)

4.6.2 For AC Power Supply Port Test

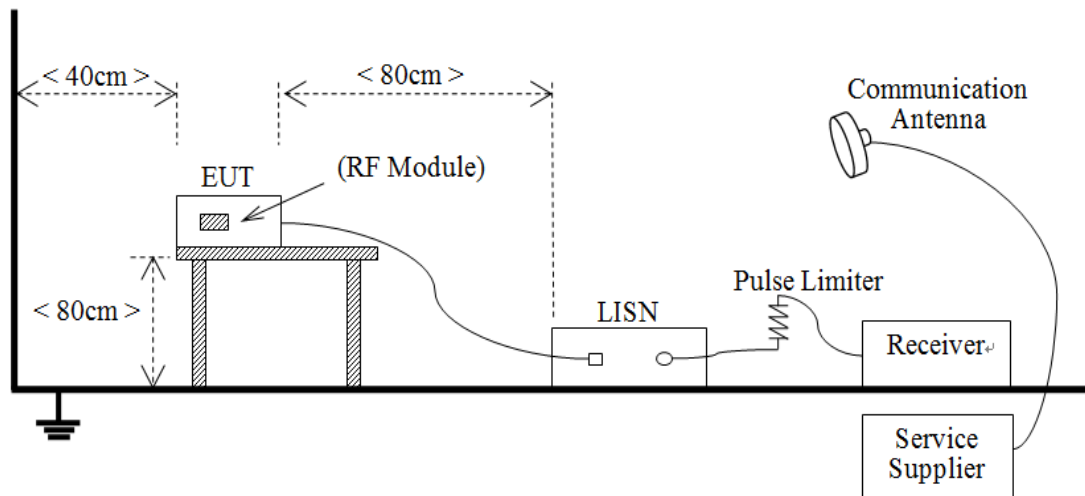


(Diagram 2)

4.6.3 For Radiated Test (Below 30 MHz)

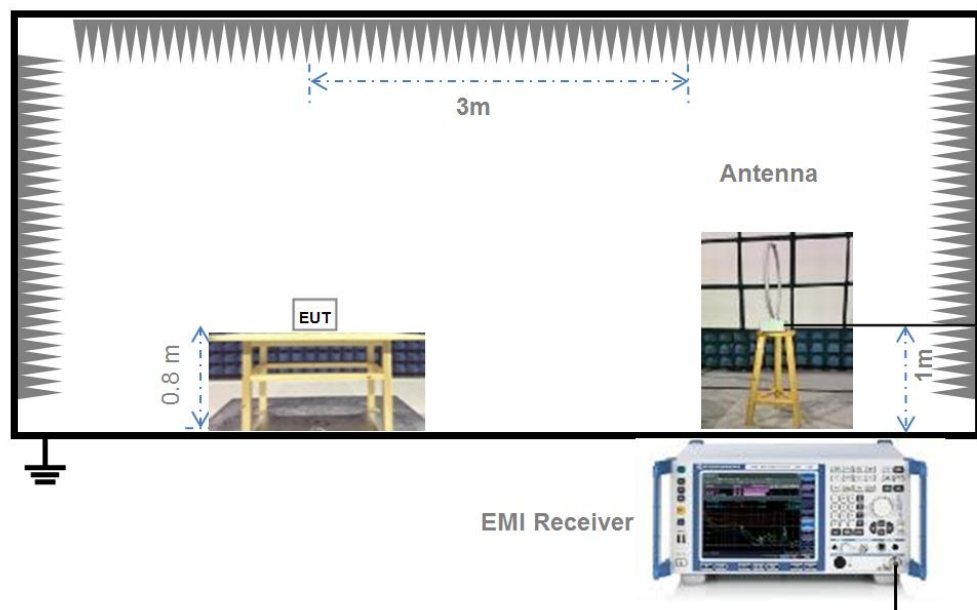


(Diagram 3)

4.6.4 For Radiated Test (30 MHz-1 GHz)

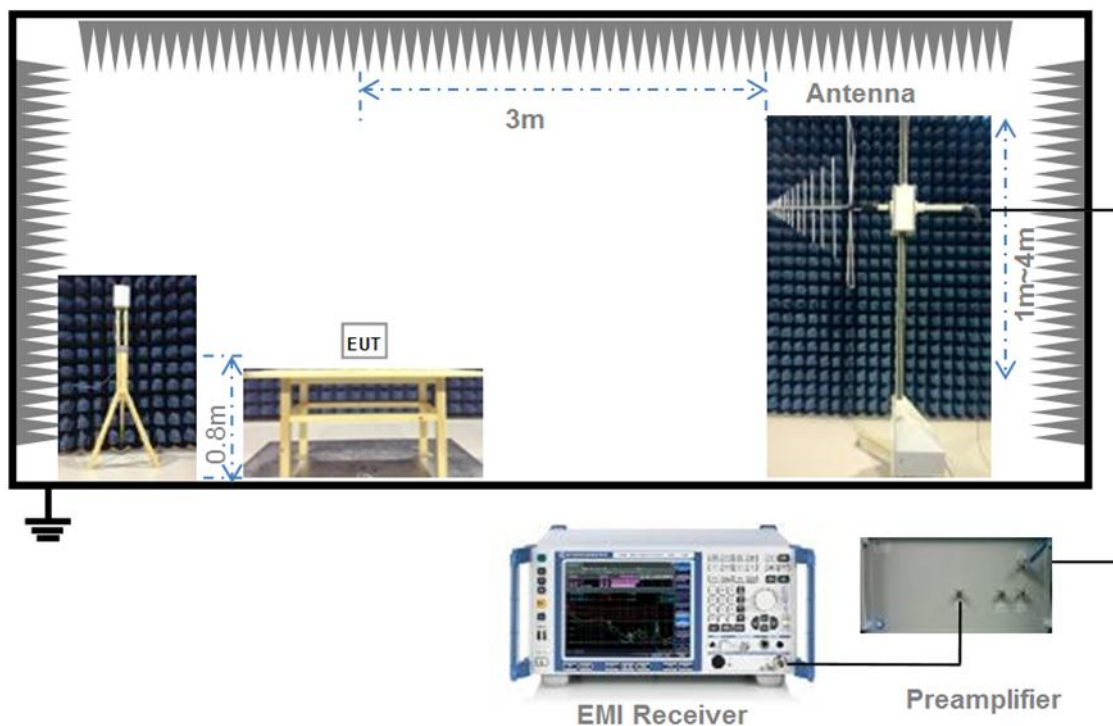

(Diagram 4)

4.6.5 For Radiated Test (Above 1 GHz)

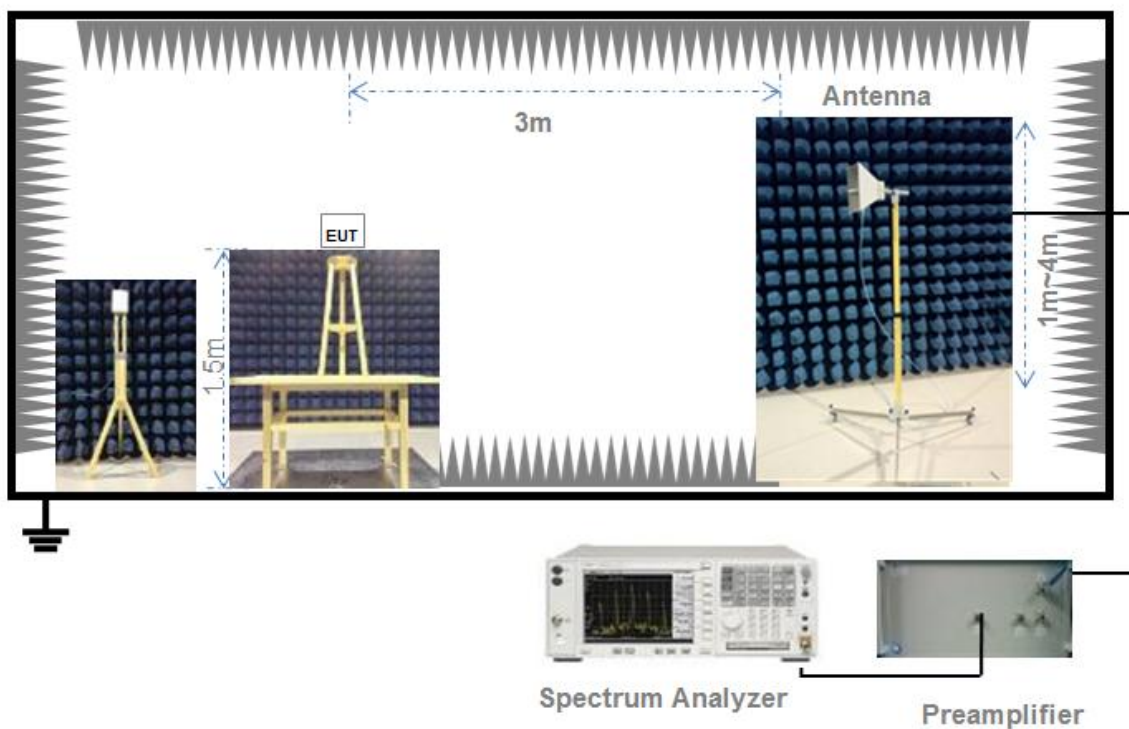

(Diagram 5)

5 TEST ITEMS

5.1 RF Output Power

5.1.1 Test Limit

FCC §15.407(a)

The maximum conducted output power should not exceed:

Frequency Band (MHz)	Limit
5150-5250	250 mW
5250-5350	250 mW or 11 dBm + 10log B, whichever is less.
5470-5725	250 mW or 11 dBm + 10log B, whichever is less.
5725-5850	1 W
Note: Where "B" is the 26 dB emissions bandwidth in MHz.	

5.1.2 Test Setup

The section 4.6.1 (Diagram 1) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.1.3 Test Procedure

Maximum conducted (average) output power

a) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.

- 1) The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- b) If the transmitter does not transmit continuously, measure the duty cycle (x) of the transmitter output signal.
- c) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- d) Adjust the measurement in dBm by adding 10 log (1/x) where x is the duty cycle.

Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set RBW $\geq$ OBW if possible; otherwise, set RBW to the largest available value.

Set VBW $\geq$ RBW. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

The E.I.R.P used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space

environment.

5.1.4 Test Result

Please refer to ANNEX A.1.

5.2 Emission Bandwidth and 6 dB Bandwidth

5.2.1 Limit

FCC §15.407(a)

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

5.2.2 Test Setup

The test setup photo please refer to 4.6.1 (Diagram 1) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

Emission bandwidth

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set VBW $\geq 3 \times$ RBW,
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.

Occupied Bandwidth

1. Set Span = 1.5 times to 5.0 times the OBW
2. Set RBW = 1% to 5% of the OBW.
3. Set VBW $\geq 3 \times$ RBW,
4. Detector = Peak.
5. Trace mode = Max hold.
6. Use the 99% power bandwidth function of the instrument.

6 dB bandwidth

1. Set RBW = 100 kHz, VBW = 300 kHz.
2. Detector = Peak.
3. Trace mode = Max hold.
4. Allow the trace to stabilize.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.2.4 Test Result

Please refer to ANNEX A.2 and ANNEX A.3.

5.3 Power Spectral density (PSD)

5.3.1 Limit

FCC §15.407(a)

The maximum power spectral density should not exceed:

Frequency Band (MHz)	Limit
5150-5250	11 dBm/MHz
5250-5350	11 dBm/MHz
5470-5725	11 dBm/MHz
5725-5850	30 dBm/500kHz

5.3.2 Test Setup

The section 4.6.1 (Diagram 1) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth.

1. Set RBW = 510 kHz/1 MHz, VBW $\geq 3 \times$ RBW, Sweep time = Auto, Detector = RMS.
2. Allow the sweeps to continue until the trace stabilizes.
3. Use the peak marker function to determine the maximum amplitude level.
4. The E.I.R.P spectral density used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment.

5.3.4 Test Result

Please refer to ANNEX A.4.

5.4 Conducted Emission

5.4.1 Limit

FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the U-NII-150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

5.4.2 Test Setup

The section 4.6.2 (Diagram 2) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

5.4.4 Test Result

Please refer to ANNEX A.5.

5.5 Radiated Spurious Emissions and Band Edge (Restricted-band)


5.5.1 Limit

FCC §15.209 & 15.407(b)

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note ¹: The Limit for radiated test was performed according to FCC Part 15C

Note ²: The tighter limit applies at the band edge.

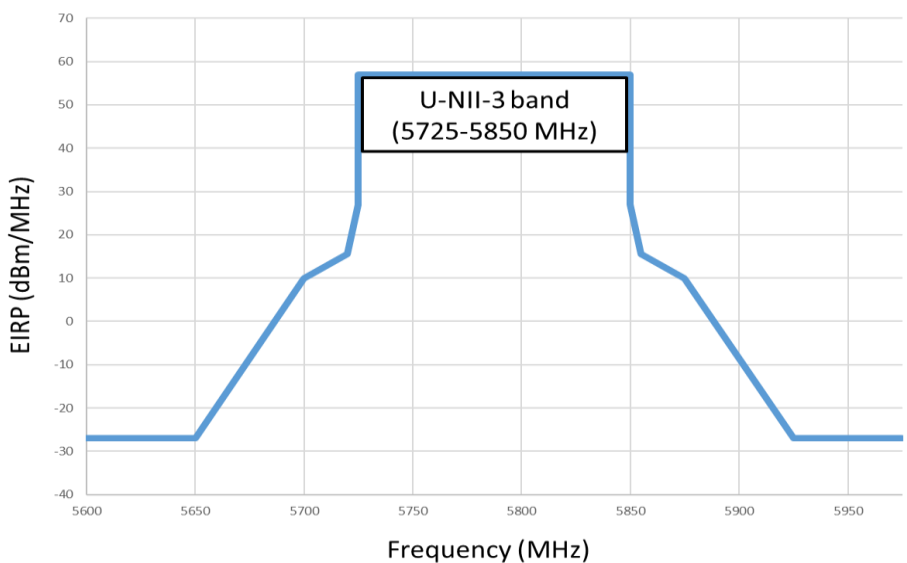Un-restricted band emissions	
Out Operating Band (MHz)	Limit
5150 - 5250	e.i.r.p. -27 dBm (68.2 dBuV/m@3m)
5250 - 5350	e.i.r.p. -27 dBm (68.2 dBuV/m@3m)
5470 - 5725	e.i.r.p. -27 dBm (68.2 dBuV/m@3m)
5725 - 5850	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. 

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength.

5.5.2 Test Setup

The section 4.6.3-4.6.5 (Diagram 3 - Diagram 5) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:
$$E = \text{EIRP} - 20\log D + 104.8$$
where:
E = electric field strength in dB μ V/m,
EIRP = equivalent isotropic radiated power in dBm
D = specified measurement distance in meters.
- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT (i.e., duty cycle ≥ 98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle, x , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW $\geq 3 \times$ RBW.
- e) Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on

and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30 MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.5.4 Test Result

Please refer to ANNEX A.6.

ANNEX A TEST RESULT

A.1 RF Output Power

Note 1: For FCC standard, if transmitting antennas of directional gain greater than 6 dBi are used, all band maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note 2: The RF Output Power has considered the Duty Factor.

Duty Cycle

Test Mode	On Time (ms)	On+Off time (ms)	Duty Cycle
11a	2.09	2.11	99.19%
11n (HT20)/11ac (VHT20)	5.39	5.42	99.59%
11n (HT40)/11ac (VHT40)	2.15	2.17	99.17%
11ac (VHT80)	5.39	5.42	99.59%
11ac (VHT160)	2.15	2.17	99.17%
11ax (HE20)	2.69	2.73	98.50%
11ax (HE40)	2.08	2.10	99.24%
11ax (HE80)	5.42	5.42	99.85%
11ax (HE160)	4.09	4.11	99.51%

Test DataConducted PowerMain Antenna

U-NII-1 (5150 - 5250 MHz)					
Mode	Channel	Conducted Power (dBm)	Conducted Power (mW)	FCC Limit (mW)	Verdict
11a	CH36	9.95	9.87	250	Pass
11a	CH44	10.04	10.08	250	Pass
11a	CH48	10.35	10.83	250	Pass
11n (HT20)	CH36	9.17	8.26	250	Pass
11n (HT20)	CH44	7.99	6.29	250	Pass
11n (HT20)	CH48	8.17	6.56	250	Pass
11n (HT40)	CH38	7.65	5.82	250	Pass
11n (HT40)	CH46	7.69	5.87	250	Pass
11ac (VHT20)	CH36	7.78	5.99	250	Pass
11ac (VHT20)	CH44	7.56	5.70	250	Pass
11ac (VHT20)	CH48	7.68	5.86	250	Pass
11ac (VHT40)	CH38	6.71	4.68	250	Pass
11ac (VHT40)	CH46	6.76	4.74	250	Pass
11ac (VHT80)	CH42	5.79	3.79	250	Pass
11ax (HE20) (SU)	CH36	7.76	5.97	250	Pass
11ax (HE20) (SU)	CH44	7.58	5.72	250	Pass
11ax (HE20) (SU)	CH48	7.73	5.92	250	Pass
11ax (HE40) (SU)	CH38	6.57	4.54	250	Pass
11ax (HE40) (SU)	CH46	6.61	4.58	250	Pass
11ax (HE80) (SU)	CH42	6.70	4.68	250	Pass
11ax (HE20) (RU26)	CH36	13.06	20.21	250	Pass
11ax (HE20) (RU26)	CH44	13.05	20.17	250	Pass
11ax (HE20) (RU26)	CH48	13.25	21.12	250	Pass
11ax (HE20) (RU52)	CH36	14.79	30.11	250	Pass
11ax (HE20) (RU52)	CH44	14.84	30.45	250	Pass
11ax (HE20) (RU52)	CH48	14.98	31.45	250	Pass
11ax (HE20) (RU106)	CH36	14.82	30.31	250	Pass
11ax (HE20) (RU106)	CH44	14.84	30.45	250	Pass
11ax (HE20) (RU106)	CH48	14.95	31.23	250	Pass
11ax (HE20) (RU242)	CH36	15.06	32.04	250	Pass
11ax (HE20) (RU242)	CH44	14.93	31.09	250	Pass
11ax (HE20) (RU242)	CH48	15.12	32.48	250	Pass
11ax (HE40) (RU484)	CH38	14.98	31.49	250	Pass
11ax (HE40) (RU484)	CH46	15.08	32.22	250	Pass
11ax (HE80) (RU996)	CH42	15.14	32.65	250	Pass

U-NII-2A (5250 - 5350 MHz)					
Mode	Channel	Conducted Power (dBm)	Conducted Power (mW)	FCC Limit (mW)	Verdict
11a	CH52	9.71	9.34	250	Pass
11a	CH60	9.44	8.78	250	Pass
11a	CH64	9.65	9.22	250	Pass
11n (HT20)	CH52	8.24	6.66	250	Pass
11n (HT20)	CH60	8.70	7.41	250	Pass
11n (HT20)	CH64	9.11	8.14	250	Pass
11n (HT40)	CH54	7.52	5.64	250	Pass
11n (HT40)	CH62	8.01	6.32	250	Pass
11ac (VHT20)	CH52	7.64	5.80	250	Pass
11ac (VHT20)	CH60	7.65	5.82	250	Pass
11ac (VHT20)	CH64	7.94	6.22	250	Pass
11ac (VHT40)	CH54	6.50	4.68	250	Pass
11ac (VHT40)	CH62	6.98	4.74	250	Pass
11ac (VHT80)	CH58	5.59	3.62	250	Pass
11ac (VHT160)	CH50	6.15	4.12	250	Pass
11ax (HE20) (SU)	CH52	7.77	5.98	250	Pass
11ax (HE20) (SU)	CH60	7.65	5.82	250	Pass
11ax (HE20) (SU)	CH64	7.92	6.19	250	Pass
11ax (HE40) (SU)	CH54	6.35	4.32	250	Pass
11ax (HE40) (SU)	CH62	6.81	4.80	250	Pass
11ax (HE80) (SU)	CH58	6.43	4.39	250	Pass
11ax (HE160) (SU)	CH50	6.10	4.07	250	Pass
11ax (HE20) (RU26)	CH52	13.40	21.86	250	Pass
11ax (HE20) (RU26)	CH60	12.98	19.84	250	Pass
11ax (HE20) (RU26)	CH64	12.95	19.71	250	Pass
11ax (HE20) (RU52)	CH52	15.17	32.86	250	Pass
11ax (HE20) (RU52)	CH60	15.58	36.11	250	Pass
11ax (HE20) (RU52)	CH64	15.57	36.03	250	Pass
11ax (HE20) (RU106)	CH52	15.17	32.86	250	Pass
11ax (HE20) (RU106)	CH60	15.65	36.70	250	Pass
11ax (HE20) (RU106)	CH64	15.59	36.19	250	Pass
11ax (HE20) (RU242)	CH52	15.13	32.56	250	Pass
11ax (HE20) (RU242)	CH60	15.59	36.19	250	Pass
11ax (HE20) (RU242)	CH64	15.50	35.45	250	Pass
11ax (HE40) (RU484)	CH54	15.07	32.15	250	Pass
11ax (HE40) (RU484)	CH62	15.50	35.49	250	Pass
11ax (HE80) (RU996)	CH58	15.03	31.84	250	Pass
11ax (HE160) (RU996*2)	CH50	14.95	31.23	250	Pass

U-NII-2C (5470 - 5725 MHz)					
Mode	Channel	Conducted Power (dBm)	Conducted Power (mW)	FCC Limit (mW)	Verdict
11a	CH100	9.74	9.41	250	Pass
11a	CH116	10.40	10.95	250	Pass
11a	CH140	9.81	9.56	250	Pass
11n (HT20)	CH100	8.19	6.59	250	Pass
11n (HT20)	CH116	9.06	8.05	250	Pass
11n (HT20)	CH140	9.17	8.26	250	Pass
11n (HT40)	CH102	7.72	5.91	250	Pass
11n (HT40)	CH118	8.69	7.39	250	Pass
11n (HT40)	CH134	8.55	7.16	250	Pass
11ac (VHT20)	CH100	7.44	5.54	250	Pass
11ac (VHT20)	CH116	8.49	7.06	250	Pass
11ac (VHT20)	CH140	8.68	7.38	250	Pass
11ac (VHT40)	CH102	7.24	5.29	250	Pass
11ac (VHT40)	CH118	7.54	5.67	250	Pass
11ac (VHT40)	CH134	7.70	5.88	250	Pass
11ac (VHT80)	CH106	6.32	4.28	250	Pass
11ac (VHT80)	CH122	6.50	4.46	250	Pass
11ac (VHT160)	CH114	6.96	4.96	250	Pass
11ax (HE20) (SU)	CH100	7.50	5.62	250	Pass
11ax (HE20) (SU)	CH116	8.51	7.09	250	Pass
11ax (HE20) (SU)	CH140	8.27	6.71	250	Pass
11ax (HE40) (SU)	CH102	7.54	5.68	250	Pass
11ax (HE40) (SU)	CH118	7.34	5.42	250	Pass
11ax (HE40) (SU)	CH134	7.17	5.21	250	Pass
11ax (HE80) (SU)	CH106	7.30	5.37	250	Pass
11ax (HE80) (SU)	CH122	6.95	4.95	250	Pass
11ax (HE160) (SU)	CH114	6.95	4.95	250	Pass
11ax (HE20) (RU26)	CH100	12.74	18.78	250	Pass
11ax (HE20) (RU26)	CH116	13.32	21.46	250	Pass
11ax (HE20) (RU26)	CH140	13.41	21.91	250	Pass
11ax (HE20) (RU52)	CH100	15.24	33.39	250	Pass
11ax (HE20) (RU52)	CH116	15.83	38.25	250	Pass
11ax (HE20) (RU52)	CH140	16.01	39.87	250	Pass
11ax (HE20) (RU106)	CH100	15.27	33.62	250	Pass
11ax (HE20) (RU106)	CH116	15.88	38.69	250	Pass
11ax (HE20) (RU106)	CH140	16.02	39.96	250	Pass
11ax (HE20) (RU242)	CH100	15.31	33.93	250	Pass
11ax (HE20) (RU242)	CH116	15.85	38.43	250	Pass
11ax (HE20) (RU242)	CH140	15.97	39.50	250	Pass
11ax (HE40) (RU484)	CH102	15.32	34.05	250	Pass

U-NII-2C (5470 - 5725 MHz)					
Mode	Channel	Conducted Power (dBm)	Conducted Power (mW)	FCC Limit (mW)	Verdict
11ax (HE40) (RU484)	CH118	15.83	38.29	250	Pass
11ax (HE40) (RU484)	CH134	16.06	40.38	250	Pass
11ax (HE80) (RU996)	CH106	15.47	35.23	250	Pass
11ax (HE80) (RU996)	CH122	15.77	37.75	250	Pass
11ax (HE160) (RU996*2)	CH114	15.61	36.36	250	Pass

U-NII-3 (5725 - 5850 MHz)					
Mode	Channel	Conducted Power (dBm)	Conducted Power (mW)	FCC Limit (mW)	Verdict
11a	CH149	10.07	10.15	1000	Pass
11a	CH157	9.81	9.56	1000	Pass
11a	CH165	10.19	10.44	1000	Pass
11n (HT20)	CH149	8.86	7.69	1000	Pass
11n (HT20)	CH157	8.82	7.62	1000	Pass
11n (HT20)	CH165	8.93	7.81	1000	Pass
11n (HT40)	CH151	8.43	6.96	1000	Pass
11n (HT40)	CH159	8.44	6.98	1000	Pass
11ac (VHT20)	CH149	8.33	6.80	1000	Pass
11ac (VHT20)	CH157	8.40	6.91	1000	Pass
11ac (VHT20)	CH165	8.45	6.99	1000	Pass
11ac (VHT40)	CH151	7.52	5.64	1000	Pass
11ac (VHT40)	CH159	7.47	5.58	1000	Pass
11ac (VHT80)	CH155	6.91	4.90	1000	Pass
11ax (HE20) (SU)	CH149	8.39	6.90	1000	Pass
11ax (HE20) (SU)	CH157	8.47	7.02	1000	Pass
11ax (HE20) (SU)	CH165	8.49	7.06	1000	Pass
11ax (HE40) (SU)	CH151	7.31	5.38	1000	Pass
11ax (HE40) (SU)	CH159	7.32	5.40	1000	Pass
11ax (HE80) (SU)	CH155	7.32	5.39	1000	Pass
11ax (HE20) (RU26)	CH149	13.28	21.26	1000	Pass
11ax (HE20) (RU26)	CH157	13.38	21.76	1000	Pass
11ax (HE20) (RU26)	CH165	12.84	19.22	1000	Pass
11ax (HE20) (RU52)	CH149	15.87	38.60	1000	Pass
11ax (HE20) (RU52)	CH157	15.86	38.52	1000	Pass
11ax (HE20) (RU52)	CH165	15.35	34.25	1000	Pass
11ax (HE20) (RU106)	CH149	15.97	39.50	1000	Pass
11ax (HE20) (RU106)	CH157	15.94	39.23	1000	Pass
11ax (HE20) (RU106)	CH165	15.40	34.65	1000	Pass
11ax (HE20) (RU242)	CH149	15.91	38.99	1000	Pass
11ax (HE20) (RU242)	CH157	15.91	38.99	1000	Pass
11ax (HE20) (RU242)	CH165	15.38	34.49	1000	Pass
11ax (HE40) (RU484)	CH151	15.97	39.55	1000	Pass
11ax (HE40) (RU484)	CH159	15.60	36.32	1000	Pass
11ax (HE80) (RU996)	CH155	15.91	38.99	1000	Pass

Aux. Antenna

U-NII-1 (5150 - 5250 MHz)					
Mode	Channel	Conducted Power (dBm)	Conducted Power (mW)	FCC Limit (mW)	Verdict
11a	CH36	10.06	10.13	250	Pass
11a	CH44	10.15	10.34	250	Pass
11a	CH48	10.36	10.85	250	Pass
11n (HT20)	CH36	8.79	7.56	250	Pass
11n (HT20)	CH44	9.53	8.97	250	Pass
11n (HT20)	CH48	9.72	9.37	250	Pass
11n (HT40)	CH38	8.38	6.88	250	Pass
11n (HT40)	CH46	8.82	7.61	250	Pass
11ac (VHT20)	CH36	8.18	6.57	250	Pass
11ac (VHT20)	CH44	8.51	7.09	250	Pass
11ac (VHT20)	CH48	8.70	7.41	250	Pass
11ac (VHT40)	CH38	7.53	5.66	250	Pass
11ac (VHT40)	CH46	7.72	5.91	250	Pass
11ac (VHT80)	CH42	6.83	4.81	250	Pass
11ax (HE20) (SU)	CH36	8.22	6.63	250	Pass
11ax (HE20) (SU)	CH44	8.62	7.27	250	Pass
11ax (HE20) (SU)	CH48	8.74	7.48	250	Pass
11ax (HE40) (SU)	CH38	7.11	5.14	250	Pass
11ax (HE40) (SU)	CH46	7.56	5.70	250	Pass
11ax (HE80) (SU)	CH42	7.37	5.46	250	Pass
11ax (HE20) (RU26)	CH36	13.32	21.46	250	Pass
11ax (HE20) (RU26)	CH44	13.16	20.68	250	Pass
11ax (HE20) (RU26)	CH48	13.37	21.71	250	Pass
11ax (HE20) (RU52)	CH36	15.36	34.33	250	Pass
11ax (HE20) (RU52)	CH44	15.74	37.47	250	Pass
11ax (HE20) (RU52)	CH48	15.89	38.78	250	Pass
11ax (HE20) (RU106)	CH36	15.44	34.97	250	Pass
11ax (HE20) (RU106)	CH44	15.82	38.16	250	Pass
11ax (HE20) (RU106)	CH48	15.96	39.41	250	Pass
11ax (HE20) (RU242)	CH36	15.45	35.05	250	Pass
11ax (HE20) (RU242)	CH44	15.84	38.34	250	Pass
11ax (HE20) (RU242)	CH48	16.01	39.87	250	Pass
11ax (HE40) (RU484)	CH38	15.51	35.56	250	Pass
11ax (HE40) (RU484)	CH46	15.90	38.90	250	Pass
11ax (HE80) (RU996)	CH42	15.87	38.64	250	Pass

U-NII-2A (5250 - 5350 MHz)					
Mode	Channel	Conducted Power (dBm)	Conducted Power (mW)	FCC Limit (mW)	Verdict
11a	CH52	10.87	12.20	243	Pass
11a	CH60	10.67	11.66	243	Pass
11a	CH64	10.80	12.01	242	Pass
11n (HT20)	CH52	9.68	9.28	250	Pass
11n (HT20)	CH60	9.61	9.14	250	Pass
11n (HT20)	CH64	9.69	9.31	250	Pass
11n (HT40)	CH54	9.02	7.97	250	Pass
11n (HT40)	CH62	8.91	7.77	250	Pass
11ac (VHT20)	CH52	8.74	7.48	250	Pass
11ac (VHT20)	CH60	8.61	7.26	250	Pass
11ac (VHT20)	CH64	8.73	7.46	250	Pass
11ac (VHT40)	CH54	7.76	5.66	250	Pass
11ac (VHT40)	CH62	8.14	5.91	250	Pass
11ac (VHT80)	CH58	6.92	4.92	250	Pass
11ac (VHT160)	CH50	6.09	4.07	250	Pass
11ax (HE20) (SU)	CH52	8.77	7.53	250	Pass
11ax (HE20) (SU)	CH60	8.62	7.27	250	Pass
11ax (HE20) (SU)	CH64	8.75	7.49	250	Pass
11ax (HE40) (SU)	CH54	7.57	5.70	250	Pass
11ax (HE40) (SU)	CH62	7.99	5.46	250	Pass
11ax (HE80) (SU)	CH58	7.81	6.04	250	Pass
11ax (HE160) (SU)	CH50	6.17	4.14	250	Pass
11ax (HE20) (RU26)	CH52	12.59	18.16	250	Pass
11ax (HE20) (RU26)	CH60	12.81	19.10	250	Pass
11ax (HE20) (RU26)	CH64	12.84	19.23	250	Pass
11ax (HE20) (RU52)	CH52	16.14	41.11	250	Pass
11ax (HE20) (RU52)	CH60	16.26	42.27	250	Pass
11ax (HE20) (RU52)	CH64	16.29	42.56	250	Pass
11ax (HE20) (RU106)	CH52	16.22	41.88	250	Pass
11ax (HE20) (RU106)	CH60	16.32	42.85	250	Pass
11ax (HE20) (RU106)	CH64	16.37	43.35	250	Pass
11ax (HE20) (RU242)	CH52	16.23	41.98	250	Pass
11ax (HE20) (RU242)	CH60	16.33	42.95	250	Pass
11ax (HE20) (RU242)	CH64	16.35	43.15	250	Pass
11ax (HE40) (RU484)	CH54	16.31	42.76	250	Pass
11ax (HE40) (RU484)	CH62	16.31	42.76	250	Pass
11ax (HE80) (RU996)	CH58	16.39	43.55	250	Pass
11ax (HE160) (RU996*2)	CH50	16.17	41.40	250	Pass

U-NII-2C (5470 - 5725 MHz)					
Mode	Channel	Conducted Power (dBm)	Conducted Power (mW)	FCC Limit (mW)	Verdict
11a	CH100	9.64	9.19	243	Pass
11a	CH116	9.13	8.18	243	Pass
11a	CH140	9.75	9.43	244	Pass
11n (HT20)	CH100	8.59	7.22	250	Pass
11n (HT20)	CH116	8.09	6.44	250	Pass
11n (HT20)	CH140	9.04	8.01	250	Pass
11n (HT40)	CH102	8.28	6.72	250	Pass
11n (HT40)	CH118	7.50	5.62	250	Pass
11n (HT40)	CH134	7.98	6.28	250	Pass
11ac (VHT20)	CH100	7.66	5.83	250	Pass
11ac (VHT20)	CH116	7.24	5.29	250	Pass
11ac (VHT20)	CH140	7.29	5.36	250	Pass
11ac (VHT40)	CH102	6.95	4.95	250	Pass
11ac (VHT40)	CH118	6.55	4.51	250	Pass
11ac (VHT40)	CH134	7.10	5.12	250	Pass
11ac (VHT80)	CH106	6.20	4.16	250	Pass
11ac (VHT80)	CH122	5.57	3.60	250	Pass
11ac (VHT160)	CH114	6.62	4.59	250	Pass
11ax (HE20) (SU)	CH100	8.13	6.50	250	Pass
11ax (HE20) (SU)	CH116	7.30	5.37	250	Pass
11ax (HE20) (SU)	CH140	8.20	6.60	250	Pass
11ax (HE40) (SU)	CH102	7.20	5.25	250	Pass
11ax (HE40) (SU)	CH118	6.42	4.39	250	Pass
11ax (HE40) (SU)	CH134	6.90	4.90	250	Pass
11ax (HE80) (SU)	CH106	6.72	4.70	250	Pass
11ax (HE80) (SU)	CH122	6.59	4.56	250	Pass
11ax (HE160) (SU)	CH114	6.59	4.56	250	Pass
11ax (HE20) (RU26)	CH100	12.67	18.49	250	Pass
11ax (HE20) (RU26)	CH116	12.52	17.86	250	Pass
11ax (HE20) (RU26)	CH140	12.88	19.41	250	Pass
11ax (HE20) (RU52)	CH100	15.55	35.89	250	Pass
11ax (HE20) (RU52)	CH116	15.11	32.43	250	Pass
11ax (HE20) (RU52)	CH140	15.60	36.31	250	Pass
11ax (HE20) (RU106)	CH100	15.41	34.75	250	Pass
11ax (HE20) (RU106)	CH116	15.05	31.99	250	Pass
11ax (HE20) (RU106)	CH140	15.70	37.15	250	Pass
11ax (HE20) (RU242)	CH100	15.42	34.83	250	Pass
11ax (HE20) (RU242)	CH116	15.00	31.62	250	Pass
11ax (HE20) (RU242)	CH140	15.65	36.73	250	Pass
11ax (HE40) (RU484)	CH102	15.56	35.97	250	Pass

U-NII-2C (5470 - 5725 MHz)					
Mode	Channel	Conducted Power (dBm)	Conducted Power (mW)	FCC Limit (mW)	Verdict
11ax (HE40) (RU484)	CH118	15.06	32.06	250	Pass
11ax (HE40) (RU484)	CH134	15.43	34.91	250	Pass
11ax (HE80) (RU996)	CH106	15.38	34.51	250	Pass
11ax (HE80) (RU996)	CH122	14.98	31.48	250	Pass
11ax (HE160) (RU996*2)	CH114	15.01	31.70	250	Pass

U-NII-3 (5725 - 5850 MHz)					
Mode	Channel	Conducted Power (dBm)	Conducted Power (mW)	FCC Limit (mW)	Verdict
11a	CH149	10.10	10.22	1000	Pass
11a	CH157	9.40	8.70	1000	Pass
11a	CH165	9.66	9.24	1000	Pass
11n (HT20)	CH149	9.05	8.03	1000	Pass
11n (HT20)	CH157	8.77	7.53	1000	Pass
11n (HT20)	CH165	8.60	7.24	1000	Pass
11n (HT40)	CH151	8.17	6.56	1000	Pass
11n (HT40)	CH159	7.86	6.10	1000	Pass
11ac (VHT20)	CH149	8.49	7.06	1000	Pass
11ac (VHT20)	CH157	7.86	6.11	1000	Pass
11ac (VHT20)	CH165	8.10	6.45	1000	Pass
11ac (VHT40)	CH151	7.29	5.35	1000	Pass
11ac (VHT40)	CH159	6.99	5.00	1000	Pass
11ac (VHT80)	CH155	6.02	4.00	1000	Pass
11ax (HE20) (SU)	CH149	8.51	7.09	1000	Pass
11ax (HE20) (SU)	CH157	7.83	6.06	1000	Pass
11ax (HE20) (SU)	CH165	8.08	6.42	1000	Pass
11ax (HE40) (SU)	CH151	7.00	5.01	1000	Pass
11ax (HE40) (SU)	CH159	6.73	4.71	1000	Pass
11ax (HE80) (SU)	CH155	6.89	4.89	1000	Pass
11ax (HE20) (RU26)	CH149	12.55	17.99	1000	Pass
11ax (HE20) (RU26)	CH157	11.63	14.55	1000	Pass
11ax (HE20) (RU26)	CH165	11.60	14.45	1000	Pass
11ax (HE20) (RU52)	CH149	15.33	34.12	1000	Pass
11ax (HE20) (RU52)	CH157	14.63	29.04	1000	Pass
11ax (HE20) (RU52)	CH165	14.54	28.44	1000	Pass
11ax (HE20) (RU106)	CH149	15.37	34.43	1000	Pass
11ax (HE20) (RU106)	CH157	14.65	29.17	1000	Pass
11ax (HE20) (RU106)	CH165	14.57	28.64	1000	Pass
11ax (HE20) (RU242)	CH149	15.30	33.88	1000	Pass
11ax (HE20) (RU242)	CH157	14.54	28.44	1000	Pass
11ax (HE20) (RU242)	CH165	14.54	28.44	1000	Pass
11ax (HE40) (RU484)	CH151	14.78	30.06	1000	Pass
11ax (HE40) (RU484)	CH159	14.46	27.93	1000	Pass
11ax (HE80) (RU996)	CH155	14.56	28.58	1000	Pass

A.2 Emission Bandwidth & 99% Bandwidth

Note 1: Test plots please refer to the document “Annex No.: BL-SH2580913-604 Data Part 1.pdf”.

Note 2: All antenna were tested, but only the worst case has been reported in this report.

Test Data

U-NII-1 (5150 - 5250 MHz)			
Mode	Channel	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
11a	CH36	29.23	16.63
11a	CH44	27.88	16.58
11a	CH48	27.91	16.58
11n (HT20)	CH36	24.30	17.65
11n (HT20)	CH44	24.50	17.63
11n (HT20)	CH48	24.39	17.62
11n (HT40)	CH38	39.71	36.04
11n (HT40)	CH46	39.83	36.01
11ac (VHT20)	CH36	21.14	17.57
11ac (VHT20)	CH44	20.37	17.55
11ac (VHT20)	CH48	20.46	17.55
11ac (VHT40)	CH38	39.92	36.01
11ac (VHT40)	CH46	39.84	36.01
11ac (VHT80)	CH42	82.31	75.49
11ax (HE20) (SU)	CH36	29.38	18.97
11ax (HE20) (SU)	CH44	24.53	18.98
11ax (HE20) (SU)	CH48	22.53	18.98
11ax (HE40) (SU)	CH38	40.86	37.75
11ax (HE40) (SU)	CH46	40.59	37.69
11ax (HE80) (SU)	CH42	82.51	77.38

U-NII-2A (5250 - 5350 MHz)			
Mode	Channel	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
11a	CH52	27.88	16.56
11a	CH60	30.77	16.68
11a	CH64	29.15	16.60
11n (HT20)	CH52	22.56	17.63
11n (HT20)	CH60	23.73	17.67
11n (HT20)	CH64	23.14	17.64
11n (HT40)	CH54	40.00	36.01
11n (HT40)	CH62	40.32	36.13
11ac (VHT20)	CH52	20.81	17.57
11ac (VHT20)	CH60	20.85	17.58
11ac (VHT20)	CH64	20.90	17.56
11ac (VHT40)	CH54	39.82	35.99
11ac (VHT40)	CH62	39.84	36.03
11ac (VHT80)	CH58	82.38	75.47
11ac (VHT160)	CH50	166.60	154.36
11ax (HE20) (SU)	CH52	21.59	18.95
11ax (HE20) (SU)	CH60	26.42	19.00
11ax (HE20) (SU)	CH64	21.25	18.98
11ax (HE40) (SU)	CH54	40.39	37.69
11ax (HE40) (SU)	CH62	40.61	37.70
11ax (HE80) (SU)	CH58	82.66	77.33
11ax (HE160) (SU)	CH50	165.40	156.19

U-NII-2C (5470 - 5725 MHz)			
Mode	Channel	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
11a	CH100	21.37	16.43
11a	CH116	22.62	16.47
11a	CH140	22.77	16.49
11n (HT20)	CH100	21.04	17.57
11n (HT20)	CH116	20.89	17.59
11n (HT20)	CH140	21.40	17.60
11n (HT40)	CH102	39.82	36.01
11n (HT40)	CH118	39.86	36.02
11n (HT40)	CH134	39.74	36.02
11ac (VHT20)	CH100	20.41	17.54
11ac (VHT20)	CH116	20.17	17.53
11ac (VHT20)	CH140	20.37	17.54
11ac (VHT40)	CH102	39.86	36.01
11ac (VHT40)	CH118	45.04	36.59
11ac (VHT40)	CH134	39.64	36.01
11ac (VHT80)	CH106	82.04	75.54
11ac (VHT80)	CH122	82.08	75.48
11ac (VHT160)	CH114	166.70	154.43
11ax (HE20) (SU)	CH100	21.14	18.91
11ax (HE20) (SU)	CH116	21.50	18.94
11ax (HE20) (SU)	CH140	21.31	18.94
11ax (HE40) (SU)	CH102	40.61	37.69
11ax (HE40) (SU)	CH118	40.64	37.71
11ax (HE40) (SU)	CH134	40.60	37.71
11ax (HE80) (SU)	CH106	82.72	77.32
11ax (HE80) (SU)	CH122	82.02	77.10
11ax (HE160) (SU)	CH114	165.70	156.11

U-NII-3 (5725 - 5850 MHz)			
Mode	Channel	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
11a	CH149	24.14	16.52
11a	CH157	27.66	16.51
11a	CH165	22.81	16.49
11n (HT20)	CH149	21.90	17.61
11n (HT20)	CH157	22.30	17.61
11n (HT20)	CH165	21.80	17.60
11n (HT40)	CH151	39.94	36.04
11n (HT40)	CH159	39.80	36.03
11ac (VHT20)	CH149	20.24	17.54
11ac (VHT20)	CH157	20.59	17.57
11ac (VHT20)	CH165	20.69	17.56
11ac (VHT40)	CH151	39.76	36.04
11ac (VHT40)	CH159	39.74	36.02
11ac (VHT80)	CH155	82.30	75.48
11ax (HE20) (SU)	CH149	21.43	18.93
11ax (HE20) (SU)	CH157	21.33	18.96
11ax (HE20) (SU)	CH165	21.55	18.95
11ax (HE40) (SU)	CH151	40.70	37.73
11ax (HE40) (SU)	CH159	40.61	37.72
11ax (HE80) (SU)	CH155	82.45	77.18

A.3 6 dB Bandwidth

Note 1: Test plots please refer to the document “Annex No.: BL-SH2580913-604 Data Part 2.pdf”.

Note 2: All antenna were tested, but only the worst case has been reported in this report.

Test Data

U-NII-3 (5725 - 5850 MHz)				
Mode	Channel	6 dB Bandwidth (MHz)	Limit (kHz)	Verdict
11a	CH149	16.50	500.00	Pass
11a	CH157	16.50	500.00	Pass
11a	CH165	16.50	500.00	Pass
11n (HT20)	CH149	17.80	500.00	Pass
11n (HT20)	CH157	17.80	500.00	Pass
11n (HT20)	CH165	17.80	500.00	Pass
11n (HT40)	CH151	36.50	500.00	Pass
11n (HT40)	CH159	36.20	500.00	Pass
11ac (VHT20)	CH149	17.80	500.00	Pass
11ac (VHT20)	CH157	17.40	500.00	Pass
11ac (VHT20)	CH165	17.80	500.00	Pass
11ac (VHT40)	CH151	36.20	500.00	Pass
11ac (VHT40)	CH159	36.10	500.00	Pass
11ac (VHT80)	CH155	75.70	500.00	Pass
11ax (HE20) (SU)	CH149	19.00	500.00	Pass
11ax (HE20) (SU)	CH157	19.00	500.00	Pass
11ax (HE20) (SU)	CH165	19.10	500.00	Pass
11ax (HE40) (SU)	CH151	38.10	500.00	Pass
11ax (HE40) (SU)	CH159	38.00	500.00	Pass
11ax (HE80) (SU)	CH155	77.70	500.00	Pass

A.4 Power Spectral Density

Note¹: Test plots please refer to the document "Annex No.: BL-SH2580913-604 Data Part 3.pdf".

Note²: The RBW used in U-NII-3 is 1 MHz, and the PSD factor is: $10 \cdot \log(500 \text{ kHz/RBW}) = -3 \text{ dBm}$.

Note³: The PSD has considered the Duty Factor.

Test Data

Main Antenna

U-NII-1 (5150 - 5250 MHz)				
Mode	Channel	PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
11a	CH36	-1.53	11.00	Pass
11a	CH44	-1.35	11.00	Pass
11a	CH48	-1.10	11.00	Pass
11n (HT20)	CH36	-2.53	11.00	Pass
11n (HT20)	CH44	-3.59	11.00	Pass
11n (HT20)	CH48	-3.51	11.00	Pass
11n (HT40)	CH38	-6.93	11.00	Pass
11n (HT40)	CH46	-6.79	11.00	Pass
11ac (VHT20)	CH36	-3.97	11.00	Pass
11ac (VHT20)	CH44	-4.05	11.00	Pass
11ac (VHT20)	CH48	-3.95	11.00	Pass
11ac (VHT40)	CH38	-7.87	11.00	Pass
11ac (VHT40)	CH46	-7.80	11.00	Pass
11ac (VHT80)	CH42	-12.09	11.00	Pass
11ax (HE20) (SU)	CH36	-4.20	11.00	Pass
11ax (HE20) (SU)	CH44	-4.32	11.00	Pass
11ax (HE20) (SU)	CH48	-4.24	11.00	Pass
11ax (HE40) (SU)	CH38	-8.25	11.00	Pass
11ax (HE40) (SU)	CH46	-8.09	11.00	Pass
11ax (HE80) (SU)	CH42	-11.31	11.00	Pass
11ax (HE20) (RU26)	CH36	8.98	11.00	Pass
11ax (HE20) (RU26)	CH44	9.27	11.00	Pass
11ax (HE20) (RU26)	CH48	9.57	11.00	Pass
11ax (HE20) (RU52)	CH36	8.21	11.00	Pass
11ax (HE20) (RU52)	CH44	8.36	11.00	Pass
11ax (HE20) (RU52)	CH48	8.43	11.00	Pass
11ax (HE20) (RU106)	CH36	5.26	11.00	Pass
11ax (HE20) (RU106)	CH44	5.35	11.00	Pass
11ax (HE20) (RU106)	CH48	5.43	11.00	Pass
11ax (HE20) (RU242)	CH36	1.80	11.00	Pass
11ax (HE20) (RU242)	CH44	1.81	11.00	Pass
11ax (HE20) (RU242)	CH48	1.90	11.00	Pass
11ax (HE40) (RU484)	CH38	-1.28	11.00	Pass
11ax (HE40) (RU484)	CH46	-1.16	11.00	Pass

U-NII-1 (5150 - 5250 MHz)				
Mode	Channel	PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
11ax (HE80) (RU996)	CH42	-4.19	11.00	Pass

U-NII-2A (5250 - 5350 MHz)				
Mode	Channel	PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
11a	CH52	-1.67	11.00	Pass
11a	CH60	-1.94	11.00	Pass
11a	CH64	-1.65	11.00	Pass
11n (HT20)	CH52	-3.40	11.00	Pass
11n (HT20)	CH60	-2.88	11.00	Pass
11n (HT20)	CH64	-2.67	11.00	Pass
11n (HT40)	CH54	-7.00	11.00	Pass
11n (HT40)	CH62	-6.70	11.00	Pass
11ac (VHT20)	CH52	-3.91	11.00	Pass
11ac (VHT20)	CH60	-4.09	11.00	Pass
11ac (VHT20)	CH64	-3.75	11.00	Pass
11ac (VHT40)	CH54	-8.00	11.00	Pass
11ac (VHT40)	CH62	-7.63	11.00	Pass
11ac (VHT80)	CH58	-12.39	11.00	Pass
11ac (VHT160)	CH50	-14.65	11.00	Pass
11ax (HE20) (SU)	CH52	-4.14	11.00	Pass
11ax (HE20) (SU)	CH60	-4.37	11.00	Pass
11ax (HE20) (SU)	CH64	-4.08	11.00	Pass
11ax (HE40) (SU)	CH54	-8.37	11.00	Pass
11ax (HE40) (SU)	CH62	-8.02	11.00	Pass
11ax (HE80) (SU)	CH58	-11.59	11.00	Pass
11ax (HE160) (SU)	CH50	-14.68	11.00	Pass
11ax (HE20) (RU26)	CH52	9.45	11.00	Pass
11ax (HE20) (RU26)	CH60	8.62	11.00	Pass
11ax (HE20) (RU26)	CH64	8.57	11.00	Pass
11ax (HE20) (RU52)	CH52	8.34	11.00	Pass
11ax (HE20) (RU52)	CH60	8.53	11.00	Pass
11ax (HE20) (RU52)	CH64	8.28	11.00	Pass
11ax (HE20) (RU106)	CH52	5.38	11.00	Pass
11ax (HE20) (RU106)	CH60	5.61	11.00	Pass
11ax (HE20) (RU106)	CH64	5.51	11.00	Pass
11ax (HE20) (RU242)	CH52	1.82	11.00	Pass
11ax (HE20) (RU242)	CH60	2.12	11.00	Pass
11ax (HE20) (RU242)	CH64	2.05	11.00	Pass
11ax (HE40) (RU484)	CH54	-1.15	11.00	Pass
11ax (HE40) (RU484)	CH62	-0.98	11.00	Pass
11ax (HE80) (RU996)	CH58	-4.23	11.00	Pass
11ax (HE160) (RU996*2)	CH50	-9.81	11.00	Pass

U-NII-2C (5470 - 5725 MHz)				
Mode	Channel	PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
11a	CH100	-1.77	11.00	Pass
11a	CH116	-1.23	11.00	Pass
11a	CH140	-1.67	11.00	Pass
11n (HT20)	CH100	-3.73	11.00	Pass
11n (HT20)	CH116	-2.77	11.00	Pass
11n (HT20)	CH140	-2.24	11.00	Pass
11n (HT40)	CH102	-7.12	11.00	Pass
11n (HT40)	CH118	-6.26	11.00	Pass
11n (HT40)	CH134	-6.05	11.00	Pass
11ac (VHT20)	CH100	-4.37	11.00	Pass
11ac (VHT20)	CH116	-3.39	11.00	Pass
11ac (VHT20)	CH140	-3.07	11.00	Pass
11ac (VHT40)	CH102	-7.46	11.00	Pass
11ac (VHT40)	CH118	-7.34	11.00	Pass
11ac (VHT40)	CH134	-6.84	11.00	Pass
11ac (VHT80)	CH106	-11.66	11.00	Pass
11ac (VHT80)	CH122	-11.36	11.00	Pass
11ac (VHT160)	CH114	-13.86	11.00	Pass
11ax (HE20) (SU)	CH100	-4.59	11.00	Pass
11ax (HE20) (SU)	CH116	-3.63	11.00	Pass
11ax (HE20) (SU)	CH140	-3.72	11.00	Pass
11ax (HE40) (SU)	CH102	-7.39	11.00	Pass
11ax (HE40) (SU)	CH118	-7.81	11.00	Pass
11ax (HE40) (SU)	CH134	-7.66	11.00	Pass
11ax (HE80) (SU)	CH106	-10.81	11.00	Pass
11ax (HE80) (SU)	CH122	-11.01	11.00	Pass
11ax (HE160) (SU)	CH114	-13.97	11.00	Pass
11ax (HE20) (RU26)	CH100	10.05	11.00	Pass
11ax (HE20) (RU26)	CH116	10.41	11.00	Pass
11ax (HE20) (RU26)	CH140	10.54	11.00	Pass
11ax (HE20) (RU52)	CH100	8.76	11.00	Pass
11ax (HE20) (RU52)	CH116	9.16	11.00	Pass
11ax (HE20) (RU52)	CH140	9.18	11.00	Pass
11ax (HE20) (RU106)	CH100	5.83	11.00	Pass
11ax (HE20) (RU106)	CH116	6.31	11.00	Pass
11ax (HE20) (RU106)	CH140	6.41	11.00	Pass
11ax (HE20) (RU242)	CH100	2.42	11.00	Pass
11ax (HE20) (RU242)	CH116	2.78	11.00	Pass
11ax (HE20) (RU242)	CH140	2.85	11.00	Pass
11ax (HE40) (RU484)	CH102	-0.54	11.00	Pass
11ax (HE40) (RU484)	CH118	-0.09	11.00	Pass

U-NII-2C (5470 - 5725 MHz)				
Mode	Channel	PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
11ax (HE40) (RU484)	CH134	0.01	11.00	Pass
11ax (HE80) (RU996)	CH106	-3.35	11.00	Pass
11ax (HE80) (RU996)	CH122	-2.92	11.00	Pass
11ax (HE160) (RU996*2)	CH114	-9.07	11.00	Pass

U-NII-3 (5725 - 5850 MHz)				
Mode	Channel	PSD (dBm/500kHz)	Limit (dBm/500kHz)	Verdict
11a	CH149	-4.24	30.00	Pass
11a	CH157	-4.59	30.00	Pass
11a	CH165	-4.24	30.00	Pass
11n (HT20)	CH149	-5.75	30.00	Pass
11n (HT20)	CH157	-5.87	30.00	Pass
11n (HT20)	CH165	-5.73	30.00	Pass
11n (HT40)	CH151	-9.12	30.00	Pass
11n (HT40)	CH159	-9.25	30.00	Pass
11ac (VHT20)	CH149	-6.26	30.00	Pass
11ac (VHT20)	CH157	-6.18	30.00	Pass
11ac (VHT20)	CH165	-6.19	30.00	Pass
11ac (VHT40)	CH151	-10.20	30.00	Pass
11ac (VHT40)	CH159	-10.20	30.00	Pass
11ac (VHT80)	CH155	-13.87	30.00	Pass
11ax (HE20) (SU)	CH149	-6.53	30.00	Pass
11ax (HE20) (SU)	CH157	-6.55	30.00	Pass
11ax (HE20) (SU)	CH165	-6.44	30.00	Pass
11ax (HE40) (SU)	CH151	-10.39	30.00	Pass
11ax (HE40) (SU)	CH159	-10.56	30.00	Pass
11ax (HE80) (SU)	CH155	-13.55	30.00	Pass
11ax (HE20) (RU26)	CH149	6.76	30.00	Pass
11ax (HE20) (RU26)	CH157	6.89	30.00	Pass
11ax (HE20) (RU26)	CH165	6.59	30.00	Pass
11ax (HE20) (RU52)	CH149	6.36	30.00	Pass
11ax (HE20) (RU52)	CH157	6.29	30.00	Pass
11ax (HE20) (RU52)	CH165	6.27	30.00	Pass
11ax (HE20) (RU106)	CH149	3.46	30.00	Pass
11ax (HE20) (RU106)	CH157	3.45	30.00	Pass
11ax (HE20) (RU106)	CH165	3.30	30.00	Pass
11ax (HE20) (RU242)	CH149	0.09	30.00	Pass
11ax (HE20) (RU242)	CH157	0.07	30.00	Pass
11ax (HE20) (RU242)	CH165	-0.08	30.00	Pass
11ax (HE40) (RU484)	CH151	-2.93	30.00	Pass
11ax (HE40) (RU484)	CH159	-3.18	30.00	Pass
11ax (HE80) (RU996)	CH155	-5.79	30.00	Pass

Aux. Antenna

U-NII-1 (5150 - 5250 MHz)				
Mode	Channel	PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
11a	CH36	-1.38	11.00	Pass
11a	CH44	-1.26	11.00	Pass
11a	CH48	-1.01	11.00	Pass
11n (HT20)	CH36	-2.94	11.00	Pass
11n (HT20)	CH44	-2.12	11.00	Pass
11n (HT20)	CH48	-1.98	11.00	Pass
11n (HT40)	CH38	-6.45	11.00	Pass
11n (HT40)	CH46	-5.95	11.00	Pass
11ac (VHT20)	CH36	-3.58	11.00	Pass
11ac (VHT20)	CH44	-3.16	11.00	Pass
11ac (VHT20)	CH48	-3.03	11.00	Pass
11ac (VHT40)	CH38	-7.33	11.00	Pass
11ac (VHT40)	CH46	-7.01	11.00	Pass
11ac (VHT80)	CH42	-10.88	11.00	Pass
11ax (HE20) (SU)	CH36	-3.76	11.00	Pass
11ax (HE20) (SU)	CH44	-3.41	11.00	Pass
11ax (HE20) (SU)	CH48	-3.23	11.00	Pass
11ax (HE40) (SU)	CH38	-7.93	11.00	Pass
11ax (HE40) (SU)	CH46	-7.35	11.00	Pass
11ax (HE80) (SU)	CH42	-10.35	11.00	Pass
11ax (HE20) (RU26)	CH36	9.73	11.00	Pass
11ax (HE20) (RU26)	CH44	9.51	11.00	Pass
11ax (HE20) (RU26)	CH48	9.63	11.00	Pass
11ax (HE20) (RU52)	CH36	8.83	11.00	Pass
11ax (HE20) (RU52)	CH44	9.31	11.00	Pass
11ax (HE20) (RU52)	CH48	9.35	11.00	Pass
11ax (HE20) (RU106)	CH36	5.94	11.00	Pass
11ax (HE20) (RU106)	CH44	6.31	11.00	Pass
11ax (HE20) (RU106)	CH48	6.39	11.00	Pass
11ax (HE20) (RU242)	CH36	2.54	11.00	Pass
11ax (HE20) (RU242)	CH44	2.86	11.00	Pass
11ax (HE20) (RU242)	CH48	2.94	11.00	Pass
11ax (HE40) (RU484)	CH38	-0.40	11.00	Pass
11ax (HE40) (RU484)	CH46	-0.13	11.00	Pass
11ax (HE80) (RU996)	CH42	-3.02	11.00	Pass

U-NII-2A (5250 - 5350 MHz)				
Mode	Channel	PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
11a	CH52	-0.54	11.00	Pass
11a	CH60	-0.89	11.00	Pass
11a	CH64	-0.73	11.00	Pass
11n (HT20)	CH52	-1.97	11.00	Pass
11n (HT20)	CH60	-2.12	11.00	Pass
11n (HT20)	CH64	-2.05	11.00	Pass
11n (HT40)	CH54	-5.64	11.00	Pass
11n (HT40)	CH62	-5.80	11.00	Pass
11ac (VHT20)	CH52	-2.91	11.00	Pass
11ac (VHT20)	CH60	-3.08	11.00	Pass
11ac (VHT20)	CH64	-3.00	11.00	Pass
11ac (VHT40)	CH54	-6.91	11.00	Pass
11ac (VHT40)	CH62	-6.57	11.00	Pass
11ac (VHT80)	CH58	-10.94	11.00	Pass
11ac (VHT160)	CH50	-14.38	11.00	Pass
11ax (HE20) (SU)	CH52	-3.20	11.00	Pass
11ax (HE20) (SU)	CH60	-3.38	11.00	Pass
11ax (HE20) (SU)	CH64	-3.24	11.00	Pass
11ax (HE40) (SU)	CH54	-7.31	11.00	Pass
11ax (HE40) (SU)	CH62	-6.92	11.00	Pass
11ax (HE80) (SU)	CH58	-10.11	11.00	Pass
11ax (HE160) (SU)	CH50	-14.52	11.00	Pass
11ax (HE20) (RU26)	CH52	8.72	11.00	Pass
11ax (HE20) (RU26)	CH60	8.97	11.00	Pass
11ax (HE20) (RU26)	CH64	9.10	11.00	Pass
11ax (HE20) (RU52)	CH52	9.39	11.00	Pass
11ax (HE20) (RU52)	CH60	9.58	11.00	Pass
11ax (HE20) (RU52)	CH64	9.73	11.00	Pass
11ax (HE20) (RU106)	CH52	6.53	11.00	Pass
11ax (HE20) (RU106)	CH60	6.68	11.00	Pass
11ax (HE20) (RU106)	CH64	6.78	11.00	Pass
11ax (HE20) (RU242)	CH52	3.03	11.00	Pass
11ax (HE20) (RU242)	CH60	3.23	11.00	Pass
11ax (HE20) (RU242)	CH64	3.31	11.00	Pass
11ax (HE40) (RU484)	CH54	0.14	11.00	Pass
11ax (HE40) (RU484)	CH62	0.22	11.00	Pass
11ax (HE80) (RU996)	CH58	-2.90	11.00	Pass
11ax (HE160) (RU996*2)	CH50	-8.37	11.00	Pass

U-NII-2C (5470 - 5725 MHz)				
Mode	Channel	PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
11a	CH100	-1.94	11.00	Pass
11a	CH116	-2.49	11.00	Pass
11a	CH140	-1.70	11.00	Pass
11n (HT20)	CH100	-3.23	11.00	Pass
11n (HT20)	CH116	-3.77	11.00	Pass
11n (HT20)	CH140	-2.64	11.00	Pass
11n (HT40)	CH102	-6.43	11.00	Pass
11n (HT40)	CH118	-7.34	11.00	Pass
11n (HT40)	CH134	-6.83	11.00	Pass
11ac (VHT20)	CH100	-4.14	11.00	Pass
11ac (VHT20)	CH116	-4.61	11.00	Pass
11ac (VHT20)	CH140	-4.36	11.00	Pass
11ac (VHT40)	CH102	-7.78	11.00	Pass
11ac (VHT40)	CH118	-8.33	11.00	Pass
11ac (VHT40)	CH134	-7.71	11.00	Pass
11ac (VHT80)	CH106	-11.88	11.00	Pass
11ac (VHT80)	CH122	-12.25	11.00	Pass
11ac (VHT160)	CH114	-14.36	11.00	Pass
11ax (HE20) (SU)	CH100	-3.92	11.00	Pass
11ax (HE20) (SU)	CH116	-4.86	11.00	Pass
11ax (HE20) (SU)	CH140	-3.76	11.00	Pass
11ax (HE40) (SU)	CH102	-7.73	11.00	Pass
11ax (HE40) (SU)	CH118	-8.66	11.00	Pass
11ax (HE40) (SU)	CH134	-8.10	11.00	Pass
11ax (HE80) (SU)	CH106	-11.45	11.00	Pass
11ax (HE80) (SU)	CH122	-11.31	11.00	Pass
11ax (HE160) (SU)	CH114	-14.40	11.00	Pass
11ax (HE20) (RU26)	CH100	8.92	11.00	Pass
11ax (HE20) (RU26)	CH116	8.46	11.00	Pass
11ax (HE20) (RU26)	CH140	9.16	11.00	Pass
11ax (HE20) (RU52)	CH100	8.88	11.00	Pass
11ax (HE20) (RU52)	CH116	8.17	11.00	Pass
11ax (HE20) (RU52)	CH140	9.04	11.00	Pass
11ax (HE20) (RU106)	CH100	5.84	11.00	Pass
11ax (HE20) (RU106)	CH116	5.28	11.00	Pass
11ax (HE20) (RU106)	CH140	6.18	11.00	Pass
11ax (HE20) (RU242)	CH100	2.36	11.00	Pass
11ax (HE20) (RU242)	CH116	1.71	11.00	Pass
11ax (HE20) (RU242)	CH140	2.77	11.00	Pass
11ax (HE40) (RU484)	CH102	-0.60	11.00	Pass
11ax (HE40) (RU484)	CH118	-1.17	11.00	Pass

U-NII-2C (5470 - 5725 MHz)				
Mode	Channel	PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
11ax (HE40) (RU484)	CH134	-0.44	11.00	Pass
11ax (HE80) (RU996)	CH106	-3.56	11.00	Pass
11ax (HE80) (RU996)	CH122	-3.88	11.00	Pass
11ax (HE160) (RU996*2)	CH114	-9.76	11.00	Pass

U-NII-3 (5725 - 5850 MHz)				
Mode	Channel	PSD (dBm/500kHz)	Limit (dBm/500kHz)	Verdict
11a	CH149	-4.23	30.00	Pass
11a	CH157	-5.02	30.00	Pass
11a	CH165	-4.76	30.00	Pass
11n (HT20)	CH149	-5.65	30.00	Pass
11n (HT20)	CH157	-5.90	30.00	Pass
11n (HT20)	CH165	-6.15	30.00	Pass
11n (HT40)	CH151	-9.52	30.00	Pass
11n (HT40)	CH159	-9.73	30.00	Pass
11ac (VHT20)	CH149	-6.10	30.00	Pass
11ac (VHT20)	CH157	-6.80	30.00	Pass
11ac (VHT20)	CH165	-6.56	30.00	Pass
11ac (VHT40)	CH151	-10.39	30.00	Pass
11ac (VHT40)	CH159	-10.61	30.00	Pass
11ac (VHT80)	CH155	-14.88	30.00	Pass
11ax (HE20) (SU)	CH149	-6.50	30.00	Pass
11ax (HE20) (SU)	CH157	-7.23	30.00	Pass
11ax (HE20) (SU)	CH165	-6.93	30.00	Pass
11ax (HE40) (SU)	CH151	-10.82	30.00	Pass
11ax (HE40) (SU)	CH159	-11.09	30.00	Pass
11ax (HE80) (SU)	CH155	-13.99	30.00	Pass
11ax (HE20) (RU26)	CH149	6.78	30.00	Pass
11ax (HE20) (RU26)	CH157	5.73	30.00	Pass
11ax (HE20) (RU26)	CH165	5.82	30.00	Pass
11ax (HE20) (RU52)	CH149	6.48	30.00	Pass
11ax (HE20) (RU52)	CH157	5.67	30.00	Pass
11ax (HE20) (RU52)	CH165	5.75	30.00	Pass
11ax (HE20) (RU106)	CH149	3.63	30.00	Pass
11ax (HE20) (RU106)	CH157	2.81	30.00	Pass
11ax (HE20) (RU106)	CH165	2.91	30.00	Pass
11ax (HE20) (RU242)	CH149	0.07	30.00	Pass
11ax (HE20) (RU242)	CH157	-0.76	30.00	Pass
11ax (HE20) (RU242)	CH165	-0.65	30.00	Pass
11ax (HE40) (RU484)	CH151	-3.52	30.00	Pass
11ax (HE40) (RU484)	CH159	-3.80	30.00	Pass
11ax (HE80) (RU996)	CH155	-6.69	30.00	Pass


A.5 Conducted Emission

Note 1: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Note 2: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.


Test Data and Plots

PHASE L

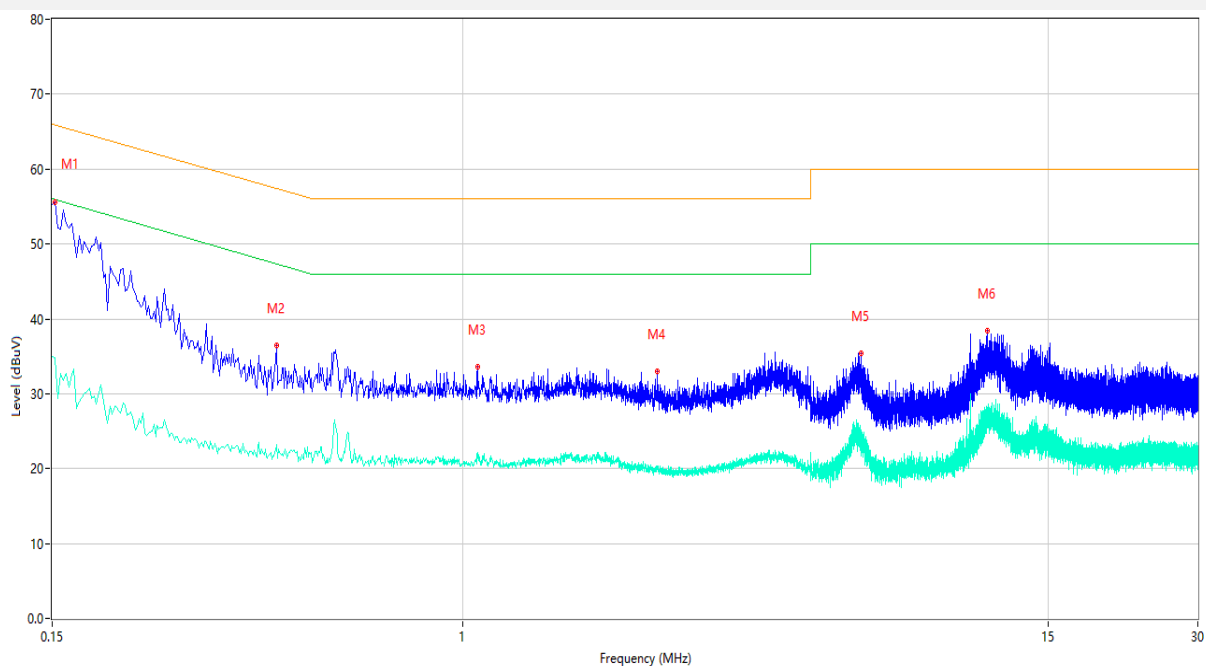

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.152	55.63	10.06	65.89	10.26	Peak	L	Pass
1**	0.152	34.85	10.06	55.89	21.04	AV	L	Pass
2	0.424	36.44	10.14	57.37	20.93	Peak	L	Pass
2**	0.424	23.27	10.14	47.37	24.10	AV	L	Pass
3	1.072	33.62	10.20	56.00	22.38	Peak	L	Pass
3**	1.072	22.14	10.20	46.00	23.86	AV	L	Pass
4	2.460	32.94	10.37	56.00	23.06	Peak	L	Pass
4**	2.460	20.29	10.37	46.00	25.71	AV	L	Pass
5	6.334	35.37	10.63	60.00	24.63	Peak	L	Pass
5**	6.334	24.84	10.63	50.00	25.16	AV	L	Pass
6	11.326	38.41	11.00	60.00	21.59	Peak	L	Pass
6**	11.326	28.17	11.00	50.00	21.83	AV	L	Pass

PHASE N

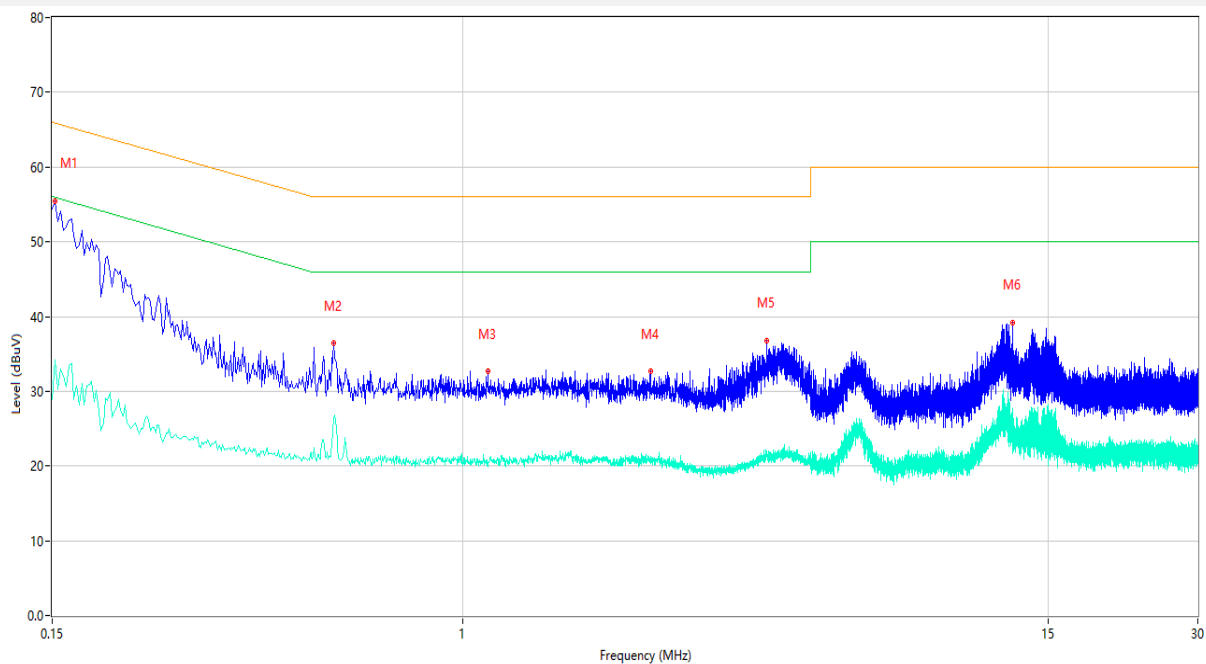

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.152	55.50	10.15	65.89	10.39	Peak	N	Pass
1**	0.152	34.17	10.15	55.89	21.72	AV	N	Pass
2	0.552	36.39	10.18	56.00	19.61	Peak	N	Pass
2**	0.552	26.17	10.18	46.00	19.83	AV	N	Pass
3	1.126	32.70	10.25	56.00	23.30	Peak	N	Pass
3**	1.126	20.43	10.25	46.00	25.57	AV	N	Pass
4	2.390	32.68	10.27	56.00	23.32	Peak	N	Pass
4**	2.390	20.74	10.27	46.00	25.26	AV	N	Pass
5	4.090	36.83	10.38	56.00	19.17	Peak	N	Pass
5**	4.090	22.07	10.38	46.00	23.93	AV	N	Pass
6	12.750	39.23	11.04	60.00	20.77	Peak	N	Pass
6**	12.750	25.68	11.04	50.00	24.32	AV	N	Pass

A.6 Radiated Spurious Emissions and Band Edge (Restricted-band)

A.6.1 Radiated Spurious Emissions

Test Data


Note 1: The symbol of "--" in the table which means not application.

Note 2: For the test data above 1 GHz, According the ANSI C63.4, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


Note 4: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.

30 MHz to 1 GHz, ANT H

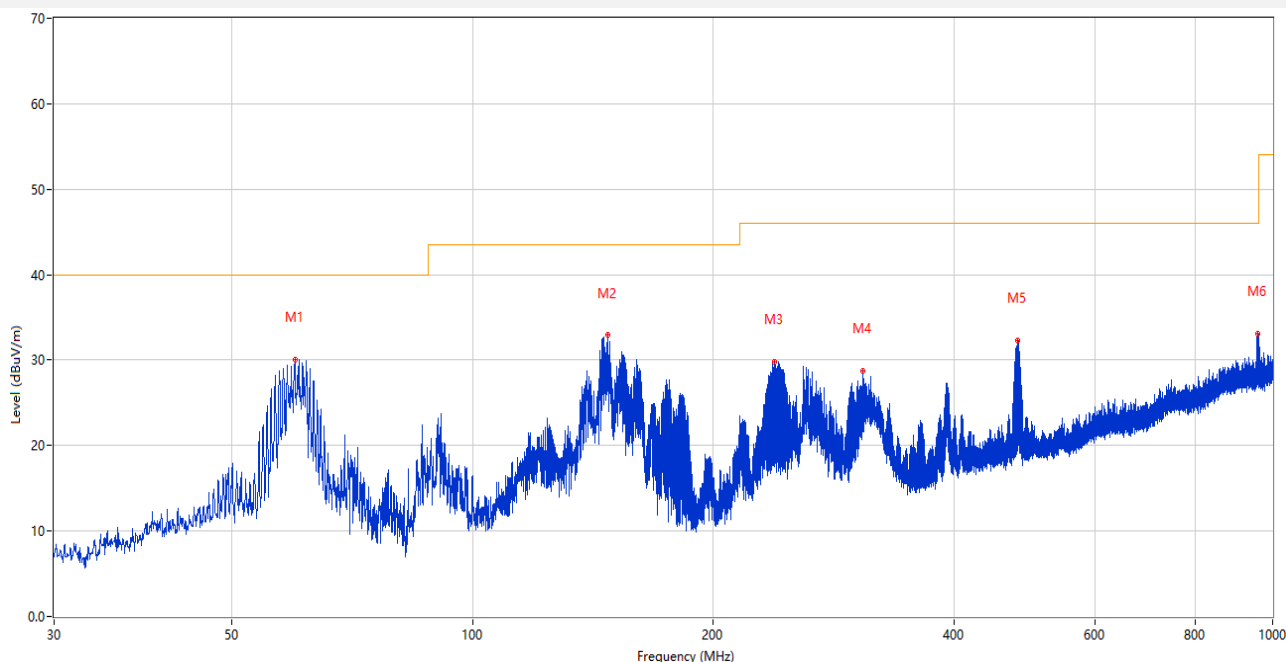

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	60.022	30.09	-26.03	40.0	9.91	Peak	40.00	200	Horizontal	Pass
2	147.710	32.89	-29.61	43.5	10.61	Peak	82.00	100	Horizontal	Pass
3	238.695	29.83	-24.55	46.0	16.17	Peak	83.00	200	Horizontal	Pass
4	307.905	28.79	-23.24	46.0	17.21	Peak	28.00	200	Horizontal	Pass
5	479.983	32.30	-18.70	46.0	13.70	Peak	325.00	200	Horizontal	Pass
6	957.271	33.12	-8.77	46.0	12.88	Peak	360.00	200	Horizontal	Pass

30 MHz to 1 GHz, ANT V

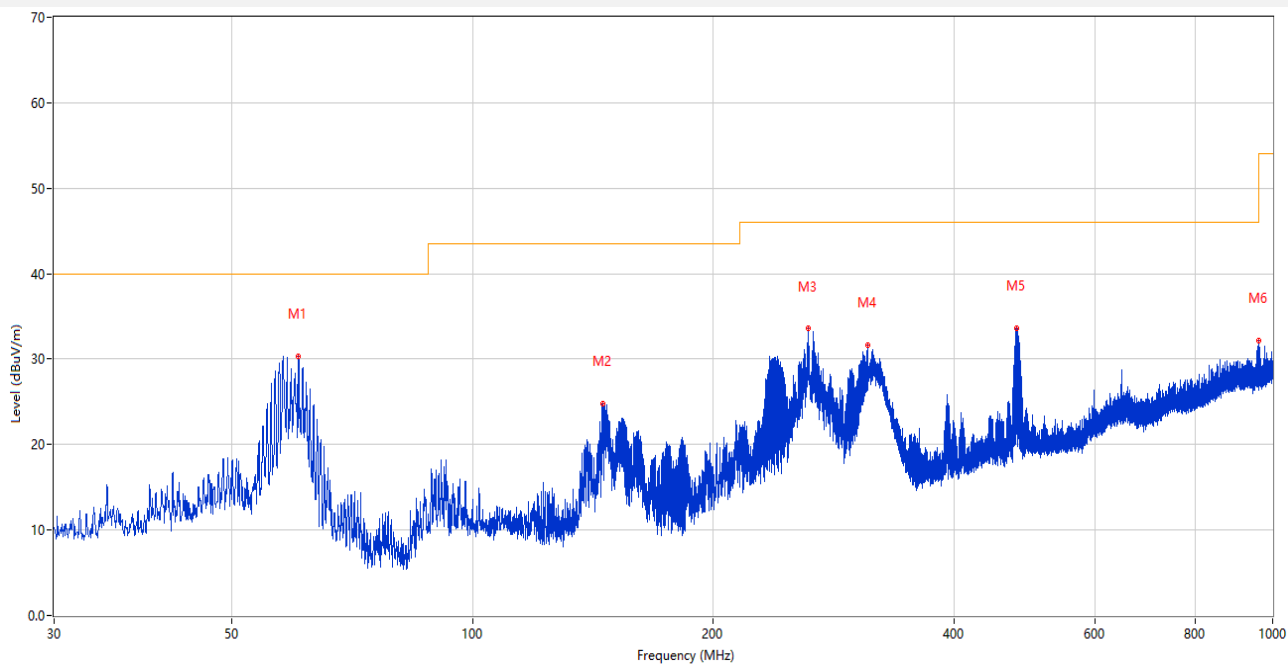


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	60.603	30.33	-26.17	40.0	9.67	Peak	130.00	100	Vertical	Pass
2	145.721	24.83	-29.59	43.5	18.67	Peak	78.00	200	Vertical	Pass
3	262.509	33.56	-24.12	46.0	12.44	Peak	150.00	200	Vertical	Pass
4	311.882	31.62	-23.12	46.0	14.38	Peak	57.00	100	Vertical	Pass
5	479.304	33.62	-18.76	46.0	12.38	Peak	19.00	200	Vertical	Pass
6	959.939	32.13	-8.72	46.0	13.87	Peak	360.00	200	Vertical	Pass

Note: The spurious above 18G is noise only, do not show on the report.

Main Antenna


11a, U-NII-1, 1 GHz to 18 GHz, Middle Channel, ANT H

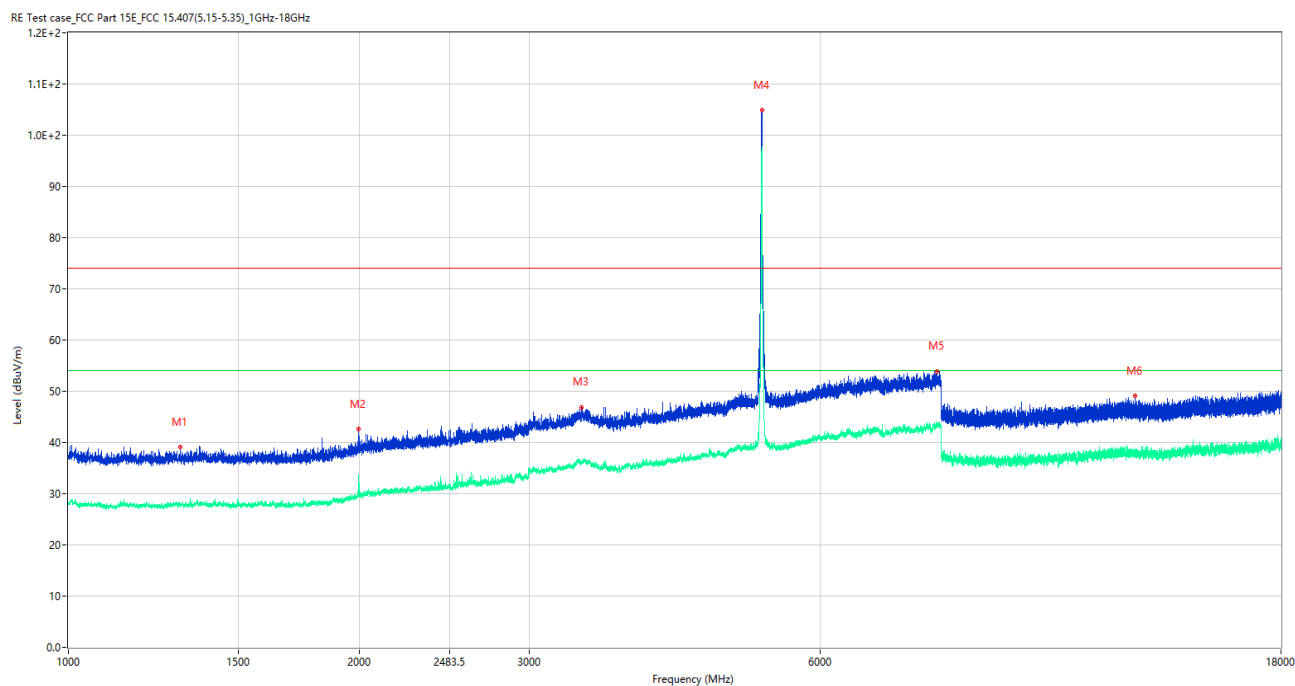

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1306.000	39.06	-15.62	74.0	34.94	Peak	164.00	150	Horizontal	Pass
1**	1306.000	28.06	-15.62	54.0	25.94	AV	164.00	150	Horizontal	Pass
2	1995.000	42.71	-14.54	74.0	31.29	Peak	177.00	150	Horizontal	Pass
2**	1995.000	32.54	-14.54	54.0	21.46	AV	177.00	150	Horizontal	Pass
3	3395.000	46.85	-5.85	74.0	27.15	Peak	355.00	150	Horizontal	Pass
3**	3395.000	35.87	-5.85	54.0	18.13	AV	355.00	150	Horizontal	Pass
4	5223.500	104.90	-2.34	74.0	-30.90	Peak	205.00	150	Horizontal	N/A
4**	5223.500	97.78	-2.34	54.0	-43.78	AV	205.00	150	Horizontal	N/A
5	7922.500	53.93	1.94	74.0	20.07	Peak	332.00	150	Horizontal	Pass
5**	7922.500	43.75	1.94	54.0	10.25	AV	332.00	150	Horizontal	Pass
6	12706.062	49.06	-2.92	74.0	24.94	Peak	355.00	150	Horizontal	Pass
6**	12706.062	38.13	-2.92	54.0	15.87	AV	355.00	150	Horizontal	Pass

11a, U-NII-1, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

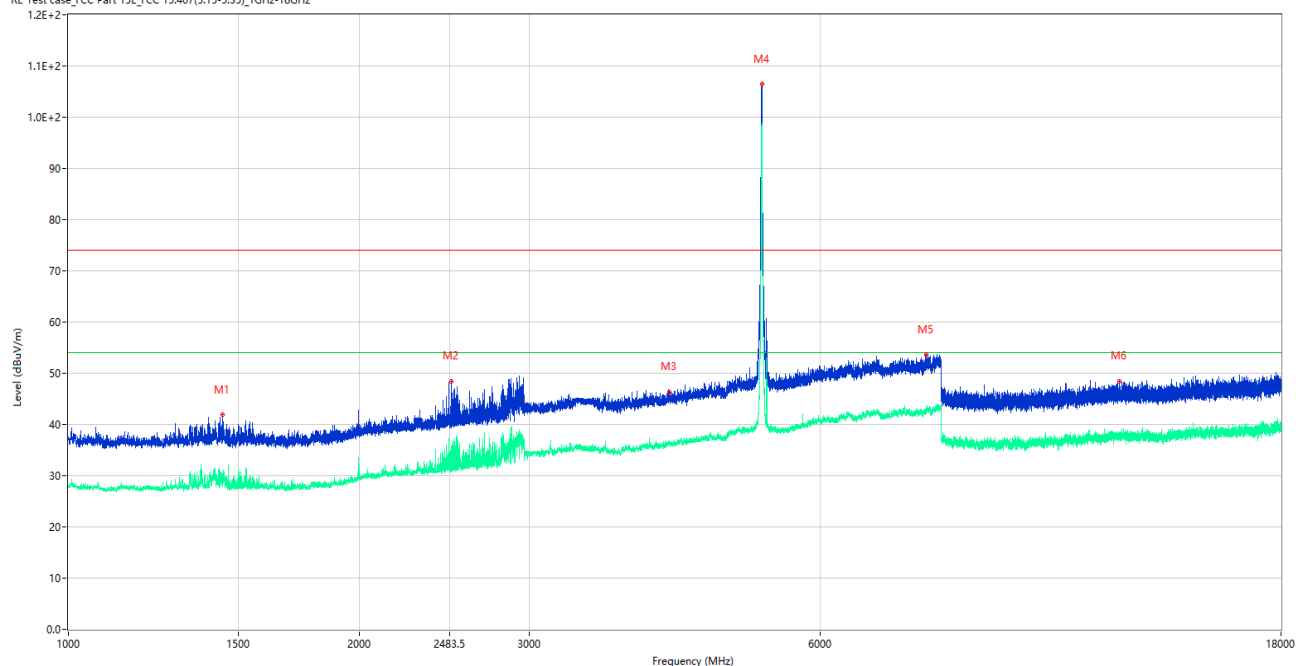

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1444.000	41.92	-15.92	74.0	32.08	Peak	274.00	150	Vertical	Pass
1**	1444.000	28.85	-15.92	54.0	25.15	AV	274.00	150	Vertical	Pass
2	2492.500	48.40	-11.93	74.0	25.60	Peak	258.00	150	Vertical	Pass
2**	2492.500	31.00	-11.93	54.0	23.00	AV	258.00	150	Vertical	Pass
3	4192.500	46.26	-3.64	74.0	27.74	Peak	0.00	150	Vertical	Pass
3**	4192.500	36.77	-3.64	54.0	17.23	AV	0.00	150	Vertical	Pass
4	5225.500	106.48	-2.34	74.0	-32.48	Peak	233.00	150	Vertical	N/A
4**	5225.500	98.20	-2.34	54.0	-44.20	AV	233.00	150	Vertical	N/A
5	7721.000	53.63	0.94	74.0	20.37	Peak	309.00	150	Vertical	Pass
5**	7721.000	42.53	0.94	54.0	11.47	AV	309.00	150	Vertical	Pass
6	12237.712	48.46	-2.70	74.0	25.54	Peak	173.00	150	Vertical	Pass
6**	12237.712	38.02	-2.70	54.0	15.98	AV	173.00	150	Vertical	Pass

11n20, U-NII-1, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

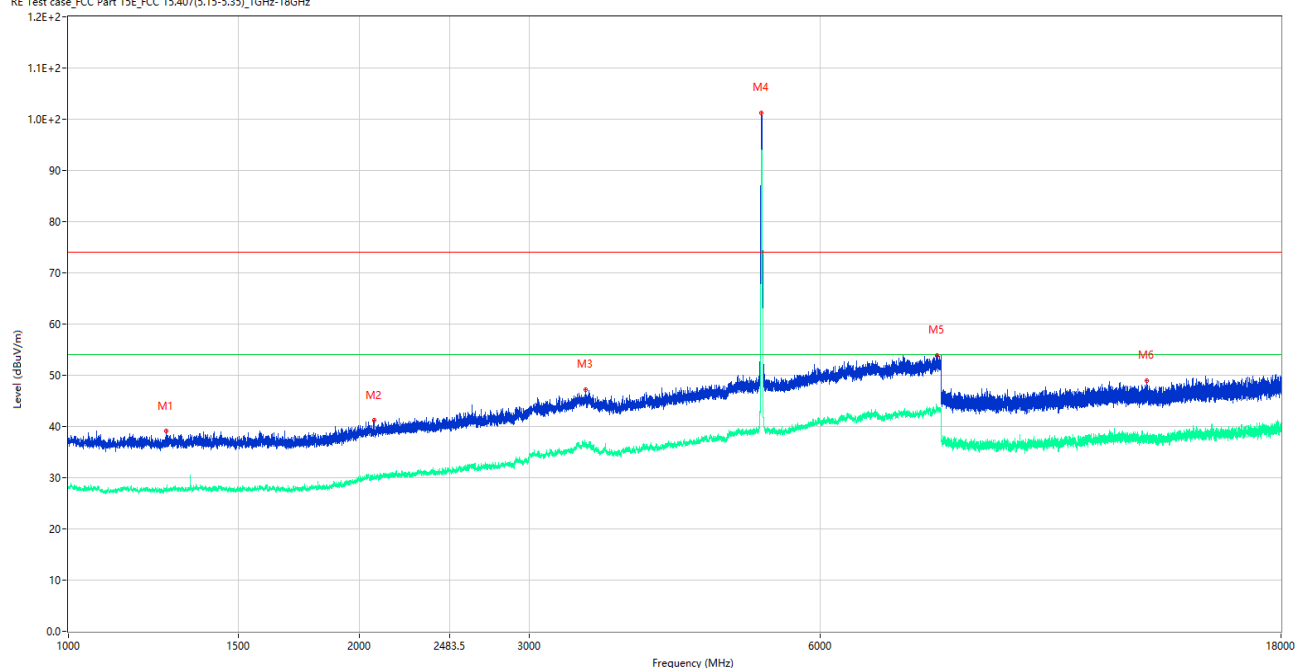

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1263.750	39.08	-16.00	74.0	34.92	Peak	14.00	150	Horizontal	Pass
1**	1263.750	27.61	-16.00	54.0	26.39	AV	14.00	150	Horizontal	Pass
2	2071.000	41.19	-13.74	74.0	32.81	Peak	353.00	150	Horizontal	Pass
2**	2071.000	30.29	-13.74	54.0	23.71	AV	353.00	150	Horizontal	Pass
3	3428.000	47.21	-4.91	74.0	26.79	Peak	0.00	150	Horizontal	Pass
3**	3428.000	36.82	-4.91	54.0	17.18	AV	0.00	150	Horizontal	Pass
4	5217.500	101.31	-2.36	74.0	-27.31	Peak	224.00	150	Horizontal	N/A
4**	5217.500	93.95	-2.36	54.0	-39.95	AV	224.00	150	Horizontal	N/A
5	7922.000	53.92	1.95	74.0	20.08	Peak	342.00	150	Horizontal	Pass
5**	7922.000	43.43	1.95	54.0	10.57	AV	342.00	150	Horizontal	Pass
6	13079.963	48.88	-1.60	74.0	25.12	Peak	81.00	150	Horizontal	Pass
6**	13079.963	38.04	-1.60	54.0	15.96	AV	81.00	150	Horizontal	Pass

11n20, U-NII-1, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

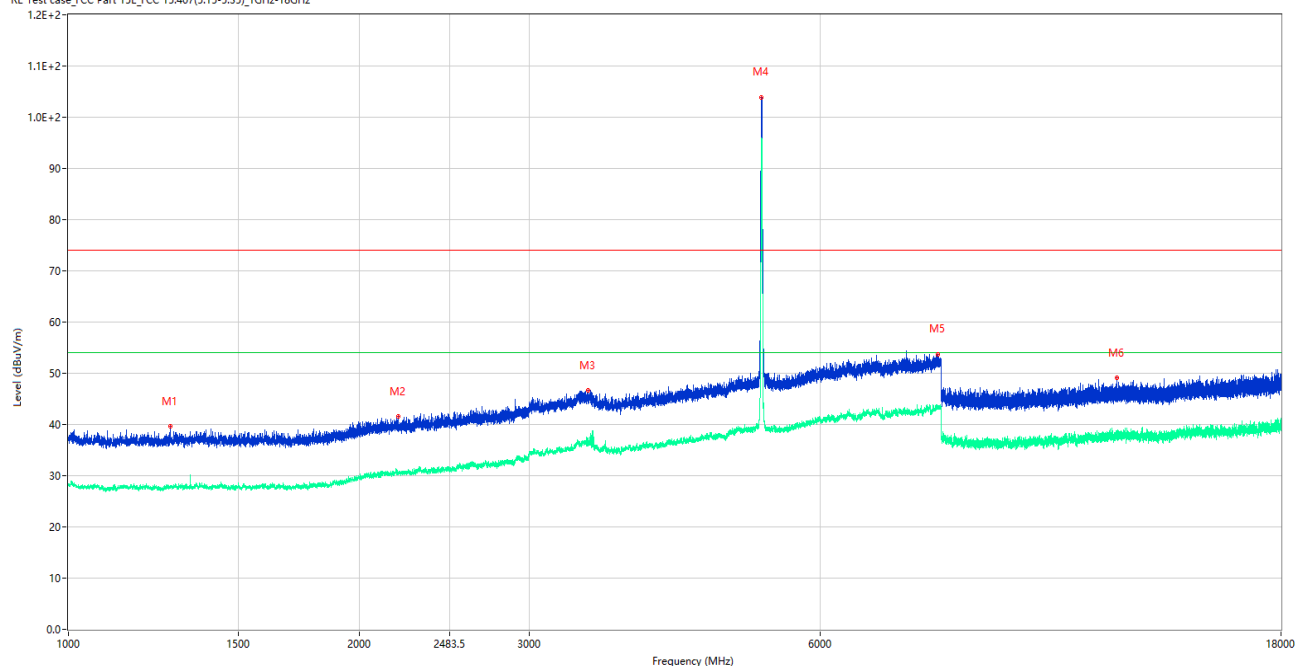

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1274.000	39.62	-15.83	74.0	34.38	Peak	360.00	150	Vertical	Pass
1**	1274.000	27.77	-15.83	54.0	26.23	AV	360.00	150	Vertical	Pass
2	2195.250	41.55	-13.32	74.0	32.45	Peak	81.00	150	Vertical	Pass
2**	2195.250	30.43	-13.32	54.0	23.57	AV	81.00	150	Vertical	Pass
3	3449.500	46.60	-5.02	74.0	27.40	Peak	106.00	150	Vertical	Pass
3**	3449.500	37.30	-5.02	54.0	16.70	AV	106.00	150	Vertical	Pass
4	5215.500	103.87	-2.32	74.0	-29.87	Peak	12.00	150	Vertical	N/A
4**	5215.500	95.16	-2.32	54.0	-41.16	AV	12.00	150	Vertical	N/A
5	7947.000	53.60	1.99	74.0	20.40	Peak	22.00	150	Vertical	Pass
5**	7947.000	43.08	1.99	54.0	10.92	AV	22.00	150	Vertical	Pass
6	12173.112	49.15	-2.76	74.0	24.85	Peak	243.00	150	Vertical	Pass
6**	12173.112	37.34	-2.76	54.0	16.66	AV	243.00	150	Vertical	Pass

11n40, U-NII-1, 1 GHz to 18 GHz, Low Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

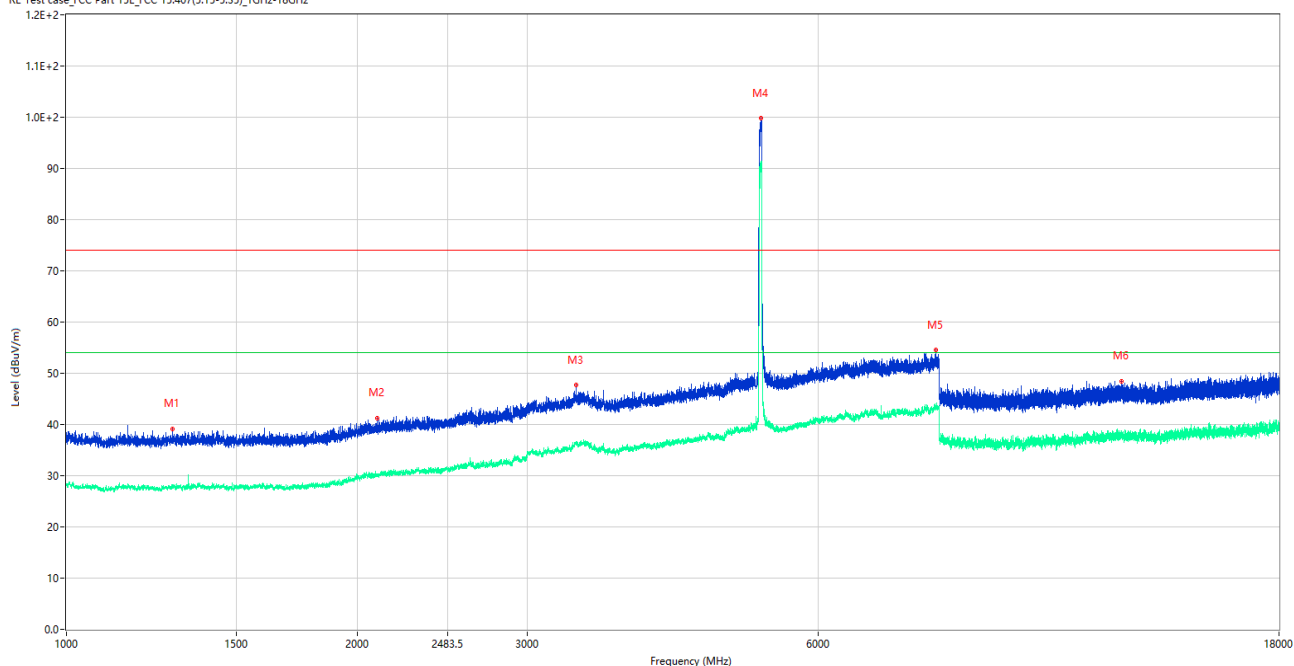

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1287.500	39.14	-15.93	74.0	34.86	Peak	360.00	150	Horizontal	Pass
1**	1287.500	28.18	-15.93	54.0	25.82	AV	360.00	150	Horizontal	Pass
2	2096.000	41.30	-13.58	74.0	32.70	Peak	249.00	150	Horizontal	Pass
2**	2096.000	29.87	-13.58	54.0	24.13	AV	249.00	150	Horizontal	Pass
3	3369.000	47.69	-4.90	74.0	26.31	Peak	359.00	150	Horizontal	Pass
3**	3369.000	36.50	-4.90	54.0	17.50	AV	359.00	150	Horizontal	Pass
4	5241.000	99.77	-2.17	74.0	-25.77	Peak	205.00	150	Horizontal	N/A
4**	5241.000	91.43	-2.17	54.0	-37.43	AV	205.00	150	Horizontal	N/A
5	7942.500	54.55	1.90	74.0	19.45	Peak	52.00	150	Horizontal	Pass
5**	7942.500	43.07	1.90	54.0	10.93	AV	52.00	150	Horizontal	Pass
6	12357.175	48.40	-2.00	74.0	25.60	Peak	34.00	150	Horizontal	Pass
6**	12357.175	37.70	-2.00	54.0	16.30	AV	34.00	150	Horizontal	Pass

11n40, U-NII-1, 1 GHz to 18 GHz, Low Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

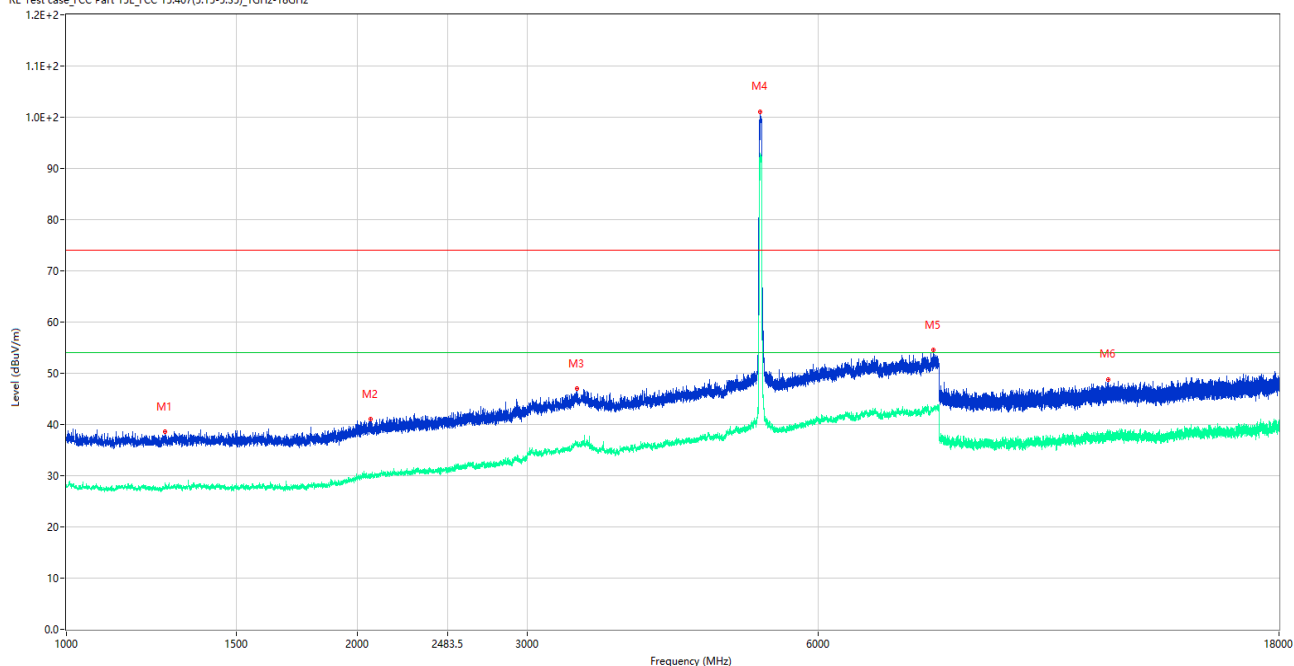

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1266.000	38.57	-15.94	74.0	35.43	Peak	253.00	150	Vertical	Pass
1**	1266.000	27.75	-15.94	54.0	26.25	AV	253.00	150	Vertical	Pass
2	2063.500	41.05	-13.84	74.0	32.95	Peak	93.00	150	Vertical	Pass
2**	2063.500	29.98	-13.84	54.0	24.02	AV	93.00	150	Vertical	Pass
3	3380.000	46.95	-5.11	74.0	27.05	Peak	50.00	150	Vertical	Pass
3**	3380.000	36.28	-5.11	54.0	17.72	AV	50.00	150	Vertical	Pass
4	5227.500	101.13	-2.32	74.0	-27.13	Peak	31.00	150	Vertical	N/A
4**	5227.500	92.41	-2.32	54.0	-38.41	AV	31.00	150	Vertical	N/A
5	7902.500	54.50	1.60	74.0	19.50	Peak	358.00	150	Vertical	Pass
5**	7902.500	42.84	1.60	54.0	11.16	AV	358.00	150	Vertical	Pass
6	11977.650	48.80	-3.22	74.0	25.20	Peak	0.00	150	Vertical	Pass
6**	11977.650	37.61	-3.22	54.0	16.39	AV	0.00	150	Vertical	Pass

11ac80, U-NII-1, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

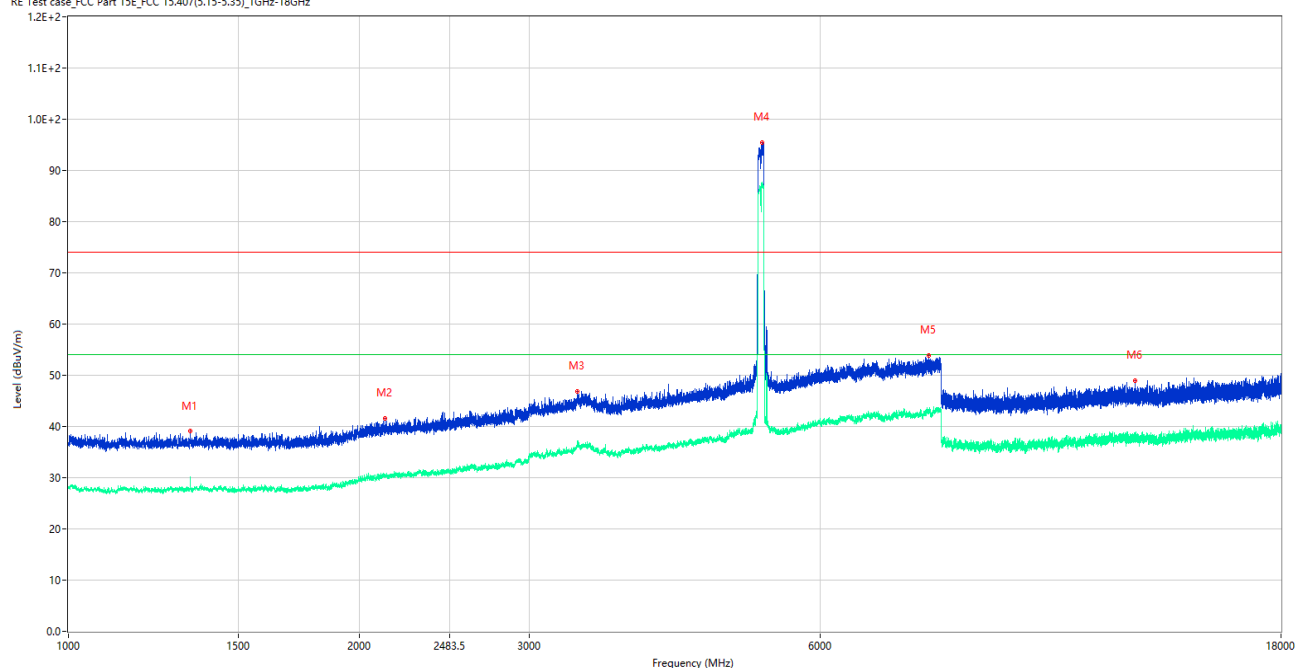

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1336.750	39.10	-16.05	74.0	34.90	Peak	360.00	150	Horizontal	Pass
1**	1336.750	30.23	-16.05	54.0	23.77	AV	360.00	150	Horizontal	Pass
2	2127.750	41.49	-13.25	74.0	32.51	Peak	229.00	150	Horizontal	Pass
2**	2127.750	30.68	-13.25	54.0	23.32	AV	229.00	150	Horizontal	Pass
3	3363.500	46.77	-5.35	74.0	27.23	Peak	32.00	150	Horizontal	Pass
3**	3363.500	36.21	-5.35	54.0	17.79	AV	32.00	150	Horizontal	Pass
4	5223.500	95.45	-2.34	74.0	-21.45	Peak	236.00	150	Horizontal	N/A
4**	5223.500	87.14	-2.34	54.0	-33.14	AV	236.00	150	Horizontal	N/A
5	7780.500	53.94	1.33	74.0	20.06	Peak	359.00	150	Horizontal	Pass
5**	7780.500	42.65	1.33	54.0	11.35	AV	359.00	150	Horizontal	Pass
6	12701.075	49.02	-3.13	74.0	24.98	Peak	0.00	150	Horizontal	Pass
6**	12701.075	37.76	-3.13	54.0	16.24	AV	0.00	150	Horizontal	Pass

11ac80, U-NII-1, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

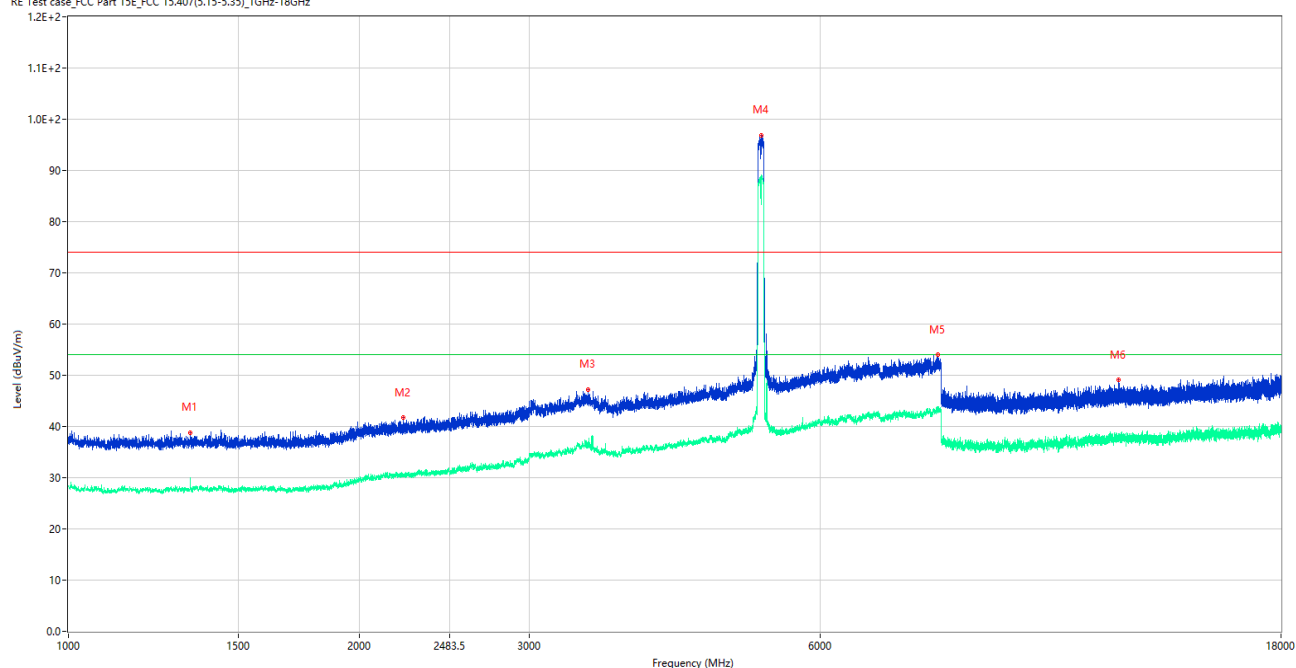

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1336.500	38.78	-16.05	74.0	35.22	Peak	288.00	150	Vertical	Pass
1**	1336.500	29.36	-16.05	54.0	24.64	AV	288.00	150	Vertical	Pass
2	2223.000	41.69	-13.06	74.0	32.31	Peak	209.00	150	Vertical	Pass
2**	2223.000	30.30	-13.06	54.0	23.70	AV	209.00	150	Vertical	Pass
3	3448.000	47.26	-5.12	74.0	26.74	Peak	41.00	150	Vertical	Pass
3**	3448.000	36.04	-5.12	54.0	17.96	AV	41.00	150	Vertical	Pass
4	5218.500	96.86	-2.37	74.0	-22.86	Peak	32.00	150	Vertical	N/A
4**	5218.500	88.69	-2.37	54.0	-34.69	AV	32.00	150	Vertical	N/A
5	7949.000	53.98	2.03	74.0	20.02	Peak	358.00	150	Vertical	Pass
5**	7949.000	43.13	2.03	54.0	10.87	AV	358.00	150	Vertical	Pass
6	12225.599	49.08	-2.81	74.0	24.92	Peak	2.00	150	Vertical	Pass
6**	12225.599	37.85	-2.81	54.0	16.15	AV	2.00	150	Vertical	Pass

11ax20 (SU), U-NII-1, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

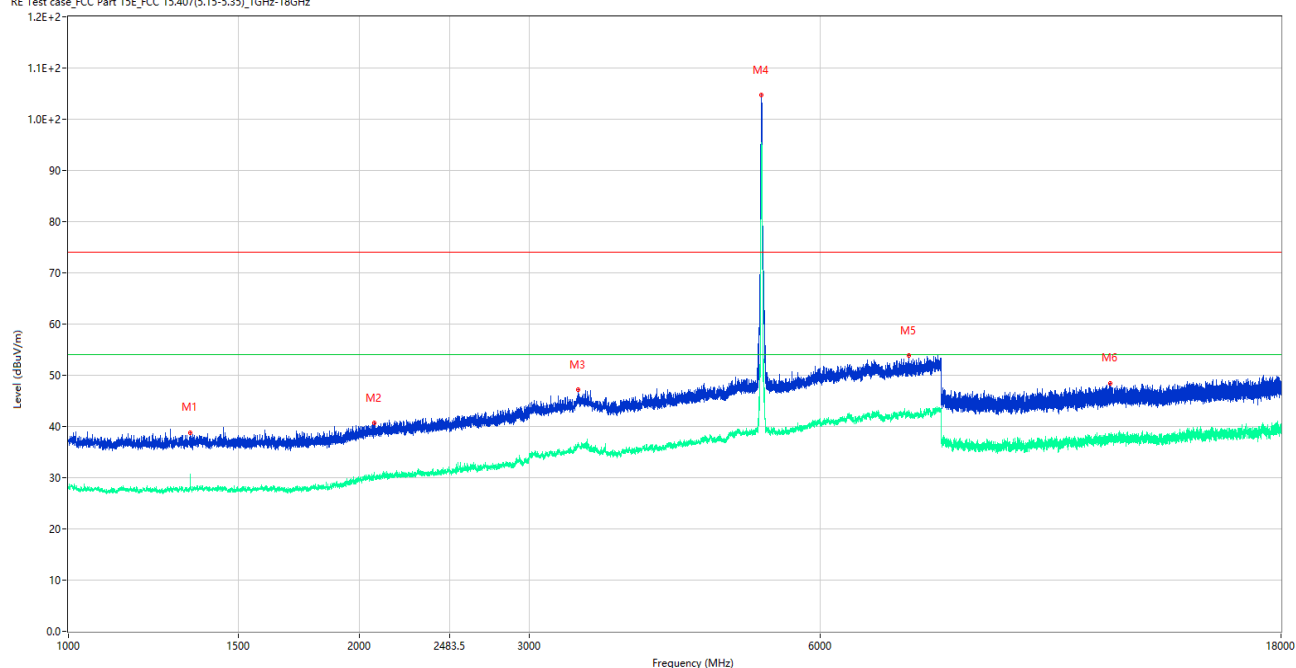

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1336.500	38.78	-16.05	74.0	35.22	Peak	129.00	150	Horizontal	Pass
1**	1336.500	30.63	-16.05	54.0	23.37	AV	129.00	150	Horizontal	Pass
2	2071.000	40.66	-13.74	74.0	33.34	Peak	245.00	150	Horizontal	Pass
2**	2071.000	30.36	-13.74	54.0	23.64	AV	245.00	150	Horizontal	Pass
3	3368.000	47.24	-4.98	74.0	26.76	Peak	298.00	150	Horizontal	Pass
3**	3368.000	36.48	-4.98	54.0	17.52	AV	298.00	150	Horizontal	Pass
4	5219.000	104.72	-2.36	74.0	-30.72	Peak	154.00	150	Horizontal	N/A
4**	5219.000	94.98	-2.36	54.0	-40.98	AV	154.00	150	Horizontal	N/A
5	7406.500	53.85	0.76	74.0	20.15	Peak	184.00	150	Horizontal	Pass
5**	7406.500	43.21	0.76	54.0	10.79	AV	184.00	150	Horizontal	Pass
6	11974.563	48.43	-3.08	74.0	25.57	Peak	360.00	150	Horizontal	Pass
6**	11974.563	38.16	-3.08	54.0	15.84	AV	360.00	150	Horizontal	Pass

11ax20 (SU), U-NII-1, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

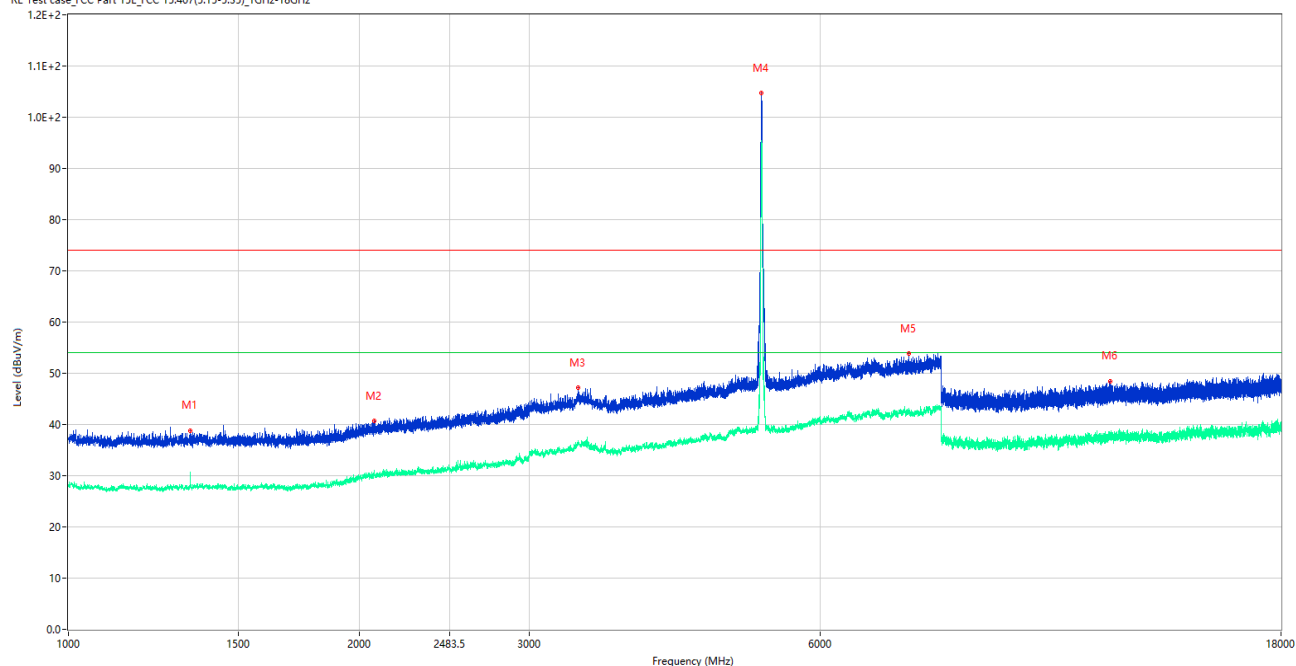

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1336.500	38.78	-16.05	74.0	35.22	Peak	129.00	150	Horizontal	Pass
1**	1336.500	30.63	-16.05	54.0	23.37	AV	129.00	150	Horizontal	Pass
2	2071.000	40.66	-13.74	74.0	33.34	Peak	245.00	150	Horizontal	Pass
2**	2071.000	30.36	-13.74	54.0	23.64	AV	245.00	150	Horizontal	Pass
3	3368.000	47.24	-4.98	74.0	26.76	Peak	298.00	150	Horizontal	Pass
3**	3368.000	36.48	-4.98	54.0	17.52	AV	298.00	150	Horizontal	Pass
4	5219.000	104.72	-2.36	74.0	-30.72	Peak	154.00	150	Horizontal	N/A
4**	5219.000	94.98	-2.36	54.0	-40.98	AV	154.00	150	Horizontal	N/A
5	7406.500	53.85	0.76	74.0	20.15	Peak	184.00	150	Horizontal	Pass
5**	7406.500	43.21	0.76	54.0	10.79	AV	184.00	150	Horizontal	Pass
6	11974.563	48.43	-3.08	74.0	25.57	Peak	360.00	150	Horizontal	Pass
6**	11974.563	38.16	-3.08	54.0	15.84	AV	360.00	150	Horizontal	Pass

11ax40 (SU), U-NII-1, 1 GHz to 18 GHz, Low Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

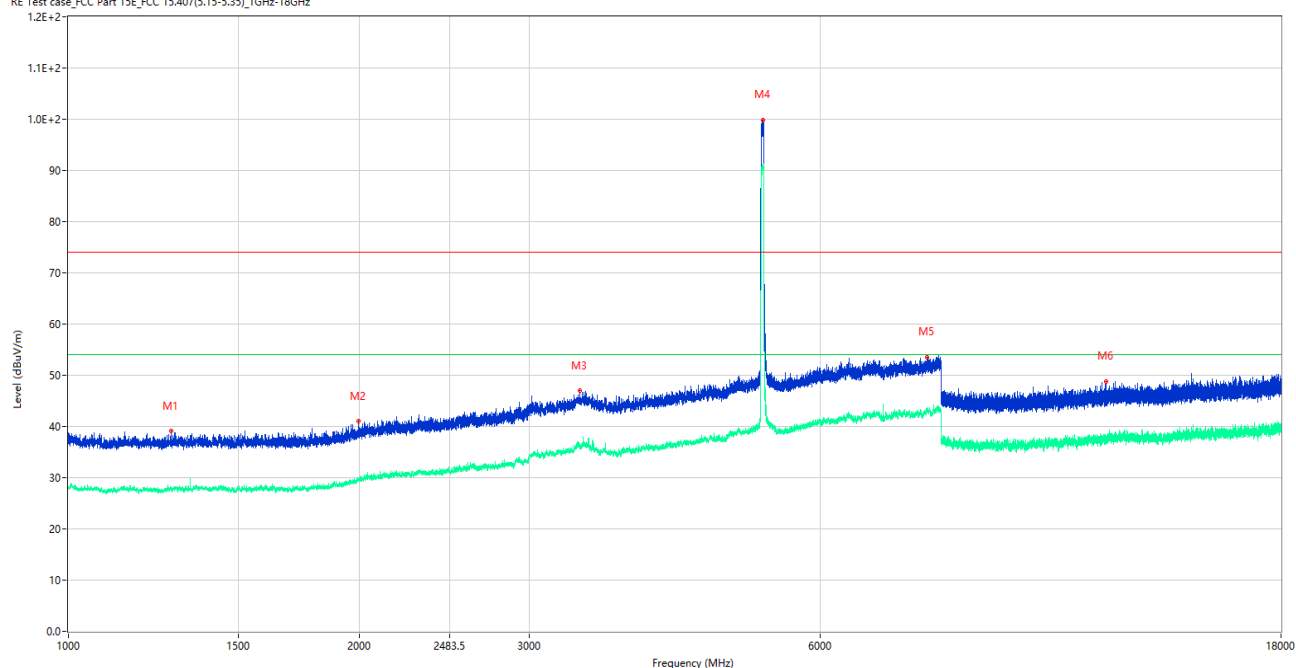

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1277.500	39.08	-15.87	74.0	34.92	Peak	360.00	150	Horizontal	Pass
1**	1277.500	28.01	-15.87	54.0	25.99	AV	360.00	150	Horizontal	Pass
2	1998.000	41.02	-14.39	74.0	32.98	Peak	360.00	150	Horizontal	Pass
2**	1998.000	30.04	-14.39	54.0	23.96	AV	360.00	150	Horizontal	Pass
3	3383.000	46.97	-5.25	74.0	27.03	Peak	89.00	150	Horizontal	Pass
3**	3383.000	36.02	-5.25	54.0	17.98	AV	89.00	150	Horizontal	Pass
4	5237.500	99.89	-2.25	74.0	-25.89	Peak	129.00	150	Horizontal	N/A
4**	5237.500	90.57	-2.25	54.0	-36.57	AV	129.00	150	Horizontal	N/A
5	7748.000	53.56	1.45	74.0	20.44	Peak	119.00	150	Horizontal	Pass
5**	7748.000	43.32	1.45	54.0	10.68	AV	119.00	150	Horizontal	Pass
6	11859.375	48.78	-3.69	74.0	25.22	Peak	265.00	150	Horizontal	Pass
6**	11859.375	36.97	-3.69	54.0	17.03	AV	265.00	150	Horizontal	Pass

11ax40 (SU), U-NII-1, 1 GHz to 18 GHz, Low Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

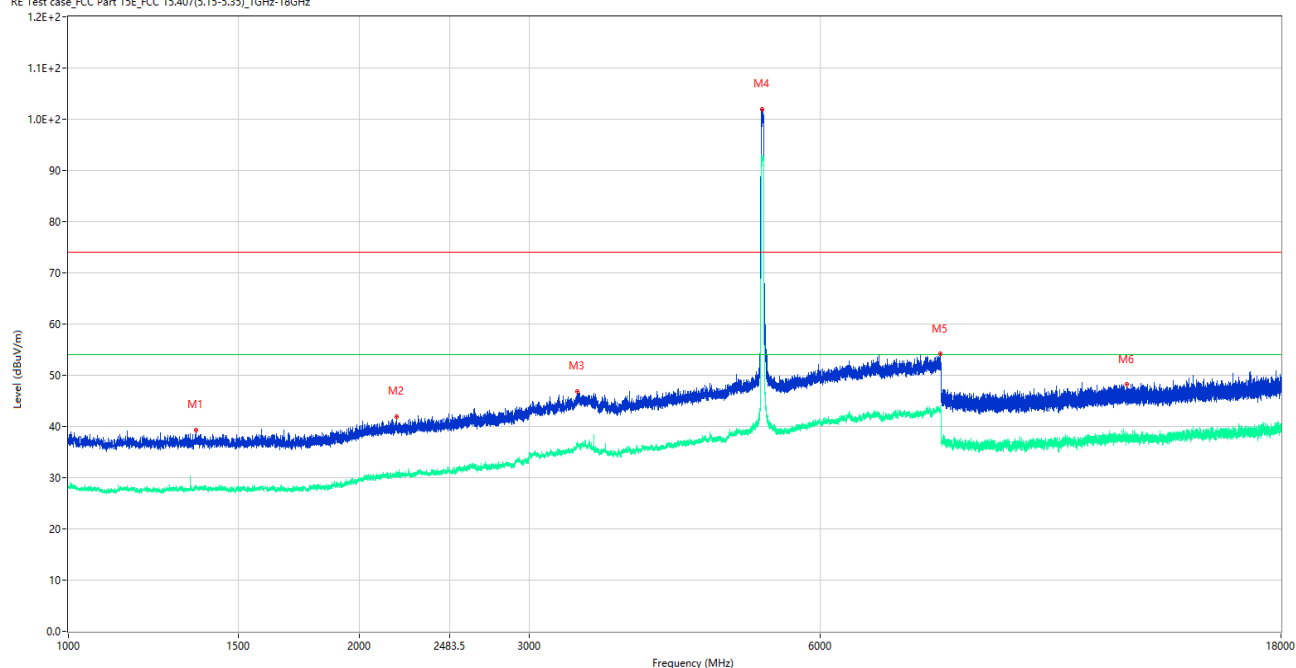

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1354.500	39.38	-15.88	74.0	34.62	Peak	7.00	150	Vertical	Pass
1**	1354.500	28.09	-15.88	54.0	25.91	AV	7.00	150	Vertical	Pass
2	2185.500	42.01	-13.18	74.0	31.99	Peak	74.00	150	Vertical	Pass
2**	2185.500	30.52	-13.18	54.0	23.48	AV	74.00	150	Vertical	Pass
3	3365.500	46.85	-5.13	74.0	27.15	Peak	23.00	150	Vertical	Pass
3**	3365.500	36.13	-5.13	54.0	17.87	AV	23.00	150	Vertical	Pass
4	5225.000	101.94	-2.35	74.0	-27.94	Peak	302.00	150	Vertical	N/A
4**	5225.000	92.96	-2.35	54.0	-38.96	AV	302.00	150	Vertical	N/A
5	7984.500	54.18	1.92	74.0	19.82	Peak	215.00	150	Vertical	Pass
5**	7984.500	43.43	1.92	54.0	10.57	AV	215.00	150	Vertical	Pass
6	12458.588	48.27	-2.32	74.0	25.73	Peak	240.00	150	Vertical	Pass
6**	12458.588	37.83	-2.32	54.0	16.17	AV	240.00	150	Vertical	Pass

11ax80 (SU), U-NII-1, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

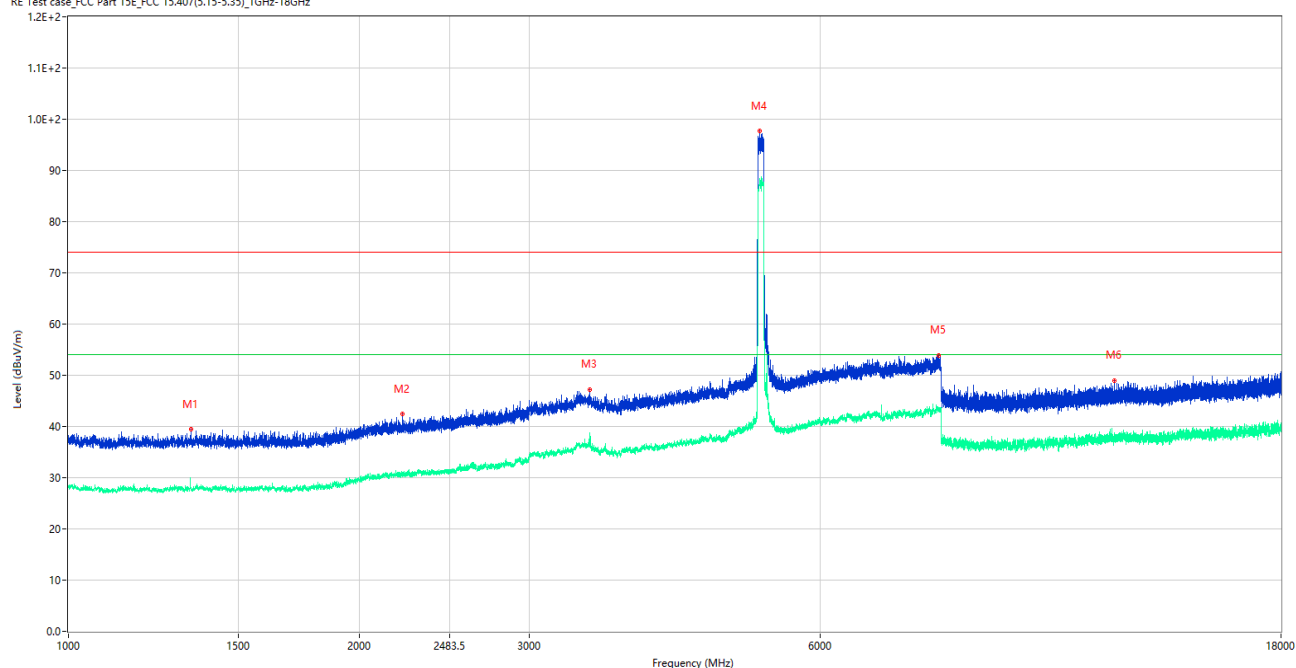

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1339.000	39.45	-16.07	74.0	34.55	Peak	335.00	150	Horizontal	Pass
1**	1339.000	27.97	-16.07	54.0	26.03	AV	335.00	150	Horizontal	Pass
2	2219.250	42.38	-13.07	74.0	31.62	Peak	360.00	150	Horizontal	Pass
2**	2219.250	30.59	-13.07	54.0	23.41	AV	360.00	150	Horizontal	Pass
3	3464.000	47.25	-5.05	74.0	26.75	Peak	187.00	150	Horizontal	Pass
3**	3464.000	36.68	-5.05	54.0	17.32	AV	187.00	150	Horizontal	Pass
4	5191.500	97.69	-2.30	74.0	-23.69	Peak	138.00	150	Horizontal	N/A
4**	5191.500	86.98	-2.30	54.0	-32.98	AV	138.00	150	Horizontal	N/A
5	7964.000	53.87	2.35	74.0	20.13	Peak	23.00	150	Horizontal	Pass
5**	7964.000	43.46	2.35	54.0	10.54	AV	23.00	150	Horizontal	Pass
6	12099.250	49.02	-3.13	74.0	24.98	Peak	335.00	150	Horizontal	Pass
6**	12099.250	37.80	-3.13	54.0	16.20	AV	335.00	150	Horizontal	Pass

11ax80 (SU), U-NII-1, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

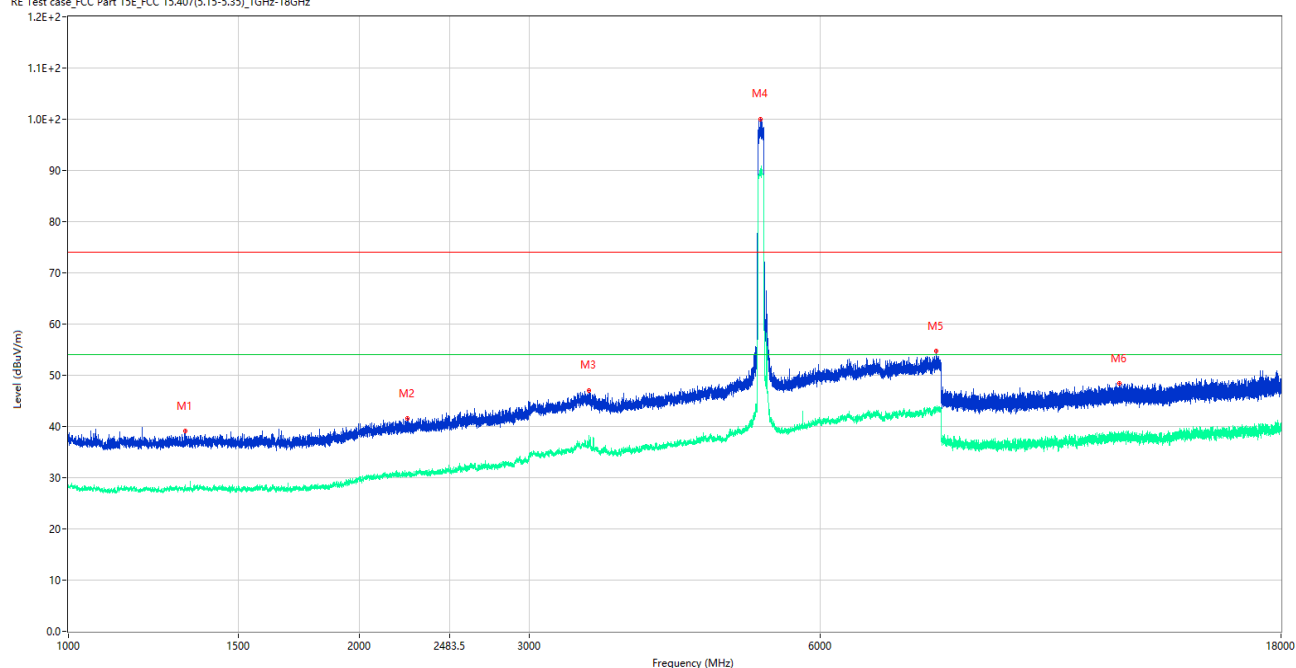

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1322.500	39.04	-15.86	74.0	34.96	Peak	243.00	150	Vertical	Pass
1**	1322.500	28.06	-15.86	54.0	25.94	AV	243.00	150	Vertical	Pass
2	2243.750	41.52	-12.91	74.0	32.48	Peak	95.00	150	Vertical	Pass
2**	2243.750	30.45	-12.91	54.0	23.55	AV	95.00	150	Vertical	Pass
3	3455.500	47.09	-4.89	74.0	26.91	Peak	51.00	150	Vertical	Pass
3**	3455.500	38.12	-4.89	54.0	15.88	AV	51.00	150	Vertical	Pass
4	5204.500	100.04	-2.40	74.0	-26.04	Peak	282.00	150	Vertical	N/A
4**	5204.500	89.82	-2.40	54.0	-35.82	AV	282.00	150	Vertical	N/A
5	7919.500	54.67	1.97	74.0	19.33	Peak	310.00	150	Vertical	Pass
5**	7919.500	43.64	1.97	54.0	10.36	AV	310.00	150	Vertical	Pass
6	12245.075	48.39	-2.72	74.0	25.61	Peak	1.00	150	Vertical	Pass
6**	12245.075	37.51	-2.72	54.0	16.49	AV	1.00	150	Vertical	Pass

11a, U-NII-2A, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

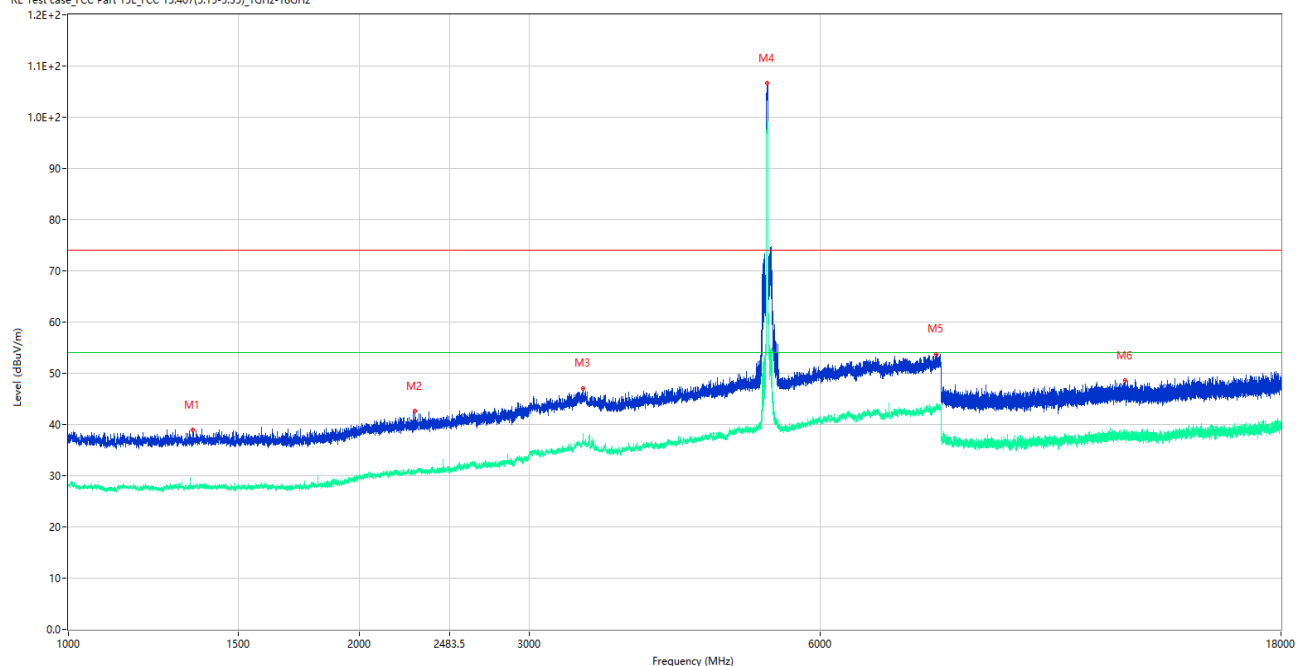

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1345.000	38.93	-16.08	74.0	35.07	Peak	234.00	150	Horizontal	Pass
1**	1345.000	27.31	-16.08	54.0	26.69	AV	234.00	150	Horizontal	Pass
2	2283.500	42.55	-12.81	74.0	31.45	Peak	341.00	150	Horizontal	Pass
2**	2283.500	30.34	-12.81	54.0	23.66	AV	341.00	150	Horizontal	Pass
3	3412.000	46.95	-5.29	74.0	27.05	Peak	161.00	150	Horizontal	Pass
3**	3412.000	38.27	-5.29	54.0	15.73	AV	161.00	150	Horizontal	Pass
4	5291.500	106.61	-1.97	74.0	-32.61	Peak	132.00	150	Horizontal	N/A
4**	5291.500	98.41	-1.97	54.0	-44.41	AV	132.00	150	Horizontal	N/A
5	7913.500	53.69	1.76	74.0	20.31	Peak	360.00	150	Horizontal	Pass
5**	7913.500	44.07	1.76	54.0	9.93	AV	360.00	150	Horizontal	Pass
6	12423.675	48.52	-2.01	74.0	25.48	Peak	279.00	150	Horizontal	Pass
6**	12423.675	37.81	-2.01	54.0	16.19	AV	279.00	150	Horizontal	Pass

11a, U-NII-2A, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

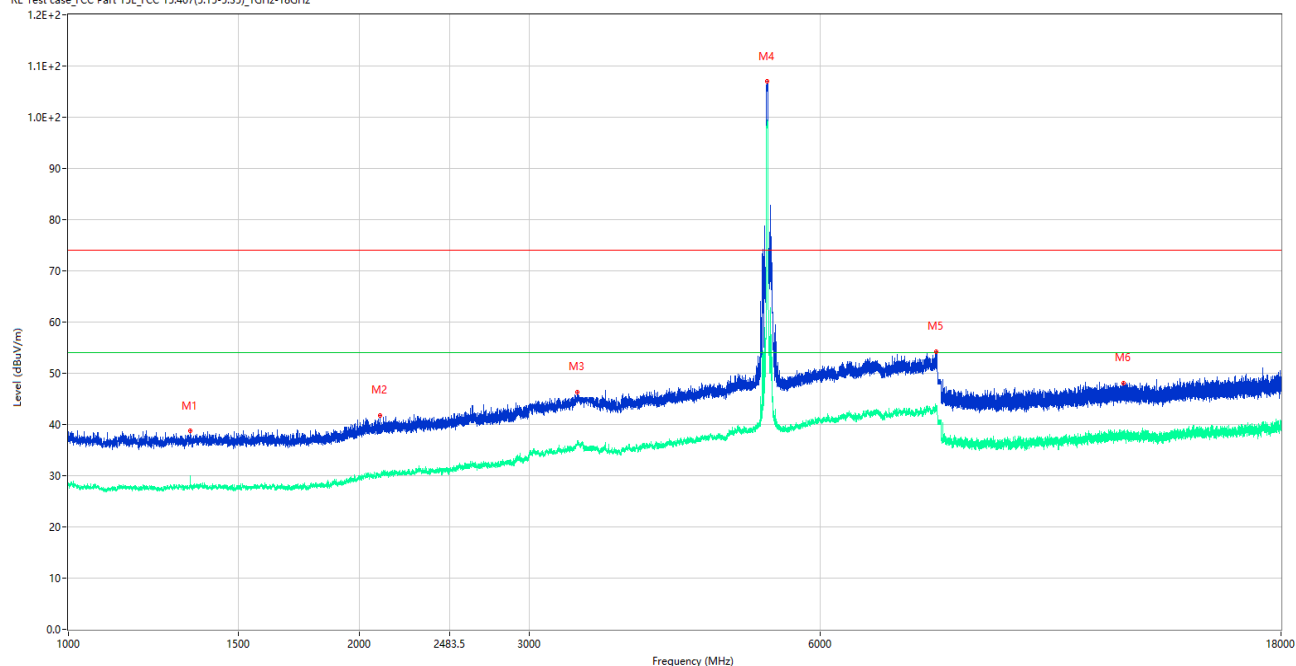

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1336.500	38.70	-16.05	74.0	35.30	Peak	0.00	150	Vertical	Pass
1**	1336.500	29.68	-16.05	54.0	24.32	AV	0.00	150	Vertical	Pass
2	2103.250	41.84	-13.55	74.0	32.16	Peak	343.00	150	Vertical	Pass
2**	2103.250	29.82	-13.55	54.0	24.18	AV	343.00	150	Vertical	Pass
3	3367.000	46.30	-5.05	74.0	27.70	Peak	142.00	150	Vertical	Pass
3**	3367.000	35.93	-5.05	54.0	18.07	AV	142.00	150	Vertical	Pass
4	5284.500	107.01	-2.16	74.0	-33.01	Peak	115.00	150	Vertical	N/A
4**	5284.500	99.37	-2.16	54.0	-45.37	AV	115.00	150	Vertical	N/A
5	7910.000	54.22	1.62	74.0	19.78	Peak	1.00	150	Vertical	Pass
5**	7910.000	43.00	1.62	54.0	11.00	AV	1.00	150	Vertical	Pass
6	12362.162	48.13	-2.19	74.0	25.87	Peak	0.00	150	Vertical	Pass
6**	12362.162	37.07	-2.19	54.0	16.93	AV	0.00	150	Vertical	Pass

11n20, U-NII-2A, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

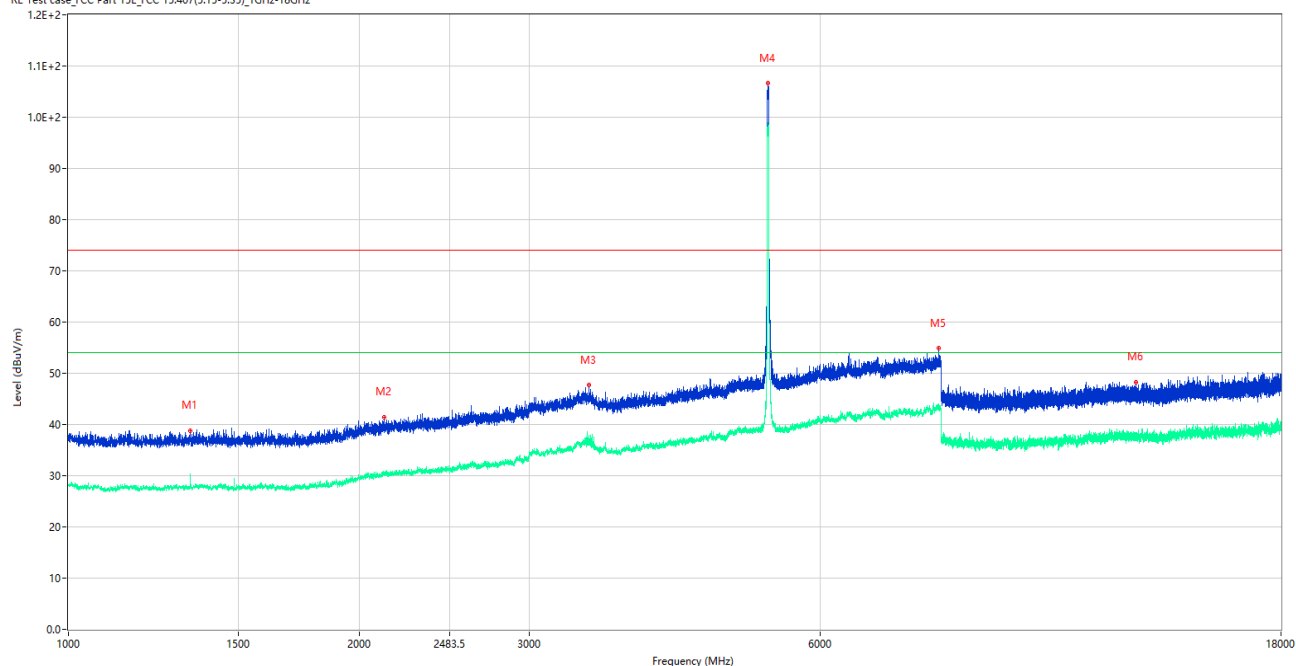

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1336.750	38.81	-16.05	74.0	35.19	Peak	60.00	150	Horizontal	Pass
1**	1336.750	30.12	-16.05	54.0	23.88	AV	60.00	150	Horizontal	Pass
2	2121.500	41.46	-13.32	74.0	32.54	Peak	356.00	150	Horizontal	Pass
2**	2121.500	30.09	-13.32	54.0	23.91	AV	356.00	150	Horizontal	Pass
3	3458.500	47.68	-4.94	74.0	26.32	Peak	258.00	150	Horizontal	Pass
3**	3458.500	36.02	-4.94	54.0	17.98	AV	258.00	150	Horizontal	Pass
4	5299.000	106.61	-2.01	74.0	-32.61	Peak	143.00	150	Horizontal	N/A
4**	5299.000	98.49	-2.01	54.0	-44.49	AV	143.00	150	Horizontal	N/A
5	7964.000	54.82	2.35	74.0	19.18	Peak	327.00	150	Horizontal	Pass
5**	7964.000	43.44	2.35	54.0	10.56	AV	327.00	150	Horizontal	Pass
6	12732.188	48.25	-3.18	74.0	25.75	Peak	213.00	150	Horizontal	Pass
6**	12732.188	38.01	-3.18	54.0	15.99	AV	213.00	150	Horizontal	Pass

11n20, U-NII-2A, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

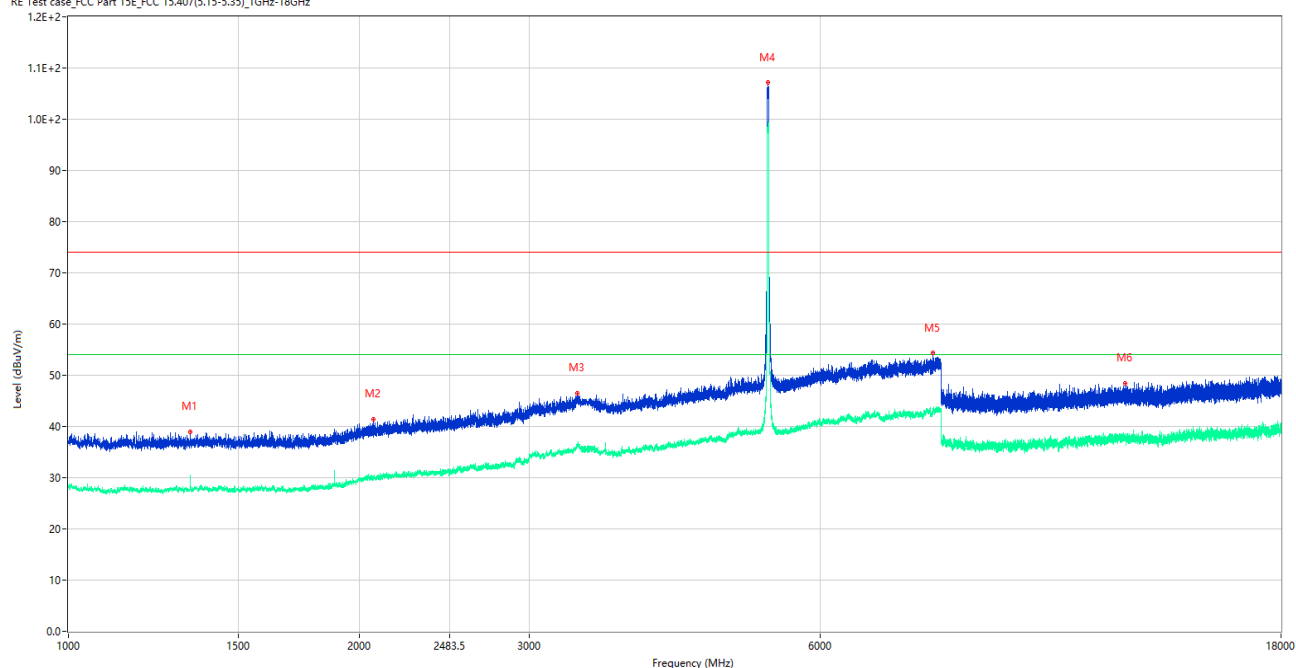

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1336.250	38.98	-16.05	74.0	35.02	Peak	157.00	150	Vertical	Pass
1**	1336.250	28.97	-16.05	54.0	25.03	AV	157.00	150	Vertical	Pass
2	2069.750	41.42	-13.78	74.0	32.58	Peak	47.00	150	Vertical	Pass
2**	2069.750	29.69	-13.78	54.0	24.31	AV	47.00	150	Vertical	Pass
3	3364.000	46.50	-5.28	74.0	27.50	Peak	1.00	150	Vertical	Pass
3**	3364.000	36.45	-5.28	54.0	17.55	AV	1.00	150	Vertical	Pass
4	5298.000	107.18	-2.04	74.0	-33.18	Peak	137.00	150	Vertical	N/A
4**	5298.000	98.67	-2.04	54.0	-44.67	AV	137.00	150	Vertical	N/A
5	7851.500	54.36	1.48	74.0	19.64	Peak	127.00	150	Vertical	Pass
5**	7851.500	42.82	1.48	54.0	11.18	AV	127.00	150	Vertical	Pass
6	12424.150	48.49	-2.01	74.0	25.51	Peak	6.00	150	Vertical	Pass
6**	12424.150	37.42	-2.01	54.0	16.58	AV	6.00	150	Vertical	Pass

11n40, U-NII-2A, 1 GHz to 18 GHz, Low Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

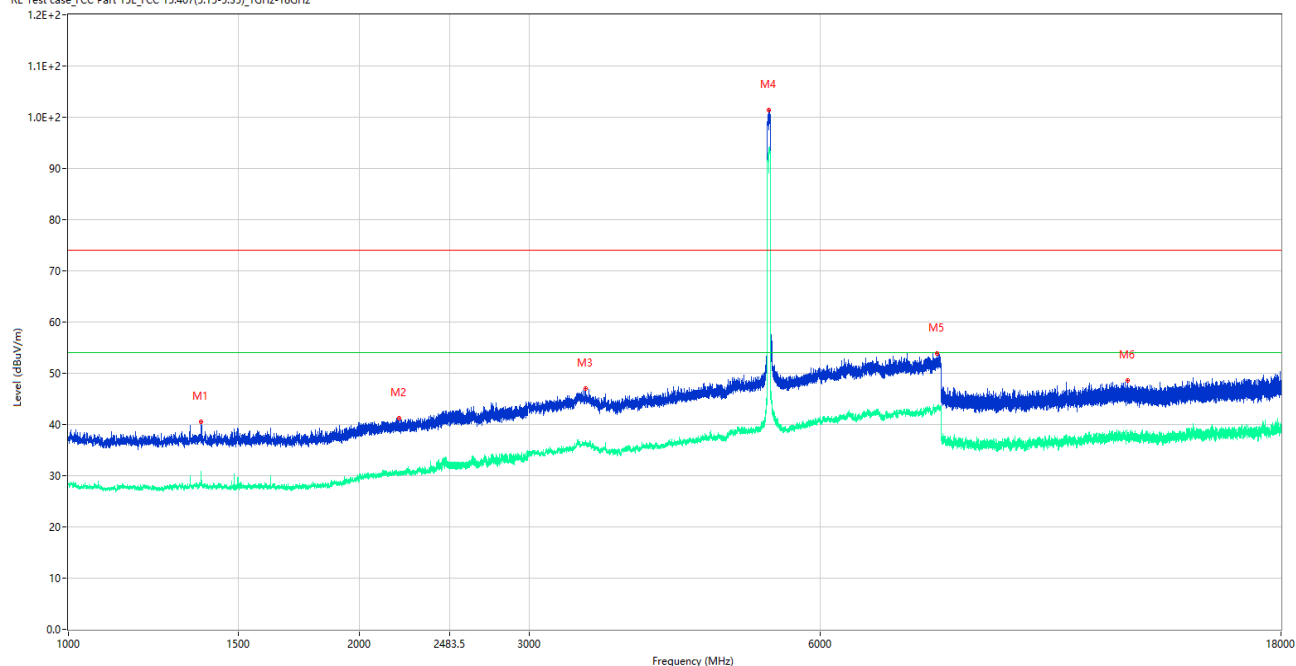

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1371.500	40.59	-15.95	74.0	33.41	Peak	52.00	150	Horizontal	Pass
1**	1371.500	29.67	-15.95	54.0	24.33	AV	52.00	150	Horizontal	Pass
2	2197.500	41.20	-13.30	74.0	32.80	Peak	108.00	150	Horizontal	Pass
2**	2197.500	30.50	-13.30	54.0	23.50	AV	108.00	150	Horizontal	Pass
3	3430.000	47.04	-5.02	74.0	26.96	Peak	217.00	150	Horizontal	Pass
3**	3430.000	36.09	-5.02	54.0	17.91	AV	217.00	150	Horizontal	Pass
4	5314.000	101.44	-2.06	74.0	-27.44	Peak	207.00	150	Horizontal	N/A
4**	5314.000	93.90	-2.06	54.0	-39.90	AV	207.00	150	Horizontal	N/A
5	7921.500	53.94	1.95	74.0	20.06	Peak	229.00	150	Horizontal	Pass
5**	7921.500	43.17	1.95	54.0	10.83	AV	229.00	150	Horizontal	Pass
6	12493.975	48.68	-2.71	74.0	25.32	Peak	93.00	150	Horizontal	Pass
6**	12493.975	37.78	-2.71	54.0	16.22	AV	93.00	150	Horizontal	Pass

11n40, U-NII-2A, 1 GHz to 18 GHz, Low Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

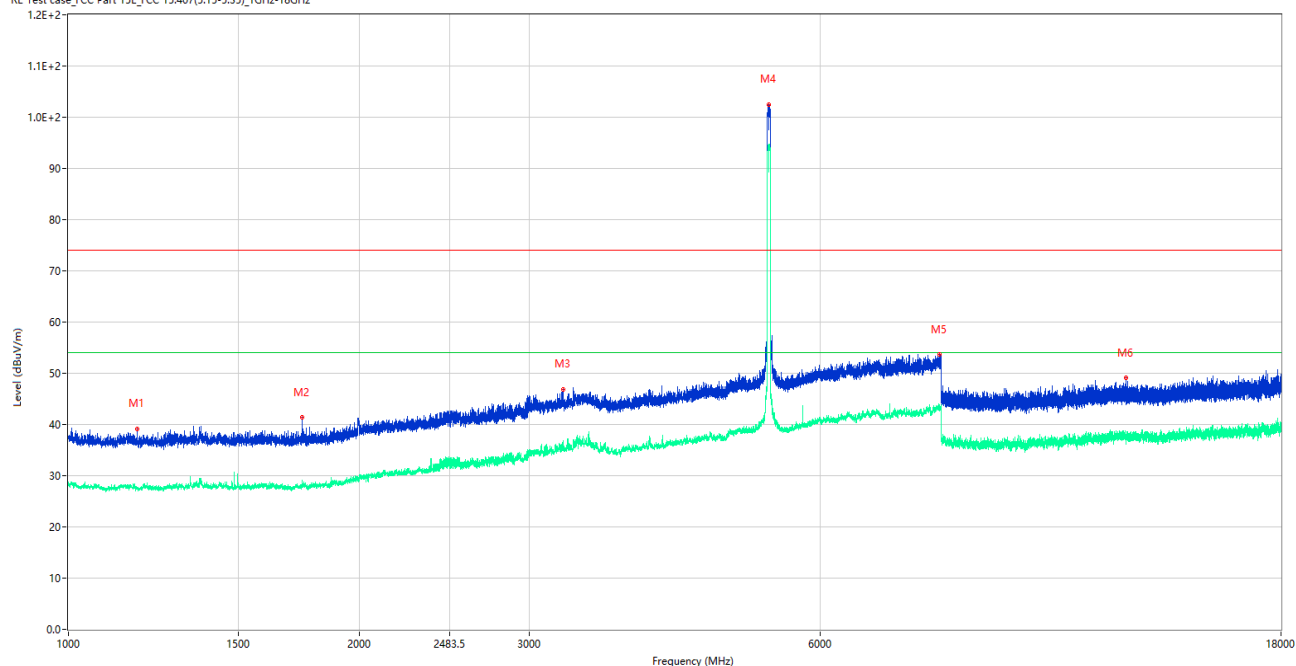

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1177.750	39.17	-15.71	74.0	34.83	Peak	360.00	150	Vertical	Pass
1**	1177.750	27.72	-15.71	54.0	26.28	AV	360.00	150	Vertical	Pass
2	1746.750	41.34	-16.06	74.0	32.66	Peak	150.00	150	Vertical	Pass
2**	1746.750	27.91	-16.06	54.0	26.09	AV	150.00	150	Vertical	Pass
3	3250.500	46.89	-7.43	74.0	27.11	Peak	294.00	150	Vertical	Pass
3**	3250.500	36.83	-7.43	54.0	17.17	AV	294.00	150	Vertical	Pass
4	5314.000	102.48	-2.06	74.0	-28.48	Peak	125.00	150	Vertical	N/A
4**	5314.000	94.72	-2.06	54.0	-40.72	AV	125.00	150	Vertical	N/A
5	7969.000	53.65	2.09	74.0	20.35	Peak	284.00	150	Vertical	Pass
5**	7969.000	43.33	2.09	54.0	10.67	AV	284.00	150	Vertical	Pass
6	12450.750	49.10	-2.47	74.0	24.90	Peak	47.00	150	Vertical	Pass
6**	12450.750	37.62	-2.47	54.0	16.38	AV	47.00	150	Vertical	Pass

11ac80, U-NII-2A, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

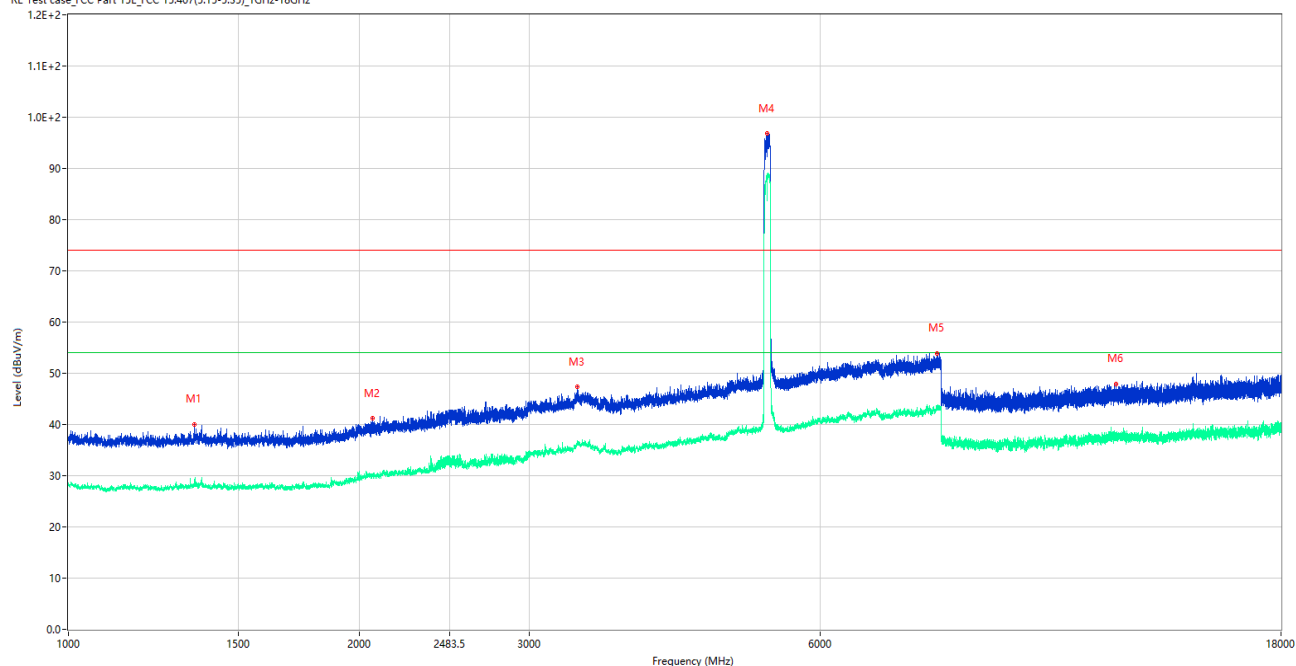

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1349.000	40.02	-15.99	74.0	33.98	Peak	112.00	150	Horizontal	Pass
1**	1349.000	28.15	-15.99	54.0	25.85	AV	112.00	150	Horizontal	Pass
2	2064.250	41.19	-13.82	74.0	32.81	Peak	152.00	150	Horizontal	Pass
2**	2064.250	30.25	-13.82	54.0	23.75	AV	152.00	150	Horizontal	Pass
3	3366.000	47.33	-5.08	74.0	26.67	Peak	356.00	150	Horizontal	Pass
3**	3366.000	36.28	-5.08	54.0	17.72	AV	356.00	150	Horizontal	Pass
4	5288.000	96.76	-2.05	74.0	-22.76	Peak	200.00	150	Horizontal	N/A
4**	5288.000	88.27	-2.05	54.0	-34.27	AV	200.00	150	Horizontal	N/A
5	7929.000	53.90	2.00	74.0	20.10	Peak	360.00	150	Horizontal	Pass
5**	7929.000	43.25	2.00	54.0	10.75	AV	360.00	150	Horizontal	Pass
6	12138.912	47.97	-3.14	74.0	26.03	Peak	351.00	150	Horizontal	Pass
6**	12138.912	37.43	-3.14	54.0	16.57	AV	351.00	150	Horizontal	Pass

11ac80, U-NII-2A, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

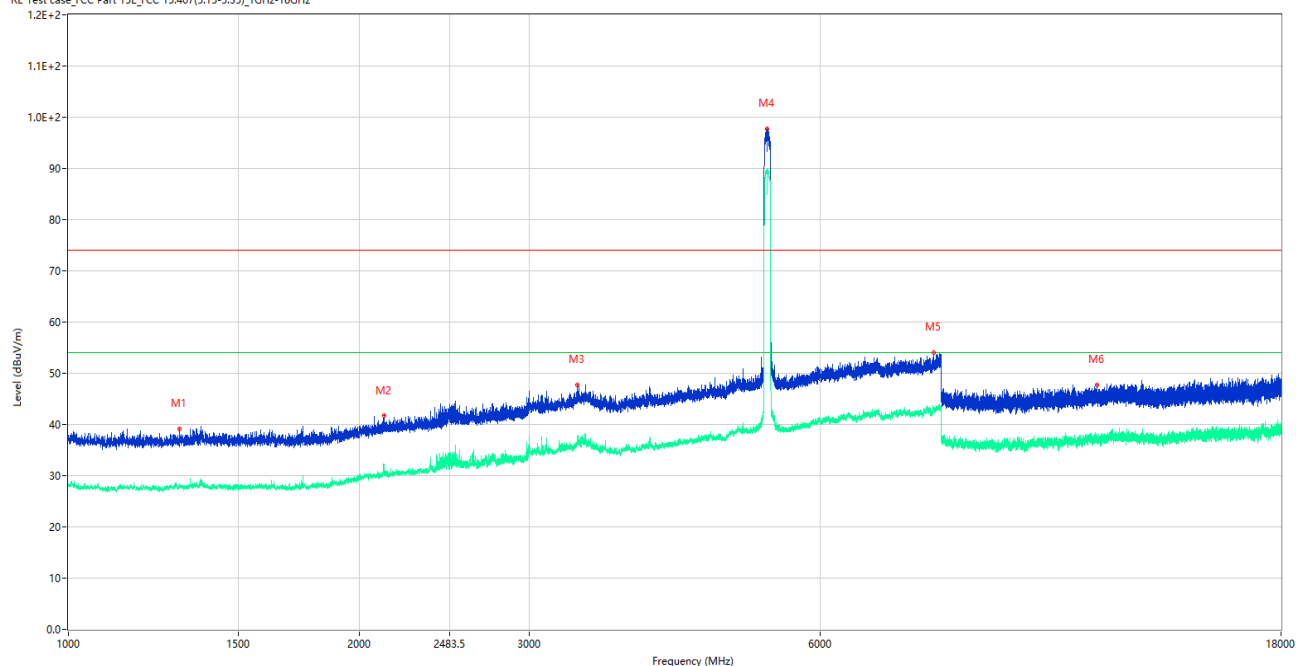

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1304.000	39.19	-15.59	74.0	34.81	Peak	229.00	150	Vertical	Pass
1**	1304.000	27.96	-15.59	54.0	26.04	AV	229.00	150	Vertical	Pass
2	2121.750	41.81	-13.32	74.0	32.19	Peak	16.00	150	Vertical	Pass
2**	2121.750	30.68	-13.32	54.0	23.32	AV	16.00	150	Vertical	Pass
3	3365.500	47.70	-5.13	74.0	26.30	Peak	60.00	150	Vertical	Pass
3**	3365.500	37.79	-5.13	54.0	16.21	AV	60.00	150	Vertical	Pass
4	5288.000	97.79	-2.05	74.0	-23.79	Peak	120.00	150	Vertical	N/A
4**	5288.000	89.90	-2.05	54.0	-35.90	AV	120.00	150	Vertical	N/A
5	7859.500	54.06	1.65	74.0	19.94	Peak	139.00	150	Vertical	Pass
5**	7859.500	42.55	1.65	54.0	11.45	AV	139.00	150	Vertical	Pass
6	11611.900	47.64	-2.22	74.0	26.36	Peak	77.00	150	Vertical	Pass
6**	11611.900	37.42	-2.22	54.0	16.58	AV	77.00	150	Vertical	Pass

11ac160 (SU), U-NII-2A, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

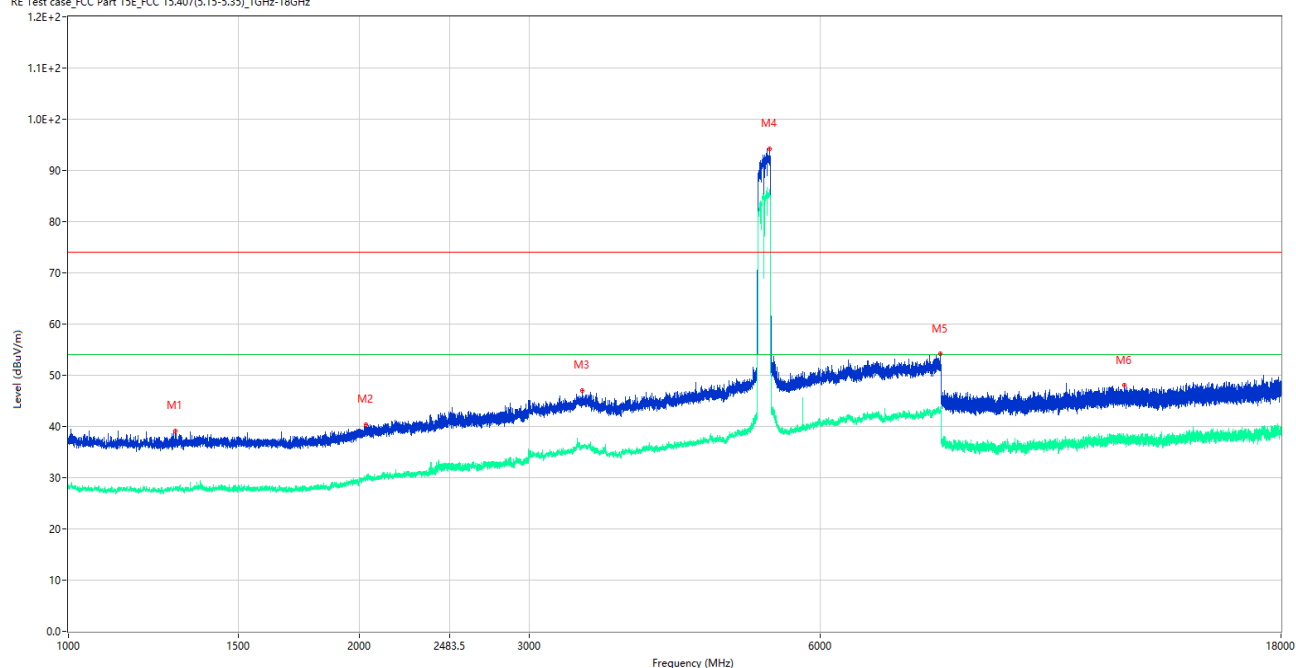

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1290.500	39.13	-15.82	74.0	34.87	Peak	6.00	150	Horizontal	Pass
1**	1290.500	27.75	-15.82	54.0	26.25	AV	6.00	150	Horizontal	Pass
2	2033.250	40.31	-13.45	74.0	33.69	Peak	21.00	150	Horizontal	Pass
2**	2033.250	30.04	-13.45	54.0	23.96	AV	21.00	150	Horizontal	Pass
3	3401.000	47.03	-5.63	74.0	26.97	Peak	31.00	150	Horizontal	Pass
3**	3401.000	36.11	-5.63	54.0	17.89	AV	31.00	150	Horizontal	Pass
4	5316.500	94.27	-2.14	74.0	-20.27	Peak	190.00	150	Horizontal	N/A
4**	5316.500	86.04	-2.14	54.0	-32.04	AV	190.00	150	Horizontal	N/A
5	7997.000	54.14	1.83	74.0	19.86	Peak	130.00	150	Horizontal	Pass
5**	7997.000	43.10	1.83	54.0	10.90	AV	130.00	150	Horizontal	Pass
6	12399.450	48.05	-2.32	74.0	25.95	Peak	309.00	150	Horizontal	Pass
6**	12399.450	37.52	-2.32	54.0	16.48	AV	309.00	150	Horizontal	Pass

11ac160 (SU), U-NII-2A, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

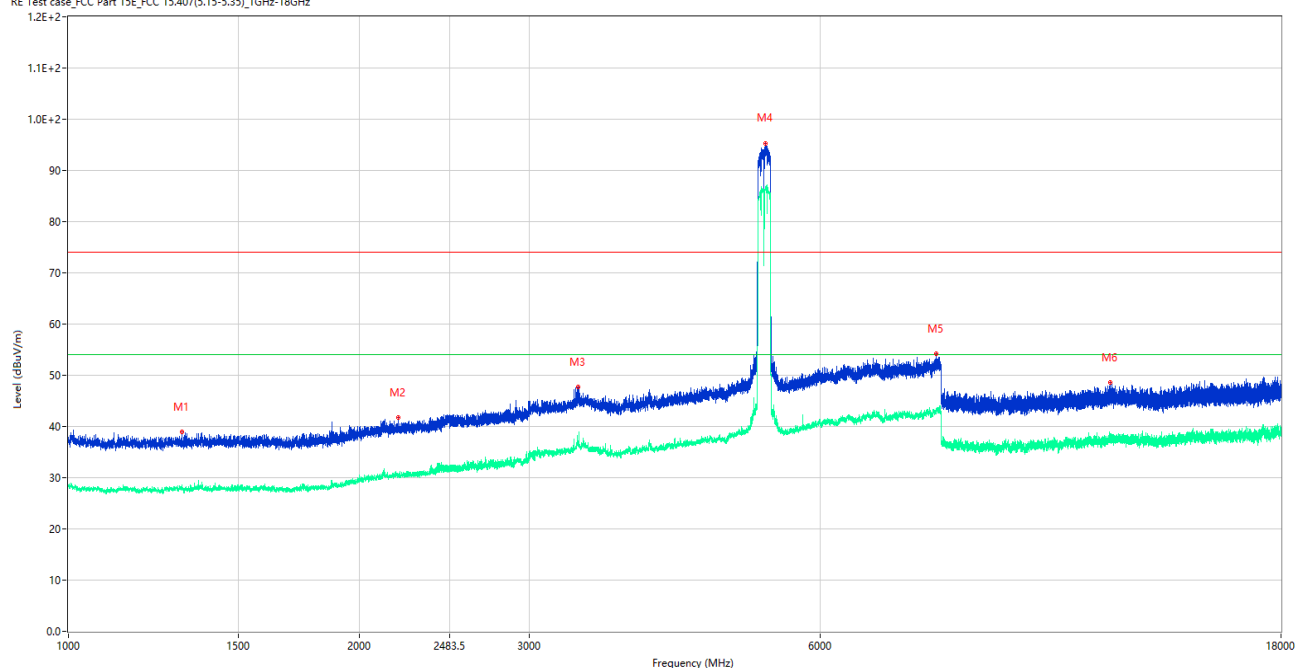

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1310.250	38.90	-15.73	74.0	35.10	Peak	0.00	150	Vertical	Pass
1**	1310.250	27.65	-15.73	54.0	26.35	AV	0.00	150	Vertical	Pass
2	2194.750	41.81	-13.32	74.0	32.19	Peak	82.00	150	Vertical	Pass
2**	2194.750	30.53	-13.32	54.0	23.47	AV	82.00	150	Vertical	Pass
3	3369.000	47.76	-4.90	74.0	26.24	Peak	101.00	150	Vertical	Pass
3**	3369.000	36.35	-4.90	54.0	17.65	AV	101.00	150	Vertical	Pass
4	5267.500	95.35	-2.40	74.0	-21.35	Peak	112.00	150	Vertical	N/A
4**	5267.500	86.59	-2.40	54.0	-32.59	AV	112.00	150	Vertical	N/A
5	7920.000	54.15	1.96	74.0	19.85	Peak	321.00	150	Vertical	Pass
5**	7920.000	43.13	1.96	54.0	10.87	AV	321.00	150	Vertical	Pass
6	11971.237	48.59	-3.10	74.0	25.41	Peak	359.00	150	Vertical	Pass
6**	11971.237	37.96	-3.10	54.0	16.04	AV	359.00	150	Vertical	Pass

11ax20 (SU), U-NII-2A, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

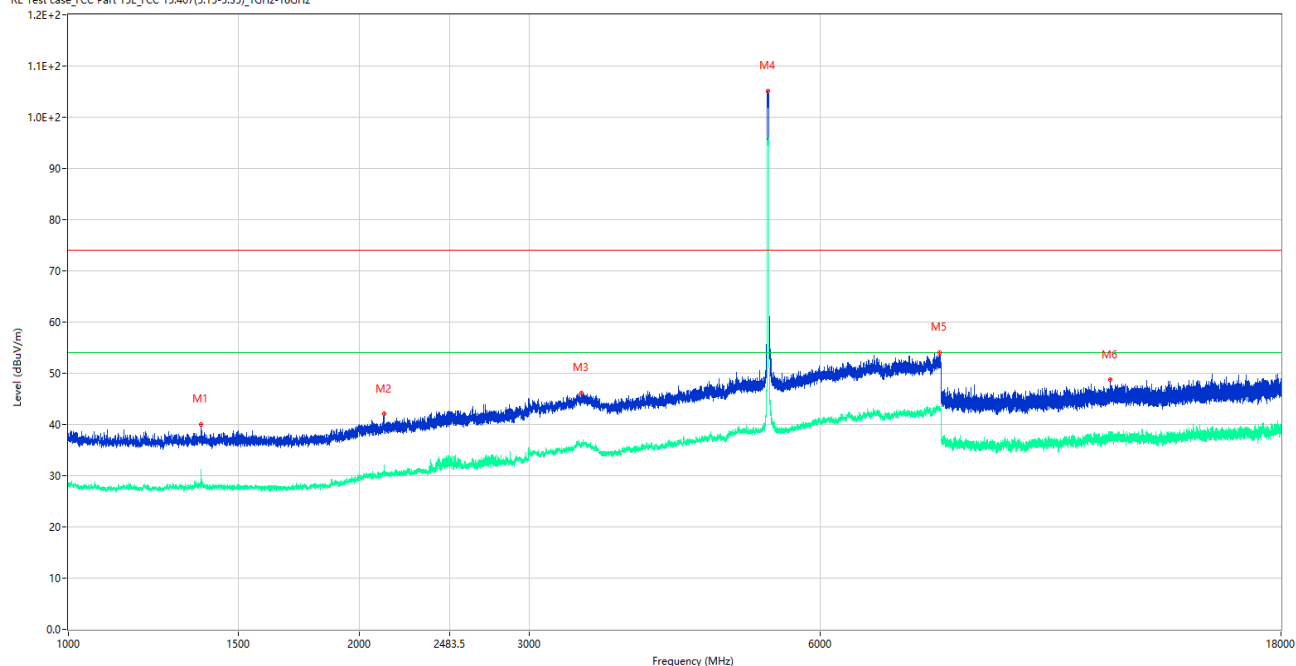

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1371.750	40.02	-15.96	74.0	33.98	Peak	37.00	150	Horizontal	Pass
1**	1371.750	27.85	-15.96	54.0	26.15	AV	37.00	150	Horizontal	Pass
2	2122.250	42.10	-13.30	74.0	31.90	Peak	356.00	150	Horizontal	Pass
2**	2122.250	31.11	-13.30	54.0	22.89	AV	356.00	150	Horizontal	Pass
3	3399.500	46.19	-5.69	74.0	27.81	Peak	172.00	150	Horizontal	Pass
3**	3399.500	36.03	-5.69	54.0	17.97	AV	172.00	150	Horizontal	Pass
4	5298.000	105.14	-2.04	74.0	-31.14	Peak	190.00	150	Horizontal	N/A
4**	5298.000	95.66	-2.04	54.0	-41.66	AV	190.00	150	Horizontal	N/A
5	7982.000	54.09	1.97	74.0	19.91	Peak	360.00	150	Horizontal	Pass
5**	7982.000	42.84	1.97	54.0	11.16	AV	360.00	150	Horizontal	Pass
6	11983.112	48.75	-3.13	74.0	25.25	Peak	222.00	150	Horizontal	Pass
6**	11983.112	37.46	-3.13	54.0	16.54	AV	222.00	150	Horizontal	Pass

11ax20 (SU), U-NII-2A, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

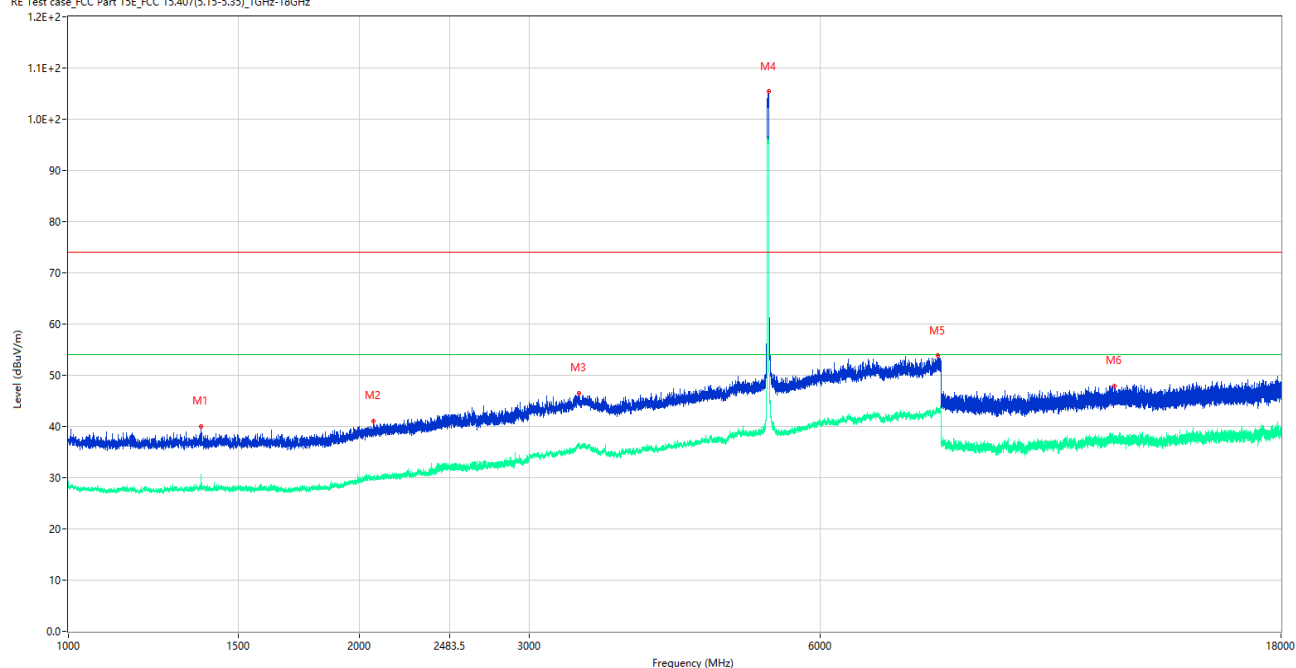

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1371.500	40.06	-15.95	74.0	33.94	Peak	39.00	150	Vertical	Pass
1**	1371.500	28.47	-15.95	54.0	25.53	AV	39.00	150	Vertical	Pass
2	2070.000	40.98	-13.77	74.0	33.02	Peak	250.00	150	Vertical	Pass
2**	2070.000	29.84	-13.77	54.0	24.16	AV	250.00	150	Vertical	Pass
3	3377.000	46.53	-4.92	74.0	27.47	Peak	111.00	150	Vertical	Pass
3**	3377.000	36.07	-4.92	54.0	17.93	AV	111.00	150	Vertical	Pass
4	5304.000	105.36	-2.02	74.0	-31.36	Peak	202.00	150	Vertical	N/A
4**	5304.000	95.82	-2.02	54.0	-41.82	AV	202.00	150	Vertical	N/A
5	7941.000	53.82	1.90	74.0	20.18	Peak	22.00	150	Vertical	Pass
5**	7941.000	43.17	1.90	54.0	10.83	AV	22.00	150	Vertical	Pass
6	12111.126	47.85	-3.00	74.0	26.15	Peak	237.00	150	Vertical	Pass
6**	12111.126	37.19	-3.00	54.0	16.81	AV	237.00	150	Vertical	Pass

11ax40 (SU), U-NII-2A, 1 GHz to 18 GHz, Low Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

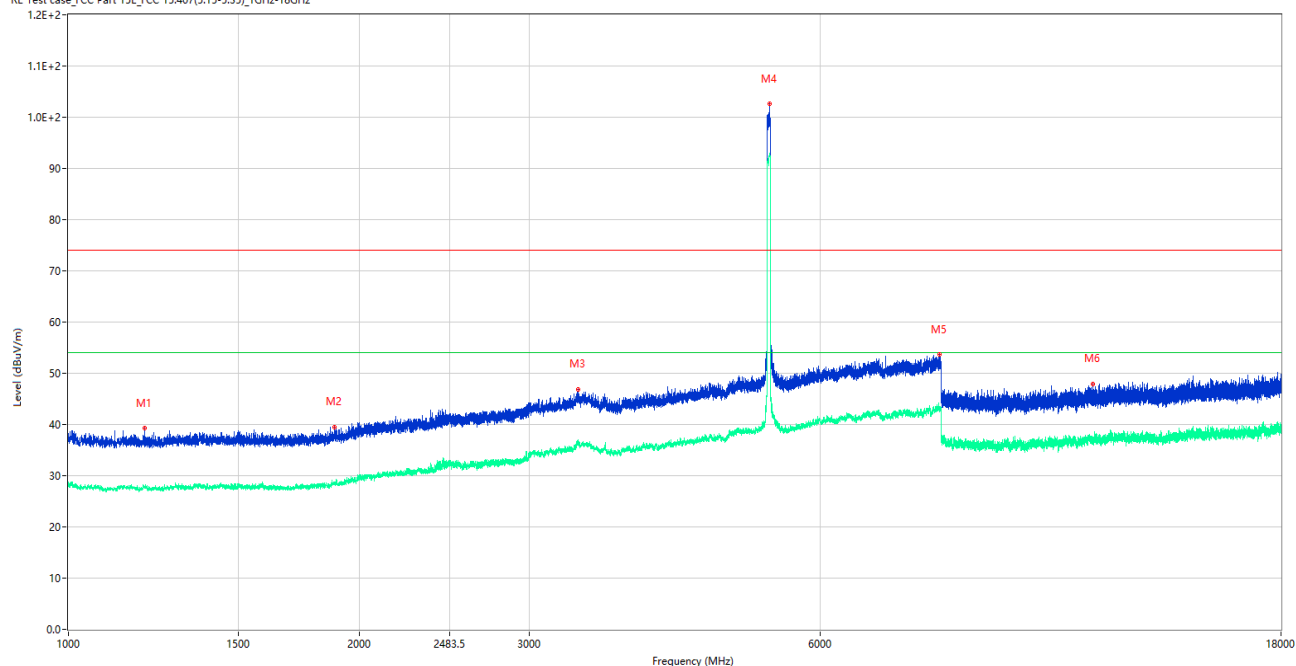

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1199.000	39.29	-15.75	74.0	34.71	Peak	3.00	150	Horizontal	Pass
1**	1199.000	27.80	-15.75	54.0	26.20	AV	3.00	150	Horizontal	Pass
2	1886.500	39.50	-15.32	74.0	34.50	Peak	0.00	150	Horizontal	Pass
2**	1886.500	28.84	-15.32	54.0	25.16	AV	0.00	150	Horizontal	Pass
3	3370.500	46.86	-4.86	74.0	27.14	Peak	331.00	150	Horizontal	Pass
3**	3370.500	36.76	-4.86	54.0	17.24	AV	331.00	150	Horizontal	Pass
4	5320.000	102.57	-2.30	74.0	-28.57	Peak	114.00	150	Horizontal	N/A
4**	5320.000	93.02	-2.30	54.0	-39.02	AV	114.00	150	Horizontal	N/A
5	7981.000	53.67	1.95	74.0	20.33	Peak	124.00	150	Horizontal	Pass
5**	7981.000	42.81	1.95	54.0	11.19	AV	124.00	150	Horizontal	Pass
6	11489.112	47.96	-3.21	74.0	26.04	Peak	144.00	150	Horizontal	Pass
6**	11489.112	36.31	-3.21	54.0	17.69	AV	144.00	150	Horizontal	Pass

11ax40 (SU), U-NII-2A, 1 GHz to 18 GHz, Low Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

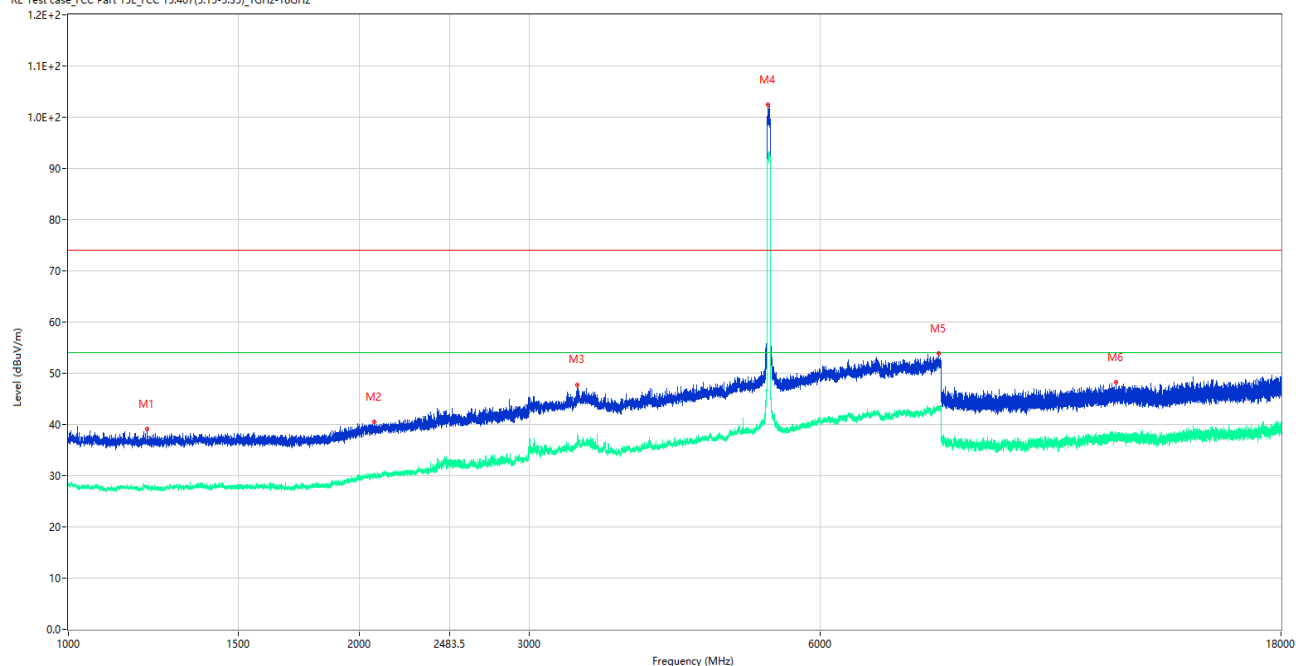

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1205.750	39.12	-15.78	74.0	34.88	Peak	359.00	150	Vertical	Pass
1**	1205.750	27.89	-15.78	54.0	26.11	AV	359.00	150	Vertical	Pass
2	2071.250	40.55	-13.74	74.0	33.45	Peak	283.00	150	Vertical	Pass
2**	2071.250	30.39	-13.74	54.0	23.61	AV	283.00	150	Vertical	Pass
3	3362.000	47.64	-5.58	74.0	26.36	Peak	111.00	150	Vertical	Pass
3**	3362.000	36.30	-5.58	54.0	17.70	AV	111.00	150	Vertical	Pass
4	5298.000	102.45	-2.04	74.0	-28.45	Peak	123.00	150	Vertical	N/A
4**	5298.000	92.79	-2.04	54.0	-38.79	AV	123.00	150	Vertical	N/A
5	7961.000	53.84	2.35	74.0	20.16	Peak	15.00	150	Vertical	Pass
5**	7961.000	43.33	2.35	54.0	10.67	AV	15.00	150	Vertical	Pass
6	12141.525	48.22	-3.03	74.0	25.78	Peak	144.00	150	Vertical	Pass
6**	12141.525	37.50	-3.03	54.0	16.50	AV	144.00	150	Vertical	Pass

11ax80 (SU), U-NII-2A, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

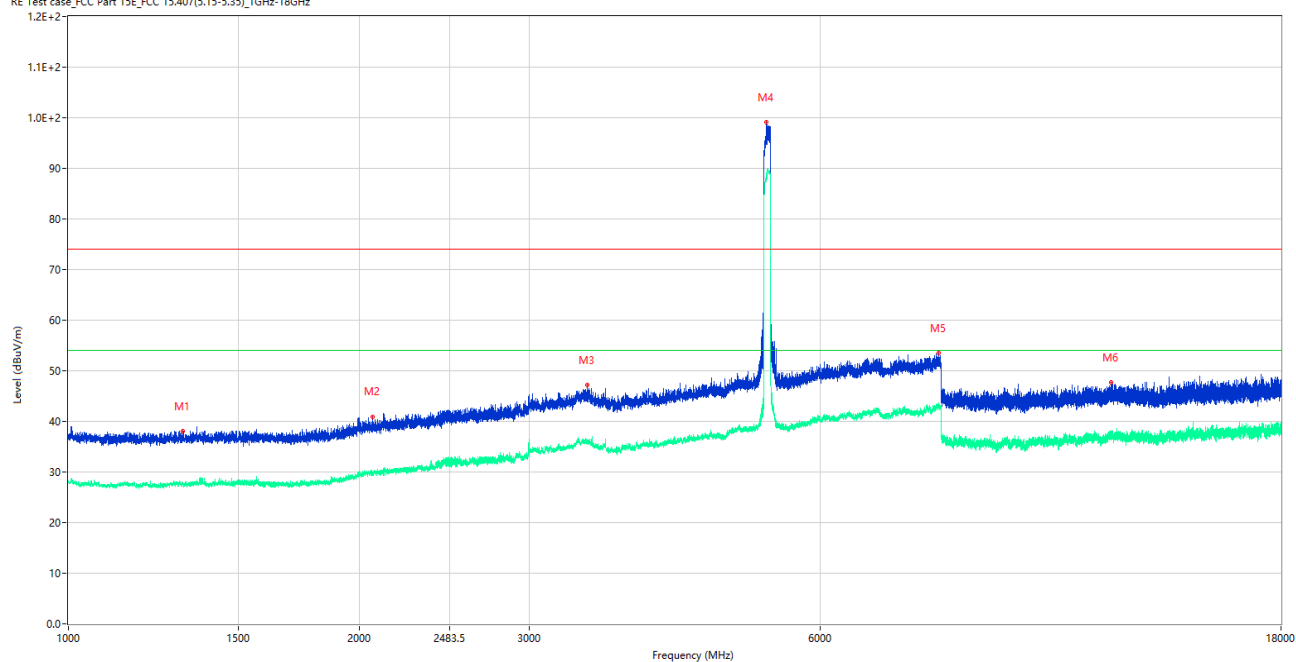

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1312.250	38.13	-15.82	74.0	35.87	Peak	185.00	150	Horizontal	Pass
1**	1312.250	27.53	-15.82	54.0	26.47	AV	185.00	150	Horizontal	Pass
2	2066.000	40.80	-13.80	74.0	33.20	Peak	296.00	150	Horizontal	Pass
2**	2066.000	29.55	-13.80	54.0	24.45	AV	296.00	150	Horizontal	Pass
3	3447.500	47.17	-5.14	74.0	26.83	Peak	331.00	150	Horizontal	Pass
3**	3447.500	35.63	-5.14	54.0	18.37	AV	331.00	150	Horizontal	Pass
4	5280.000	99.10	-2.31	74.0	-25.10	Peak	202.00	150	Horizontal	N/A
4**	5280.000	88.92	-2.31	54.0	-34.92	AV	202.00	150	Horizontal	N/A
5	7953.000	53.45	2.21	74.0	20.55	Peak	360.00	150	Horizontal	Pass
5**	7953.000	43.10	2.21	54.0	10.90	AV	360.00	150	Horizontal	Pass
6	12010.188	47.76	-3.14	74.0	26.24	Peak	333.00	150	Horizontal	Pass
6**	12010.188	37.70	-3.14	54.0	16.30	AV	333.00	150	Horizontal	Pass

11ax80 (SU), U-NII-2A, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

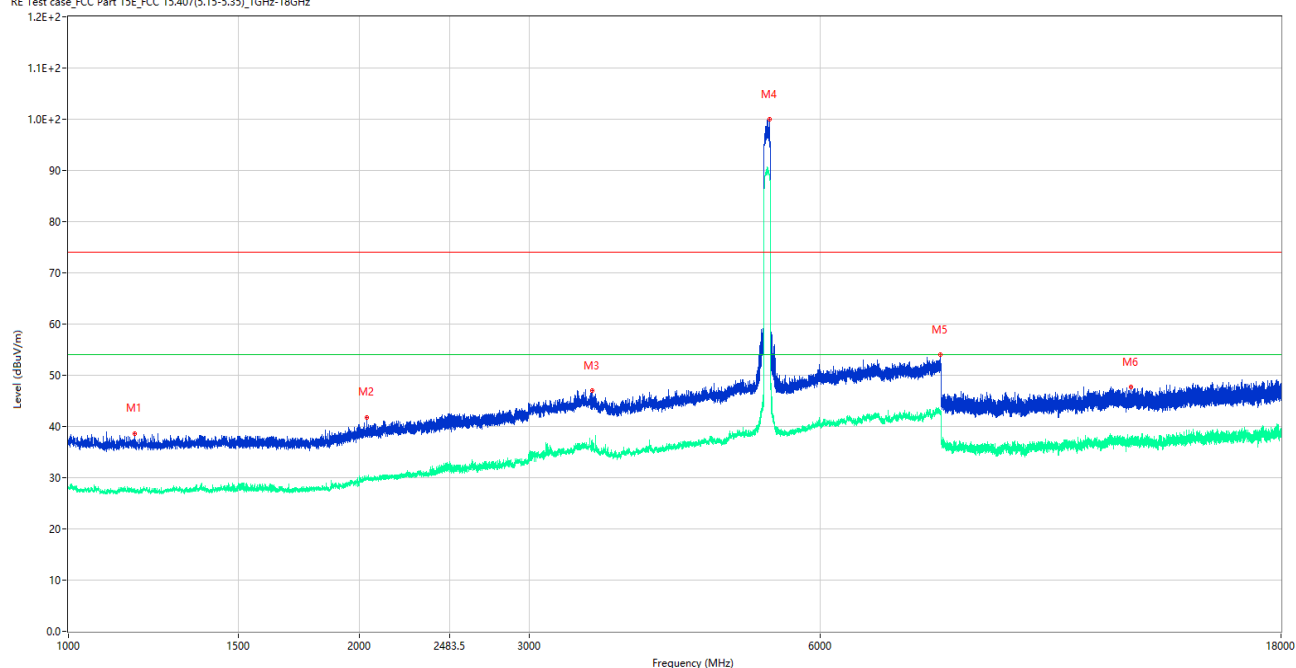

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1170.250	38.67	-15.52	74.0	35.33	Peak	4.00	150	Vertical	Pass
1**	1170.250	27.45	-15.52	54.0	26.55	AV	4.00	150	Vertical	Pass
2	2035.000	41.70	-13.39	74.0	32.30	Peak	11.00	150	Vertical	Pass
2**	2035.000	29.90	-13.39	54.0	24.10	AV	11.00	150	Vertical	Pass
3	3483.500	46.95	-6.15	74.0	27.05	Peak	106.00	150	Vertical	Pass
3**	3483.500	35.70	-6.15	54.0	18.30	AV	106.00	150	Vertical	Pass
4	5315.000	99.93	-2.07	74.0	-25.93	Peak	137.00	150	Vertical	N/A
4**	5315.000	89.37	-2.07	54.0	-35.37	AV	137.00	150	Vertical	N/A
5	7988.000	53.95	1.85	74.0	20.05	Peak	167.00	150	Vertical	Pass
5**	7988.000	42.66	1.85	54.0	11.34	AV	167.00	150	Vertical	Pass
6	12599.425	47.67	-2.71	74.0	26.33	Peak	360.00	150	Vertical	Pass
6**	12599.425	36.90	-2.71	54.0	17.10	AV	360.00	150	Vertical	Pass

11ax160 (SU), U-NII-2A, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

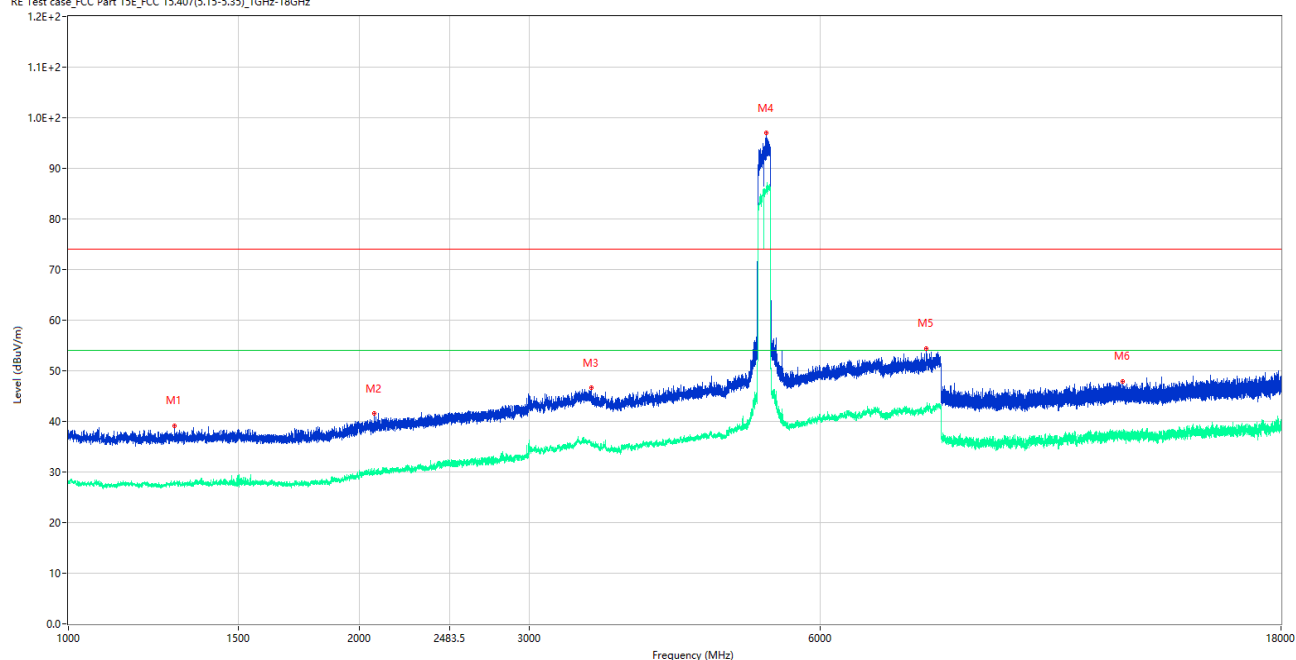

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1288.500	39.14	-15.92	74.0	34.86	Peak	82.00	150	Horizontal	Pass
1**	1288.500	28.26	-15.92	54.0	25.74	AV	82.00	150	Horizontal	Pass
2	2072.250	41.53	-13.74	74.0	32.47	Peak	217.00	150	Horizontal	Pass
2**	2072.250	29.98	-13.74	54.0	24.02	AV	217.00	150	Horizontal	Pass
3	3478.000	46.61	-6.25	74.0	27.39	Peak	184.00	150	Horizontal	Pass
3**	3478.000	35.22	-6.25	54.0	18.78	AV	184.00	150	Horizontal	Pass
4	5282.000	96.99	-2.25	74.0	-22.99	Peak	113.00	150	Horizontal	N/A
4**	5282.000	86.26	-2.25	54.0	-32.26	AV	113.00	150	Horizontal	N/A
5	7732.000	54.44	1.03	74.0	19.56	Peak	174.00	150	Horizontal	Pass
5**	7732.000	42.42	1.03	54.0	11.58	AV	174.00	150	Horizontal	Pass
6	12332.474	47.92	-2.32	74.0	26.08	Peak	169.00	150	Horizontal	Pass
6**	12332.474	36.75	-2.32	54.0	17.25	AV	169.00	150	Horizontal	Pass

11ax160 (SU), U-NII-2A, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

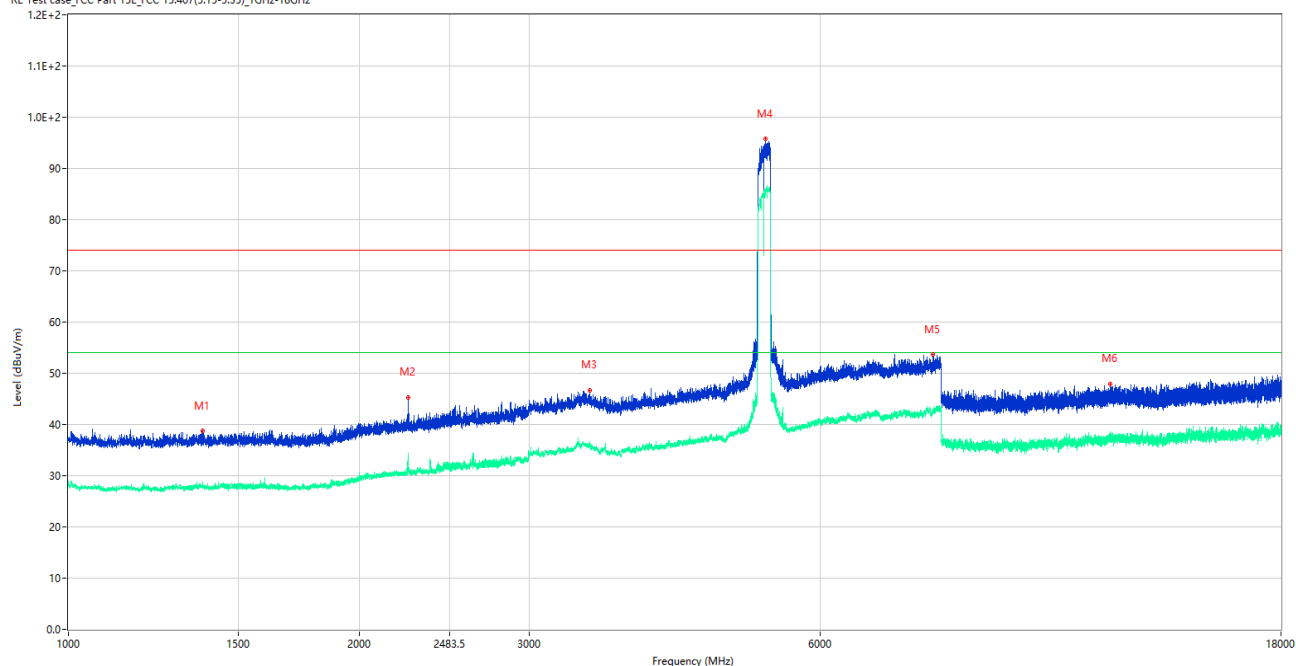

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1377.750	38.70	-16.00	74.0	35.30	Peak	100.00	150	Vertical	Pass
1**	1377.750	28.34	-16.00	54.0	25.66	AV	100.00	150	Vertical	Pass
2	2248.500	45.27	-12.87	74.0	28.73	Peak	224.00	150	Vertical	Pass
2**	2248.500	31.60	-12.87	54.0	22.40	AV	224.00	150	Vertical	Pass
3	3463.000	46.68	-5.05	74.0	27.32	Peak	291.00	150	Vertical	Pass
3**	3463.000	36.12	-5.05	54.0	17.88	AV	291.00	150	Vertical	Pass
4	5266.000	95.79	-2.38	74.0	-21.79	Peak	111.00	150	Vertical	N/A
4**	5266.000	85.49	-2.38	54.0	-31.49	AV	111.00	150	Vertical	N/A
5	7850.000	53.62	1.42	74.0	20.38	Peak	32.00	150	Vertical	Pass
5**	7850.000	42.53	1.42	54.0	11.47	AV	32.00	150	Vertical	Pass
6	11989.526	47.91	-2.92	74.0	26.09	Peak	360.00	150	Vertical	Pass
6**	11989.526	37.29	-2.92	54.0	16.71	AV	360.00	150	Vertical	Pass

11a, U-NII-2C, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

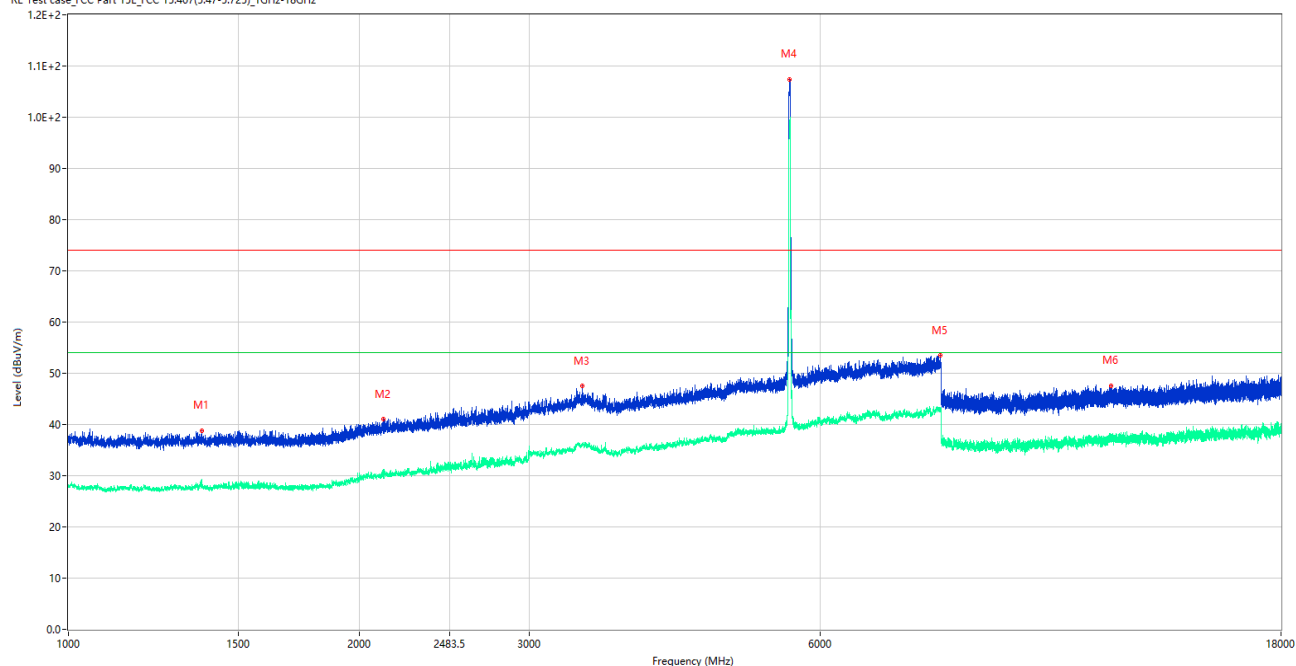

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1373.250	38.80	-15.98	74.0	35.20	Peak	245.00	150	Horizontal	Pass
1**	1373.250	29.12	-15.98	54.0	24.88	AV	245.00	150	Horizontal	Pass
2	2118.250	41.07	-13.44	74.0	32.93	Peak	35.00	150	Horizontal	Pass
2**	2118.250	30.50	-13.44	54.0	23.50	AV	35.00	150	Horizontal	Pass
3	3405.000	47.48	-5.45	74.0	26.52	Peak	181.00	150	Horizontal	Pass
3**	3405.000	36.18	-5.45	54.0	17.82	AV	181.00	150	Horizontal	Pass
4	5581.500	107.41	-2.85	74.0	-33.41	Peak	211.00	150	Horizontal	N/A
4**	5581.500	99.21	-2.85	54.0	-45.21	AV	211.00	150	Horizontal	N/A
5	7987.000	53.47	1.89	74.0	20.53	Peak	172.00	150	Horizontal	Pass
5**	7987.000	43.05	1.89	54.0	10.95	AV	172.00	150	Horizontal	Pass
6	12015.412	47.46	-2.86	74.0	26.54	Peak	215.00	150	Horizontal	Pass
6**	12015.412	37.38	-2.86	54.0	16.62	AV	215.00	150	Horizontal	Pass

11a, U-NII-2C, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

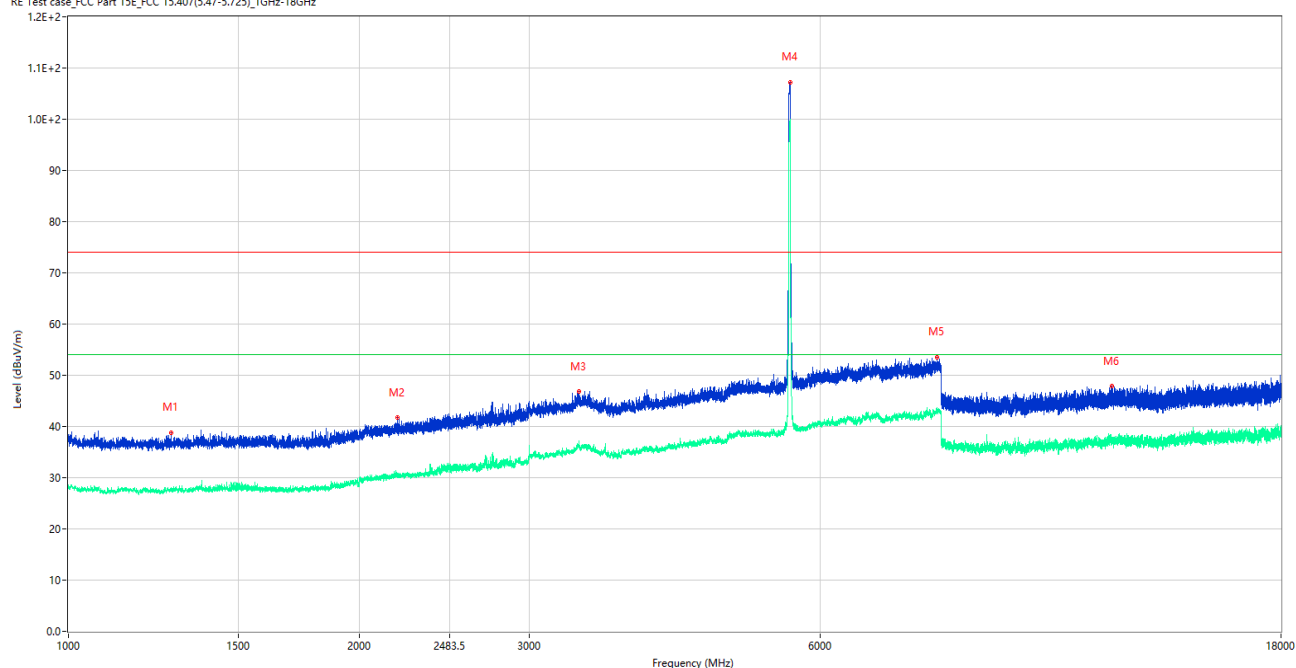

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1277.250	38.73	-15.86	74.0	35.27	Peak	0.00	150	Vertical	Pass
1**	1277.250	27.67	-15.86	54.0	26.33	AV	0.00	150	Vertical	Pass
2	2192.750	41.79	-13.35	74.0	32.21	Peak	12.00	150	Vertical	Pass
2**	2192.750	30.05	-13.35	54.0	23.95	AV	12.00	150	Vertical	Pass
3	3375.500	46.80	-4.84	74.0	27.20	Peak	360.00	150	Vertical	Pass
3**	3375.500	36.18	-4.84	54.0	17.82	AV	360.00	150	Vertical	Pass
4	5583.500	107.25	-2.83	74.0	-33.25	Peak	212.00	150	Vertical	N/A
4**	5583.500	99.71	-2.83	54.0	-45.71	AV	212.00	150	Vertical	N/A
5	7925.000	53.55	1.95	74.0	20.45	Peak	191.00	150	Vertical	Pass
5**	7925.000	43.24	1.95	54.0	10.76	AV	191.00	150	Vertical	Pass
6	12033.700	47.89	-3.07	74.0	26.11	Peak	51.00	150	Vertical	Pass
6**	12033.700	37.71	-3.07	54.0	16.29	AV	51.00	150	Vertical	Pass

11n20, U-NII-2C, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

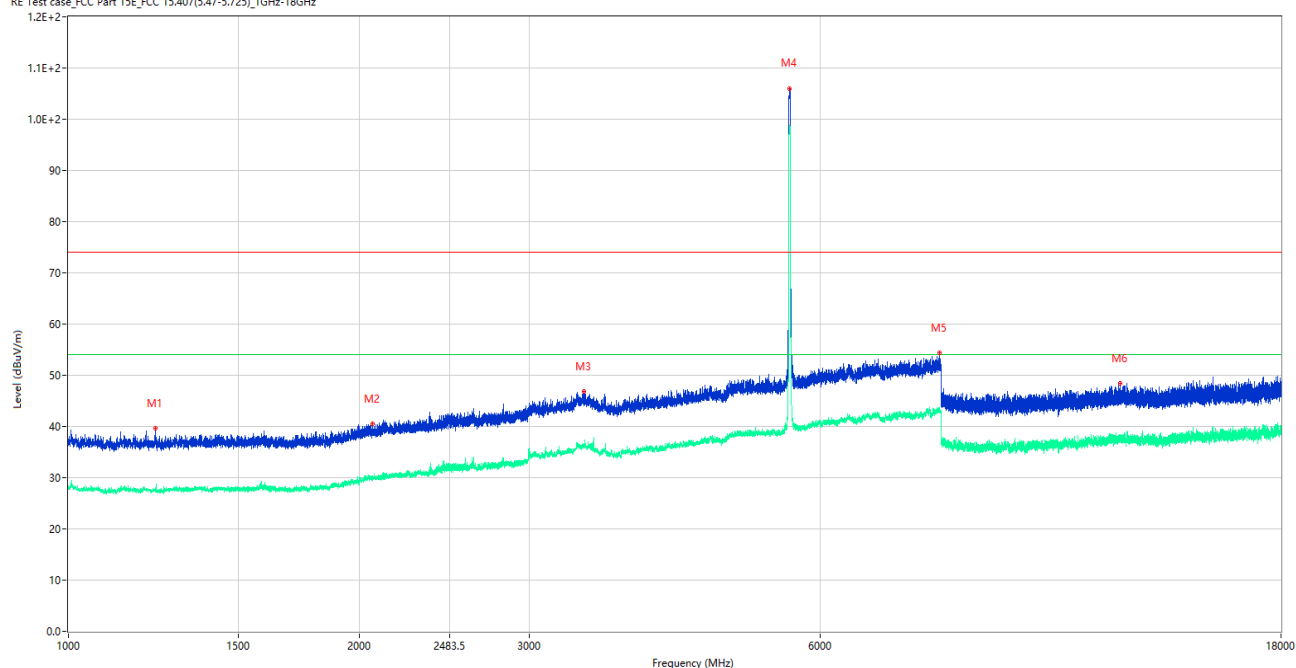

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1231.500	39.64	-16.01	74.0	34.36	Peak	7.00	150	Horizontal	Pass
1**	1231.500	27.49	-16.01	54.0	26.51	AV	7.00	150	Horizontal	Pass
2	2065.750	40.45	-13.80	74.0	33.55	Peak	196.00	150	Horizontal	Pass
2**	2065.750	29.92	-13.80	54.0	24.08	AV	196.00	150	Horizontal	Pass
3	3420.000	46.81	-5.01	74.0	27.19	Peak	319.00	150	Horizontal	Pass
3**	3420.000	35.80	-5.01	54.0	18.20	AV	319.00	150	Horizontal	Pass
4	5576.500	106.04	-2.92	74.0	-32.04	Peak	211.00	150	Horizontal	N/A
4**	5576.500	98.36	-2.92	54.0	-44.36	AV	211.00	150	Horizontal	N/A
5	7968.000	54.31	2.13	74.0	19.69	Peak	360.00	150	Horizontal	Pass
5**	7968.000	43.01	2.13	54.0	10.99	AV	360.00	150	Horizontal	Pass
6	12262.412	48.36	-2.59	74.0	25.64	Peak	95.00	150	Horizontal	Pass
6**	12262.412	37.51	-2.59	54.0	16.49	AV	95.00	150	Horizontal	Pass

11n20, U-NII-2C, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

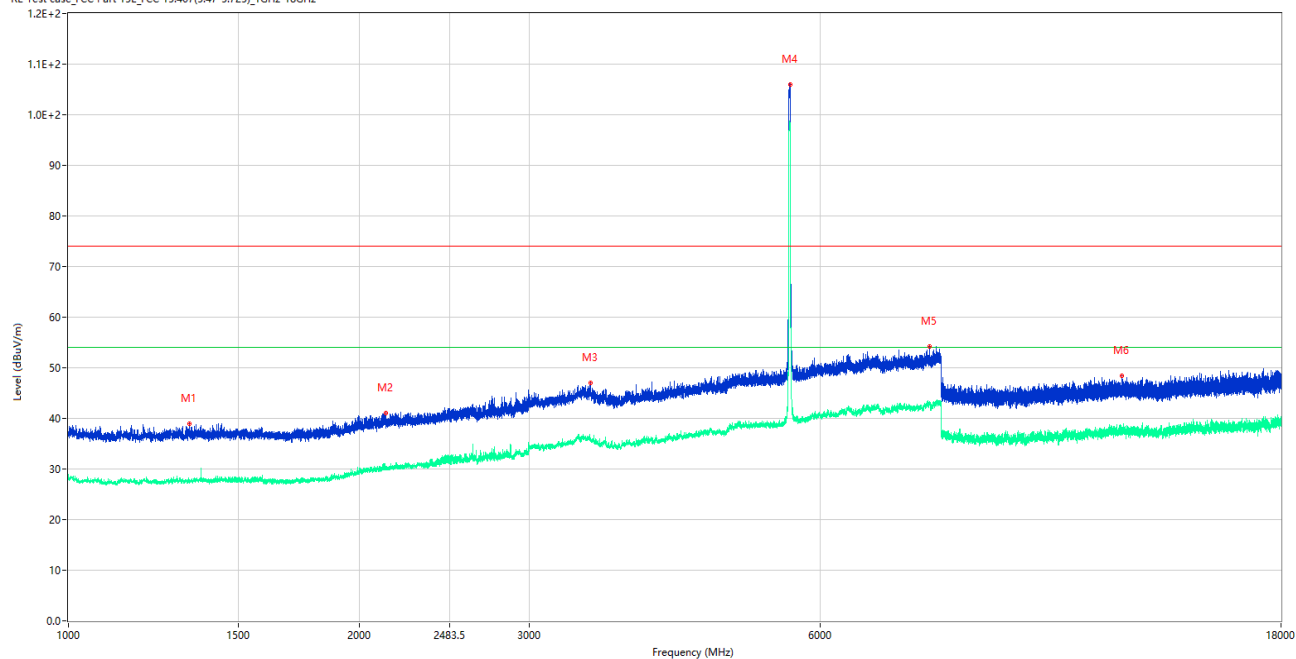

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1334.750	38.96	-16.03	74.0	35.04	Peak	13.00	150	Vertical	Pass
1**	1334.750	27.41	-16.03	54.0	26.59	AV	13.00	150	Vertical	Pass
2	2131.250	41.01	-13.29	74.0	32.99	Peak	353.00	150	Vertical	Pass
2**	2131.250	30.09	-13.29	54.0	23.91	AV	353.00	150	Vertical	Pass
3	3469.000	47.01	-5.42	74.0	26.99	Peak	6.00	150	Vertical	Pass
3**	3469.000	36.06	-5.42	54.0	17.94	AV	6.00	150	Vertical	Pass
4	5585.000	105.96	-2.84	74.0	-31.96	Peak	213.00	150	Vertical	N/A
4**	5585.000	98.08	-2.84	54.0	-44.08	AV	213.00	150	Vertical	N/A
5	7794.500	54.26	1.67	74.0	19.74	Peak	45.00	150	Vertical	Pass
5**	7794.500	43.13	1.67	54.0	10.87	AV	45.00	150	Vertical	Pass
6	12317.513	48.45	-2.47	74.0	25.55	Peak	192.00	150	Vertical	Pass
6**	12317.513	37.02	-2.47	54.0	16.98	AV	192.00	150	Vertical	Pass

11n40, U-NII-2C, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

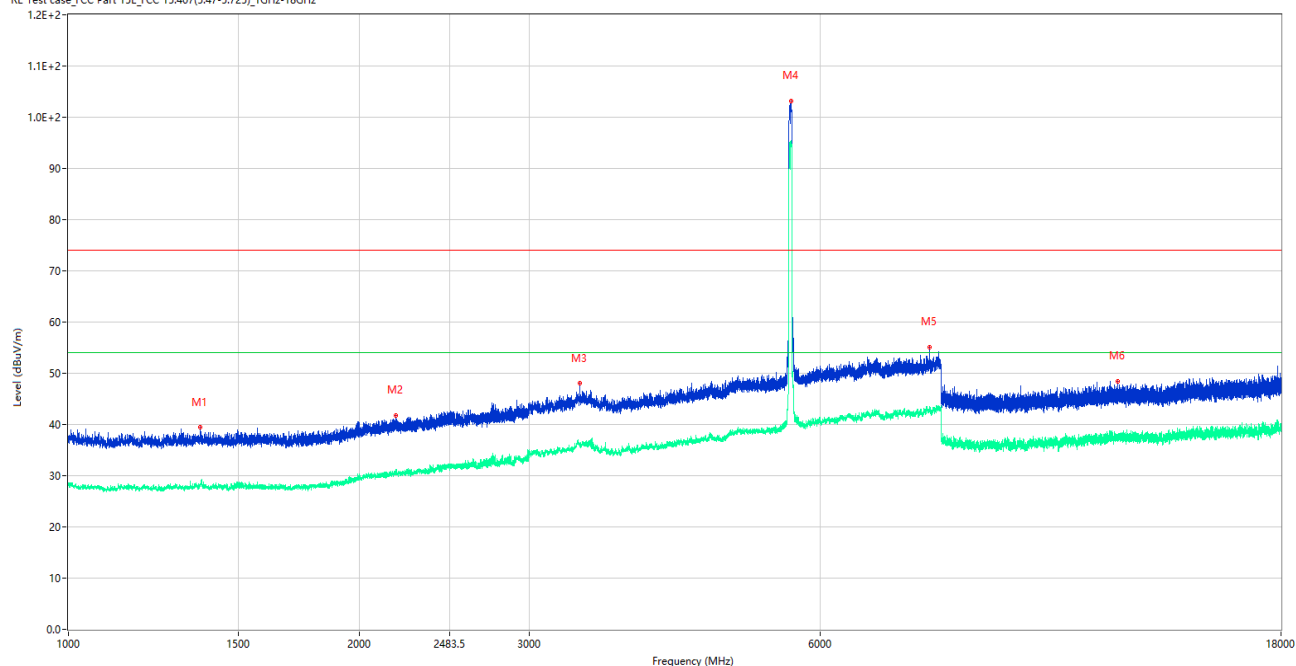

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1370.000	39.44	-15.92	74.0	34.56	Peak	54.00	150	Horizontal	Pass
1**	1370.000	28.51	-15.92	54.0	25.49	AV	54.00	150	Horizontal	Pass
2	2181.750	41.79	-12.98	74.0	32.21	Peak	63.00	150	Horizontal	Pass
2**	2181.750	30.24	-12.98	54.0	23.76	AV	63.00	150	Horizontal	Pass
3	3383.500	48.00	-5.27	74.0	26.00	Peak	312.00	150	Horizontal	Pass
3**	3383.500	35.81	-5.27	54.0	18.19	AV	312.00	150	Horizontal	Pass
4	5596.000	103.17	-2.82	74.0	-29.17	Peak	222.00	150	Horizontal	N/A
4**	5596.000	95.39	-2.82	54.0	-41.39	AV	222.00	150	Horizontal	N/A
5	7793.000	55.16	1.66	74.0	18.84	Peak	349.00	150	Horizontal	Pass
5**	7793.000	43.41	1.66	54.0	10.59	AV	349.00	150	Horizontal	Pass
6	12204.701	48.49	-2.76	74.0	25.51	Peak	0.00	150	Horizontal	Pass
6**	12204.701	37.54	-2.76	54.0	16.46	AV	0.00	150	Horizontal	Pass

11n40, U-NII-2C, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

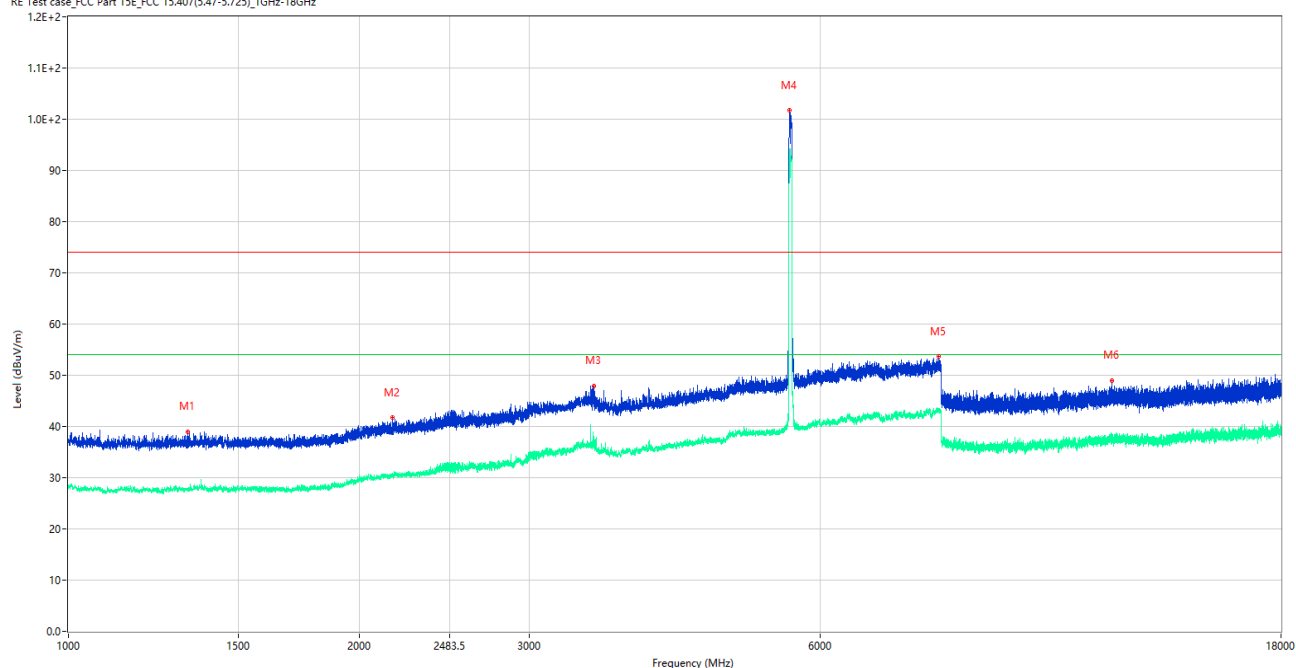

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.000	38.99	-15.93	74.0	35.01	Peak	53.00	150	Vertical	Pass
1**	1328.000	27.31	-15.93	54.0	26.69	AV	53.00	150	Vertical	Pass
2	2164.250	41.75	-13.19	74.0	32.25	Peak	44.00	150	Vertical	Pass
2**	2164.250	30.57	-13.19	54.0	23.43	AV	44.00	150	Vertical	Pass
3	3498.500	47.84	-5.96	74.0	26.16	Peak	114.00	150	Vertical	Pass
3**	3498.500	36.90	-5.96	54.0	17.10	AV	114.00	150	Vertical	Pass
4	5582.000	101.67	-2.85	74.0	-27.67	Peak	124.00	150	Vertical	N/A
4**	5582.000	93.56	-2.85	54.0	-39.56	AV	124.00	150	Vertical	N/A
5	7956.000	53.64	2.26	74.0	20.36	Peak	174.00	150	Vertical	Pass
5**	7956.000	43.43	2.26	54.0	10.57	AV	174.00	150	Vertical	Pass
6	12022.776	48.99	-2.89	74.0	25.01	Peak	360.00	150	Vertical	Pass
6**	12022.776	37.62	-2.89	54.0	16.38	AV	360.00	150	Vertical	Pass

11ac80, U-NII-2C, 1 GHz to 18 GHz, Low Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

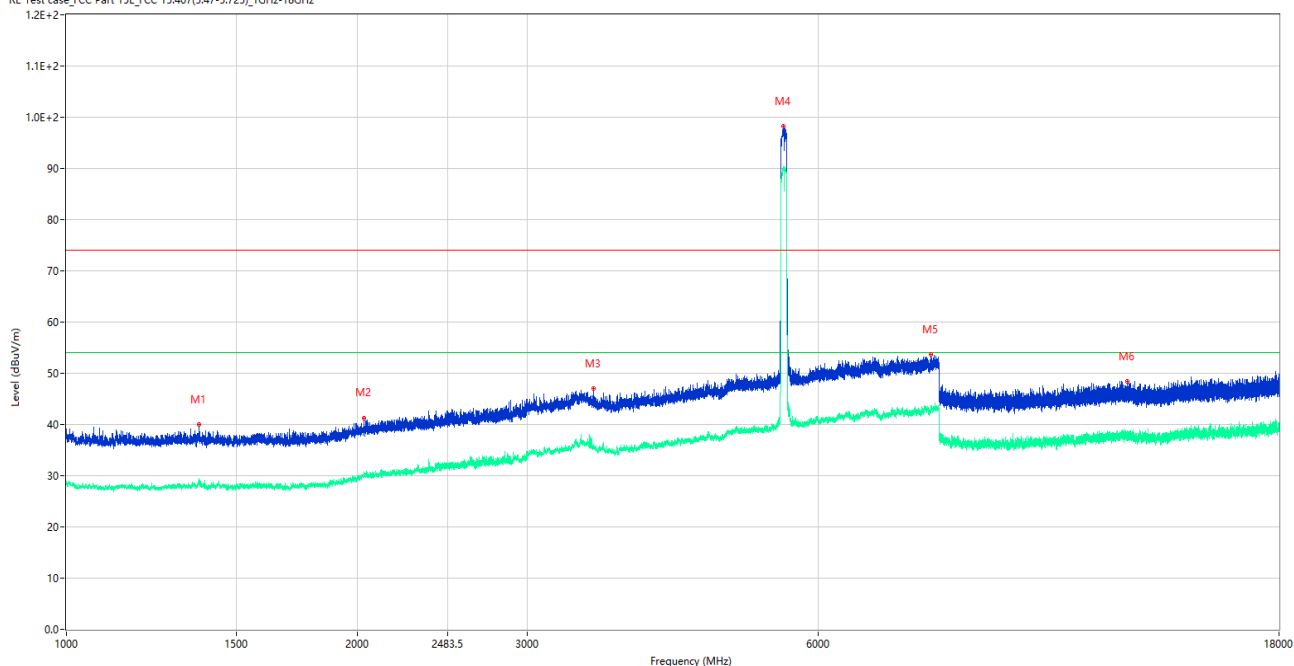

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1371.500	39.96	-15.95	74.0	34.04	Peak	31.00	150	Horizontal	Pass
1**	1371.500	28.42	-15.95	54.0	25.58	AV	31.00	150	Horizontal	Pass
2	2032.750	41.15	-13.46	74.0	32.85	Peak	129.00	150	Horizontal	Pass
2**	2032.750	30.76	-13.46	54.0	23.24	AV	129.00	150	Horizontal	Pass
3	3511.500	46.99	-5.89	74.0	27.01	Peak	20.00	150	Horizontal	Pass
3**	3511.500	35.32	-5.89	54.0	18.68	AV	20.00	150	Horizontal	Pass
4	5523.000	98.16	-2.47	74.0	-24.16	Peak	208.00	150	Horizontal	N/A
4**	5523.000	89.60	-2.47	54.0	-35.60	AV	208.00	150	Horizontal	N/A
5	7858.000	53.60	1.63	74.0	20.40	Peak	4.00	150	Horizontal	Pass
5**	7858.000	42.85	1.63	54.0	11.15	AV	4.00	150	Horizontal	Pass
6	12536.963	48.38	-3.10	74.0	25.62	Peak	333.00	150	Horizontal	Pass
6**	12536.963	38.07	-3.10	54.0	15.93	AV	333.00	150	Horizontal	Pass

11ac80, U-NII-2C, 1 GHz to 18 GHz, Low Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

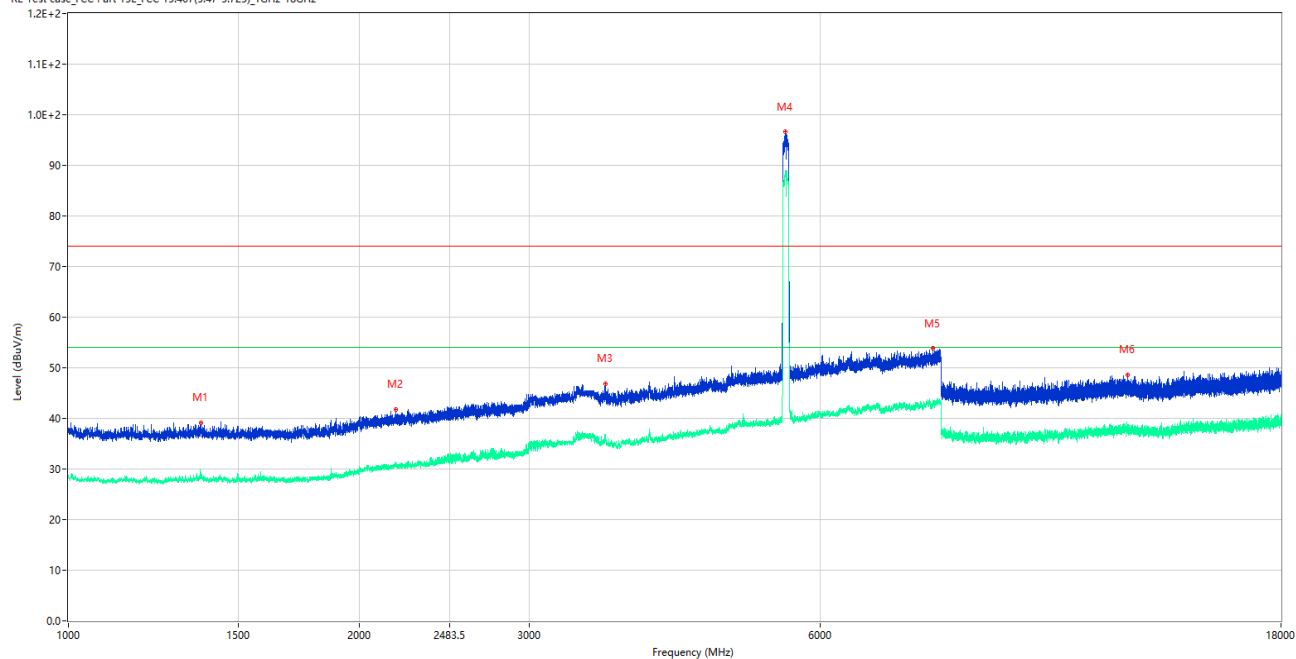

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1372.500	39.15	-15.96	74.0	34.85	Peak	206.00	150	Vertical	Pass
1**	1372.500	28.24	-15.96	54.0	25.76	AV	206.00	150	Vertical	Pass
2	2184.000	41.69	-13.08	74.0	32.31	Peak	4.00	150	Vertical	Pass
2**	2184.000	30.61	-13.08	54.0	23.39	AV	4.00	150	Vertical	Pass
3	3597.000	46.90	-5.11	74.0	27.10	Peak	247.00	150	Vertical	Pass
3**	3597.000	36.20	-5.11	54.0	17.80	AV	247.00	150	Vertical	Pass
4	5520.500	96.64	-2.46	74.0	-22.64	Peak	127.00	150	Vertical	N/A
4**	5520.500	87.87	-2.46	54.0	-33.87	AV	127.00	150	Vertical	N/A
5	7846.000	53.83	1.43	74.0	20.17	Peak	296.00	150	Vertical	Pass
5**	7846.000	42.63	1.43	54.0	11.37	AV	296.00	150	Vertical	Pass
6	12491.600	48.63	-2.55	74.0	25.37	Peak	194.00	150	Vertical	Pass
6**	12491.600	38.11	-2.55	54.0	15.89	AV	194.00	150	Vertical	Pass

11ac160, U-NII-2C, 1 GHz to 18 GHz, Low Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

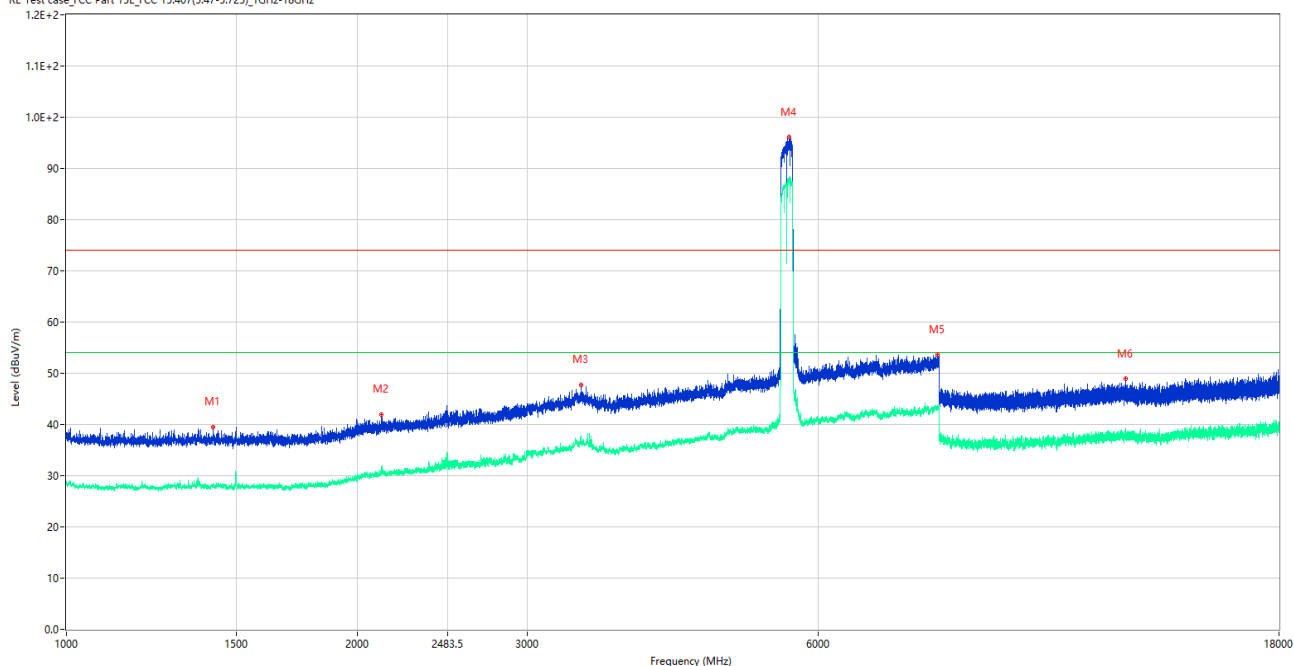

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1420.000	39.43	-15.92	74.0	34.57	Peak	86.00	150	Horizontal	Pass
1**	1420.000	28.21	-15.92	54.0	25.79	AV	86.00	150	Horizontal	Pass
2	2118.500	41.86	-13.43	74.0	32.14	Peak	190.00	150	Horizontal	Pass
2**	2118.500	30.71	-13.43	54.0	23.29	AV	190.00	150	Horizontal	Pass
3	3410.000	47.74	-5.33	74.0	26.26	Peak	230.00	150	Horizontal	Pass
3**	3410.000	36.74	-5.33	54.0	17.26	AV	230.00	150	Horizontal	Pass
4	5603.500	96.09	-2.77	74.0	-22.09	Peak	211.00	150	Horizontal	N/A
4**	5603.500	87.98	-2.77	54.0	-33.98	AV	211.00	150	Horizontal	N/A
5	7979.500	53.68	1.95	74.0	20.32	Peak	102.00	150	Horizontal	Pass
5**	7979.500	43.02	1.95	54.0	10.98	AV	102.00	150	Horizontal	Pass
6	12486.612	48.87	-2.50	74.0	25.13	Peak	48.00	150	Horizontal	Pass
6**	12486.612	38.19	-2.50	54.0	15.81	AV	48.00	150	Horizontal	Pass

11ac160, U-NII-2C, 1 GHz to 18 GHz, Low Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

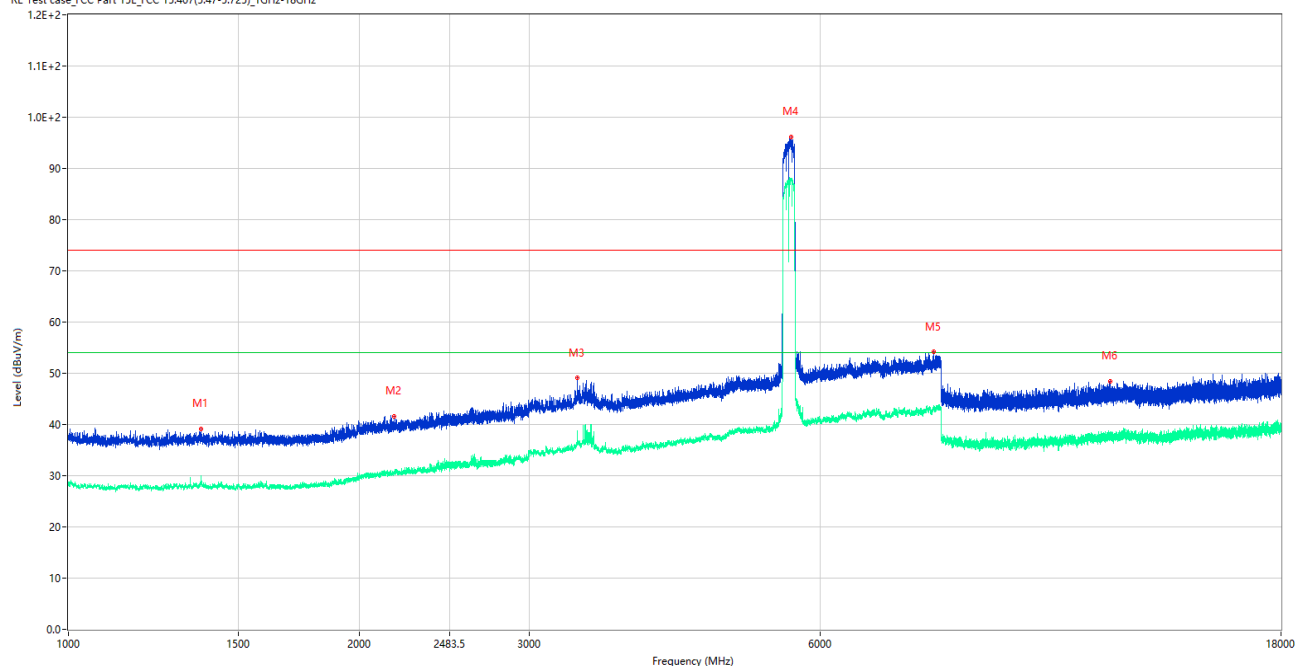

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1371.750	39.16	-15.96	74.0	34.84	Peak	173.00	150	Vertical	Pass
1**	1371.750	29.12	-15.96	54.0	24.88	AV	173.00	150	Vertical	Pass
2	2174.250	41.55	-12.94	74.0	32.45	Peak	112.00	150	Vertical	Pass
2**	2174.250	30.55	-12.94	54.0	23.45	AV	112.00	150	Vertical	Pass
3	3365.000	49.06	-5.19	74.0	24.94	Peak	178.00	150	Vertical	Pass
3**	3365.000	36.94	-5.19	54.0	17.06	AV	178.00	150	Vertical	Pass
4	5598.000	96.15	-2.80	74.0	-22.15	Peak	208.00	150	Vertical	N/A
4**	5598.000	88.10	-2.80	54.0	-34.10	AV	208.00	150	Vertical	N/A
5	7872.000	54.19	1.79	74.0	19.81	Peak	335.00	150	Vertical	Pass
5**	7872.000	43.26	1.79	54.0	10.74	AV	335.00	150	Vertical	Pass
6	11978.125	48.44	-3.24	74.0	25.56	Peak	214.00	150	Vertical	Pass
6**	11978.125	37.55	-3.24	54.0	16.45	AV	214.00	150	Vertical	Pass

11ax20 (SU), U-NII-2C, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

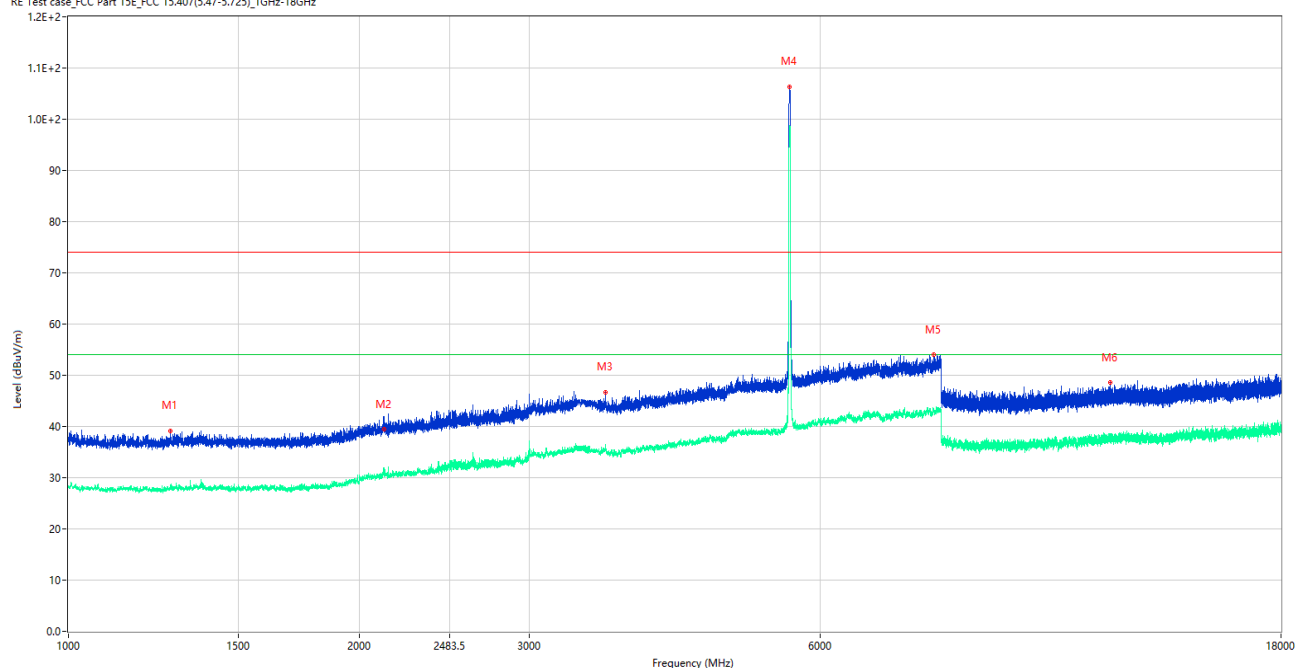

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1275.500	39.18	-15.83	74.0	34.82	Peak	181.00	150	Horizontal	Pass
1**	1275.500	28.58	-15.83	54.0	25.42	AV	181.00	150	Horizontal	Pass
2	2120.750	43.10	-13.34	74.0	30.90	Peak	5.00	150	Horizontal	Pass
2**	2120.750	31.93	-13.34	54.0	22.07	AV	5.00	150	Horizontal	Pass
3	3599.500	46.72	-4.99	74.0	27.28	Peak	89.00	150	Horizontal	Pass
3**	3599.500	36.06	-4.99	54.0	17.94	AV	89.00	150	Horizontal	Pass
4	5575.500	106.40	-2.95	74.0	-32.40	Peak	218.00	150	Horizontal	N/A
4**	5575.500	98.67	-2.95	54.0	-44.67	AV	218.00	150	Horizontal	N/A
5	7865.500	54.02	1.75	74.0	19.98	Peak	158.00	150	Horizontal	Pass
5**	7865.500	43.23	1.75	54.0	10.77	AV	158.00	150	Horizontal	Pass
6	11985.963	48.56	-2.95	74.0	25.44	Peak	360.00	150	Horizontal	Pass
6**	11985.963	37.31	-2.95	54.0	16.69	AV	360.00	150	Horizontal	Pass

11ax20 (SU), U-NII-2C, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

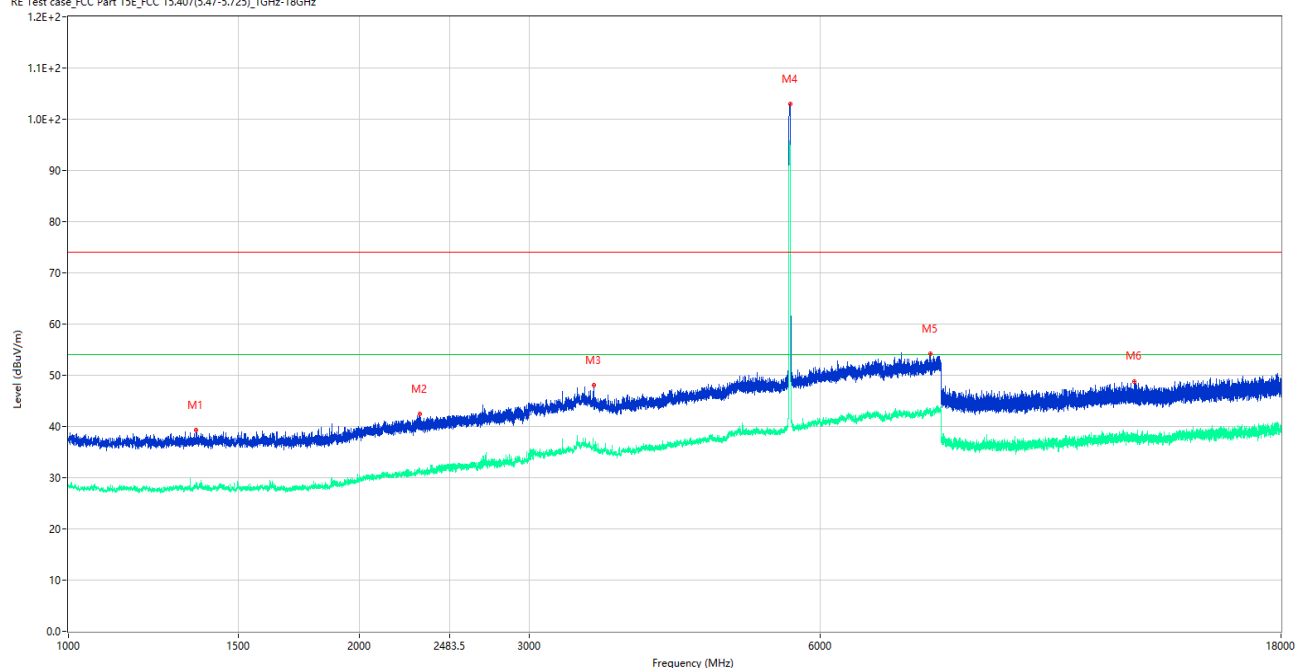

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1354.750	39.27	-15.87	74.0	34.73	Peak	6.00	150	Vertical	Pass
1**	1354.750	28.68	-15.87	54.0	25.32	AV	6.00	150	Vertical	Pass
2	2311.000	42.48	-12.46	74.0	31.52	Peak	265.00	150	Vertical	Pass
2**	2311.000	31.09	-12.46	54.0	22.91	AV	265.00	150	Vertical	Pass
3	3496.000	48.15	-5.82	74.0	25.85	Peak	286.00	150	Vertical	Pass
3**	3496.000	35.25	-5.82	54.0	18.75	AV	286.00	150	Vertical	Pass
4	5584.000	102.95	-2.84	74.0	-28.95	Peak	127.00	150	Vertical	N/A
4**	5584.000	94.97	-2.84	54.0	-40.97	AV	127.00	150	Vertical	N/A
5	7797.500	54.14	1.68	74.0	19.86	Peak	147.00	150	Vertical	Pass
5**	7797.500	43.23	1.68	54.0	10.77	AV	147.00	150	Vertical	Pass
6	12690.625	48.78	-2.93	74.0	25.22	Peak	11.00	150	Vertical	Pass
6**	12690.625	37.98	-2.93	54.0	16.02	AV	11.00	150	Vertical	Pass

11ax40 (SU), U-NII-2C, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

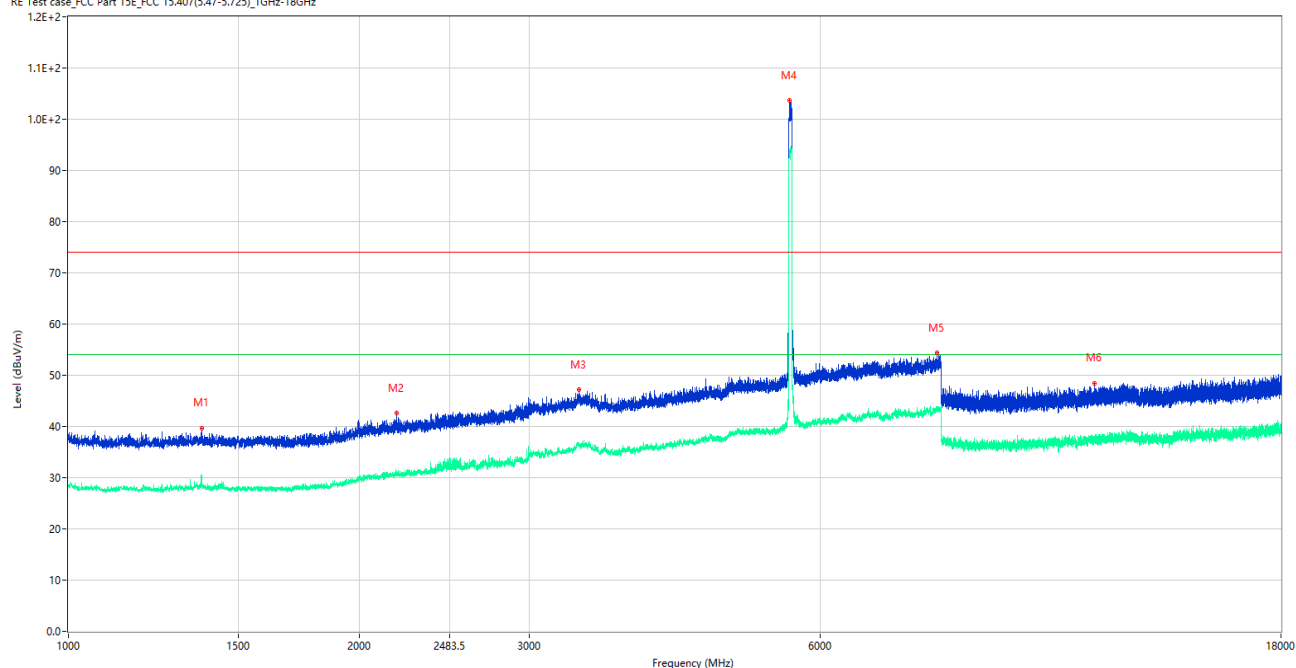

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1375.000	39.70	-16.01	74.0	34.30	Peak	223.00	150	Horizontal	Pass
1**	1375.000	28.46	-16.01	54.0	25.54	AV	223.00	150	Horizontal	Pass
2	2185.250	42.59	-13.16	74.0	31.41	Peak	143.00	150	Horizontal	Pass
2**	2185.250	30.96	-13.16	54.0	23.04	AV	143.00	150	Horizontal	Pass
3	3374.500	47.14	-4.81	74.0	26.86	Peak	172.00	150	Horizontal	Pass
3**	3374.500	36.77	-4.81	54.0	17.23	AV	172.00	150	Horizontal	Pass
4	5578.000	103.62	-2.89	74.0	-29.62	Peak	211.00	150	Horizontal	N/A
4**	5578.000	93.71	-2.89	54.0	-39.71	AV	211.00	150	Horizontal	N/A
5	7936.000	54.32	2.02	74.0	19.68	Peak	131.00	150	Horizontal	Pass
5**	7936.000	43.11	2.02	54.0	10.89	AV	131.00	150	Horizontal	Pass
6	11542.787	48.43	-2.67	74.0	25.57	Peak	360.00	150	Horizontal	Pass
6**	11542.787	37.26	-2.67	54.0	16.74	AV	360.00	150	Horizontal	Pass

11ax40 (SU), U-NII-2C, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

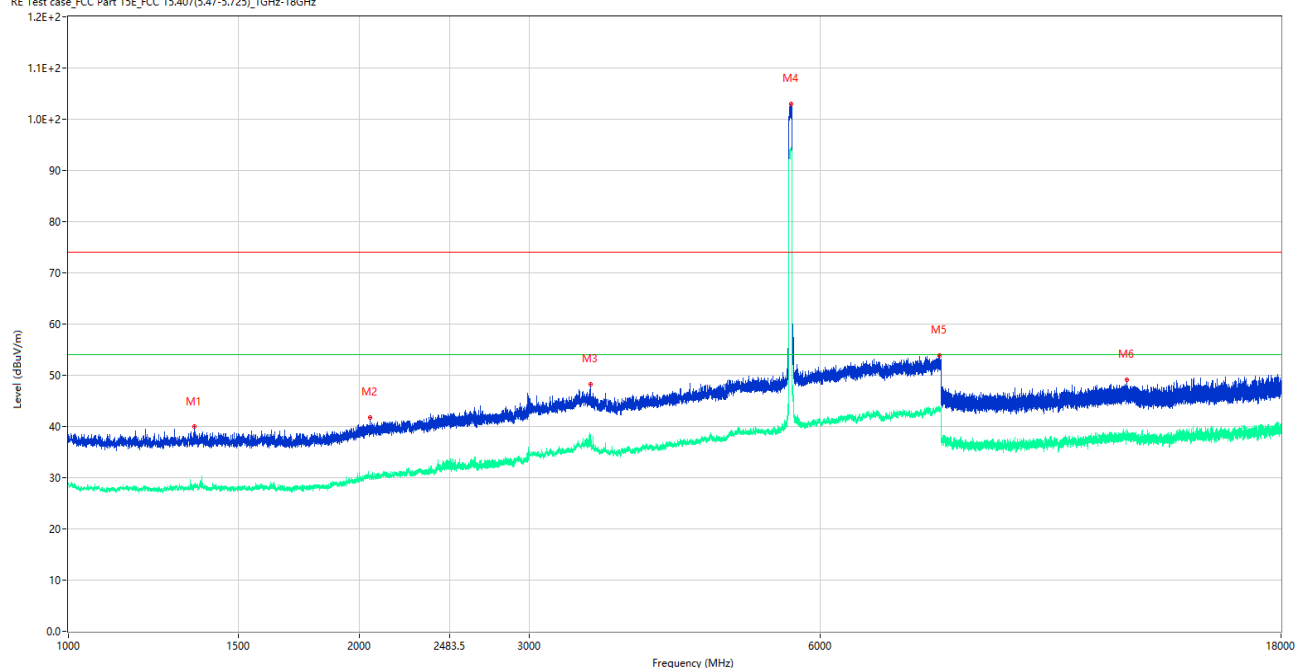

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1351.250	39.93	-15.92	74.0	34.07	Peak	174.00	150	Vertical	Pass
1**	1351.250	28.31	-15.92	54.0	25.69	AV	174.00	150	Vertical	Pass
2	2053.750	41.69	-13.75	74.0	32.31	Peak	352.00	150	Vertical	Pass
2**	2053.750	30.20	-13.75	54.0	23.80	AV	352.00	150	Vertical	Pass
3	3473.500	48.22	-5.90	74.0	25.78	Peak	247.00	150	Vertical	Pass
3**	3473.500	38.43	-5.90	54.0	15.57	AV	247.00	150	Vertical	Pass
4	5604.500	102.94	-2.73	74.0	-28.94	Peak	206.00	150	Vertical	N/A
4**	5604.500	94.08	-2.73	54.0	-40.08	AV	206.00	150	Vertical	N/A
5	7982.000	53.90	1.97	74.0	20.10	Peak	0.00	150	Vertical	Pass
5**	7982.000	43.54	1.97	54.0	10.46	AV	0.00	150	Vertical	Pass
6	12465.000	49.17	-2.25	74.0	24.83	Peak	333.00	150	Vertical	Pass
6**	12465.000	38.10	-2.25	54.0	15.90	AV	333.00	150	Vertical	Pass

11ax80 (SU), U-NII-2C, 1 GHz to 18 GHz, Low Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

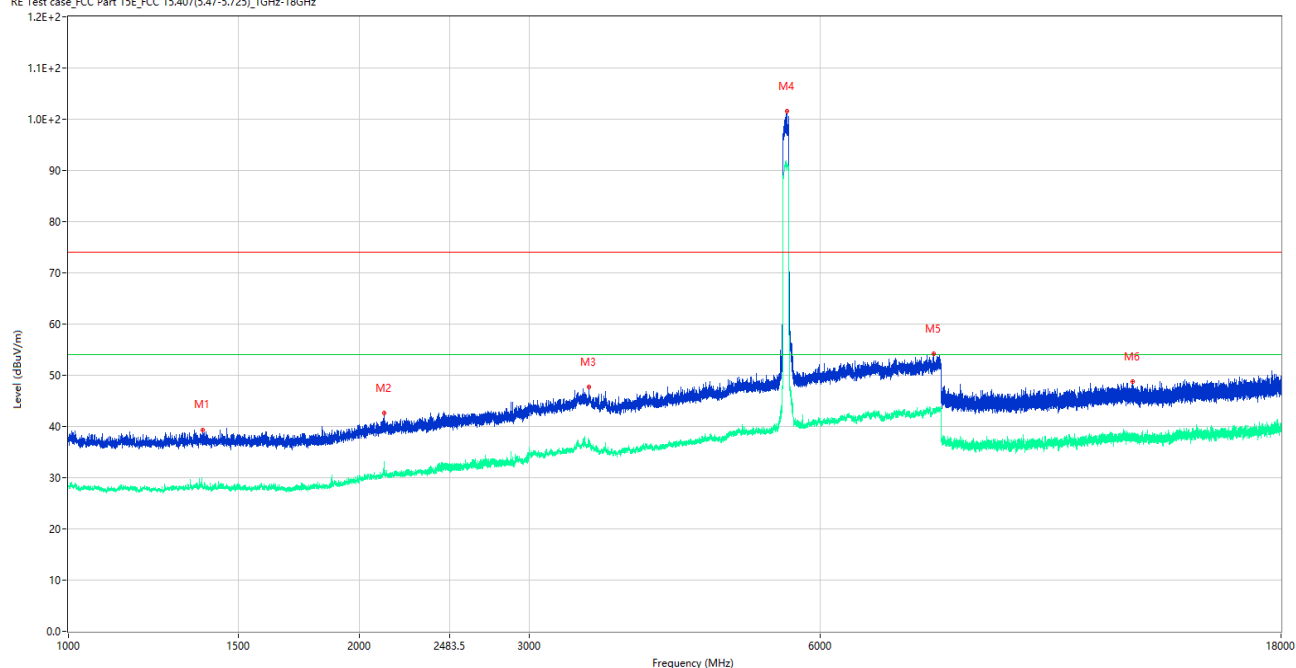

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1378.250	39.36	-16.00	74.0	34.64	Peak	329.00	150	Horizontal	Pass
1**	1378.250	28.03	-16.00	54.0	25.97	AV	329.00	150	Horizontal	Pass
2	2122.000	42.71	-13.31	74.0	31.29	Peak	359.00	150	Horizontal	Pass
2**	2122.000	30.40	-13.31	54.0	23.60	AV	359.00	150	Horizontal	Pass
3	3460.000	47.68	-4.94	74.0	26.32	Peak	80.00	150	Horizontal	Pass
3**	3460.000	37.39	-4.94	54.0	16.61	AV	80.00	150	Horizontal	Pass
4	5540.500	101.52	-2.68	74.0	-27.52	Peak	277.00	150	Horizontal	N/A
4**	5540.500	90.98	-2.68	54.0	-36.98	AV	277.00	150	Horizontal	N/A
5	7872.500	54.19	1.78	74.0	19.81	Peak	246.00	150	Horizontal	Pass
5**	7872.500	43.24	1.78	54.0	10.76	AV	246.00	150	Horizontal	Pass
6	12649.062	48.76	-2.88	74.0	25.24	Peak	74.00	150	Horizontal	Pass
6**	12649.062	38.08	-2.88	54.0	15.92	AV	74.00	150	Horizontal	Pass

11ax80 (SU), U-NII-2C, 1 GHz to 18 GHz, Low Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

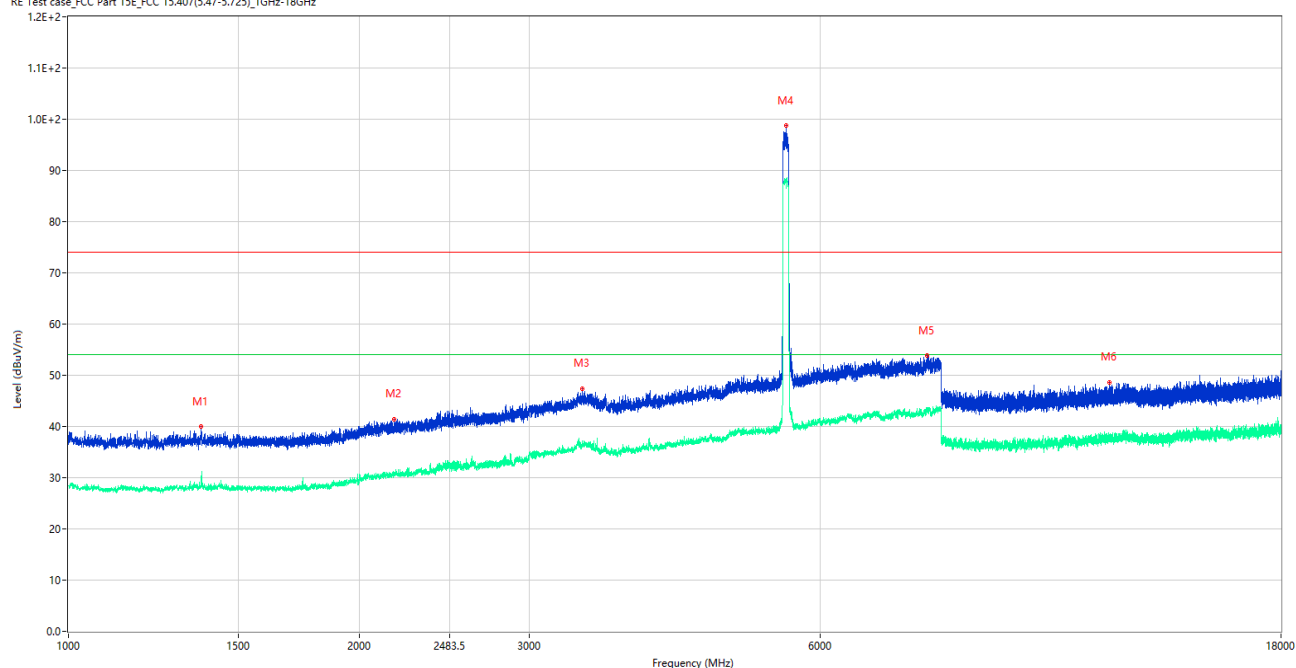

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1372.000	40.06	-15.96	74.0	33.94	Peak	190.00	150	Vertical	Pass
1**	1372.000	28.48	-15.96	54.0	25.52	AV	190.00	150	Vertical	Pass
2	2175.250	41.36	-12.93	74.0	32.64	Peak	112.00	150	Vertical	Pass
2**	2175.250	30.45	-12.93	54.0	23.55	AV	112.00	150	Vertical	Pass
3	3400.500	47.36	-5.65	74.0	26.64	Peak	358.00	150	Vertical	Pass
3**	3400.500	36.42	-5.65	54.0	17.58	AV	358.00	150	Vertical	Pass
4	5529.000	98.76	-2.47	74.0	-24.76	Peak	118.00	150	Vertical	N/A
4**	5529.000	88.39	-2.47	54.0	-34.39	AV	118.00	150	Vertical	N/A
5	7745.500	53.85	1.37	74.0	20.15	Peak	359.00	150	Vertical	Pass
5**	7745.500	43.23	1.37	54.0	10.77	AV	359.00	150	Vertical	Pass
6	11957.224	48.65	-3.28	74.0	25.35	Peak	0.00	150	Vertical	Pass
6**	11957.224	38.41	-3.28	54.0	15.59	AV	0.00	150	Vertical	Pass

11ax160 (SU), U-NII-2A, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

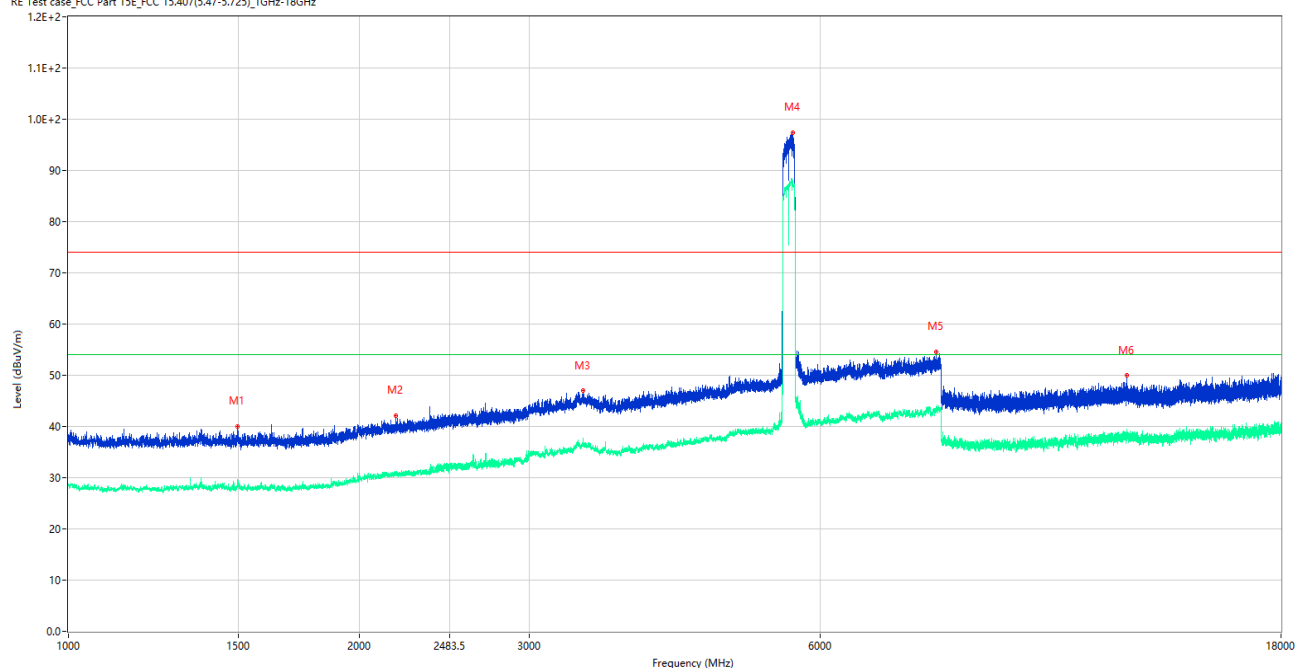

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1497.250	40.01	-16.15	74.0	33.99	Peak	208.00	150	Horizontal	Pass
1**	1497.250	29.46	-16.15	54.0	24.54	AV	208.00	150	Horizontal	Pass
2	2180.750	42.16	-12.94	74.0	31.84	Peak	360.00	150	Horizontal	Pass
2**	2180.750	30.74	-12.94	54.0	23.26	AV	360.00	150	Horizontal	Pass
3	3411.000	46.95	-5.30	74.0	27.05	Peak	70.00	150	Horizontal	Pass
3**	3411.000	36.41	-5.30	54.0	17.59	AV	70.00	150	Horizontal	Pass
4	5626.000	97.43	-2.43	74.0	-23.43	Peak	207.00	150	Horizontal	N/A
4**	5626.000	87.57	-2.43	54.0	-33.57	AV	207.00	150	Horizontal	N/A
5	7916.500	54.64	1.88	74.0	19.36	Peak	59.00	150	Horizontal	Pass
5**	7916.500	43.15	1.88	54.0	10.85	AV	59.00	150	Horizontal	Pass
6	12464.763	49.91	-2.23	74.0	24.09	Peak	121.00	150	Horizontal	Pass
6**	12464.763	38.88	-2.23	54.0	15.12	AV	121.00	150	Horizontal	Pass

11ax160 (SU), U-NII-2A, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

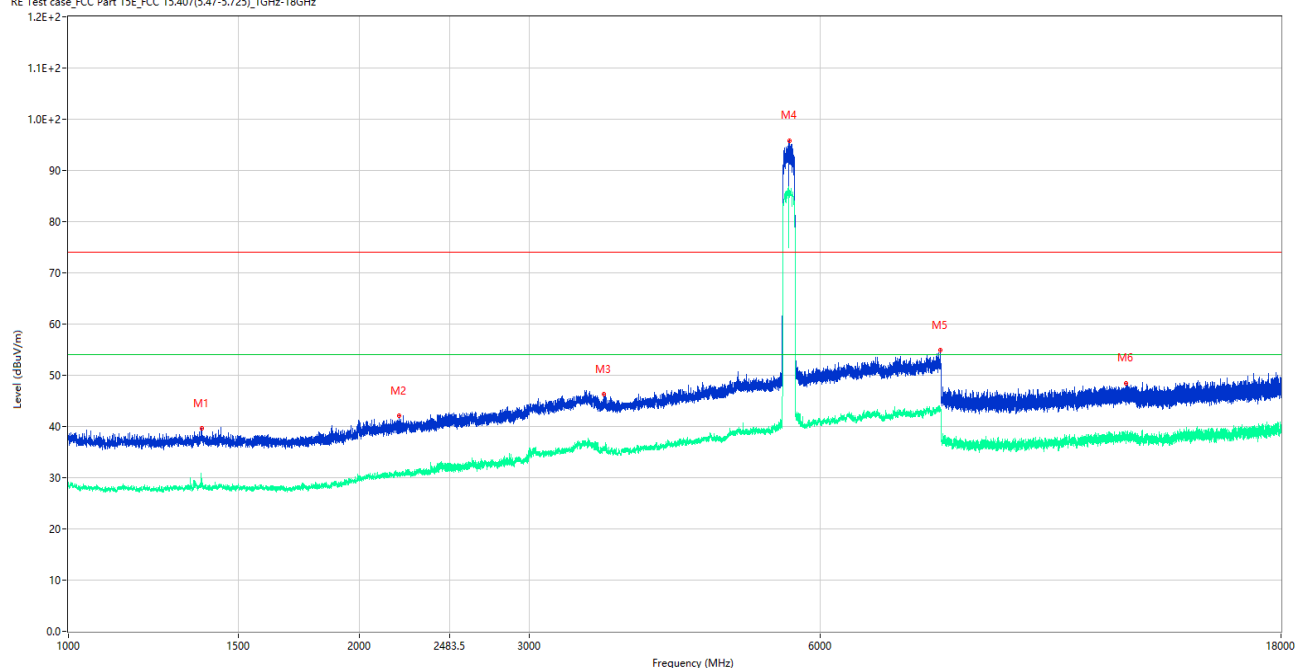

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1375.250	39.72	-16.00	74.0	34.28	Peak	217.00	150	Vertical	Pass
1**	1375.250	28.43	-16.00	54.0	25.57	AV	217.00	150	Vertical	Pass
2	2198.250	42.08	-13.33	74.0	31.92	Peak	29.00	150	Vertical	Pass
2**	2198.250	30.61	-13.33	54.0	23.39	AV	29.00	150	Vertical	Pass
3	3581.500	46.31	-6.35	74.0	27.69	Peak	137.00	150	Vertical	Pass
3**	3581.500	35.71	-6.35	54.0	18.29	AV	137.00	150	Vertical	Pass
4	5573.500	95.88	-2.96	74.0	-21.88	Peak	127.00	150	Vertical	N/A
4**	5573.500	85.75	-2.96	54.0	-31.75	AV	127.00	150	Vertical	N/A
5	7994.000	54.83	1.81	74.0	19.17	Peak	0.00	150	Vertical	Pass
5**	7994.000	43.28	1.81	54.0	10.72	AV	0.00	150	Vertical	Pass
6	12449.563	48.46	-2.53	74.0	25.54	Peak	74.00	150	Vertical	Pass
6**	12449.563	37.60	-2.53	54.0	16.40	AV	74.00	150	Vertical	Pass

11a, U-NII-3, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

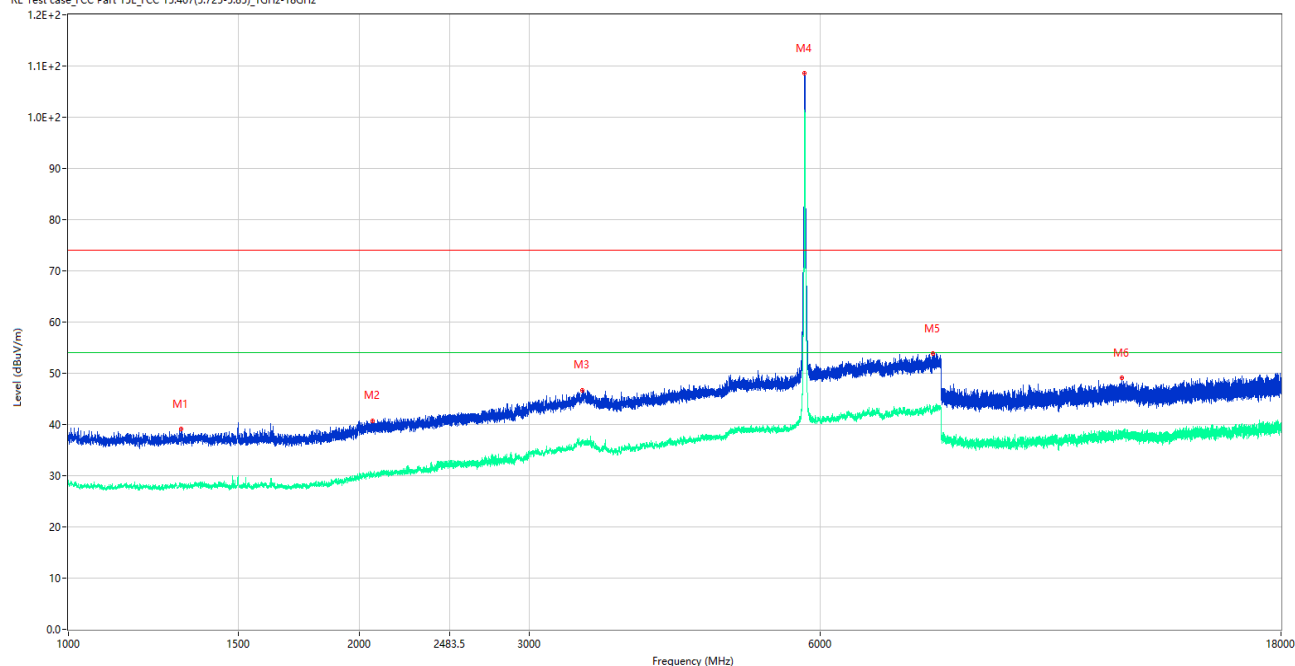

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1309.250	39.10	-15.70	74.0	34.90	Peak	358.00	150	Horizontal	Pass
1**	1309.250	28.08	-15.70	54.0	25.92	AV	358.00	150	Horizontal	Pass
2	2063.750	40.64	-13.83	74.0	33.36	Peak	286.00	150	Horizontal	Pass
2**	2063.750	30.31	-13.83	54.0	23.69	AV	286.00	150	Horizontal	Pass
3	3406.000	46.71	-5.41	74.0	27.29	Peak	0.00	150	Horizontal	Pass
3**	3406.000	36.47	-5.41	54.0	17.53	AV	0.00	150	Horizontal	Pass
4	5780.000	108.56	-1.51	74.0	-34.56	Peak	219.00	150	Horizontal	N/A
4**	5780.000	101.05	-1.51	54.0	-47.05	AV	219.00	150	Horizontal	N/A
5	7855.000	53.82	1.56	74.0	20.18	Peak	210.00	150	Horizontal	Pass
5**	7855.000	43.14	1.56	54.0	10.86	AV	210.00	150	Horizontal	Pass
6	12325.826	49.05	-2.13	74.0	24.95	Peak	261.00	150	Horizontal	Pass
6**	12325.826	37.58	-2.13	54.0	16.42	AV	261.00	150	Horizontal	Pass

11a, U-NII-3, 1 GHz to 18 GHz, Middle Channel, ANT V

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

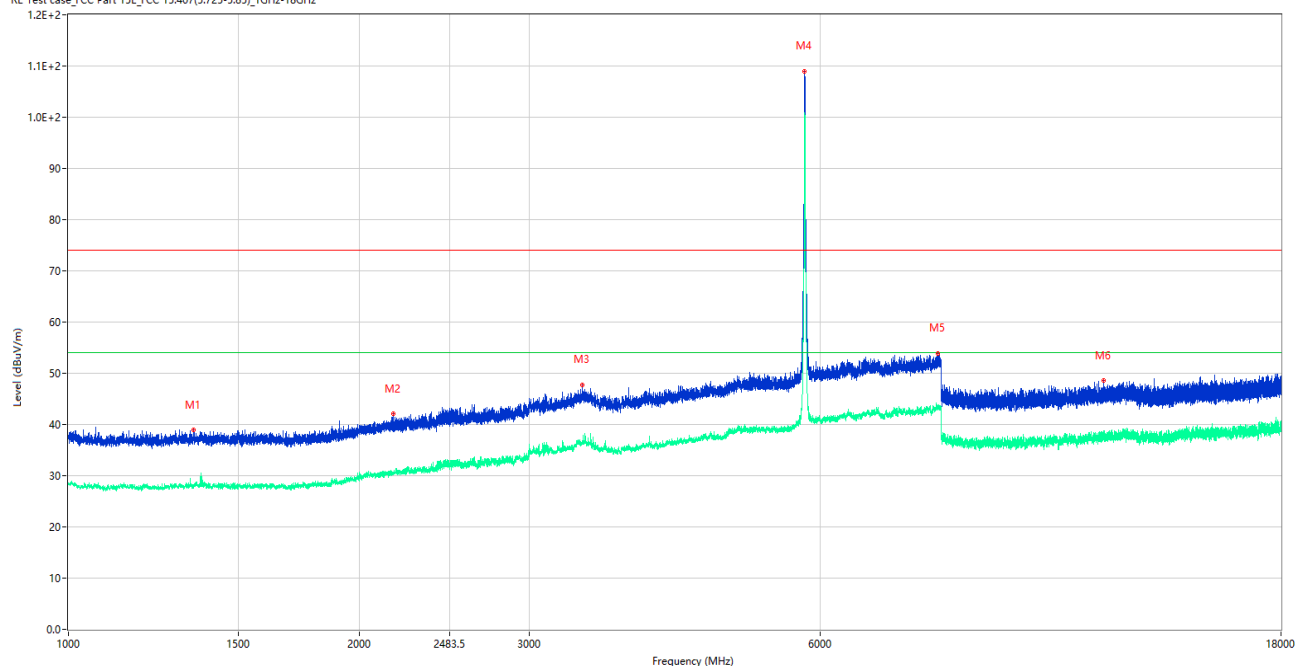

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1347.000	39.03	-16.03	74.0	34.97	Peak	136.00	150	Vertical	Pass
1**	1347.000	28.20	-16.03	54.0	25.80	AV	136.00	150	Vertical	Pass
2	2169.500	42.13	-13.04	74.0	31.87	Peak	32.00	150	Vertical	Pass
2**	2169.500	30.61	-13.04	54.0	23.39	AV	32.00	150	Vertical	Pass
3	3404.500	47.73	-5.48	74.0	26.27	Peak	119.00	150	Vertical	Pass
3**	3404.500	36.58	-5.48	54.0	17.42	AV	119.00	150	Vertical	Pass
4	5781.500	108.99	-1.53	74.0	-34.99	Peak	218.00	150	Vertical	N/A
4**	5781.500	100.73	-1.53	54.0	-46.73	AV	218.00	150	Vertical	N/A
5	7951.500	53.87	2.15	74.0	20.13	Peak	268.00	150	Vertical	Pass
5**	7951.500	43.11	2.15	54.0	10.89	AV	268.00	150	Vertical	Pass
6	11804.987	48.55	-3.62	74.0	25.45	Peak	71.00	150	Vertical	Pass
6**	11804.987	38.04	-3.62	54.0	15.96	AV	71.00	150	Vertical	Pass