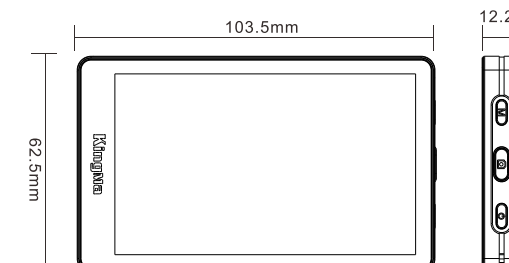
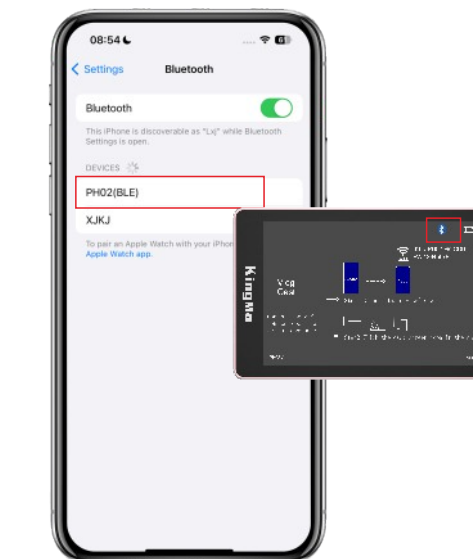
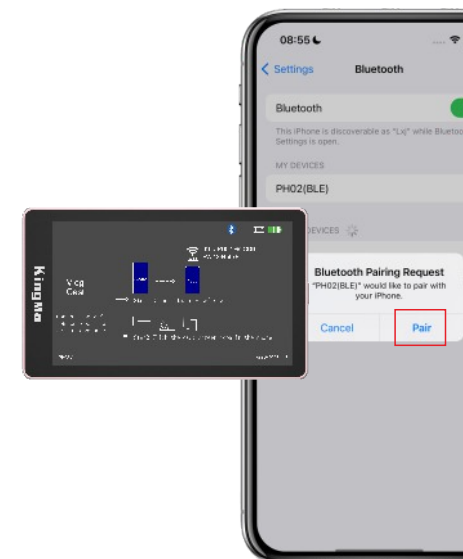
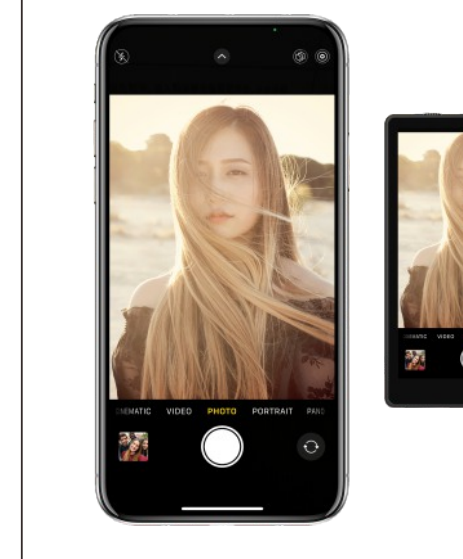


品牌: KingMa[®] VL-PH02 Max 说明书 印刷指导书			
材质	80g铜版纸 制作成册	尺寸	单面80x105mm 一共44面
颜色	彩色		
制作日期	20241022	制作者	方恒

[illegible]

KingMa®  Scan the QR code to get more info Magnetic Phone Vlog Selfie Screen VL-PH02 Max User Manual 	Catalogue Production description and Specifications.....29 Features, Instructions.....31 Charging, Dimensions.....33 Phone Wireless Screen Mirroring Connection Steps.....34 Android Smartphone Wireless Screen Mirroring Connection Steps.....40 Wired Connection Mode (Plug and play).....47 Warranty period.....50 - 28 -	Specifications Model: VL-PH02 Max Input: 5V/3A Rated Power: 1.75W Battery Capacity: 920mAh 3.4Wh Voltage: 3.7V Power Input Port: USB-C Audio/Video Transmission Port: USB-C Screen Size: 3.97 inches Screen Resolution: 480 X 800 Pixels Direction of Screen Viewing Angle: Full Viewing Angle Screen Brightness: Adjustable 300cd/m² (Max) Working Temperature: 10~40°C Storage Temperature: 10~40°C Wireless Network: WIFI 2.4G Wireless type: Bluetooth 5.0 Material: Plastic+Magnetic Dimensions: 103.5mm* 62.5mm* 12.2mm Weight: 100g Applicable with: iOS system 9.0 or above, Android system 12.0 or above, HarmonyOS system 3.0 or above, MagicOS system 4.0 or above.	Features  3.97 inch LCD Screen USB-C Charging Port Charging Indicator Audio/Video Transmission Port Magnetic mount Mode Button Shoot Button Lanyard hole Power Button / Screen 180° Rotation Button If there are any issues regarding the product and the manual, it's updated in time, please kindly understand. - 31 -	Instructions Power Button: 1. Power On/Off: Press and hold the "POWER" button for 3 seconds to turn the screen on or off. 2. Screen 180° Rotation: Short press the "POWER" button to rotate the screen 180 degrees. Shoot Button: When the screen's Bluetooth is connected to the mobile phone's Bluetooth, you can take photos and record videos directly from the screen. Mode Button: 1. Long press the mode button to switch between full screen mode and 1:1 screen mode. 2. Short press the mode button to switch between mirroring mode and normal mode. Attention: • Powering on or off will not affect the full screen and 1:1 screen settings, and the last used state will be retained. - 32 -	Charging The charging indicator light stays on RED during charging and remains on GREEN after being fully charged.  Dimensions  - 33 -	Product Connection Instructions Wireless Connection Mode (Screen Mirroring) Suitable for iPhone and Android smartphones iPhone Wireless Screen Mirroring Connection Steps 1.1 Long press the "Power" button for 3 seconds to turn on the PH01 Max Vlog screen. (It takes 6 seconds to open the system)  - 34 -	1.2 Open the phone's Bluetooth, search for available device "PH02", and pair the screen with the phone. (The indicator light stays on when Bluetooth is connected and flashes when Bluetooth is not connected).  - 35 -	1.3 Bluetooth connection is successful  - 36 -	1.2 Open the phone settings - wireless LAN or WIFI menu bar, search for the device name corresponding to the PH02 SSID, enter the PW password to connect.  - 37 -	1.3 Slide down the settings on the right side of the phone screen. Find the "Screen Mirroring" icon and click to open it. 1.4 Click on the corresponding PH01 SSID device name that pops up to connect  (1-3) (1-4) - 38 -	1.5 Wireless Projection Successfully  - 39 -	Android Smartphone Wireless Screen Mirroring Connection Steps 1.1 Long press the "Power" button for 3 seconds to turn on the PH01 Max Vlog screen. (It takes 6 seconds to open the system)  - 40 -
---	--	---	--	---	--	---	---	--	---	---	--	--