

**KEMI
MOTO**

PRODUCT MANUAL

AUDIO SYSTEM

Model name: KMP3



B SKU: F0507-00105-BK3

Complete journey of dreams

APP

*** The way to obtain the APP: Use your mobile phone to scan the QR code on the manual to download and install it, or search for "KEMIMOTO" in the app store to download it**



**Applications are available in Google play and
App Store Get more fun by using Kemimoto APP**

CUSTOMER SUPPORT





Contact us by email: support@kemimoto.com

Help center:



PRODUCT INFORMATION

- ① Main Speaker x1



- ② Pipe clamp (upper & lower) x2



- ③ Silicone sleeve x2



- ④ Non-slip pad (8mm height) x4



- ⑤ Non-slip pad (3mm height) x4



- ⑥ Fuse x2



- ⑦ Screw (M6x25) x2



- ⑧ Screw (M8x35) x2



- ⑩ Hex key (5.0*25*65) x1



- ⑨ Hex key (6.0*25*70) x1



- ⑪ M6 Spring washer x2



- ⑫ M8 Spring washer x2




- ⑬ M6 Flat washer x2





- ⑭ M8 Flat washer x2

INSTALLATION TIPS

STEP 1&2

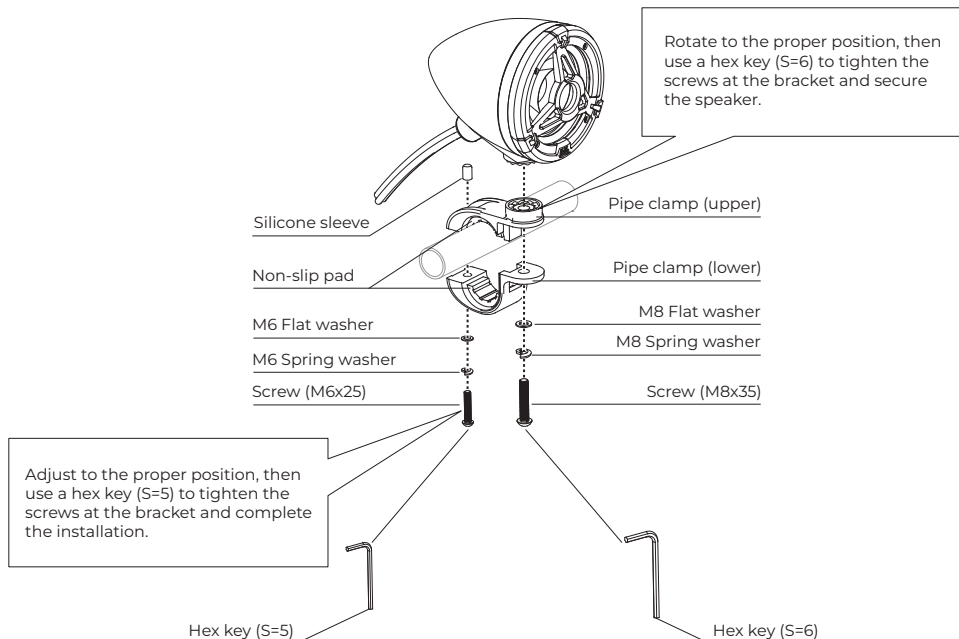


STEP 3

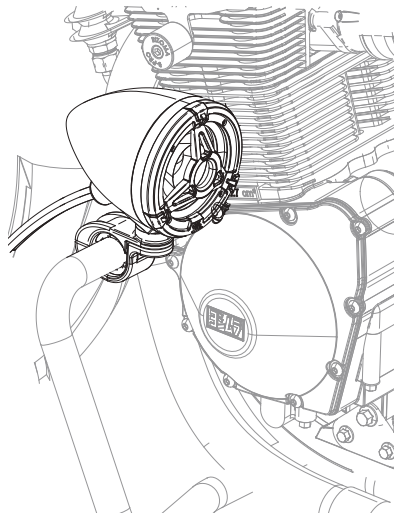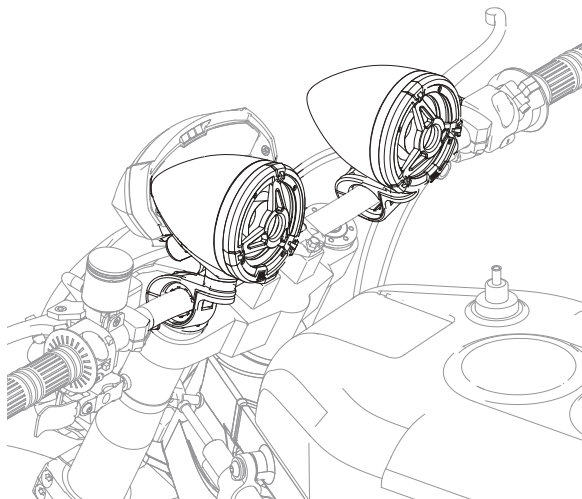

Post-installation diagram

PRODUCT OVERVIEW

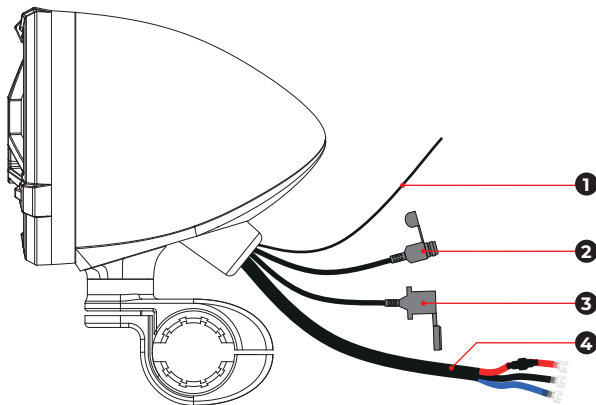

1 FM antenna

Receive FM radio signals.

2 Auxiliary input port

Connect to a external audio device through a 3.5mm audio cable(not supplied).

3 USB port

Accept USB Thumb and decode the music stored, as well it provide DC5V charging power for phone, maximumly 2A@5V.

4 Power cord

Connect to vehicle battery.

SPECIFICATIONS

PARAMETER NAME	PARAMETER
Transducers	2*3" Full Range Speakers(4Ω/25W)
Output Power	50W RMS;100W PEAK;200W MAX
THD at Rated RMS Power	<1%
Quiescent Current Draw	< 0.2A
Maximum Current Draw	5A
Frequency response	100Hz-18KHz
Signal-to-noise Ratio	>80dB
Cable type	20AWG
Cable length	3.94Feet(1.2m)
Bluetooth Version	V5.4
Bluetooth Profile	A2DP V1.3.2; AVRCP V1.6.2
Bluetooth Transmitter Frequency Range	2402MHz-2480MHz
Bluetooth Transmitter Power	≤11dBm (EIRP)
Aux-in	0.5V(0.3mV-1V) (3.5mm connector)

PARAMETER NAME	PARAMETER
USB Drive File System	FAT16, FAT32, exFAT
USB Drive Maximum	64GB
USB Supported Audio Formats	MP3/WMA/WAV/FLAC/AAC/APE
Packaging Dimensions	L383*W171*H143
Gross Weight	1.30Kg
Operation Temperature	-20°C~60°C

REMOTE CONTROL

- 1) RF controller range: Up to 33ft (LoS)
- 2) Do not obstruct the RF remote with metal
- 3) Do not store in direct sunlight



Replacement Battery - CR2025 or CR2032



Speaker power ON/OFF



Disconnect



Play/pause



Sound effect selection key



Previous sound track



Next sound track



LED light power On/OFF



LED light mode select



Broadcast pairing /exit



Sound sources select



Volume up




Volume down



Remote pairing mode

WIRING AND POWER ON

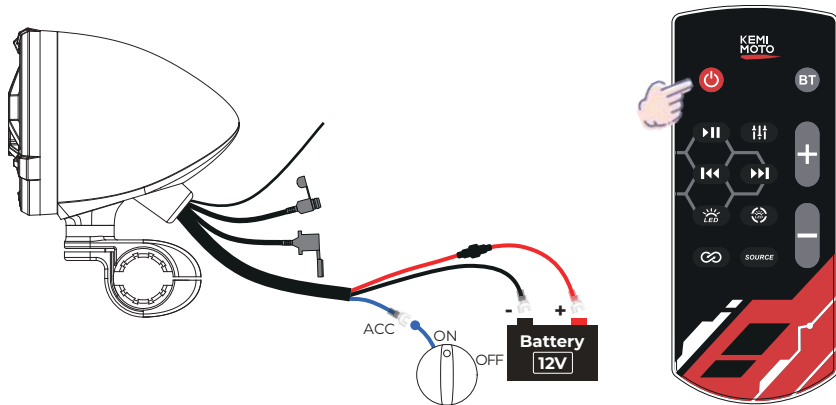

Wiring


Connect the speaker power cord correctly to the vehicle battery.
and connect the ACC control line to the vehicle's ACC port.

Press Power button

Press the power button on the remote control.
The RGB light of the speaker will light up, and you will hear the voice prompt "Hello kimimoto", which shows that the speaker is on operation mode.

BLUETOOTH MUSIC



STEP 1: Press the **SOURCE** to cycles in Bluetooth/AUX/FM/USB mode on the remote control. When hear the voice prompt "Bluetooth mode", and the blue light stays on for 5 seconds, it means speaker is in Bluetooth mode and waiting for connection.



"Bluetooth Mode"



STEP 2: Scan for the devices named "KMP3" in your smart phone Bluetooth list, click it to wait for connection.

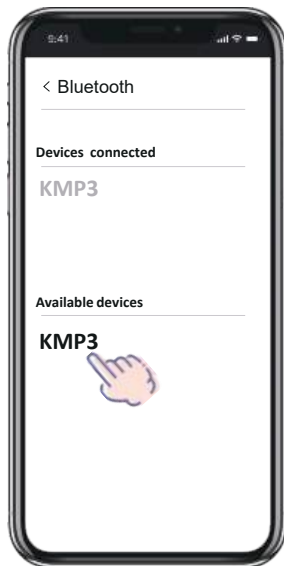


"Connected"



USB MUSIC

Insert the USB thumb, with MP3/WMA/WAV/FLAC/AAC/APE format music stored, into the USB acceptance at back of connecting panel, The mode will automatically turn to USB mode, and start playing USB music after voice prompt "USB player mode", and the red light stays on for 5 seconds.

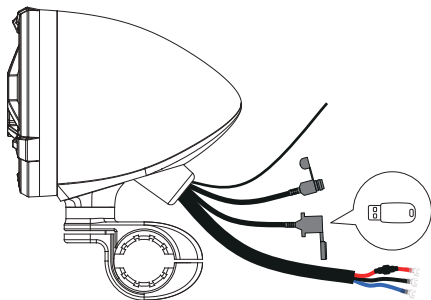


NOTE:

1. The system support hot swap of USB thumb, you are allowed to plug out/in the USB during the working status.
2. Make sure there (is) are at least one piece of music file stored in the USB thumb, or the decode might not recognize the USB.
3. The system will kick into USB mode directly once the USB thumb is inserted and successfully recognized.
4. The USB port can provide 5V power to mobile phone or other appliance charging, with maximum 2A output current.

AUX INPUT

STEP 1: If you want the soundbar speaker work with your existing vehicle radio or Mp3 player that have got no Bluetooth audio function, you may use the auxiliary input function.

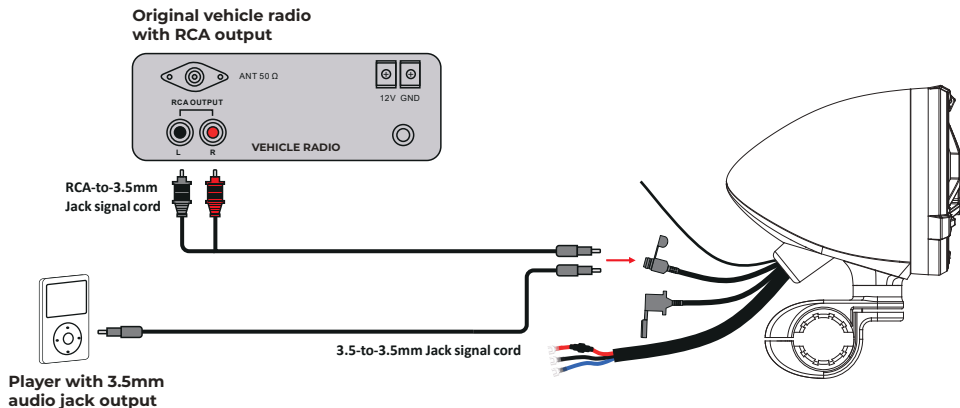


STEP 2: Press the **source** button on speaker panel cycle select the speaker mode until you hear the voice prompt "Auxiliary Input Mode", and the green light stays on for 5 seconds, that means the system is under Aux-in mode.



FM RADIO

If you want to receive local weather or news information, you can use the FM radio mode.

STEP 1:  Press the button on the remote control to cycle select the speaker mode until you hear the voice prompt "FM Radio Mode", and the purple light stays on for 5 seconds.

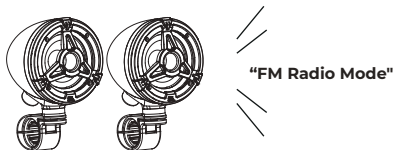

STEP 3:  Press the Next button to switch to the next saved radio station. button to select the next saved radio station.



STEP 2:   Long press previous or next button to auto searching station, after the search is complete, play the first radio station.



STEP 4:  Press the Previous button to switch to the previous saved radio station. button to select the previous saved radio station.




BROADCAST MODE

Broadcast pairing

STEP 1: Prepare 2 or more speakers, turn on the A(master) speaker, make sure it's under bluetooth mode, and connected it by smartphone, the blue light is always on, stays on for 5 seconds. Then we press the  button, the voice prompt "Broadcast on", means the A(master) speaker in Broadcast mode.


STEP 2: Then we turn on the B/C/D(slave) speaker, make sure it's under bluetooth mode, and not occupied by smartphone, the blue light will be in flashing mode.

STEP 3: We press the  button on the B/C/D(slave) speaker, and voice prompt "Broadcast on". just wait for seconds, the Broadcast pairing process will be done, the yellow light of B/C/D(slave) stays on for 5 seconds.

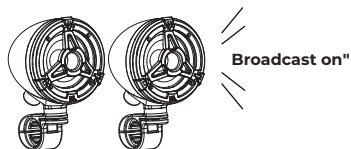


Exit Broadcast mode:

Which speaker wants to exit the Broadcast mode, short press the  button to exit. and voice prompt "Broadcast off".



A (master)



Slave B



Slave C



Slave D




}

About 100th unit (slave)

APP


* The way to obtain the APP: Use your mobile phone to scan the QR code on the manual to download and install it, or search for "KEMIMOTO" in the app store to download it

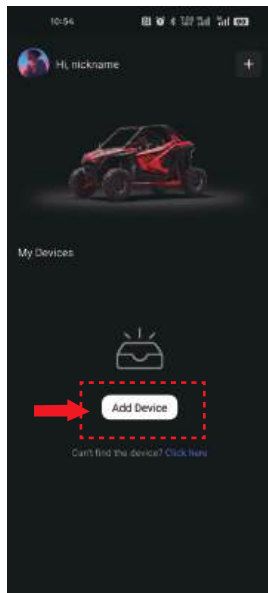

1. Add Device




2. Connect Device

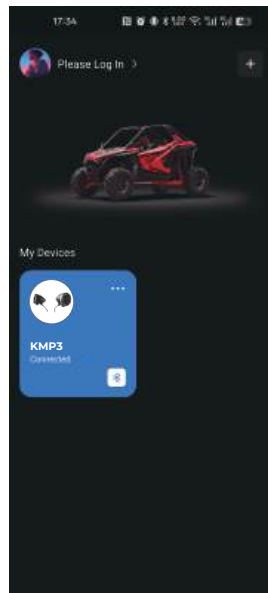

3. Connection Successful


After connection, the device name will be displayed. Click on the device to enter the control page

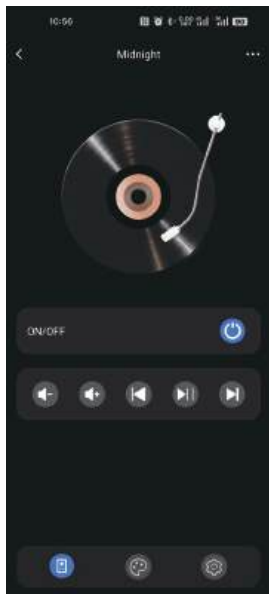

4. Music Control



5. Light Control Page

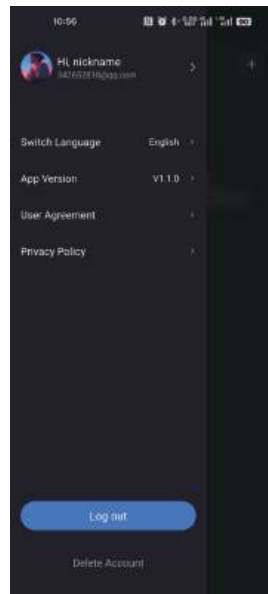

6. Language Options

FCC STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/TV technician for help.

FCC and ISED Radiation Exposure Statement

This equipment complies with FCC and ISED radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body. Cet équipement est conforme aux limites d'exposition au rayonnement FCC et ISED établies pour un environnement non contrôlé, cet équipement devrait être installé et exploité avec une distance minimale de 20cm entre le radiateur et Votre corps.

- English: "

This device complies with Innovation, Science and Economic Development Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

(1) this device may not cause interference, and

(2) this device must accept any interference, including interference that may cause undesired operation of the device."

- French:"

Cet appareil est conforme aux normes RSS exemptées de licence d'innovation, sciences et développement économique Canada. Le fonctionnement est soumis aux deux conditions suivantes:

(1) l'appareil nedit pas produire de brouillage, et

(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement."

CUSTOMER SUPPORT



Contact us by email: support@kemimoto.com

Help center:



⚠ WARNING

- **INGESTION HAZARD:** This product contains a button cell or coin battery.
- **DEATH** or serious injury can occur if ingested.
- A swallowed button cell or coin battery can cause **Internal Chemical Burns** in as little as **2 hours**.
- **KEEP** new and used batteries **OUT OF REACH of CHILDREN**.
- **Seek immediate medical attention** if a battery is suspected to be swallowed or inserted inside any part of the body.



- a) Remove and immediately recycle or dispose of used batteries according to local regulations and keep away from children. Do NOT dispose of batteries in household trash or incinerate.
- b) Even used batteries may cause severe injury or death.
- c) Call a local poison control center for treatment information.
- d) The compatible battery model for the product is CR2025.
- e) The operating battery voltage for the product is 3V.
- f) Non-rechargeable batteries are not to be recharged.
- g) Do not force discharge, recharge, disassemble, heat above (manufacturer's specified temperature rating) or incinerate. Doing so may result in injury due to venting, leakage or explosion resulting in chemical burns.
- h) Ensure the batteries are installed correctly according to polarity (+ and -).
- i) Do not mix old and new batteries, different brands or types of batteries, such as alkaline, carbon-zinc, or rechargeable batteries.
- J) Remove and immediately recycle or dispose of batteries from equipment not used for an extended period of time according to local regulations.
- K) Always completely secure the battery compartment. If the battery compartment does not close securely, stop using the product, remove the batteries, and keep them away from children.



FCC ID: 2BGR4-KMP3

IC: 33652-KMP3

Designed and engineered by Kemimoto in
California,U.S.A , assembled in China

A decorative horizontal band consisting of a series of parallel red diagonal stripes.

Complete journey of dreams