iFLYTEK

Make Your Voice Visible

iFLYTEK AI Recorder P1
Product Manual

1 English
7 日本語
13 한국어
19 Español
25 繁體中文

Product Overview

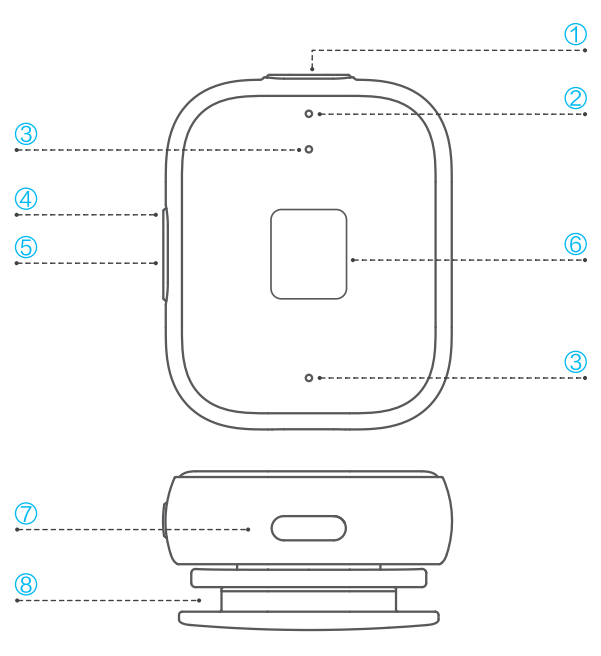

① Record button
② Recording indicator light
③ Microphone
④ Power indicator light
⑤ Power button
⑥ Display
⑦ Type-C
⑧ Magnetic mount

* Pressing the button starts recording in omnidirectional mode by default.

Activation Guide

Power On

Press and hold the Power button for 2 seconds until the "iFLYTEK" logo appears.

Download the App

1. Download the app in the mobile app store.
2. The app supports Bluetooth connection with the recorder. Features include account binding, real-time or offline transcription/translation, storage, viewing, and file management.

Web Platform

1. Access via PC at cloud.iflytekrecord.com
2. Supports cloud storage, file viewing, editing, sharing, and management. Provides extended AI features.

User Guide

Power On/Off

1. Power On

Press and hold the Power button for 2 seconds until the "iFLYTEK" logo appears.

2. Power Off

Press and hold the Power button for 2 seconds until the shutdown screen appears and the display turns off.

Bluetooth Connection with App

1. When powered on, the recorder automatically enters Bluetooth pairing mode. The multifunction indicator will flash blue;
2. Open the app, tap "Add Device" on the homepage, and select your recorder model;
3. Once the recorder is detected, tap Connect in the app to complete pairing;
4. After successful connection, the recorder will be bound to your account.

Start/Save Recording

1. Start Recording

Method 1: When powered on, press the top Record button once. (Default: Omnidirectional)

Method 2: Start recording from the app.

Method 3: From standby or off, press the Record button once to power on and begin recording. (Default: Omnidirectional)

During recording, the indicator light stays solid white. You can change this setting in the app.

2. Pause Recording

Method 1: Press the Record button once.

Method 2: Pause via app.

When recording is paused, the indicator light flashes white slowly.

3. End Recording

Method 1: Double-press the Record button.

Method 2: Stop via app.

When recording ends, the indicator light flashes white quickly three times, then turns off.

* The maximum recording duration per file is 4 hours 55 minutes. If exceeded, the recorder will automatically save in segments.

4. Recording Modes

Directional Mode: Top directional microphone faces the speaker, emphasizing the primary voice. Ideal for collar-mounted use.



Omnidirectional Mode: 360° pickup, ideal for group discussions and small to medium meetings.



* Recording mode can be switched during recording via app.

Export Files

1. To Computer

Connect the recorder to your PC with a USB cable. Copy files from the [RECORD] folder;

Once connected, the recorder mounts as a USB drive;

If "USB Transfer Protection" is enabled in the app, keep Bluetooth connected and confirm the transfer in app before proceeding.

2. To Mobile

Keep recorder and app connected via Bluetooth;

Open the app and use Bluetooth or Wi-Fi transfer to send audio files from your phone to the recorder.

System Update

Ensure the recorder is connected to the app via Bluetooth and has at least two battery bars;

In the App, go to Settings → Firmware Update;

During the upgrade, the recorder's multifunction indicator remains solid blue;

Do not operate the recorder or exit the app until the update completes;

The recorder will reboot automatically once the update finishes.

Factory Reset

* All files and account information on the recorder will be deleted after a factory reset;

After connecting to the app, go to device page → Settings → Factory Reset. The device will restart and return to factory settings.

Battery Indicators

Charging: Red light flashes slowly.

Fully Charged: Green light stays solid.

Low Battery (<20%): Quick flash 3 times every 15 minutes.

App Features

Keep the recorder connected to the app via Bluetooth to access more features;

The app provides real-time and offline transcription, simultaneous translation, file management, and screen display management.

外観

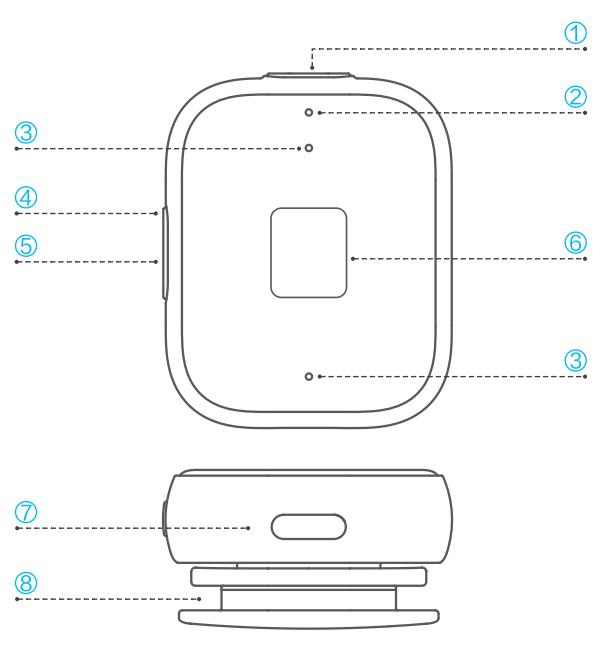

① 録音ボタン
② 録音インジケーターランプ
③ マイク
④ 電源インジケーターランプ
⑤ 電源ボタン
⑥ ディスプレイ
⑦ 充電ポート
⑧ 磁気吸着バッククリップ

*ボタン操作で録音します。デフォルトモードは全方向です。

アクティベーションガイド

起動

電源ボタンを2秒間長押しすると、画面に「iFLYTEK」のアイコンが点灯し、デバイスの電源がオンになります。

Appのダウンロード

1. スマホアプリストアでAppをダウンロードしてインストールします。
2. Appは、ICレコーダーとのBluetooth接続、アカウントのバインド、（非）リアルタイムでの文字起こし（翻訳）、ファイルの保存、表示、編集管理に対応しています。

インテリジェントICレコーダーWeb版

1. パソコンでiFLYTEK ICレコーダーWeb版にログインします。：cloud.iflytekrecord.com
2. Web版はクラウド上でのファイルの保存、表示、編集、共有、管理に対応し、より多様なインテリジェント機能に対応しています。

ご使用方法

電源オン/オフ切り替え方法

1. 起動

電源ボタンを2秒間長押しすると、画面に「iFLYTEK」のアイコンが点灯し、電源がオンになります。

2. 停止

電源ボタンを2秒間長押しすると、シャットダウン画面が点灯してから消え、電源がオフになります。

AppにBluetooth接続する方法

1、ICレコーダーをオンにすると、デフォルトでBluetoothペアリングモードになり、マルチファンクションインジケーターが青く点滅します。

2、Appを開き、「トップページ」の「デバイスの追加」ボタンをクリックし、対応するICレコーダーモデルを選択して、検索プロセスを実行します。

3. ICレコーダーの検索に成功したら、接続ボタンをクリックして、ICレコーダーとAppの接続を完了します。

4. 接続に成功すると、ICレコーダーとアカウントが正常にバインドされます。

録音を開始/保存する方法

1. 録音の開始

方法1：デバイスがオンの状態で、上部の録音ボタンをクリックすると、デフォルトで全指向性録音がオンになります。

方法2：Appに接続し、App経由で録音をオンにすることができます。

方法3：デバイスがスタンバイ/オフの状態で録音ボタンをクリックすると、デフォルトで全指向性録音がオンになります。

録音中、録音インジケーターの白ランプが点灯し続けますが、Appで設定を変更できます。

2. 録音の一時停止

方法1：録音ボタンをクリックし、録音を一時停止します。

方法2：Appに接続し、Appからの操作で録音を一時停止します。

録音が一時停止されると、録音インジケーターの白ランプがゆっくりと点滅し続けます。

3. 録音の終了

方法1：録音ボタンをダブルクリックし、録音を終了します。

方法2：Appに接続し、Appからの操作で録音を終了します。

録音が終了すると、録音インジケーターの白ランプが3回素早く点滅してから消えます。

* ICレコーダーの最大録音時間は4時間55分で、最大録音時間を超えると、自動的に分割保存されます。

4. 録音モードの切り替え

指向性モード：上部の指向性マイクが発言者に向けられ、メインの発言者の声を強調します。襟元に装着して収音するシーンに最適です。



全指向性モード：360度全方位から収音します。グループディスカッション、中小規模の討論会などのシーンに最適です。



*録音中にAppでモードを切り替えます。

ファイルのエクスポート方法

1. 録音ファイルのパソコンへのエクスポート

USBケーブルでICレコーダーをパソコンに接続し、【RECORD】フォルダの必要なファイルをパソコンにコピーします。

ICレコーダーをパソコンに接続し、USBメモリの読み込みが完了したら、パソコン上にUSBメモリがポップアップ表示されます。

Appで「USB転送セキュリティ保護」モードをオンにしている場合は、データ転送前にAppとのBluetooth接続を維持し、Appで確認をクリックする必要があります。

2. 録音ファイルのスマホへのエクスポート

ICレコーダーがAppにBluetooth接続されていることを確認してください。

Appを開き、App上でBluetoothまたはWi-Fiを選択して使用し、スマホからICレコーダーに録音ファイルを転送します。

システムバージョンの更新方法

ICレコーダーがAppにBluetooth接続されていることを確認し、ICレコーダーのバッテリー残量が2目盛り以上充電されていることを確認します。

Appの設定でファームウェアのアップグレードをクリックします。

アップグレード中、ICレコーダーのマルチファンクションインジケーターは青ランプが常に点灯している状態になります。

アップグレード中は、ICレコーダーを操作したり、Appを終了したりしないでください。

アップグレードに成功すると、ICレコーダーは自動的に再起動します。

工場出荷時の設定にリセットする方法

*工場出荷時の設定にリセットすると、ICレコーダー内のすべてのファイルとアカウント情報が削除されます。

Appと接続した後、デバイスページで設定-工場出荷時の設定にリセットをクリックすると、デバイスが再起動し、工場出荷時の設定にリセットされます。

充電について

充電中：充電インジケーターの赤ランプがゆっくり点滅します。

フル充電：充電インジケーターの緑色ランプが常に点灯している状態になります。

バッテリー残量20%以下：15分ごとに3回のフラッシュ警告を行います。

App機能管理

App上でさらに多くの機能を体験するには、ICレコーダーをAppにBluetooth接続したままにします。

App上で（非）リアルタイムの文字起こし、同時翻訳機能を体験でき、またICレコーダーファイルや画面表示を管理することができます。

외관 소개

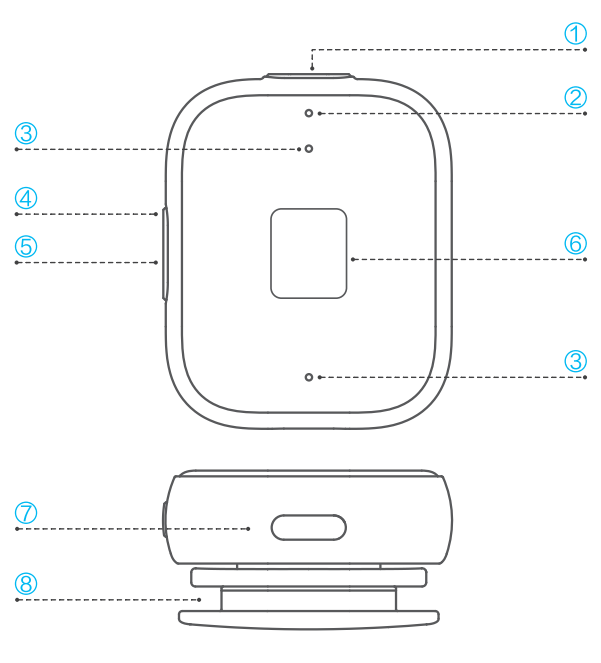

① 녹음 버튼
② 녹음 표시등
③ 마이크
④ 전원 표시등
⑤ 전원 버튼
⑥ 디스플레이 화면
⑦ 충전 포트
⑧ 마그네틱 백클립

*녹음 버튼 기본값: 전방향 모드

활성화 가이드

전원 켜기

전원 버튼을 2초간 길게 누르면 화면에 [iFLYTEK] 로고가 뜨며 전원이 켜집니다.

App 다운로드

1. 모바일 앱 마켓에서 App을 다운로드 받으세요.
2. 블루투스로 App과 기기를 연결하고 계정을 연동하면. 실시간(및 비실시간) 텍스트 변환(및 번역)과 파일 저장, 확인, 편집 및 관리를 할 수 있습니다.

AI 녹음펜 웹페이지

1. PC에서 iFLYTEK 녹음펜 웹페이지에 로그인: cloud.iflytekrecord.com
2. 웹페이지에서는 파일을 클라우드에 저장하거나 확인, 편집, 공유 및 관리할 수 있으며 다양한 AI 기능을 지원합니다.

사용 가이드

전원 켜기/끄기는 어떻게 하나요?

1. 전원 켜기

전원 버튼을 2초간 길게 누르면 화면에 [iFLYTEK] 로고가 뜨며 전원이 켜집니다.

2. 전원 끄기

전원 버튼을 2초간 길게 누르면 끄기 화면이 켜진 후 화면이 꺼지면서 기기가 꺼집니다.

블루투스로 App에 어떻게 연결하나요?

1. 기기를 켜면 기본적으로 블루투스 페어링 모드로 이동하면서 멀티 표시등에 파란불이 깜빡입니다.
2. App을 실행하고 [홈]의 [기기 추가] 버튼을 누릅니다. 해당 녹음펜 모델을 선택하면 검색을 시작합니다.
3. 기기가 검색된 뒤 연결 버튼을 누르면 기기와 App이 연결됩니다.
4. 연결 성공 후 기기와 계정이 바로 연동됩니다.

녹음 시작/저장은 어떻게 하나요?

1. 녹음 시작

방법1: 전원이 켜진 상태에서 상단의 녹음 버튼을 한 번 누르면 기본값인 전방향 녹음이 시작됩니다.

방법2: App과 연결하면 App에서 녹음을 시작할 수 있습니다.

방법3: 대기 모드/전원이 꺼진 상태에서 녹음 버튼을 한 번 누르면 전원이 켜지며 기본값인 전방향 녹음이 시작됩니다.

녹음 중에는 녹음 표시등에 흰색불이 켜집니다. App에서 설정을 바꿀 수 있습니다.

2. 녹음 일시 중지

방법1: 녹음 버튼을 한 번 눌러 일시 중지합니다.

방법2: App과 연결하면 App에서 일시 중지할 수 있습니다.

녹음을 일시 정지하면 녹음 표시등에 흰색불이 느리게 깜박입니다.

3. 녹음 종료

방법1: 녹음 버튼을 두 번 눌러 종료합니다.

방법2: App과 연결하면 App에서 종료할 수 있습니다.

녹음을 종료하면 녹음 표시등에 흰색불이 빠르게 세 번 깜박이다 꺼집니다.

* 기기의 최대 녹음 시간은 4시간 55분입니다. 최대 녹음 시간이 넘으면 자동으로 분할 저장됩니다.

4. 녹음 모드 전환

단일 지향 모드: 상단 마이크를 발화자를 향하게 하면 주 발화자의 목소리를 중점적으로 강조합니다. 옷깃에 장착하여 소리를 모으는 데 적합합니다.



전방향 모드: 360도 모든 방향에서 소리를 받아들입니다. 그룹 토론이나 중소형 그룹의 토론형 회의 등 상황에 적합합니다.

* 녹음 중간에 App에서 모드를 전환합니다.

파일 내보내기는 어떻게 하나요?

1. 녹음 파일을 PC로 내보내기

USB 데이터 케이블로 기기를 PC에 연결하고 [RECORD] 폴더에서 필요한 파일을 PC에 복사합니다.

기기를 PC에 연결하고 USB 드라이브 로딩이 끝나면 PC에서 USB 드라이브 창이 뜹니다.

App에서 [USB 전송 보호] 모드를 실행하면 데이터를 전송하기 전에 App과 블루투스 연결을 유지해야 하며 App에서 확인 버튼을 눌러야 합니다.

2. 녹음 파일을 휴대전화로 내보내기

기기와 App의 블루투스 연결을 유지합니다.

App을 실행하고 App에서 블루투스 또는 Wi-Fi 전송을 선택한 다음 녹음 파일을 휴대전화에서 기기로 전송합니다.

시스템은 어떻게 업데이트하나요?

블루투스로 기기와 App을 연결합니다. 기기의 배터리는 최소 두 칸을 유지해야 합니다.

App 설정에서 펌웨어 업그레이드를 누릅니다.

업그레이드 중 기기의 멀티 표시등에 파란불이 켜집니다.

업그레이드 중에 기기를 조작하거나 App 화면을 종료하지 마세요.

업그레이드가 끝나면 기기가 자동으로 다시 시작합니다.

공장초기화는 어떻게 하나요?

*공장초기화 후 기기 내 파일과 계정 정보는 모두 삭제됩니다.

App과 연결한 뒤 기기 화면에서 설정-공장초기화를 누르면 기기가 다시 시작되며 공장초기화가 완료됩니다.

배터리양 안내

충전 중: 충전 표시등에 빨간불이 느리게 깜박입니다.

충전 완료: 충전 표시등에 녹색불이 켜집니다.

배터리 잔량 20% 미만: 매 15분, 빠르게 3번 깜박임 알림

App 기능 관리

기기와 App의 블루투스 연결을 유지하면 App에서 다양한 기능을 경험할 수 있습니다.

App에서 실시간(및 비실시간) 음성 텍스트 변환, 동시통역 기능을 이용할 수 있으며 기기 파일이나 화면 표시를 관리할 수 있습니다.

Conociendo el dispositivo

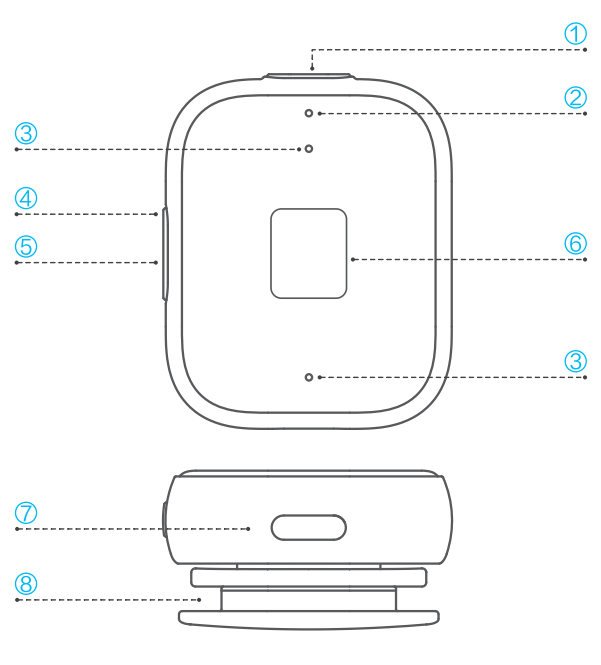

① Botón de grabación
② Indicador luminoso de grabación
③ Micrófono omnidireccional
④ Indicador luminoso de alimentación
⑤ Botón de encendido/apagado
⑥ Pantalla
⑦ Puerto de carga
⑧ Soporte trasero magnético

*Grabación mediante botón. El modo predeterminado es omnidireccional.

Guía de activación

Encendido

Mantén presionado el botón de encendido por 2 segundos hasta que aparezca el logotipo de "iFLYTEK" en pantalla: el dispositivo se encenderá correctamente.

Descargar la app

1. Ve a la tienda de aplicaciones de tu teléfono y descarga la app oficial.
2. La app permite conectar la grabadora vía Bluetooth, vincular tu cuenta y usar funciones como transcripción (y traducción) en tiempo real (o posterior), almacenamiento, gestión, edición y consulta de archivos.

Versión web de la grabadora inteligente

1. Ingresa desde tu computadora al portal web: cloud.iflytekrecord.com
2. En la versión web podrás almacenar en la nube, consultar, editar, compartir y gestionar archivos, además de acceder a más funciones inteligentes.

Guía de uso

Cómo encender/apagar

1. Encender

Mantén presionado el botón de encendido por 2 segundos hasta que aparezca el logotipo de "iFLYTEK".

2. Apagar

Mantén presionado el mismo botón por 2 segundos, aparecerá la pantalla de apagado y luego la pantalla se apagará por completo.

Cómo conectar la app vía Bluetooth

1、Al encenderse, la grabadora entra en modo de emparejamiento por defecto; el indicador multifunción parpadeará en azul.

2、Abre la app, toca en "Inicio" y selecciona "Agregar dispositivo", luego elige el modelo correspondiente.

3. Una vez detectado, toca "Conectar" para vincular la grabadora con la app.

4. Al completarse, la grabadora quedará vinculada a tu cuenta.

Cómo iniciar y guardar grabaciones

1. Iniciar grabación

Método 1: Con el dispositivo encendido, presiona el botón superior de grabación. Por defecto se activa en modo omnidireccional.

Método 2: Desde la app, inicia la grabación directamente.

Método 3: Con el dispositivo apagado o en espera, presiona el botón de grabación para encenderlo y comenzar a grabar automáticamente (modo omnidireccional). Durante la grabación, el indicador se mantiene encendido en blanco. Puedes cambiar configuraciones desde la app.

2. Pausar grabación

Método 1: Presiona una vez el botón de grabación para pausar la grabación.

Método 2: Pausa desde la app.

Mientras está en pausa, el indicador parpadeará en blanco lentamente.

3. Finalizar grabación

Método 1: Presiona dos veces el botón de grabación para finalizar la grabación.

Método 2: Finaliza desde la app.

Una vez terminada, el indicador parpadeará en blanco rápidamente 3 veces antes de apagarse.

* La grabadora soporta un máximo de 4 horas y 55 minutos por archivo. Al superar ese límite, se guardará en segmentos automáticos.

4. Cambiar de modo de grabación

Modo direccional: El micrófono superior se enfoca en el hablante principal. Ideal para sujetar en la solapa de la ropa.



Modo omnidireccional: Captura sonido en 360°. Recomendado para discusiones grupales o reuniones pequeñas/medianas.



* Puedes alternar entre modos desde la app incluso mientras grabas.

Cómo exportar archivos

1. Exportar grabaciones a la computadora

Conecta la grabadora a tu PC con un cable USB. Busca la carpeta [RECORD] y copia los archivos deseados.

Cuando la grabadora se conecta correctamente, el sistema la reconocerá como una memoria USB.

Si activaste la opción "Protección de transferencia por USB" en la app, primero deberás mantener la conexión Bluetooth con la grabadora y confirmar en la app antes de transferir datos.

2. Exportar grabaciones al teléfono

Asegúrate de que la grabadora esté conectada vía Bluetooth a la app.

Desde la app, selecciona la opción para transferir archivos por Bluetooth o Wi-Fi y envíalos directamente a tu dispositivo móvil.

Cómo actualizar el sistema

Verifica que la grabadora tenga al menos 2 barras de batería y esté vinculada a la app vía Bluetooth.

Entra a Ajustes > Actualización de firmware en la app.

Durante la actualización, el indicador luminoso permanecerá en azul fijo.

No manipules la grabadora ni cierres la app mientras dure el proceso.

Al finalizar, la grabadora se reiniciará automáticamente.

Cómo restablecer valores de fábrica

* Este proceso borra todos los archivos y la información de cuenta en la grabadora.

Conecta la grabadora a la app. Ve a la página del dispositivo > Ajustes > Restablecer de fábrica. El dispositivo se reiniciará y quedará restaurado a sus valores originales.

Indicadores de batería

Cargando: La luz roja parpadea lentamente.

Carga completa: La luz verde permanece fija.

Batería baja (<20%): La luz parpadea rápidamente 3 veces cada 15 minutos.

Funciones desde la app

Al mantener la grabadora vinculada por Bluetooth puedes:

Usar la transcripción en tiempo real o posterior, acceder a la traducción simultánea, gestionar grabaciones y pantalla de la grabadora, etc.

外觀介紹

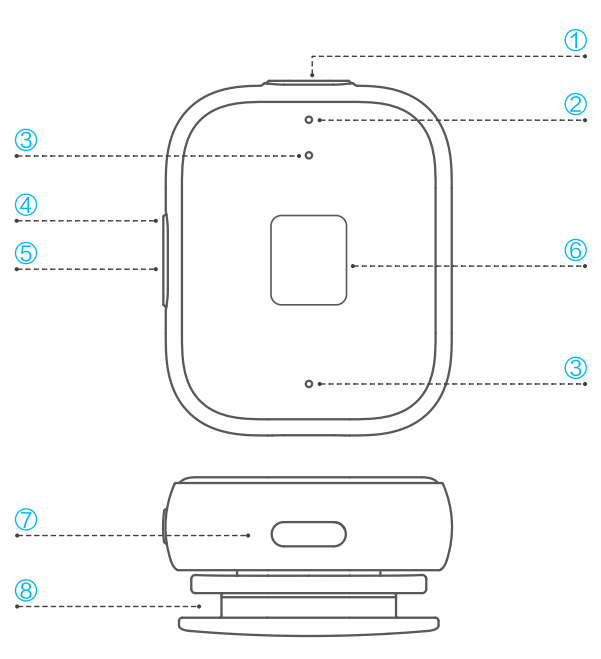

① 錄音鍵
② 錄音指示燈
③ 麥克風
④ 電源指示燈
⑤ 電源鍵
⑥ 顯示螢幕
⑦ 充電口
⑧ 磁吸背夾

*按鍵錄音，預設為全向模式

啟用指南

開機

長按電源鍵2秒，螢幕亮起”iFLYTEK“圖示，開機成功

下載App

1. 前往手機應用商店下載安裝App
2. App支援與錄音筆藍牙連接，綁定帳號，（非）即時轉寫（轉譯）、儲存、查看、編輯管理文件

智慧錄音筆網頁版

1. 電腦登入訊飛錄音筆網頁版：cloud.iflytekrecord.com
2. 網頁端支援雲端儲存、查看、編輯、分享、管理檔，支援更多智慧功能

使用指南

如何開/關機

1. 開機

長按電源鍵約 2 秒，螢幕顯示 "iFLYTEK" 圖示，即完成開機

2. 關機

長按電源鍵約 2 秒，螢幕顯示關機畫面後熄滅，即完成關機

如何藍牙連接App

1. 錄音筆開機預設進入藍牙配對模式，多功能指示燈藍燈閃爍；
2. 開啟 App，點選「首頁」的「新增裝置」按鈕，選擇對應的錄音筆型號後，即進入搜尋流程；
3. 成功搜索到錄音筆後，點選連接按鈕即可完成錄音筆與App的連接；
4. 連接成功後，錄音筆和帳號即綁定成功。

如何開啟/保存錄音

1. 開啟錄音

方法一：在開機狀態下，按一下頂部錄音鍵，將依預設開啟全向錄音

方法二：連接App，可透過App開啟錄音

方法三：關機/待機狀態下，按一下錄音鍵進行開機並錄音，預設開啟全向錄音

錄音中，錄音指示燈保持白燈常亮，可透過App進行設定更改

2. 錄音暫停

方法一：按一下錄音鍵，錄音暫停

方法二：連線至 App，透過App控制並暫停錄音

錄音暫停時，錄音指示燈保持白燈慢閃

3. 錄音結束

方法一：按兩下錄音鍵，錄音結束

方法二：連線至 App，透過 App 控制並結束錄音

錄音結束後，錄音指示燈白燈快閃3次後熄滅

*錄音筆最大錄音時長為4小時55分鐘，超過最大時長限制後，自動分段保存

4. 錄音模式切換

定向模式：將頂部的定向麥克風對準說話者，可加強主要說話者的聲音，適合夾在衣領處進行收音



全向模式：360度全方位收音，適用於小組討論、中小型討論型會議等場景



*透過App在錄音過程中切換模式

如何將文件匯出

1. 將錄音檔匯出到電腦

使用USB傳輸線將錄音筆連接至電腦，在【RECORD】資料夾中將所需檔拷貝到電腦；

將錄音筆連接至電腦後，待完成隨身碟載入，電腦上會顯示隨身碟。

若在 App 中開啟「USB 傳輸安全保護」模式，資料傳輸前需維持與 App 的藍牙連線，並在 App 中點選確認

2. 將錄音檔匯出到手機

請確保錄音筆與 App 維持藍牙連線；

開啟 App，並選擇透過藍牙或 Wi-Fi 將錄音檔從錄音筆傳輸到手機。

如何更新系統版本

請維持錄音筆與 App 的藍牙連線，並確認錄音筆電量至少有兩格

在 App 的「設定」中點選「韌體更新」。

更新過程中，錄音筆的多功能指示燈會維持藍燈常亮。

請勿在更新過程中操作錄音筆，或離開 App 畫面。

更新完成後，錄音筆將自動重新啟動。

何恢復出廠設定

*恢復出廠設定後，錄音筆內檔和帳號資訊將全部刪除；

連線至 App 後，於「裝置」頁面中點選「設定」→「恢復出廠設定」，裝置會重新啟動並完成出廠設定還原

電量指引

充電中：充電指示燈呈紅燈慢閃。

充滿電：充電指示燈維持綠燈常亮。

電量低於 20%：每 15 分鐘快閃 3 次提醒。

App功能管理

將錄音筆與 App 維持藍牙連線，即可透過 App 使用更多功能。

可在App上體驗（非）即時轉寫、同聲轉譯功能，管理錄音筆檔和管理螢幕顯示。

FAQ

This section provides answers to frequently asked questions to help resolve common issues during device use. If the problem persists and cannot be resolved, please contact customer support.

a) Device not responding

1. Battery may be depleted. Please recharge.
2. Try pressing and holding the Power button for 8 seconds to force restart.

b) Unable to record

1. Battery may be depleted. Please recharge.
2. Storage may be full. Connect to the app or PC to delete files (important files can be backed up to app or PC).

c) App cannot connect

1. Device may already be bound to another account. Please unbind in the previous app and reconnect.
2. Try pressing and holding the Power button for 8 seconds to force restart.

Specifications

Product Name: iFLYTEK AI Recorder P1
Model: AIR2511
Bluetooth: BLE5.3
Microphone Array: 2 Silicon Mics
Battery Capacity: 300mAh
Storage: 64GB
Input: 5VDC / 1A / 5W
Net Weight: 22g
Dimensions: 42.8 × 35 × 12.15 mm (without clip)
42.8 × 35 × 19.4 mm (with clip)
Accessories: Main unit (with clip)

2.4G WiFi: 2412-2462MHz;
5G WiFi: 5150-5250MHz,
5725-5850MHz.

Manufacturer Information

China

Manufacturer: Anhui Tingjian Technology Co., Ltd.
Address: Room 2001, Building 2, Area A, China (Hefei) National Intelligent Voice Innovation Center, No. 3333 Xiyou Road, Changning Community, Hefei National High-tech Industry Development Zone, Anhui, China

United States

Manufacturer: SYNLAN TECHNOLOGY PTE. LTD.
Address: 8 MARINA VIEW #42-092 ASIA SQUARE TOWER 1 SINGAPORE (018960)

Japan

Manufacturer: iFLYTEK JAPAN AI SOLUTIONS Co., Ltd.
Address: 東京都港区芝公園1丁目7番6号KDX浜松町プレイス7階

Korea

Manufacturer: iFLYTEK (Korea) LLC
Address: 서울특별시 금천구 가산디지털1로 225, 1315호(가산동)

Taiwan

進口商：快譯通股份有限公司
進口商地址：臺北市內湖區瑞光路316 巷3號1樓
Manufacturer: SYNLAN TECHNOLOGY PTE. LTD.
Address: 8 MARINA VIEW #42-092 ASIA SQUARE TOWER 1 SINGAPORE (018960)

Singapore:

Manufacturer: SYNLAN TECHNOLOGY PTE. LTD.
Address: 8 MARINA VIEW #42-092 ASIA SQUARE TOWER 1 SINGAPORE (018960)

User Agreement

If your usual residence is in Korea. The product manufacturers and the software operator of Smart Recorder is iFLYTEK (Korea) LLC.

If your usual residence is in Japan. The product manufacturers and the software operator of Smart Recorder is iFLYTEK JAPAN AI SOLUTIONS Co., Ltd.,

If your usual residence is in the United States, Canada, Singapore or Taiwan, China. The product manufacturers and the software operator of Smart Recorder is SYNLAN TECHNOLOGY PTE. LTD.,

Hereinafter collectively referred to as "we", "us" or "our".

1. The user understands and agrees that we shall not be responsible for any service interruption or developer losses caused by any of the following circumstances:

2. Upon occurrence of any force majeure event;

3. In the event of hacker attacks, computer virus invasions, or attacks;

4. If computer systems are damaged, paralyzed, or not functioning properly;

5. In the event of technical adjustment(s) by telecommunications provider(s);

6. In the event of a temporary shutdown due to governmental regulation(s) or interruption(s); and/or

7. Other malfunctions not caused by the fault of us.

8. The users and we shall be jointly responsible for software security and ensuring normal service.we will take reasonable and necessary technical measures, in line with industry standards, to safeguard users' terminal information and data. However, users acknowledge and agree that we cannot provide any guarantee for the foregoing matter.

9. We shall review the user's recording in accordance with the terms of this agreement ("Agreement"), other service agreements, or the software's prescribed standards. Such review shall not imply any guarantee regarding whether the recording itself or other content within it violates, or otherwise complies with, applicable laws and regulations or infringes upon the rights of third parties. If the user's recording or any content within it is found to be in violation of laws and regulations or infringes upon the rights of third parties, the user shall assume sole responsibility, including, but not limited to, attorney's fees, court fees, arbitration expenses, and public administrative fees. If we incurs any costs and losses as a result of such violation, the user shall promptly reimburse us for such costs and expenses in full.

10. This software may incorporate third-party software or technology, including open-source code and public domain code, which has been legally authorized for use. If this software includes third-party software or technology, we will provide the relevant agreements or other documents in accordance with applicable regulations or agreements. These documents may take the form of a 'Software Use License Agreement', 'Authorization Agreement', 'Open Source Code License' or other similar forms, which can be found as attachments to this Agreement or within specific folders of this software's installation package. The agreements and other documents referred to herein shall be deemed integral components of this Agreement and carry the same legal effects as this Agreement. Users shall comply with these requirements, as failure to do so may result in legal actions, fines, or other sanctions filed or imposed by third parties or governmental authorities. Users shall personally assume full legal responsibilities for failure to comply with such requirements.

12. Using the wrong type of battery for the product may pose an explosion risk. Users are fully responsible for associated risks and losses (such as explosion risk, etc.) arising from the use of the wrong type of battery.

13. Properly dispose of and recycle waste batteries in accordance with applicable laws and regulations.

Please scan the QR code below to read the complete User Agreement.

Safety Notes

1. The operating system supports only official upgrades. Installing unofficial systems is at the user's own risk, including possible security breaches (e.g., information leakage).
2. Using the wrong type of battery, or exposing the product to water or fire, may result in explosion risks. Users are solely responsible for risks and losses arising from improper usage (e.g., explosion risks).
3. Waste batteries must be properly disposed of and recycled in compliance with applicable laws and regulations.

Recycling Notice

To better protect our planet, when this product is no longer in use or has reached the end of its service life, please comply with local electronic waste recycling regulations. Dispose of the product through officially certified recycling facilities.

After-Sales Service

The warranty period is 12 months or another specified period as the Applicable consumer laws in the consumer's country of purchase require. Our warranty is in addition to rights provided by Applicable consumer laws.

Within 15 days after receipt, if non-human-caused performance issues occur, the product may be sent to the iFLYTEK After-Sales Service Center for inspection and repair.

Customers may apply for after-sales service by mailing the product to the designated repair center.

Please check more detail on the website: https://www.iflytek.com/en/support/warranty-policy.html

Warranty Coverage	Warranty Period
Recorder Main Unit	1 year
Strap/Lanyard	3 months

Please take attention that changes or modification not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and

(2) This device must accept any interference received, including interference that may cause undesired operation.

FCC ID: 2BHTA-AIR2511

disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion;

leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas; and

a battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.

RF Exposure Information

This device has been tested and meets applicable limits for Radio Frequency (RF) exposure.

Complies with
IMDA Standards
【DA109215】

본 제품의 전자파흡수율은 과학기술정보통신부의 전자파 인체보호기준을 만족합니다.

본 제품은 국립전파연구원의 전자파흡수율 측정기준에 따라 최대 출력 조건에서 머리에 근접하여 시험되었으며, 최대 전자파흡수율 측정값은 다음과 같습니다.

모델명	머리 전자파흡수율
AIR2511	0.427 [W/kg]

※ 전자파흡수율(SAR: Specific Absorption Rate)은 휴대전화를 사용할 때 인체에 흡수될 수있는 전자파의 양으로 우리나라는 국제권고기준인 2 W/kg 보다 엄격한 1.6 W/kg 기준을적용하고 있습니다.

테스트 과정에서 무선통신의 전송수준을 최고로 설정하고, SAR(전자파흡수율)은 해당하는 규정에서 지정된 시간 간격에 따라 실시간으로 평가됩니다. 본 제품은 얼굴 전면에서 사용하는 상황(10 mm 간격), 및 신체에 착용하거나 휴대하는 상황(0 mm 간격)을 시뮬레이션 할 수 있는위치에서 평가되었습니다.

그러나 일상생활에서는 최대출력보다 현저히 낮은 출력상태에서 통신이 이루어지므로

전자파흡수율은 위 시험 결과보다 매우 낮습니다.

전자파흡수율에 대한 자세한 정보는 국립전파연구원(www.rra.go.kr) 또는 제조사 홈페이지에서 확인할 수 있습니다.

전파법(제47조의2)에 따른 전자파 흡수율 등급

1등급

- 본 단말기의 전자파 인체 흡수율은 과학기술정보통신부 전자파 인체보호 기준에 적합합니다.
- SAR 수치 및 등급기준에 관한 상세한 정보는 www.rra.go.kr 또는 제조사 홈페이지에서 확인하실 수 있습니다.

根據 NCC LP0002低功率射頻器材技術規範_章節3.8.2:

取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。

前述合法通信，指依電信管理法規定作業之無線電通信。

低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

應避免影響附近雷達系統之操作。

當產品使用USB進行充電或使用外接電源供應器進行充電時，請確保電源規格符合CNS 15598-1標準中附錄Q（電力限制型電源）之要求。

Equipment name 設備名稱：智能錄音筆　Type designation (Type) 型號（型式）：AIR2511

單元Unit	限用物質及其化學符號 Restricted substances and its chemical symbols					
	鉛Lead (Pb)	汞Mercury (Hg)	鎘Cadmium (Cd)	六價鉻 Hexavalent chromium (Cr+6)	多溴聯苯 Polybrominated biphenyls (PBB)	多溴二苯醚 Polybrominated diphenyl ethers (PBDE)
外殼	○	○	○	○	○	○
螢幕	超出0.1 wt %	○	○	○	○	○
電路板組件	超出0.1 wt %	○	○	○	○	○
配件	超出0.1 wt %	○	○	○	○	○

備考1.“超出0.1 wt %”及“超出0.01 wt %”係指限用物質之百分比含量超出百分比含量基準值。
Note 1: "Exceeding 0.1 wt %" and "exceeding 0.01 wt %" indicate that the percentage content of the restricted substance exceeds the reference percentage value of presence condition.
備考2.“○”係指該項限用物質之百分比含量未超出百分比含量基準值。
Note 2: "○" indicates that the percentage content of the restricted substance does not exceed the percentage of reference value of presence.
備考3.“—”係指該項限用物質為排除項目。
Note 3: The "—" indicates that the restricted substance corresponds to the exemption.