



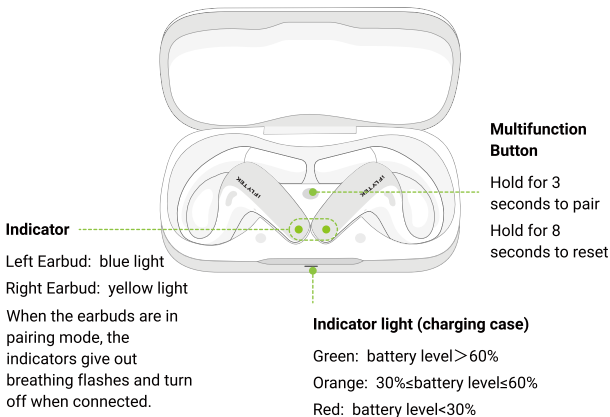


iFLYTEK AI Translation Earbuds

User Manual

Product Appearance

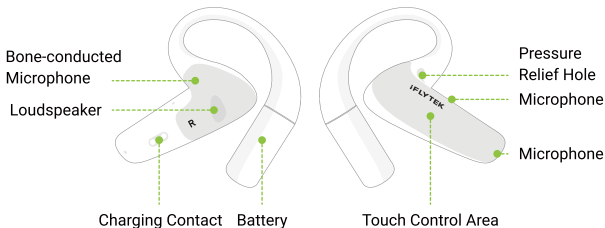

Touch Control Descriptions



Touch Control Area

Support gestures like double tap, triple tap, long press and swipe.

Use the translation function.

Wear either earbud Double tap: pause/resume (during translation)

Listening to music/making phone calls

	Left Earbud	Right Earbud
Music	Double tap: pause/resume	Double tap: pause/resume
	Triple tap: play the previous track	Triple tap: play the next track
	Hold for 3 seconds: wake up the AI Assistant	Hold for 3 seconds: wake up the AI Assistant
	Swipe up/down: adjust the volume	Swipe up/down: adjust the volume
Phone Call	Double tap: answer/end phone calls	Double tap: answer/end phone calls

First-time Connection


Translation and AI features require the use of the designated Bavvo App. Please scan the code to download it. You can also search for "Bavvo" on the App Store or Google Play to install the app.




Scan the QR code to download the app

Bluetooth Pairing and Connection

- 1 Tap "Connect" and authorize Bluetooth as prompted on the Bavvo app homepage.

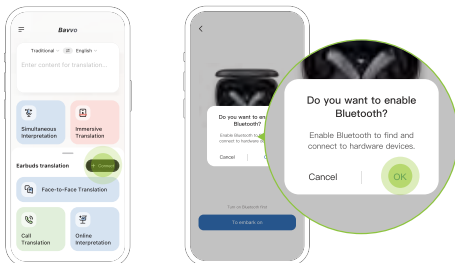


- 2 Open the charging case, and you will find yellow and blue breathing flashes, indicating the pairing mode is on and earbuds are ready for cellphone search and connection.
- 3 Tap "Pair" on the cellphone to complete the connection.
- 4 Once connected, functions of the translation earbuds will be displayed on the Bavvo app homepage.

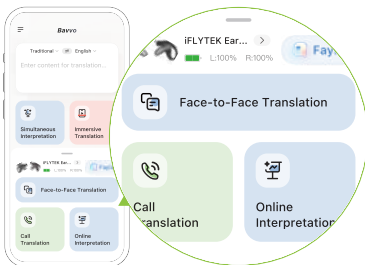

Face-to-Face Translation

Use case: one-on-one, in-person talk


Enable "Face-to-Face Translation" to select the language pair and give one of the earbuds to the other party. During the conversation, no screen taps are needed, since the earbud auto-recognizes the speech and translates it to the other party instantly.

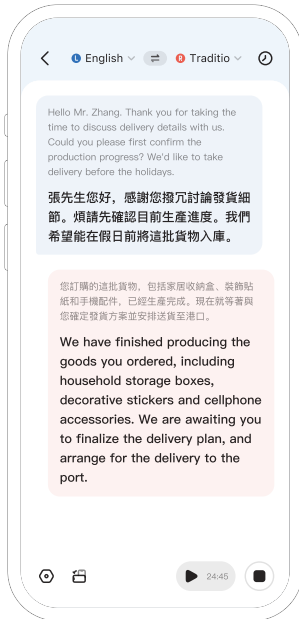

Call Translation

Use case: make or answer overseas calls


No more language barriers during calls with foreign partners! Enable "Call Translation" for seamless, real-time two-way translation!

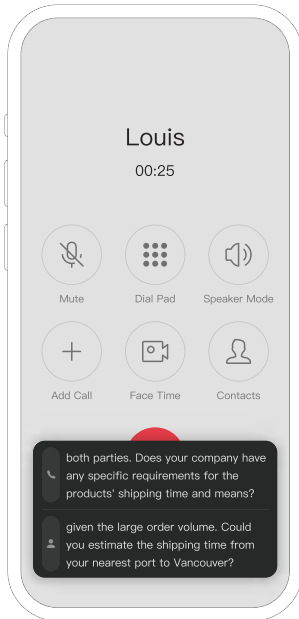

Online Interpretation

Use case: online meetings


When joining multilingual meetings via phone, enable "Online Interpretation". A floating window with bilingual subtitles then pops up at the meeting interface's bottom for real-time interpretation of the other party's speech.

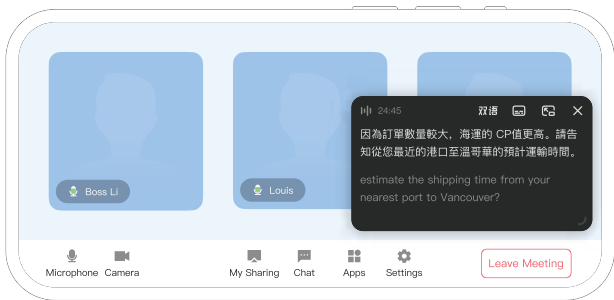


Simultaneous Interpretation

Use cases: small-sized on-site meetings, forums, speeches, etc.

Put on the earbuds to access real-time interpretation of on-site presentations and better grasp lecture contents. Real-time subtitles can be shared with the remote audience.

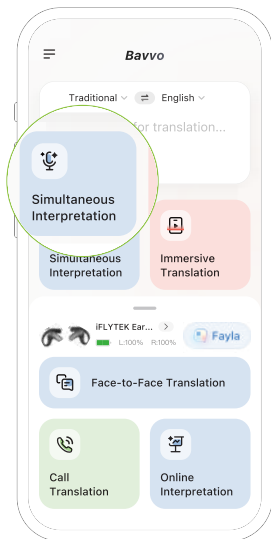

Function Entrance

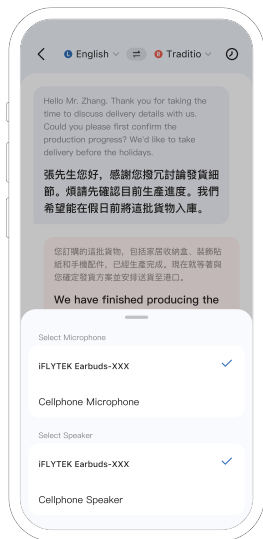


Select modes of audio pickup and broadcast


The earbuds support 8-meter long-distance audio pickup

History Sharing

The earbuds record every conversation, store history records and original audios, and support functions like history records bookmarking, and text and audio sharing.

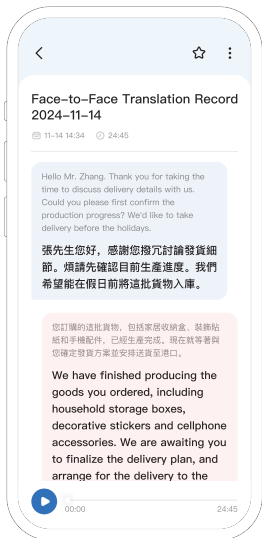

History Records

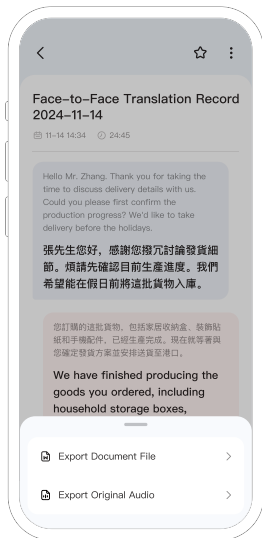


Sharing of audios and documents


AI Assistant

Your encyclopedia Q&A helper

When wearing earbuds, you may wake up the AI Assistant for real-time Q&A with two shortcut methods.

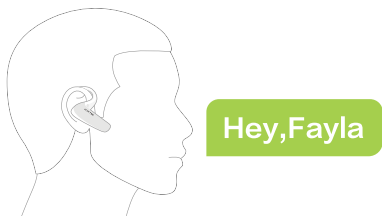

Say the wake-up word "Hey, Fayla"

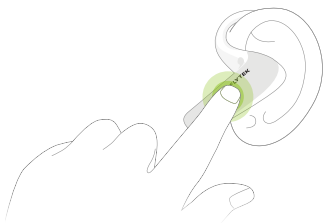

Hold the touch control area for 3 seconds

Product Specifications and Parameters

Hardware Specifications

- Product Model: AIH-2541
- Microphones: 2 air-conducted microphones + 1 bone-conducted microphone (equipped with the iFLYTEK AI noise reduction algorithm)
- Loudspeaker: 11mm round high-sensitivity speaker
- Protection Rating: IP55
- Bluetooth Version: 6.0 (compatible with cellphones supporting Bluetooth 5.0 and above only)

Earbud Dimensions

- Charging Case: $117.5 \times 65.0 \times 26.3\text{mm}$
- Earbud: $52.3 \times 50.8 \times 21.9\text{mm}$

Earbuds Battery Life

- Single Continuous Translation: 6H (12H for Music Listening)
- With Charging Case: 21H (42H for Music)


Charging Specifications & Battery Capacity

- Charging Case Input: $5\text{V} \Rightarrow 1000\text{mA}$
- Charging Case Output: $5\text{V} \Rightarrow 360\text{mA}$ (180mA per port)
- Battery capacity of the charging case: 800mAh
- Battery capacity (single earbud): 100mAh
- Charging Input of Earbuds: $5\text{V} \Rightarrow 180\text{mA} \times 2$


Package Contents



Translation Earbuds



Charging Case



Data Cable



User Manual

FAQs

1 Unable to pair with the earbuds?

- Keep earbuds close to the cellphone.
- Check the battery level, and charge the earbuds if they are out of power.
- Place both earbuds into the charging case, close the case and reopen it. Then, hold the pairing button for 3 seconds and try pairing again once the indicator lights flash.

2 How to reset the earbuds?

- Put both earbuds into the charging case.
- Hold the pairing button for 8 seconds until indicator lights flash. Open the cellphone's Bluetooth setting for pairing and connection.

3 Poor audio pickup effect and inaccurate recognition in "Simultaneous Interpretation"?

Verify that the audio pickup mode is set to "Earbud Pickup" (8-meter long-distance pickup capacity).

4 How to improve accuracy in speech recognition and translation?

- Adjust your wearing position to align microphones towards the mouth.
- Try using the translation earbuds in a quiet environment.
- Check if the correct language pair is selected when enabling the translation function.
- You may enable "Industry-specific Translation" (online only) for Chinese-English mutual translation.

Product Safety Guidelines

Please read through the following safety guidelines before using this product:

Charging Specifications

Use adapters aligned with local laws and regulations and product parameters since the product package includes no adapters.

Battery Safety

Replacement of incorrect battery packs may invalidate safety protection. Explosions may be incurred by throwing the battery pack into a fire or heating furnace, or subjecting it to mechanical extrusion or cutting. Exposing the battery pack to extremely high temperatures or low air pressure may cause explosions or leakage of flammable liquid or gas.

Physical Protection

Avoid subjecting the product to severe impact, burning, heavy pressure, battery disassembly or immersion in liquid. Such misoperations may permanently damage it or trigger safety risks.

Keep away from high temperatures

DO NOT use or store the product in high-temperature environments or near heating devices (e.g., ovens, microwave ovens and electric heaters) to prevent its deformation, damage or potential hazards.

Operational Environment

Use the product within the 0°C ~35°C ambient temperature range, and ensure storing it within the -10°C and 50°C range. Excessively high or low temperatures may cause device abnormalities.

Children Safety

Keep the product and its accessories away from infants and young kids to prevent suffocation from accidental swallowing or other serious personal injuries.

Accessories Liabilities

The Company shall not be liable for any quality abnormalities, functional failures and safety accidents resulting from the use of unofficially approved or authorized accessories.

FCC Regulatory Conformance

Please take attention that changes or modification not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help
1. Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion;

2. Leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas;
3. A battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.

FCC ID: 2BH7AAIH-2541

RF Exposure Information

This device has been tested and meets applicable limits for Radio Frequency (RF) exposure.

After-sales Service

The product comes with a 12-month or longer warranty (as required by local laws and regulations). If a performance issue occurs during normal use within the warranty period, you will receive free repair service. A valid device serial number and proof of purchase are required for warranty claims.

For detailed warranty coverage, documentation requirements, service channels, and other after-sales policies in your region, please visit:



<https://www.iflytek.com/en/support/warranty-policy.html>



訊飛AI翻譯耳機

使用指南

外觀說明

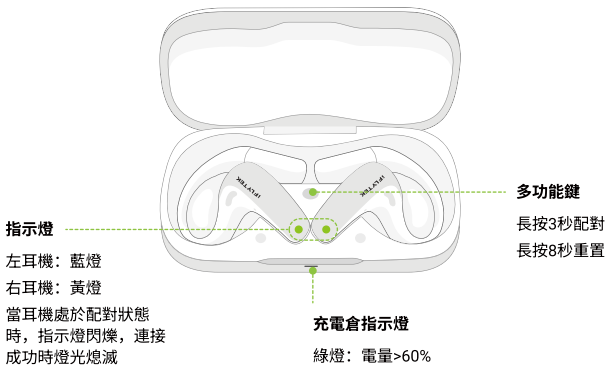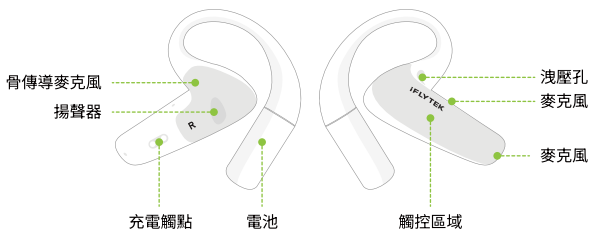

觸控說明



觸控區域

支援按兩下、三下、
長按、滑動操作

使用翻譯功能

任意耳機 按兩下：暫停/繼續(在翻譯過程中)

聽音樂、打電話

左耳機

音樂

按兩下：暫停/繼續
三下：上一首
長按3秒：喚醒AI助手
上下滑動：調節音量

右耳機

按兩下：暫停/繼續
三下：下一首
長按3秒：喚醒AI助手
上下滑動：調節音量

通話

按兩下：接通/掛斷

按兩下：接通/掛斷

首次連接

翻譯和AI功能，需要搭配指定翻譯App來使用。請先掃碼下載Bavvo App。你也可以在App Store或Google Play搜索“Bavvo”下載安裝。



掃碼下載App

藍芽配對與連接

- 1 進入Bavvo APP首頁，點選「連接」,並按提示授權藍牙。




- 2 打開充電倉，若耳機上的藍燈和黃燈閃爍，代表耳機已進入配對狀態，等待手機搜尋連接。
- 3 在手機上點選配對，即可完成連接。
- 4 連接成功後，在Bavvo APP首頁，即可看到翻譯耳機相關功能。



面對面翻譯

適用場景: 線下1對1深入溝通


面對面翻譯功能，設定語種後，分享給對方一隻耳機，您可以各自佩戴一隻耳機交流。無需點選螢幕操作，一方說話，耳機將自動識別並立即翻譯說話內容。

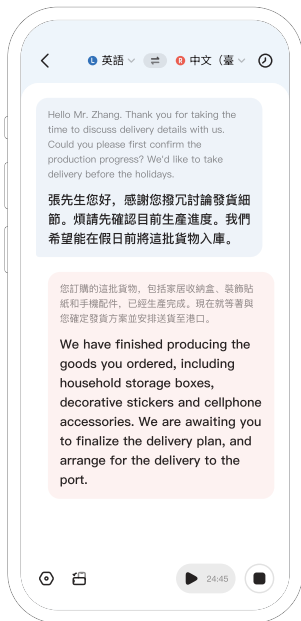

電話翻譯

適用場景：撥打或接聽國外來電

當您看見國外合作夥伴來電時，不用再擔心「聽不懂」或「不會說」。戴上耳機，開啟通話翻譯功能，耳機將即時翻譯雙向溝通內容。

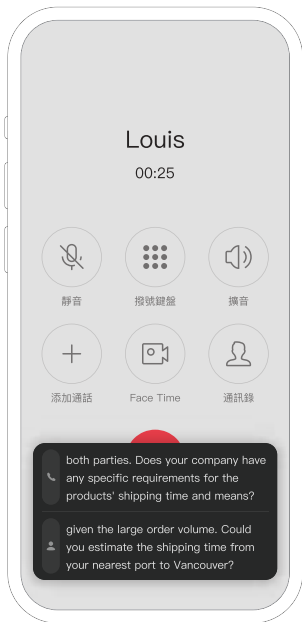

線上同傳

適用場景：線上會議

在手機上參加遠端跨語言溝通會議時，打開「同步翻譯」，您將看到雙語字幕浮窗位於介面下方，同步翻譯對方說話內容。




同步口譯

適用場景：小型線下會議、論壇、演講等

佩戴耳機，收聽現場演講者的聲音，耳機將即時翻譯，幫您更好理解講座內容。支持分享即時字幕，給未到場的夥伴遠程觀看。



功能入口

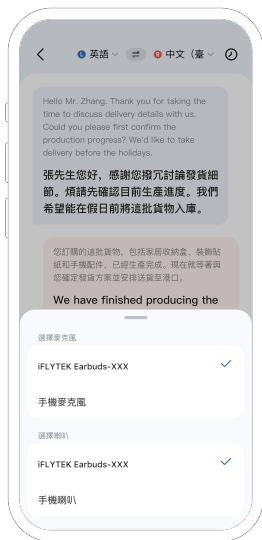


選擇收音與播報方式


耳機支持8公尺遠距收音

歷史記錄分享

耳機會記錄你每一次的溝通交流，並保存歷史記錄、原聲音訊，支持歷史記錄收藏，以及對文本和音檔分享等操作。

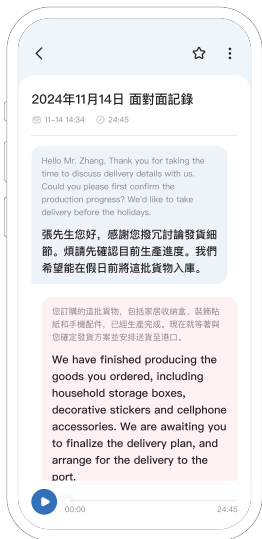

記錄詳情頁

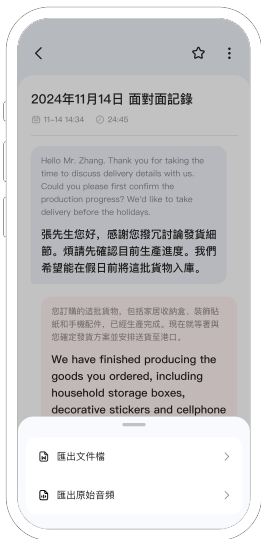


音檔和文稿分享


AI 助理

您的百科問答助理

佩戴耳機時，您可通過兩種便捷方式喚醒「AI助手」進行即時問答。

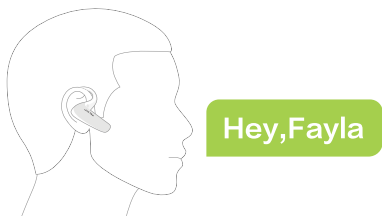

佩戴耳機說啟動詞



長按耳機觸控區3秒

產品規格與參數說明

硬體規格

- 產品型號：AIH-2541
- 麥克風：氣導麥克風*2+骨傳導麥克風*1,搭載iFLYTEK AI降噪演算法
- 揚聲器：11mm圓形高靈敏度喇叭
- 防護等級：IP55
- 藍牙版本：6.0(僅支援藍牙5.0及以上的手機使用)

耳機尺寸

- 充電盒：117.5 × 65.0 × 26.3mm
- 耳機：52.3 × 50.8 × 21.9mm

耳機續航

- 單次連續翻譯：6H (聽音樂12H)
- 搭配充電盒：21小時 (聽音樂42小時)


充電規格及電池容量

- 充電盒輸入：5V === 1000mA
- 充電盒輸出：5V === 360mA (180mA每個埠)
- 充電盒電池容量：800mAh
- 耳機電池容量：100mAh
- 耳機輸入：5V === 180mA x 2




為防止高聲壓造成聽力損傷，請勿長時間以高音量收聽。以高音量聆聽便攜式裝置可能會損害使用者的聽覺，並導致聽覺障礙（暫時或永久性耳聾、耳內雜音、耳鳴或聽覺過敏）。因此，強烈建議不要以最大音量使用便攜式裝置，或每天以中等音量使用便攜式裝置超過一小時。


產品清單



翻譯耳機



充電倉指示燈



數據線



使用指南

常见问题

1 連接不上耳機?

- 請確保耳機盡可能靠近手機。
- 請檢查耳機是否有電，若電量耗盡請先充電。
- 把兩隻耳機放進充電盒，關閉充電盒再打開，長按配對鍵3秒，看到耳機燈光閃爍後，嘗試重新連接。

2 如何重置耳機?

- 兩隻耳機放進倉內。
- 長按配對鍵8秒，直至耳機的指示燈處於閃爍狀態，打開手機系統設置的藍芽頁面進行配對連接。

3 使用同步口譯功能，收音效果不好，識別不準確?

請確認當前的收音方式，是否為「耳機收音」,耳機支持8米遠距收音。

4 如何提高翻譯準確率?

- 請調整佩戴姿勢，麥克風盡可能朝向嘴巴。
- 請盡量在安靜環境下使用耳機翻譯功能。
- 注意功能啟用時的語種配對是否正確。
- 當您選擇「中文-英語」互譯時，可以使用行業翻譯功能(僅支援線上)