

尺寸折叠:80*120mm

印刷:四色印刷 正反面印刷

材质:128g双铜

样式：6折页



系统料号		页 码	12
文件名称		制 作 人	孙冬慧
发行日期	2025-09-10	工程审核	
版 本		核 准	
材 质			

YES/NO	变 更 内 容	变更日期


HENGJIANG

User Manual S1



Please read this instruction manual carefully before using the product and keep it in a safe place.

Packing list

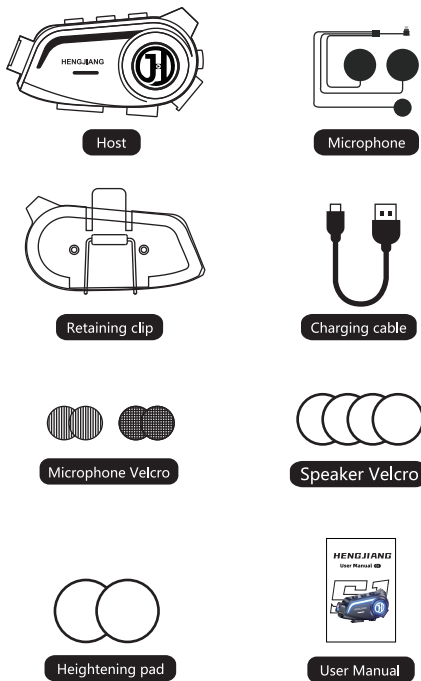

- 1 -


Installation steps

Mounting by clips

- ✓ Pull the steel clip apart a little and insert it directly into the left edge of the helmet.
- ✓ Lift the inner speaker hook of the helmet earpiece so that it faces the corresponding fur lining and attach the Velcro.
- ✓ Place the speaker hook side against the fleece surface, and then attach the short speaker wire.(Right side)
- ✓ Attach the butterfly-shaped adhesive strip to the left side of the helmet. Align the microphone with your mouth (tidy up the cables and lining).
- ✓ Insert the plug into the headphone jack
- ✓ Installation Complete

- 2 -

Button and interface description

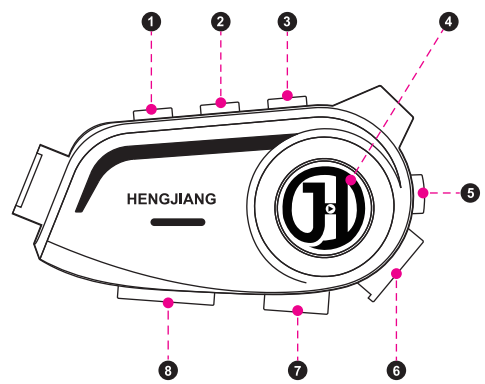

1	Volume down, previous song, voice assistant
2	Volume up, next song, turn on/off automatic answering
3	Switch atmosphere lighting
4	Power on/off, answer/end call, reject call, call back, play/pause, switch between Chinese and English
5	Turn on/off the camera, record video, take photos
6	Type-C charging port
7	Type-C headphone jack
8	TF card slot

- 3 -

Bluetooth status and indication


Pair with mobile phone Bluetooth

After the S1 is turned on, the indicator light will flash red and blue. Turn on the Bluetooth of your phone and search for "S1". After the pairing is successful, a voice prompt will be heard: "Connection successful".




Bluetooth connection

When the device is powered on and Bluetooth is waiting for pairing, the indicator light will flash red and blue. When Bluetooth pairing is successful, the indicator light will flash blue every few seconds.

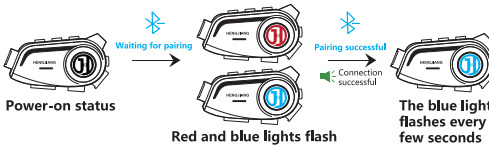

Bluetooth disconnected

When Bluetooth is disconnected, the red and blue lights flash.




- 4 -

Key operation instructions

Power on

Power on: Press and hold the [Power button] for 2 seconds in the power off state. Indicator light: Red and blue lights flash.



Shutdown

Shutdown: Press and hold the [Power Button] for 2 seconds while the device is powered on. Indicator light: Off.



Volume + key

Volume up: In call/music mode, long press [+] to increase the music volume. There will be a beep when the volume reaches the maximum.



- 5 -

Volume — Button

Volume down: In call/music state, long press [-] to reduce the music volume.



Previous song

When playing music, click the [-] key to switch to the previous song.



Next song

When playing music, click the [+] key to switch to the next song.



Music play/pause

Music play/pause: When playing music, click the [Power button] to pause/play music.



- 6 -


Answer/end call

When connected to Bluetooth and a call comes in, click the [Power Button] to answer the call. During a call, click the [Power Button] to hang up.




Reject call

When a call comes in, to reject the call, long press the [Power button].



Call back

When connected to Bluetooth, double-click the [Power Button] to call back the number at the end of the "Call History".



Automatic answering



After powering on, the "Auto Answer" function is enabled by default. Double-click the [+] button to turn off the "Auto Answer" function; double-click again to turn on the "Auto Answer" function.



- 7 -

Video/Photo

1. When using the camera, a memory card must be inserted.

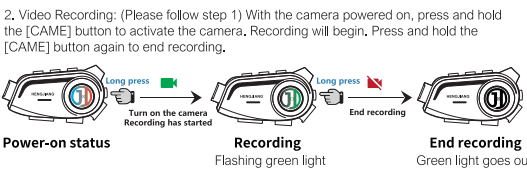

2. Video Recording: (Please follow step 1) With the camera powered on, press and hold the [CAM] button to activate the camera. Recording will begin. Press and hold the [CAM] button again to end recording.



3. Camera function: (Please follow step 1) With the device powered on, press and hold the [CAM] button to open the camera. Click the [CAM] button to start taking photos.



- 8 -

Switch between Chinese and English

After turning on the device, when not connected to Bluetooth, double-click the [Power Button] to switch between Chinese and English.



Voice Assistant

When connected to Bluetooth, double-click the [-] key to turn on the voice assistant and perform voice operations.




Turn on/switch the ambient light

In the power-on state, click the [MODE] button to turn on or switch the RGB atmosphere lighting effect.



Restore factory settings (clear pairing information)


Press and hold the volume [-] and volume [+] buttons at the same time to clear the Bluetooth pairing information. After clearing, turn off the device.



- 9 -

Low battery alarm

When the device is powered on, it will prompt "low battery" every 5 minutes.



Low battery alarm

The power button lights up red when charging, and turns green or off when fully charged (depending on the adapter type).



Parameters and specifications

Bluetooth name: S1	Standby time: about 300 hours
Bluetooth version: 5.3	Charging time: about 1-2 hours
Transmission distance: 10M (no obstacles)	Charging port: Type-C
Recording time: Approximately 5-6 hours (supports charging during recording)	Music time: 30-40 hours
Working hours: about 20-25 hours	Talk time: 30-40 hours
Standby time: about 300 hours	Charging voltage: USB 5V/1A

- 10 -

Precautions

- Do not expose the product to sharp objects to avoid scratches or damage.
- Do not expose the product to open flames to avoid the risk of explosion.
- Do not attempt to disassemble the product to avoid damage.
- If the product is not used for a long time, please store it in a dry place and charge it regularly (once a month) to ensure that the product can work properly.



Company Name: Shenzhen Xinhengsheng Electronic Technology Co., Ltd.

Contact Number: 13163776252

Address: 2nd Floor, Unit 2, No. 26, Liaokeng Avenue, Baoyuan Community, Shiyan Street, Bao'an District, Shenzhen

FCC Caution.

(1) § 15.19 Labelling requirements.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

§ 15.21 Changes or modification warning

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

§ 15.105 Information to the user.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-Reorient or relocate the receiving antenna.

-Increase the separation between the equipment and receiver.

-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-Consult the dealer or an experienced radio/TV technician for help.

RF warning for Portable device:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

According to § 15.247(e)(i) and § 1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.