

Shenzhen Puda Micro High-Tech Co., Ltd.

acknowledgement

Company name (for customers): _____

Material cost code (customer fills in): _____

Specification type (customer fills in): _____

Recognition date (customer entered): _____

Supplier name (to be filled in by SLK): Shenzhen Puda Micro High-tech Co., Ltd.

Supplier specification number (to be filled in by SLK): SLK-PDW-B2.5-180-B

acknowledgement					
supplier recognition					
engineer	examine and verify	ratify	engineer	examine and verify	ratify
Seal and sign			Seal and signature		
date	2025-12-16		date		
Approval: ☐ Accept ☐ Accept with conditions					
Notes (ZX to fill in):					

Supplier name: Shenzhen Puda Micro High-tech Co., LTD

Supplier address: 607, Building B, Shenzhen Qianwan Hard Technology Industrial Park, Baoan District, Shenzhen

Tel: 0755-29470882

Fax: 0755-29163512

WIFI Antenna

1. Explanation of Product number :

S L K - P D W - B 2 . 5 - 1 8 0 - B

1

2

3



Product Code:

(1) Customer:

PDW: Puda Micro

(2) Antenna Name:

B2.5: Brass(2.5*25*1.1)

(3) Cable:

180: 180*1.13MM

(4) Cable Color:

B: Black

2. Features

- *Stable and reliable in performances
- *Compact size
- *RoHS compliance

3. Applications



- * IEEE802.11 (b/g/n)
- * Hand-held devices when WIFI (802.11 b/g/n) functions are needed

4. Description


Holy bond ' s Brass antenna series are specially designed for WIFI (802.11b/g/n) applications. Based on Holy bond ' s proprietary design and processes, this Brass antenna has excellent stability and sensitivity to consistently provide high signal reception efficiency.

5. Electrical Specifications


Characteristics	Specifications	Unit
Outline Dimensions	2.5 x 25 x 1.1	mm
Center Frequency	2.4-2.5	GHz
Bandwidth(under-10dB return loss)	130min	MHz
VSWR	2max	
Impedance	50	Ω

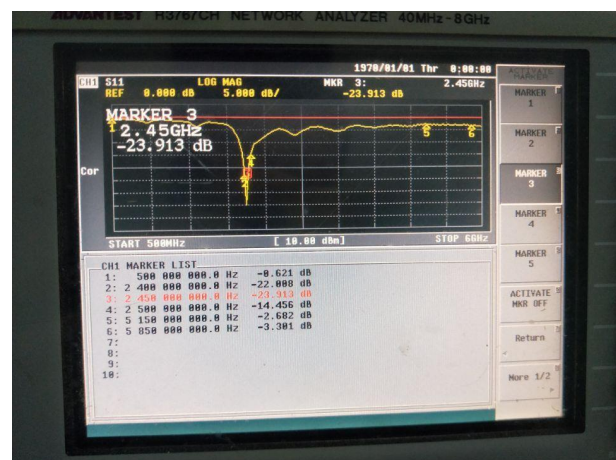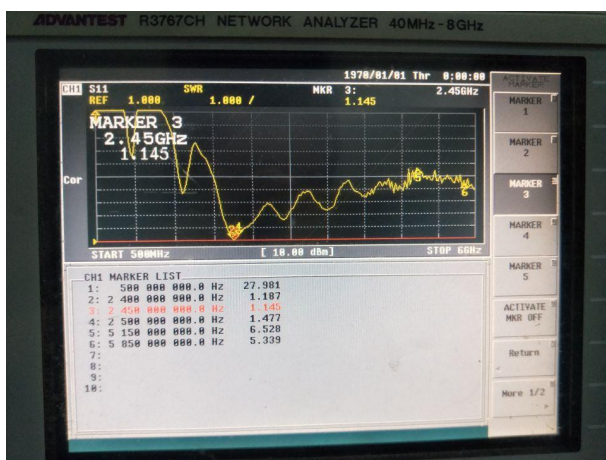

Frequency: 2400-2500 MHz
Antenna Gain: 0 dBi

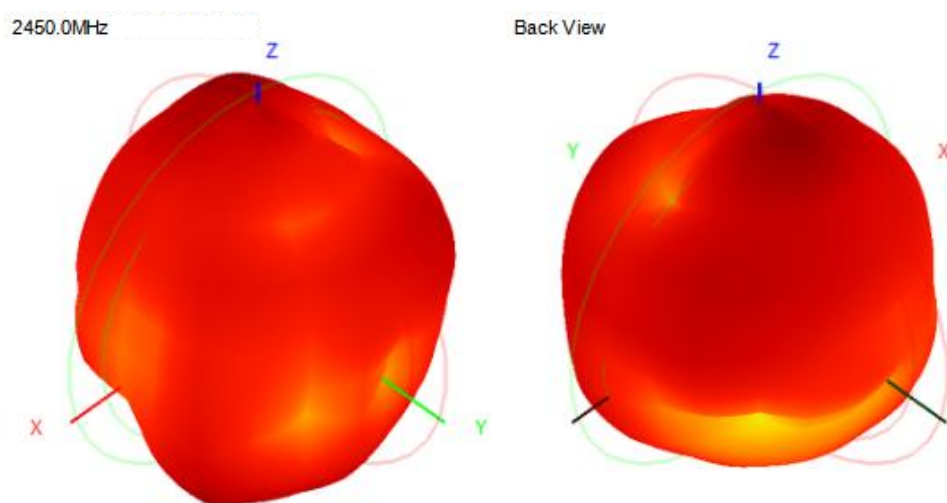

6. Antenna Dimensions (unit: mm)

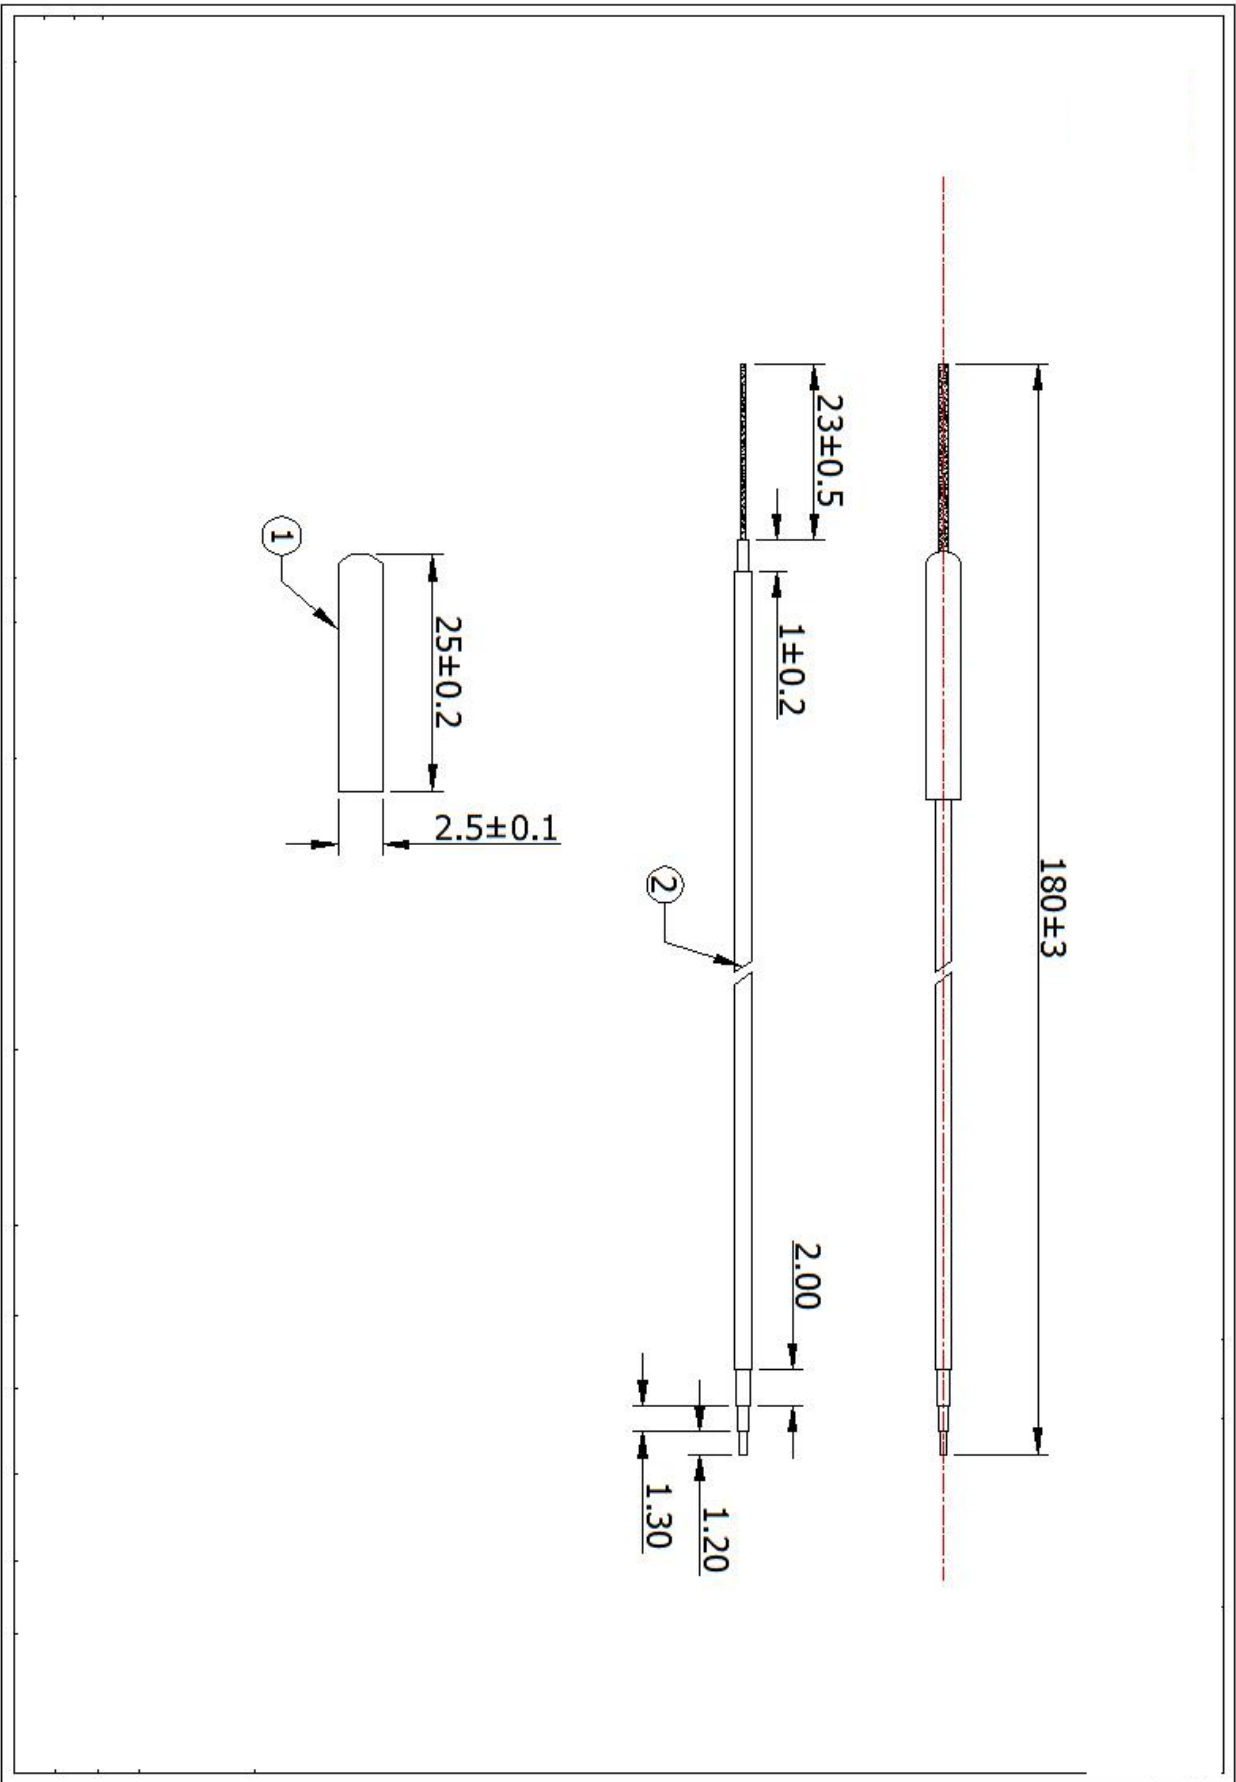

7. manner of packing

Packaging Work Instructions (Example)

client:	Product: Copper tube antenna	Color: black
Customer No.:	The company material number:	date:



1. After inspecting the appearance and performance of a single antenna in accordance with the inspection instructions, the quality department should wrap each antenna with 50PCS.

2. The production line shall carry out packaging operation according to 200PCS per bag.



3. According to the customer's label requirements, attach labels and pack the goods.

4. Seal the box and weigh it, put it into the finished product warehouse, and wait for shipment.

Remarks: Inner packaging: 200 PCS per pack
Outer packaging: carton size 480X280X300MM 10000 PCS per case.
According to the actual order quantity, the carton size may be different.
According to different customers, make different inner and outer packaging labels.

Engineering Department: Liu Cailiang	Quality department: Guo Liang	Approval: Huang Zhen
--------------------------------------	-------------------------------	----------------------