

Antenna Specification

1.ANT Type: ANT BT

2.ANT Model: Adapter 02 ANT BT


3.Manufactory:

Shenzhen Yishengxin Multilayer Circuit Co., Ltd.

Manufacturer Address: 4th Floor, Building 2, Dahua Feijie,

Yanchuan Community, Yanluo Street, Baoan District, Shenzhen

4.Antenna picture

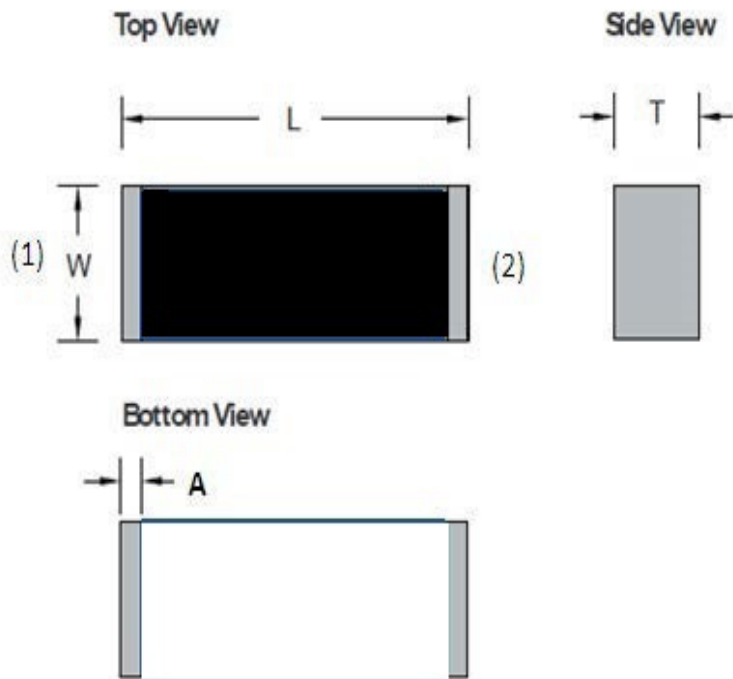


Dimension (mm)	
L	5.0 +-0.20
W	2.0+- 0.20
T	1.0+- 0.20
A	0.20+-0.20


5.test data



Gain&Efficiency			
frequency (MHz)	gain (dBi)	efficiency (dB)	efficiency (%)
2400	-1.91	-6.31	22.58
2410	-2.02	-6.33	22.51
2420	-1.12	-6.85	23.63
2430	-0.9	-5.92	25.14
2440	-1.5	-6.06	24.06
2450	-0.98	-5.95	24.14
2460	-0.86	-5.84	25.68
2470	-1.17	-6.31	25.37
2480	-0.8	-5.73	26.36
2490	-1.06	-6.37	25.07
2500	-1.69	-6	25.11

6. Directional drawing of horizontal plane

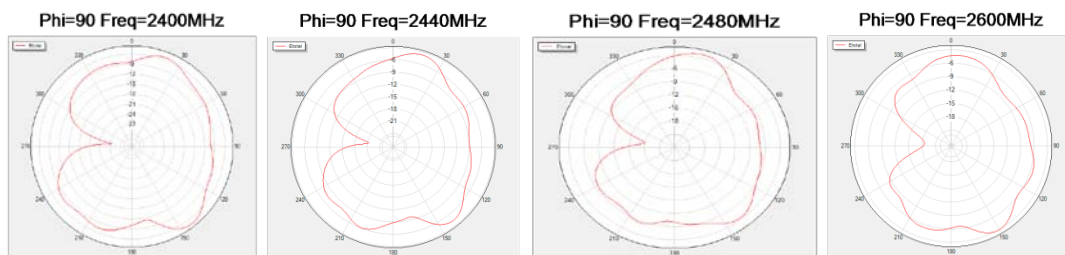

7. 3D Radiation Drawing

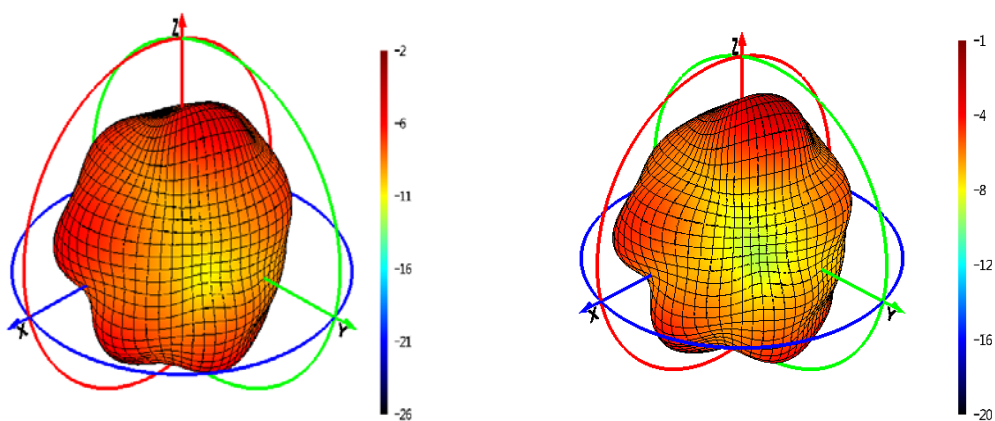

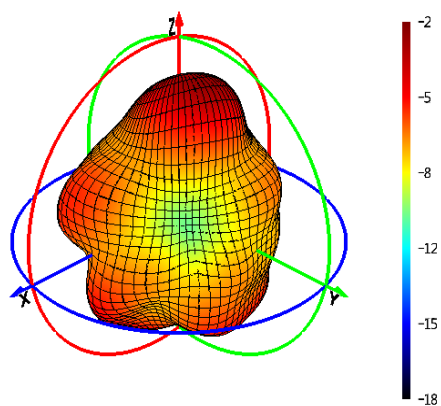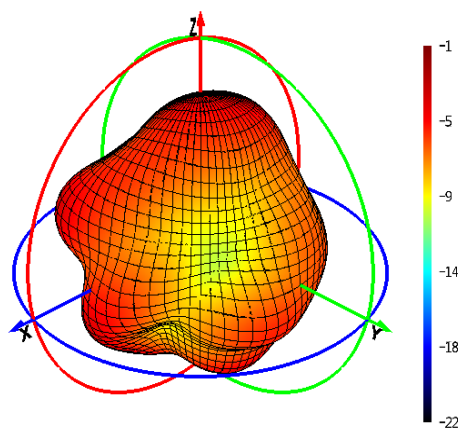

8. Frequency: 2402~2480MHz
MAX. GAIN:-0.8dBi