




深圳市华信微通信技术有限公司
ShenZhen Huaxinwei communication technology Co.,Ltd.

Room 1607, Nanguang Jiejia Building, 3037 Shennan Middle Road, Futian District, Shenzhen



测试环境 (Test Environment)

Test Equipment	Agilent E5071B 300 kHz - 8.5 GHz /ROHDE&SCHWARZ CMW500/ Anritsu MT8000A
Test System	SY-24M SISO/MIMO, 400 - 8500MHz

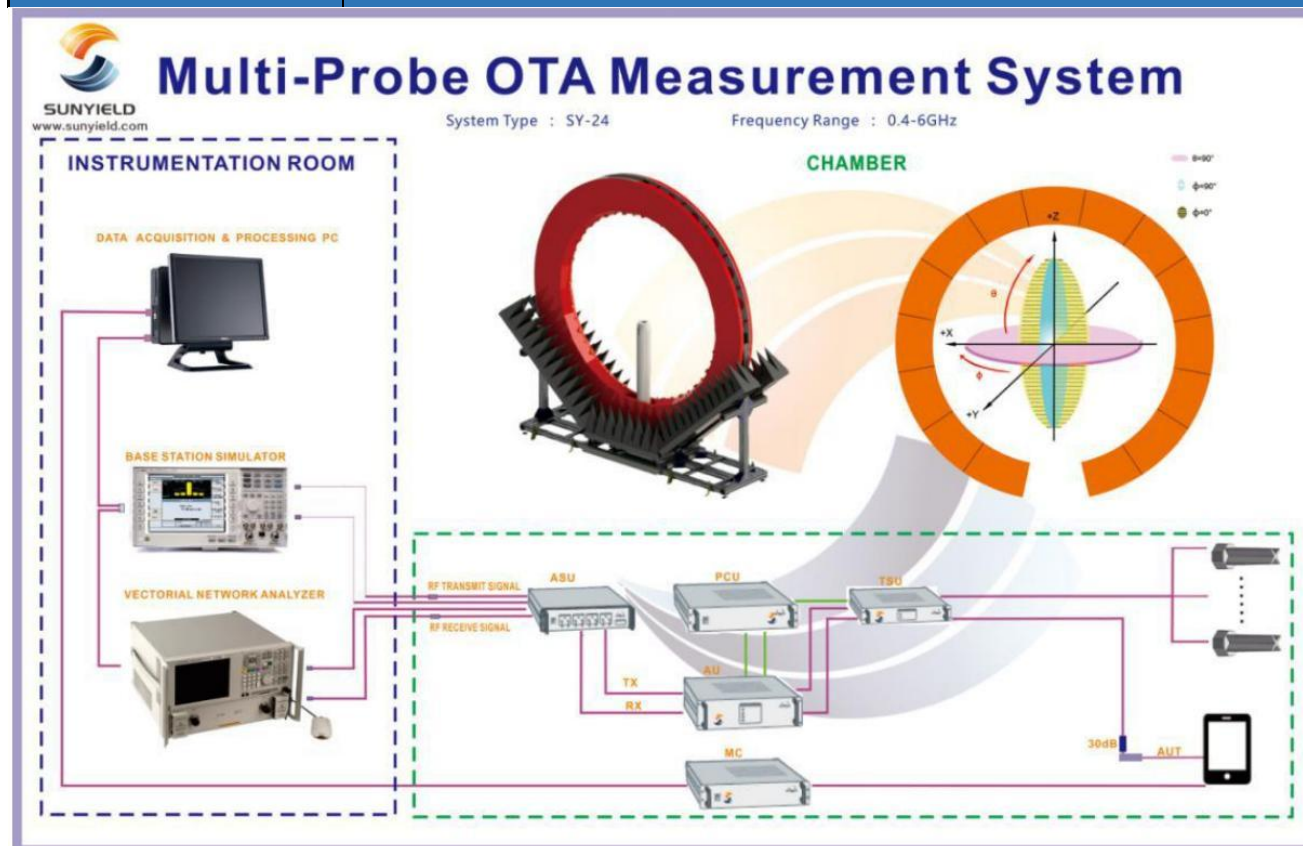



Gain&Efficiency 增益、效率			
frequency 频率(MHz)	gain 增益(dBi)	efficiency 效率(dB)	efficiency 效率(%)
2400.00	2.36	-1.60	69.21
2410.00	1.93	-1.69	67.77
2420.00	2.11	-1.56	69.75
2430.00	2.11	-1.67	68.06
2440.00	2.28	-1.69	67.70
2450.00	2.62	-1.58	69.53
2460.00	3.03	-1.30	74.08
2470.00	3.15	-1.17	76.32
2480.00	3.09	-1.37	73.02
2490.00	2.93	-1.47	71.26
2500.00	3.09	-1.34	73.43

Antenna drawings and dimensions

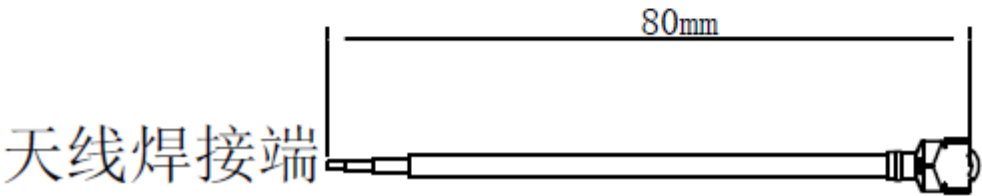
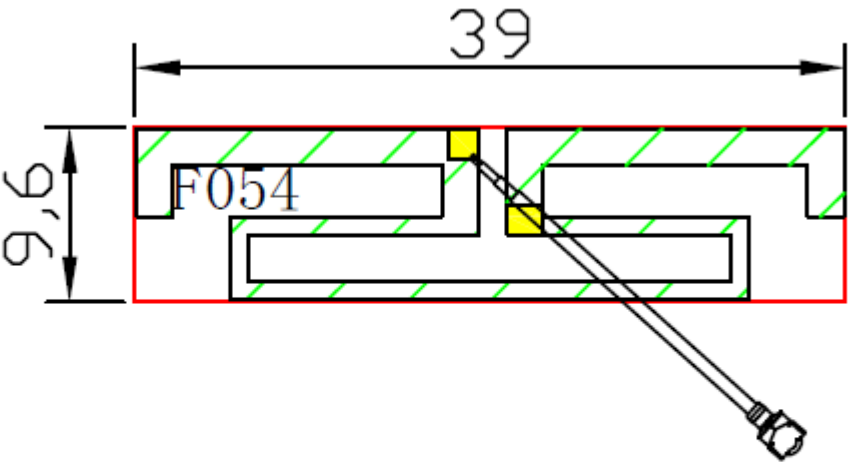


Antenna Radiation Pattern

2400MHz

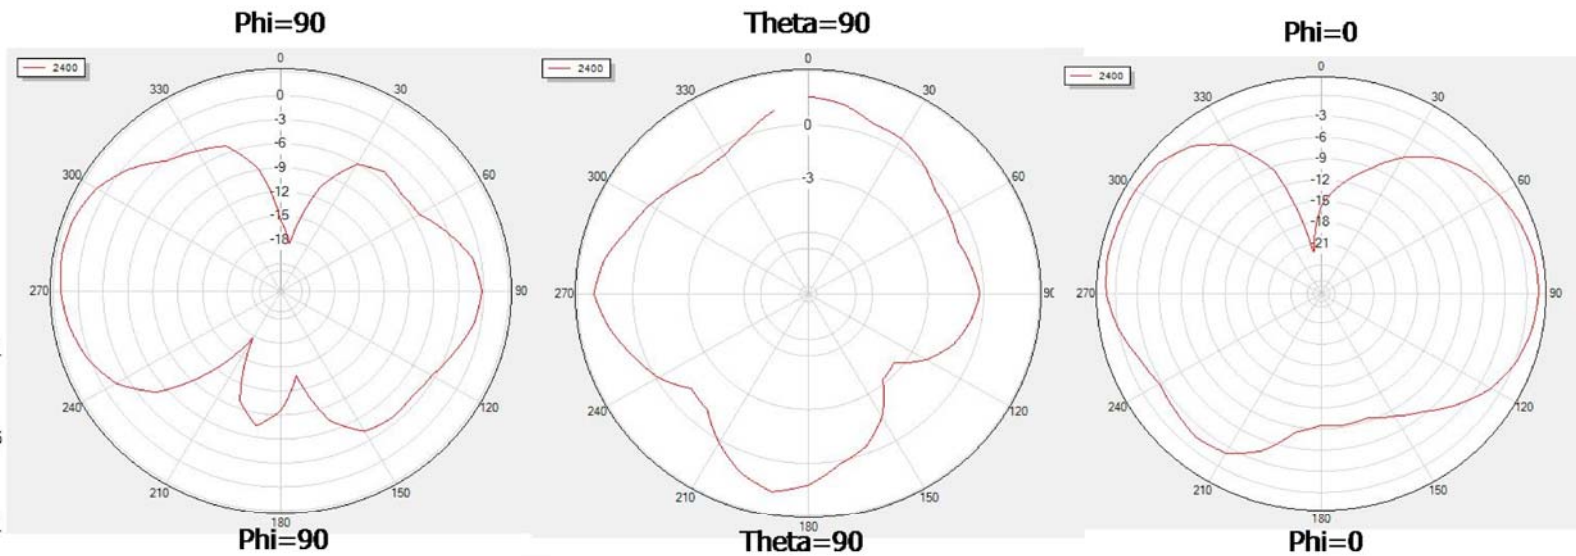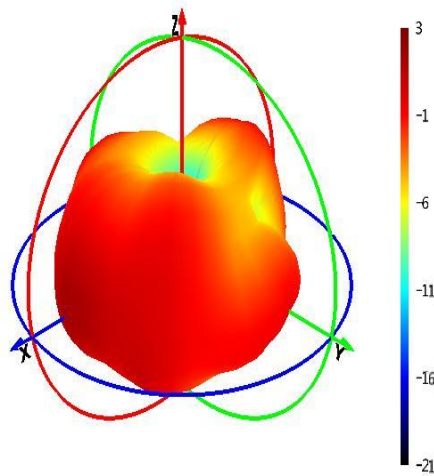

2450MHz

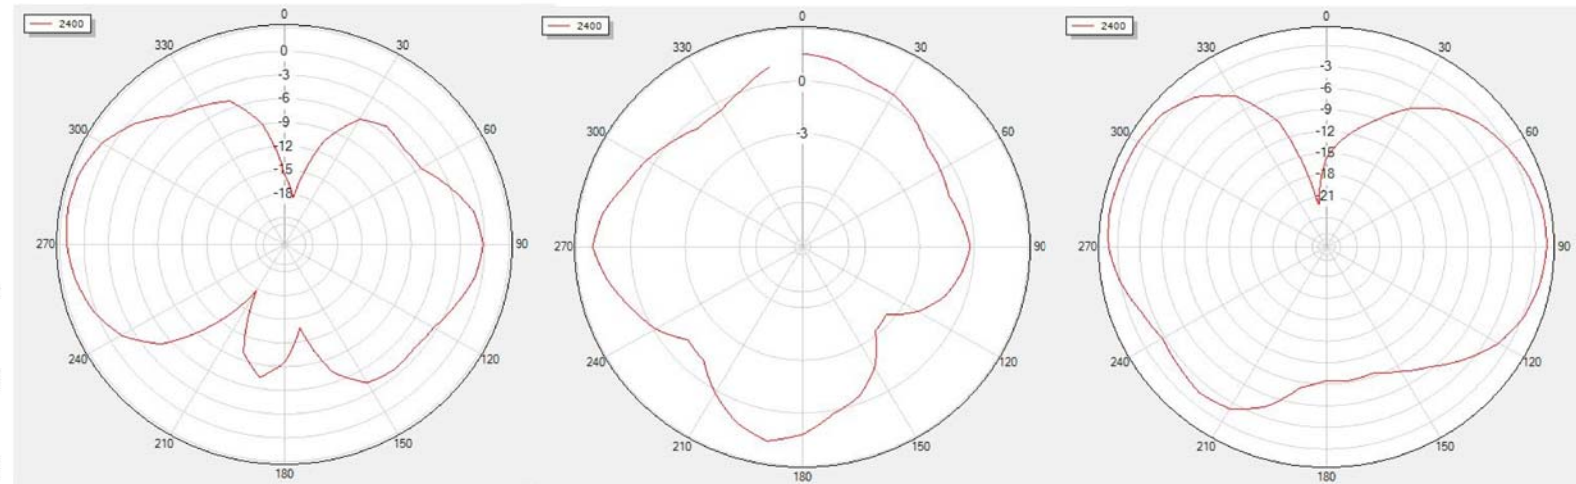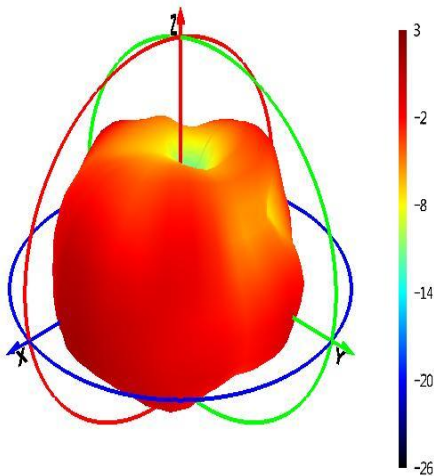

Antenna Radiation Pattern

2500MHz

