


骨传导无线耳机

H30 使用说明书

健康 · 舒适 · 释放双耳


按键功能概述



- 1.磁吸充电
4.音量+键
2.音量-键
5.麦克风
3.电源键
6.LED指示灯

释放双耳，放心自由，听音乐的同时还能聆听外界的声音；听音乐、打电话，玩游戏，立体声音，音质音效，清晰震撼；是您办公、外出、驾驶的最佳选择！

外观展示

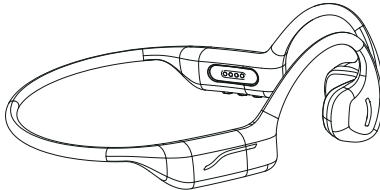

控制说明

开机：长按电源键3秒开机，蓝灯长亮3秒，再进入红蓝灯交替闪烁，提示音：power on / 开机；

关机：长按电源键5秒关机，红灯闪烁后关机，耳机提示音：power off / 蓝牙正在准备关机；

连接BT：开机后进入配对状态，红蓝灯交替闪烁，手机、台式电脑笔记本电脑搜索到**H30**，手动点击连接，耳机提示音：pairing / 等待连接；

配对成功：开机状态下，耳机自动进入搜索配对模式，蓝灯每5秒闪一次，首次开启蓝牙需手动点击连接，耳机提示音：Connected / 蓝牙已配对成功；

断开蓝牙：手动或超距离断开蓝牙，红蓝灯交替闪烁，耳机提示音：Dudu, Pairing / 嘟嘟，等待连接；

播放/暂停：BT连接音乐状态下单击电源键进行音乐播放/暂停，蓝灯每5秒闪一次；

音量增加：音乐状态下，单击音量+按键，音量增加，最大音量时提示音：嘟；

音量减小：音乐状态下，单击音量-按键，音量减小；

上一曲：连接音乐状态下双击音量+按键，播放上一曲；

下一曲：连接音乐状态下双击音量-按键，播放下一曲；

语音助手：蓝牙连接状态下长按音量+按键2秒，再按2秒抬手退出；

接听/拒接/挂断：来电状态下单击电源键为接听，蓝灯，长按2s音量+按键为拒接，通话状态下，单击电源键为挂断；

恢复出厂设置：开机状态下，连击电源键5次，嘟嘟的一声清除配对信息，红灯闪烁3下，听到嘟嘟后红蓝灯交替闪烁进入配对状态，表示恢复出厂设置成功；

中英文切换：耳机开机状态下，长按音量+按键切换中英文，听到提示音后表示切换成功；

充电：

1. 耳机充电时，耳机关机，无法开机，LED灯为红灯常亮，满电后红灯转为蓝灯；
2. 建议充电器规格，输出电压为：DC5V +/-0.25V,输出电流为100mA-500mA；

TF卡功能：

1. 开机默认蓝牙模式，任何状态下，切换TF卡功能时，蓝牙保持蓝牙连接，有电话时可以进行通话； 滚滚 长江东逝水
2. 蓝牙播放下，双击电源键，转到TF卡播放，此时LED灯处于熄灭状态 同时伴有提示音：TF card mode/ TF卡模式（蓝牙静态工作）；
3. TF卡播放下，双击电源键，转到蓝牙播放，同时伴有提示音：Bluetooth

mode / 蓝牙模式（蓝牙静态工作）；

4. TF卡播放暂停时，蓝灯常亮 TF卡播放时，蓝灯慢闪（间隔5s）；
5. 连接电脑读取储存TF卡数据，数据线连接电脑与耳机->读盘（红蓝灯常亮），读盘完成后断开数据线，耳机关机
6. TF/BT模式切换有语音播报；
7. 支持MP3(不支持WAV/FLAC/APE/WMA)；
8. TF卡播放状态下切换蓝牙，又切换回来继续播放当前歌曲（有记忆功能）；
9. TF卡模式下，来电通话结束后继续播放当前位置；
10. 关机后重开机后，需要重新配对连接。

充电器和电池

充电器和电池

使用任何充电器给本耳机充电前请检查充电器的规格标注是否符合要求（建议充电器输出电压为DC5V +/-0.25V，输出电流为：100mA-500mA），充电电压过高极有可能损坏蓝牙耳机

警告：仅可使用经过认可与此配套的充电器，使用其它规格的充电器可能违反对设备的认可和保修条款，并可能导致危险。如果出厂是配充电线出货的，需连接通过3C认证的充电器或电脑给其充电。禁止对本产品严重碰撞，严重撞击有可能损坏电子主板及电池。

为电池充电

本耳机使用内置式不可拆卸充电电池，请勿尝试从耳机中取出电池，以免损坏耳机。长期不使用耳机时，请将其存放在干燥通风的地方，并每隔两个月充其充电一次。

1.低电量时耳机红灯常亮，每5分钟会听到嘟嘟的低电量提示音时，表示耳机电量不足。如果继续使用会自动关机，此时需要充电，将充电器的连接线插头插入耳机插孔中。

2.将充电器插到交流电源插座上。


3.充电时指示灯亮红灯。如果充电未开始，请断开电源与耳机的连接，然后将其重新插入耳机再试一次。电池充满电后，红灯熄灭，蓝灯常亮，此时断开充电器与电源插座和耳机连接。

4.实际通话时间和待机时间可能与手机的使用设置、使用方法和环境而存在差异。

佩戴说明



将耳机挂在颈后，两侧扬声器贴在面颊骨调整佩戴的舒适度。



请勿过度扭曲或弯曲后支架以免损坏内部导光元件。

产品规格

音乐播放时间-----标准状态:约5小时	喇叭阻抗-----8Ω±15%
待机时间-----90小时	麦克风灵敏度-----38±3db
充电时间-----2.5小时	蓝牙连接距离-----10米
BT版本-----6.0	

重要说明

- 本款耳机扬声器的正确佩戴位置为耳朵前方的面颊骨处，请勿将扬声器置于耳内；
- 长时听闻大音量的音乐可能会带来不适感，请尽可能使用中等左右的音量，避免长时间使用大音量；
- 无论音量大小，使用耳机都将影响您对周围环境的感知，使用耳机时多加注意；
- 切勿抛扔、坐压耳机或将其浸入盐水中；耳机应远离火和高压设备；
- 不适合三岁以下儿童使用，包含小零件；
- 请勿将其归类为生活垃圾，而将其送往当地相应的电器电子产品回收站；
- ★若用户因违反以上警告内容造成的人身财产损失，本公司不承担任何责任。

合格证

品 牌 _____
产品名称 骨传导无线耳机
产品型号 H30
生产日期 _____
检 验 合格
检 验 员 _____

FCC 警告

本设备符合美国联邦通信委员会(FCC)规则第 15 部分的规定。使用时须满足以下两个条件：
(1) 本设备不得造成有害干扰；(2) 本设备必须接受所收到的任何干扰，包括可能造成意外操作的干扰。

未经负责合规的一方明确批准的任何更改或修改，可能会使用户失去操作设备的权限。

注意：本设备已通过测试，符合 FCC 规则第 15 部分对 B 类数字设备的限制。这些限制旨在为住宅安装提供合理的保护，防止有害干扰。本设备会生成、使用并可能辐射无线电频率能量，如果未按照说明进行安装和使用，可能会对无线电通信造成有害干扰。然而，不能保证在特定安装中不会发生干扰。如果此设备确实对无线电或电视接收造成了有害干扰（可通过关闭和开启设备来确定），建议用户尝试通过以下一种或多种措施来纠正干扰：- 重新调整或移动接收天线的位罝。
- 增大设备与接收器之间的距离。

- 将设备连接到与接收器不同电路的插座上。

- 咨询经销商或有经验的无线电/电视技术人员寻求帮助。


该设备已评估符合一般射频暴露要求。该设备在便携式暴露条件下使用不受限制。

Bone conduction wireless headset

H30 User Manual

Health • comfort • Release the ears


Overview Of Button Functions



- 1.Magnetic charging port
4.Volume+button
2.Volume+button
5.Microphone
3.Power button
6.LED indicator

Release your ears, rest assured and free, listen to the sound of the outside world while listening to music;Listen to music, make calls, play games, stereo sound, real sound effect, clear and shocking.It is the best choice for your office, going out and driving!

Appearance display

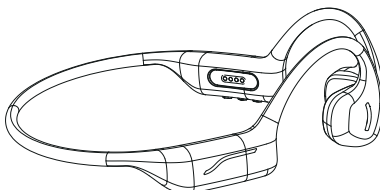

Control Description

Power on: Press and hold the Power button for 3 seconds to power on, the blue light will be on for 3 seconds, then the red and blue lights will flash alternately, the prompt sound: English is power on, Chinese means power on;

Power off: Press and hold the Power button for 5 seconds to shut down, the red light will flash and then shut down, the earphone prompt tone: English is power off, Chinese is Bluetooth is preparing to shut down;

Connect to BT: enter the pairing state after starting up, the red and blue lights flash alternately, the mobile phone, desktop computer and laptop search for **H30**. Manually click to connect, the earphone prompt tone: English is pairing, Chinese is waiting for connection;

Successful pairing: In the power-on state, the headset automatically enters the search pairing mode, the blue light flashes every 5 seconds, and the Bluetooth is turned on for the first time You need to manually click to connect, the headset prompts: English is Connected, Chinese is Bluetooth paired successfully;

Disconnect bluetooth: Disconnect bluetooth manually or over distance, red and blue lights flash alternately, earphone prompt tone: English is beep,Pairing.Chinese is Dudu, waiting for connection.

Play/pause: Click the Power button to play/pause music when BT is connected to music, and the blue light flashes every 5 seconds;

Volume increase: In the state of music, click the volume + button, the volume will increase, and the prompt tone at the maximum volume: beep;

Volume down: In music status, click the volume+button to decrease the volume;

Previous song: Double-click the volume+button while connected to music, and the previous song will be played;

Next song: When connected to music, double-click the volume + button to play the next song;

Voice Assistant: Press and hold the volume+button for 2 seconds in the state of Bluetooth connection, enter the language mode and then press 2 seconds to exit;

Answer/Reject/Hang up: Click the Power button in the incoming call state to answer, the blue light flashes slowly (interval 5s), long press the volume +button for 2s to reject, in the call state, click the Power button to hang up;

Restore factory settings: under the startup state, hit the power key five times, Duduo to clear pairing information, the red light blinks for 3 times, after hearing the Duduo, the red and blue light flashes alternately to the pairing state, indicating that the factory Settings are restored successfully;

Switching between Chinese and English: When the headset is turned on, press the volume + and volume+buttons together to switch, and the switch is successful after

hearing the prompt tone;

Charging:

1. When the headset is charging, the headset is turned off and cannot be turned on, the LED light is always red , and the red light turns to blue when fully charged;
2. Recommended charger specifications, output voltage: DC5V +/-0.25V, output current: 100mA-500mA;

TF card function:

1. The default Bluetooth mode, under any state, switch TF card function, Bluetooth to maintain Bluetooth connection, there is a phone can be called;
2. Under Bluetooth playback, double click the switch button to switch to TF card playback. At this time, the LED light is off and TF card mode prompt tone is accompanied (Bluetooth static operation);
3. Under TF card playback, double click the switch button to switch to Bluetooth playback, accompanied by Bluetooth mode prompt tone (TF card function static work);
4. When TF card playback is paused, the blue light is steady on;
5. connect the computer to read and store the TF card data, the data cable is connected to the computer and the headset -> reading disk (red and blue lights are steady on), disconnect the data cable after the completion of the reading disk, and the headset is turned off;
6. TF/BT mode cut voice broadcast;
7. Support MP3(not WAV/FLAC/APE/WMA);
8. Switch Bluetooth when TF card is playing, and then switch back to continue playing the current song (with memory function);
9. In TF card mode, continue to play the current position after the call ends;
10. After the shutdown and restart, you need to re-pair the connection.

Chargers and Batteries

Charger and battery

Before using any charger to charge the headset, please check whether the specifications of the charger meet the requirements (recommended charger the output voltage is: DC5V +/-0.25V, the output current is: 100mA-500mA)the charging voltage is extremely high and it is possible,Can damage Bluetooth headset.

WARNING: Only use chargers approved with this accessory. Use of other types of chargers may violate approval and warranty terms, and may cause danger, if the factory is shipped with a charging cable, you need to connect a 3C certifie Charger or computer. It is forbidden to severely collide with this product. Serious impact may damage the electronic motherboard and battery.

Charge the battery


This headset uses a built-in non-removable rechargeable battery. Do not attempt to remove the battery from the headset, as it may damage the headset.When you are not using the headset, store it in a dry and ventilated place and charge it every two months.

1. The indicator light is red when charging. When the battery is low,the headset's red light is steady on.If you hear a Duduo low battery tone every 5minutes,it means that the battery of the headset is low. If you continue to use it,it will automatically shut down. At this time,you need to charge it.Insert the connector of the charge into the earphone jack.
- 2.Plug the charger into an AC power outlet.
- 3.The red indicator light is on when charging. If charging does not start, disconnect the power supply from the headset, then plug it back into the headset and try again. When the battery is fully charged, the red light goes out and the blue light is always on. At this time, disconnect the charger from the power socket and headphones.
- 4.The actual call time and standby time may differ from the phone usage settings, usage and environment.

Wearing Instruction



Hang the earphones behind the neck, and the speakers on both sides are attached to the cheekbones to adjust the wearing comfort



Do not twist or bend the rear hanger excessively Avoid damage to internal light guide elements

Product Specifications

Music playing time-----Standard status>About 5 hours	Speaker impedance-----8Ω±15%
Standby time ----- 90 hours	Mike sensitivity----- -38±3db
Charging time ----- 2.5 hours	Connection distance ---10m
BT version -----6.0	

Important

- The correct wearing position of the earphone speaker is the cheek bone in front of the ear, do not put the speaker in the ear;
- Listening to loud music for a long time may cause discomfort, please try to use a moderate volume to avoid prolonged Use loud volume all the time;
- Regardless of the volume level, the use of headphones will affect your perception of the surrounding environment, so pay more attention when using headphones;
- Do not throw, sit on the headset or immerse it in salt water; keep the headset away from fire and high-voltage equipment;
- Not suitable for children under three years old, contains small parts;
- Do not sort it into household waste, but take it to the appropriate local recycling point for electrical and electronic equipment;
- ★If the user violates the above warning content and causes personal and property losses, the company will not bear any responsibility.

CERTIFICATE

Brand _____
Product Name Bone conduction wireless headset
Product Type H30
Production Date _____
Test Qualified
Inspector _____

FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-Reorient or relocate the receiving antenna.

-Increase the separation between the equipment and receiver.

-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.