


Thermal printer



User Manual

M8

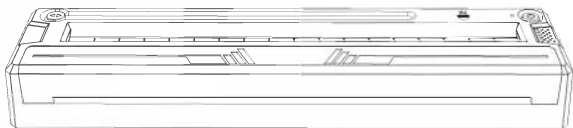

Before using the product, please read this manual carefully as it can help you easily master the usage method and Precautions.

Appearance and components

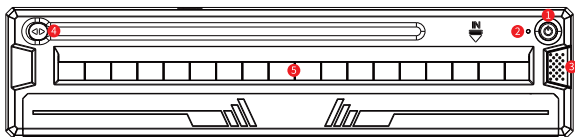


- ① Button
- ② Status Light
- ③ Cover opening switch
- ④ Limiter
- ⑤ Paper inlet
- ⑥ Paper outlet
- ⑦ Type-C interface

Situation	Operation
Button	1. Press and hold for 3 seconds and the buzzer will sound to turn the machine on and off. 3. Press the button once to advance the paper 50 mm.
Charging status light	The red light is always on when charging. The red light goes out when fully charged.
Bluetooth status light	If the Bluetooth connection is successful, it will stay on. If the Bluetooth connection is not successful, it will flash.
Limiter	When printing custom sizes, place the paper on the right side and use the stopper to check the paper position.
Self-check page	Double click the button to print the self-test page when there is paper available


Operating instructions

To ensure high-quality printing, please refer to the following steps:


Press and hold the button until you hear a beep, then release it.

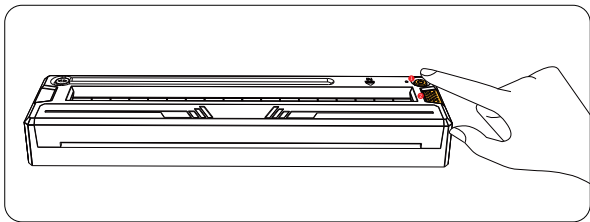

Notes for paper placement:




① Prepare four layers of transfer paper and remove the Isolation paper.



② Remove the backing paper and horizontally cut it along the top adhesive point. Please note that the adhesive part of the paper should be kept intact.

③ Prepare the printer, with the carbon strip facing downwards and the white transfer paper facing upwards, and place it along the top of the printer. The machine will automatically correct paper suction and then connect to Bluetooth for printing.




④ Automatically feed paper when placing it

Attention: Due to the different materials of transfer paper and the varying softness and hardness of the top, in order to prevent sticking during printing, when placing transfer paper, be sure to smooth it out and place it in the center

Operating instructions

④After installing the transfer paper, prepare your phone (iOS or Android) to connect to the machine. Start printing your desired pattern.



Type	Pattern	Example	Index
Line pattern			 Perfect
Shadow pattern			 Perfect
Gradient pattern			 Perfect
Color background pattern			 Perfect
The quality of the transfer paper will affect the printing effect (The quality of the transfer paper is determined by the uniformity of the ink sheet)			

Intelligent interconnection

Application download method:



Search and download the "TATTOO PRT" application from the iOS app store.



Search "TATTOO PRT" in the Google Play Store or scan the QR code on the right to download the App.



Precautions

Frequently asked questions:

Problem	Reason	Resolvent
No pattern after printing	①The transparent protective film in the middle of the transfer paper was not removed ②The transfer paper was not properly placed	① Remove the transparent protective film from the transfer paper ② Insert the transfer paper correctly according to the instructions
Print blurry	Poor consumables	Please use advanced consumables
Automatic shutdown/ intermittent printing of the printer	Depleted battery	Charge now
The printer cannot be turned on or off normally /Button malfunction	Long term non reset	Find the "RESET" reset hole at the bottom of the machine and use a tool to hold down the reset

Tattoo printing driver installation steps

**Type-C connection for charging/
data transmission/printing**



USB Type-C

- ① Scan the QR code or copy the link to download the driver using a browser.




https://www.xmwycloud.com/service/service_en.html#driver

- ② Download file name "Tattoo transfer machine drive".

File Name	Document Introduction	File Size	Download
Tattoo transfer machine drive	Computer tattoo transfer machine driver	9.3MB	

- ③ Connect the computer and tattoo transfer machine using a Type-C cable, and insert tattoo paper.

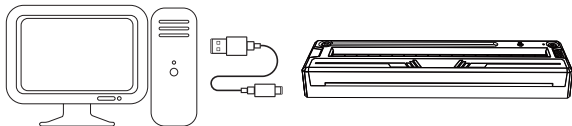


Tattoo printing driver installation steps



④ Run driver software "PrinterDriver_V1.0.14".



⑤ Set the pop-up page with system version "64 Bit" and printer type "A4 Printer", click "USB port check", and then click "Start Install".



⑥ After installation, the A4 Printer property page pops up. Click on "Print Test Page" to send the printer test page, and the driver installation is successful.



Precautions

Printing precautions:

1. It is recommended not to print in high humidity and dusty areas.
2. If the print head overheats after printing, please do not touch it directly.
3. To prevent static electricity from damaging the print head, do not touch the print head.
4. To ensure high-quality printing, please do not print continuously for a long time.

Precautions during charging:


1. Do not forcefully insert or remove the power cord.
2. Please disconnect the power after charging.
3. Please use the original power cord for charging, otherwise the transfer machine may overheat, catch fire, and burn out.
4. Do not charge in high temperature environments.
5. If the wrong type of battery is replaced, there is a risk of explosion. It is prohibited to replace the battery without authorization, as replacing the battery without authorization will void the warranty.

If you encounter trouble:

Q: The default PIN for connecting to the printer is "0000", but if "0000" is entered, the PIN is incorrect and cannot be connected. (Just Suitable For Android) How should I solve it?

A: It may be due to a conflict between the mobile phone's program and the transfer machine's program, causing confusion in the PIN program. Please contact our official technical team and we will send you a tutorial on modifying the PIN connection.

Equipment parameters

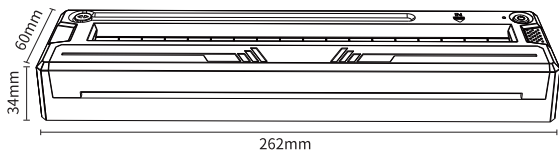

Effective printing width
210mm

Resolution ratio
203DPI

Size
262x60x34mm

Battery capacity
1500mAh

Connection method
USB+Bluetooth

Power input
5V  2A

Paper size
A4-58mm adjustable
Tattoo transfer paper/
thermal paper

Support system
Android & iOS &
Windows

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.


Note: The Grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. Such modifications could void the user's authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement.

This equipment complies with FCC's RF radiation exposure limits set forth for an uncontrolled environment. This device and its antenna(s) must not be co-located or in conjunction with any other antenna or transmitter.


A4热敏转印机 使用说明书

M8

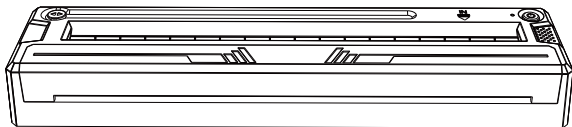

在使用产品前, 请您仔细阅读本说明书, 它可以帮助您轻松掌握本产品的使用方法和注意事项。

外观与组件

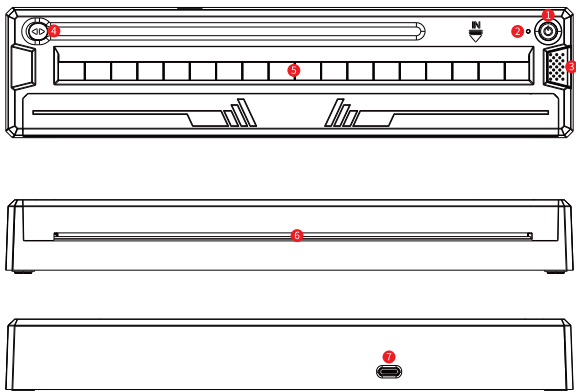

①按键

②状态灯

③开盖开关

④限位器

⑤进纸口

⑥出纸口


⑦Type-C接口

情况	操作
按键	1.长按3秒后蜂鸣器提示后开关机 2.单击按键走纸50mm
充电状态灯	充电时红灯常亮 充满电红灯熄灭
蓝牙状态灯	蓝牙连接成功常亮 蓝牙未连接成功闪烁
限位器	自定义尺寸打印时,纸张靠右侧放置, 使用限位器校验纸张位置
自检页	有纸状态下,双击按键打印自检页


操作指引

为了确保高质量打印, 请参考以下步骤:


长按按键听到蜂鸣后松手。

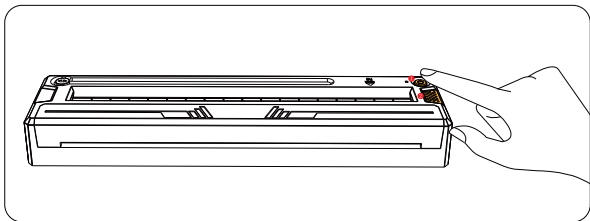

纸张放入注意事项:




①准备好四层转印纸,
取出隔离纸。



②取下底纸, 沿顶部粘合处
水平切割底纸。请注意,
纸张的粘合部分应保持完好。

③准备好打印机, 将碳带面朝下,
将白色转印纸面朝上, 沿顶部
放入打印机, 机器会自动吸纸
校正, 然后连接蓝牙进行打印。




1 放纸的时候自动入纸

注意: 由于转印纸材质不同, 顶部软硬度也不同, 为了防止打印粘纸, 放入转印纸时, 一定要把转印纸抚抹平整且居中放置

操作指引

- ④安装转印纸后, 请准备好您的手机(iOS或Android)以连接到机器。开始打印您想要的图案。



类型	图案	实例	推荐指数
线稿图案			★★★★★ 完美
阴影图案			★★★★★ 完美
渐变图案			★★★★★ 完美
彩色背景图案			★★★★★ 完美
转印纸的质量会影响打印效果 (转印纸的质量由墨片的均匀性决定)			

智能互联

应用程序的下载方式：



从iOS应用商店搜索并下载“TATTOO PRT”应用程序。



在Google Play商店中搜索“TATTOO PRT”或扫描右侧的二维码下载应用程序。



注意事项

常见问题：

问题	原因	解决方法
打印后无图案	① 转印纸中间的透明保护膜未被取下 ② 转印纸未正确放入	① 从转印纸上取下透明保护膜 ② 按照说明正确放入转印纸
打印模糊	耗材不佳	请使用高等耗材
打印机自动关闭/ 间歇性打印	电量耗尽	立即充电
打印机无法正常开机/ 按键失灵	长时间未复位	找到机器底部“RESET”复位孔，使用工具按住复位

纹身打印驱动安装步骤

Type-C连接充电/数据传输/打印



USB Type-C

①扫描二维码或复制链接,使用浏览器下载驱动程序。




https://www.xmwycloud.com/service/service_en.html#driver

② 下载文件名"Tattoo transfer machine drive".

File Name	Document Introduction	File Size	Download
Tattoo transfer machine drive	Computer tattoo transfer machine driver	9.3MB	

③使用Type-C线连接电脑和纹身转印机,放入纹身纸。

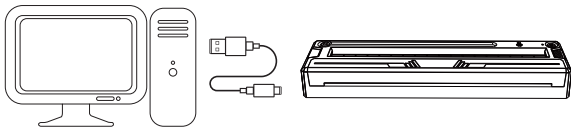


纹身打印驱动安装步骤



④运行驱动软件“PrinterDriver_V1.0.14”。



⑤设置弹出的页面,系统版本“64 Bit”,打印机类型“A4 Printer”,点击“USB port check”,再点击“Start Install”。



⑥安装完成后弹出A4 Printer属性页面,点击“Print Test Page”,发送打印机测试页,驱动安装成功。



注意事项

打印注意事项：

- 1.建议不要在高湿度和多尘的区域打印。
- 2.如果打印后打印头过热，请不要直接触摸。
- 3.为防止静电损坏打印头，请勿触摸打印头。
- 4.为保证高质量打印，请勿长时间连续打印。

充电时注意事项：


- 1.请勿用力插入或拔下电源线。
- 2.充电后请断开电源。
- 3.请使用原装电源线充电，否则转印机可能会过热、起火并烧坏。
- 4.请勿在高温环境中充电。
- 5.如果更换了错误类型的电池，存在爆炸风险，禁止私自更换电池，私自更换电池将失去保修。

如果你遇到麻烦：

Q: 连接打印机的默认PIN是：“0000”但输入了“0000”，显示PIN错误无法连接。我该如何解决？

A: 可能是由于手机的程序和转印机的程序冲突，导致PIN程序混乱。请联系我们的官方技术团队，我们将向您发送修改PIN连接的教程。

设备参数

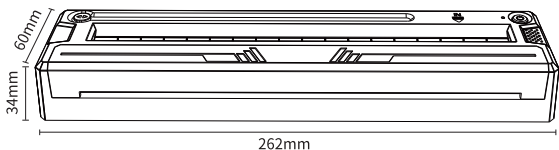

有效打印宽度
210mm

分辨率
203DPI

尺寸
262x60x34mm

电池容量
1500mAh

连接方式
USB+蓝牙

电源输入
5V  2A

纸张尺寸
A4-58mm可调节
纹身转印纸/热敏纸

支持系统
Android & iOS &
Windows

尺寸:85*160mm

颜色:四色印刷

工艺:上光油

材质:128克铜版纸

装订方式:骑马钉