
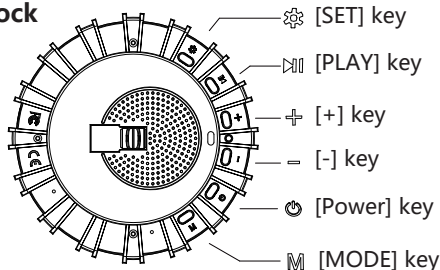


Digital Alarm Clock User Manual

- 26. Temperature display area
- 12:00. Clock display area
- FM. Radio status light
- MHz. Radio frequency
- BT. Bluetooth light
- Rhythm light
- Alarm clock 1 light
- Alarm clock 2 light
- ON OFF
- ON: Status lights ON
- OFF: Status lights OFF



Specifications

Model: YLH-N1
 Input: 5V~0.5A
 FM: 76-108MHz
 Battery Capacity: 500mAh
 Signal-to-Noise Ratio: >80db
 Transducer: p50mm
 Frequency response: 250Hz-20KHz
 Playtime: ≤4H
 Time Display: 24-hour format
 Weight: 200g
 Temperature: -10°C~60°C
 Product Dimensions: 123.8*123.8*35.5mm

Bluetooth Version: 6.0
 Charging time: 3H
 Charging port: Type-C
 Output power: 2W RMS

Safety Instructions

- Keep this product away from fire sources and heat sources.
- Charge only with a power supply that meets local regulatory requirements.
- Do not disassemble this product.
- Before charging, ensure the connector port is completely dry.
- Not for use by children under 6 years old.

Power On/Off

- Charge the product before first use.



- Press and hold the power button for 3 seconds to power on; press and hold the power button for 3 seconds to power off.



- The digital alarm clock and rhythm light are always displayed, please plug it in.

Clock Setting

- Press and hold the [SET] key for 2 seconds, the hour digits will blink. Short press the [+] / [-] keys to adjust the hour. After setting the hour, short press the [SET] key; the minute digits will blink. Short press the [+] / [-] keys to adjust the minutes. After adjustment, short press the [Power] key to confirm and return.

Alarm Setting

- Alarm 1 Setting: Short press the [SET] key, then press the [MODE] key until Alarm 1 blinks. Short press the [+] / [-] keys to set the alarm ON. Then short press the [SET] key; the alarm hour digits will blink. Short press the [+] / [-] keys to adjust the hour. After setting the hour, short press the [SET] key; the minute digits will blink. Short press the [+] / [-] keys to adjust the minutes. After adjustment, short press the [Power] key to confirm and return (Alarm 1 status light is always on).
- Alarm 2 Setting: Short press the [SET] key, then press the [MODE] key until Alarm 2 blinks. Short press the [+] / [-] keys to set the alarm ON. Then short press the [SET] key; the alarm hour digits will blink. Short press the [+] / [-] keys to adjust the hour. After setting the hour, short press the [SET] key; the minute digits will blink. Short press the [+] / [-] keys to adjust the minutes. After adjustment, short press the [Power] key to confirm and return (Alarm 1 status light is always on).
- The alarm rings for 60 seconds and stops automatically. Short press the [Power] key to stop the alarm ringing immediately.

Restart & Reset

- Press and hold the [Power] key for 15 seconds to restart and reset the device.

Rhythm Light

- Short press the [SET] key until the Rhythm Light icon blinks. Short press the [+] / [-] keys to set the Rhythm Light ON. Then short press the [SET] key; the rhythm light mode (S01-S09) will be shown. Short press the [+] / [-] keys to cycle through modes. After selecting the mode, short press the [SET] key; the rhythm light color (C01-C18) will be shown. Short press the [+] / [-] keys to adjust the color. After adjustment, short press the [Power] key to confirm and return. The rhythm light will turn on.

FM Radio

- Short press the [MODE] key until the FM icon is displayed. Press and hold the [PLAY] key for 2 seconds to auto-scan for radio stations. After scanning completes, short press the [+] / [-] keys to switch between found stations.
- Short press the [PLAY] key to toggle Mute ON/OFF.
- Press and hold the [+] key to increase volume.
- Press and hold the [-] key to decrease volume.

Bluetooth Music

- Bluetooth Connection, Short press the [MODE] key to switch until the BT icon blinks. Select "YLH-N1" from your Bluetooth device list to connect. Upon successful connection, the BT icon will be displayed steadily.



- Short press the [PLAY] key to Play/Pause music.
- Press and hold the [+] key to increase volume. Short press the [+] key for Next Track.
- Press and hold the [-] key to decrease volume. Short press the [-] key for Previous Track.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction