

Android LCD Advertising Display User manual



Precautions

Thank you for purchasing and using this product. When unpacking please check the accessories inside the box are completed. Before connecting the unit and turning on the power, please read the operation instructions carefully and keep the operation instructions for future use.

Safety Guide

IMPORTANT NOTES! High-pressure danger!

Do not open the case to avoid electric shock. Maintenance should be commissioned by professionals. Improper handling may cause electric shock or fire. To ensure your safety and the service life of the product, please read the following safety precautions carefully before use.

- ◇ Before using the unit, you must read and understand all instructions.
- ◇ The user's manual must be kept for future use.
- ◇ The warning instructions on the machine's operation instructions must be strictly observed.

Operation must be in accordance with all instructions.

◇ Do not use accessories not recommended by the manufacturer. Improper use of the settings may lead to unexpected malfunctions.

◇ Please use power adapter compliant with the color LCD monitor, the AC power cord connected to the power outlet, please check the TV specifications of the voltage source requirements are suitable for local power supply conditions, if you are not sure the type of power supply, and Dealer or the local electricity department.

◇ Do not use any object to press or winding the power cord. Damaged power cords can cause electric shock or fire.

◇ Do not attempt to repair the machine, because the machine has high-pressure devices and other damage devices, will cause harm to the human body or the TV itself, be sure to let professional maintenance personnel for maintenance.

◇ Do not touch the control parts which are not mentioned in the instruction manual. Improper adjustment of the control parts not mentioned in the operating instructions can damage the unit and increase the maintenance work of the professional technician.

◇ When replacing the unit, check with the service personnel that the accessories specified by the manufacturer or the same as the original are used. Improper use of accessories can result in fire, electric shock, and damage to the TV.

◇ To ceiling mount the unit on roof, please follow up the installation instruction recommended by manufacturer.

◇ Before cleaning the unit, unplug the power. Clean the unit with a slightly damp cloth. Do not use liquid cleaners or spray cleaners when cleaning.

- Unplug the AC power cord when not using the unit for long time.

Do not place the unit on an unstable cart, stand, tripod or table.

- ◇ Please ensure that the air around the machine, the machine is not covered or blocked vents.

◇ The LCD panel of this machine is made of sensitive material, do not touch any LCD monitor with any item. If the unit falls from height or is impacted, the LCD panel may be broken. Stop using the unit immediately.

Do not place the unit direct sunlight or near heat sources, such as radiators, heating equipment, stoves and other heat objects. Each switching time interval not less than 3 seconds.

Contents

1、 MACHINE INTRODUCTION	1
1.1 Machine Specifications:	1
1.2 Picture.....	2
1.2.1 Wall-mount type:	2
1.2.2 Interface diagram:	2
1.2.3 Installation diagram:	3
1.2.4 Floor standing type:	3
1.2.5 Interface diagram	4
1.2.6 Machine installation diagram machine.....	5
1.3 Remote control and button description:	6
2、 SOFTWARE INSTALLATION AND NETWORK CONNECTION.....	8
2.1 Computer-side installation management software	8
2.2 There are two ways to connect a device to network.....	8
3、 TERMINAL OPERATION INSTRUCTIONS.....	9
3.1 Exit the player mode	9
3.2 Set up network connection.....	9
3.3 Adjust the machine display range.....	10
3.4 Enter the player mode	10
4、 SOFTWARE OPERATION.....	11
4.1 System login	11
4.2 Exit system.....	12
5、 COMMON TROUBLES AND HANDLING METHODS OF NETWORK ADVERTISING PLAYER.....	13
6、 AFTER-SALES SERVICE AND CONTACT:	14

1 、 Machine introduction


1.1 Machine Specifications:

Main Hardware Specifications	
Video format	Support WMV、 AVI、 FLV、 RM、 RMVB、 MPEG 、 TS、 MP4
Picture format	Support BMP、 JPEG、 PNG
USB2.0 interface	USB HOST*2、 USB socket*2
Ethernet	1000Madaptive Ethernet
TF card	Compatible TF (maximum support 32GB)

Other standard interfaces and functions:

Storage interface	TF card	data storage, maximum support 128G
	USB*2	HOST interface, support data storage, data import, USB mouse and keyboard, camera, touch screen, etc.
Ethernet	RJ45 interface	supports 1000M wired network
HDMI interface	Standard interface	supports HDMI data output, maximum support 1080P
Mic interface	Standard Interface	3.5mm interface
4G interface	PCI-E	supports Huawei, ZTE and other PCI-E 4G module

1.2.1 Floor standing type

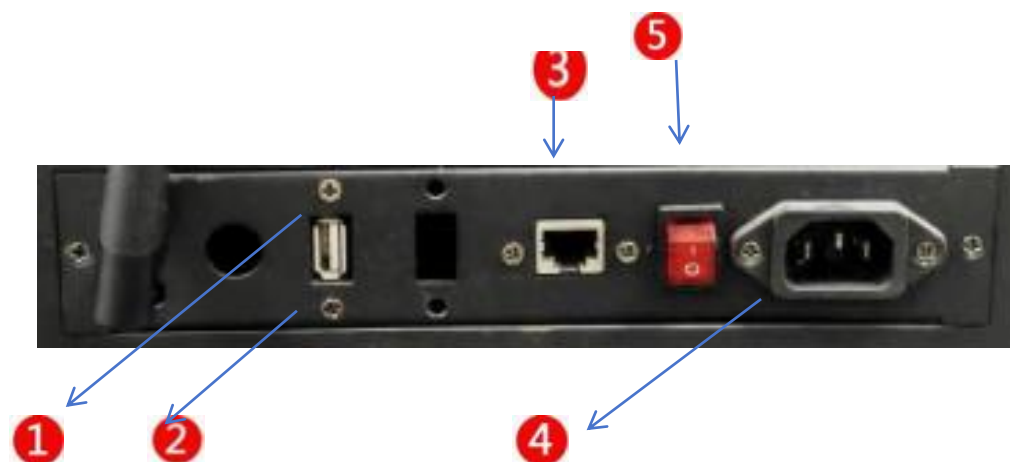

1 2 USB 2.0 interface: USB interface is compatible with the use of USB2.0 or USB1.1 standard USB devices.


3 Wired network jack: This network jack supports RJ-45 cable.

4 Power supply slot: support 100-240V power.

5 Power switch: press this button directly to turn on/off the machine.



1.2.2 Machine installation diagram machine

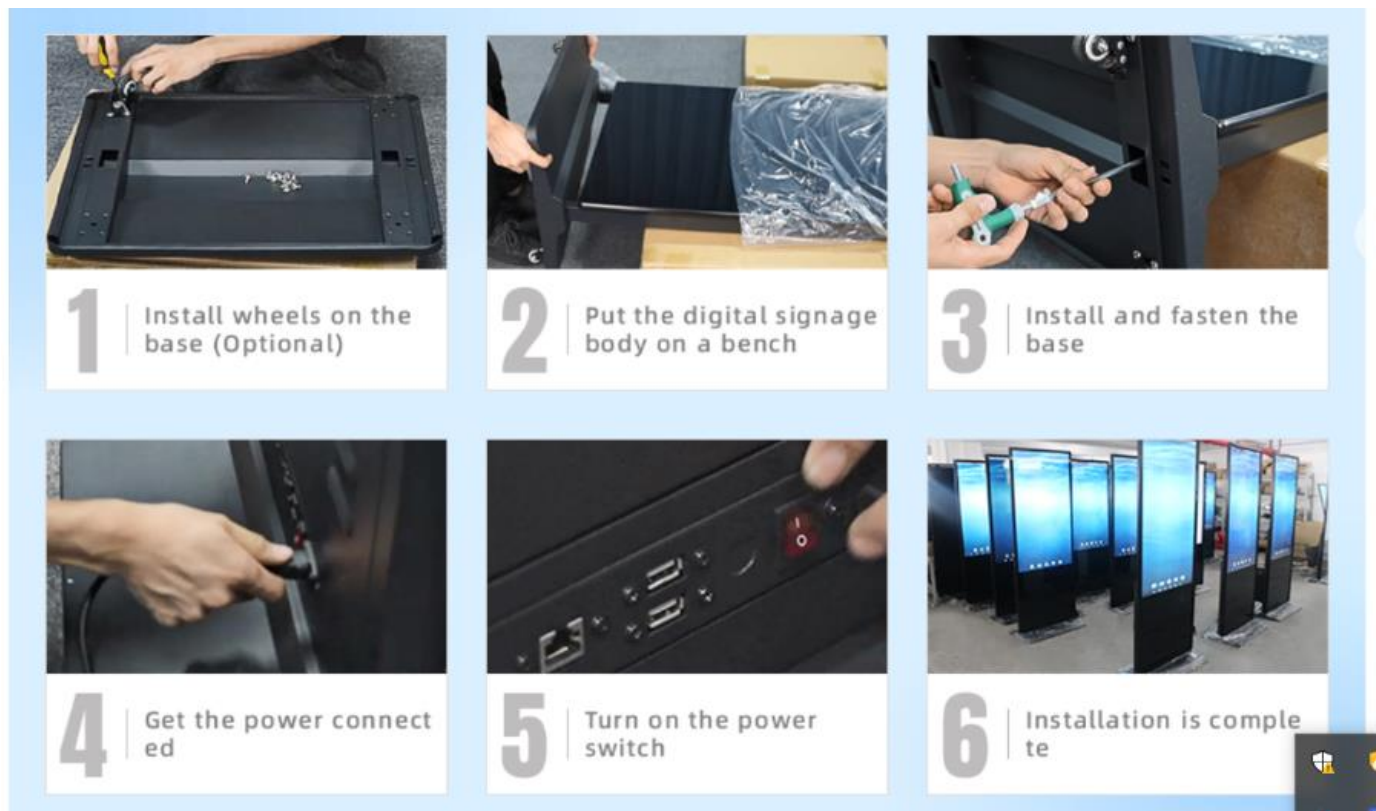

1.3 Remote control and button description:



	Power Button, control switch, Short press stand-by, long press pop-up menu shutdown or restart
	Mute Button to control the sound switch
	Play / _Pause_ Button
	Return to the main page
	Instead, it's an HDMI signal channel
	Screen mouse key
	Set_Button, quickly open the settings interface
	Backspace
	Volume plus
	Volume down

	Move The cursor up
	Confirm Button
	Move the cursor to the left
	Move The cursor to the right
	Move The cursor down
	Menu Button
	The number one button
	The number two button
	The number three button
	The number four button
	The number five button
	The number six button
	The number seven button
	The number eight button
	The number nine button
	Symbols. Push Button
	The number zero button
	Delete Button

2 、 Software installation and network connection

2.1 Computer-side installation management software


a, Please take out the CD in the accessory box of the machine before use.

b, Prepare a PC, and then install the operation software in CD disk. please follow up the software operation instructions.


c, Double click the operation software to finish installation.

2.2 There are two ways to connect a device to network

Method 1: AP direct connection

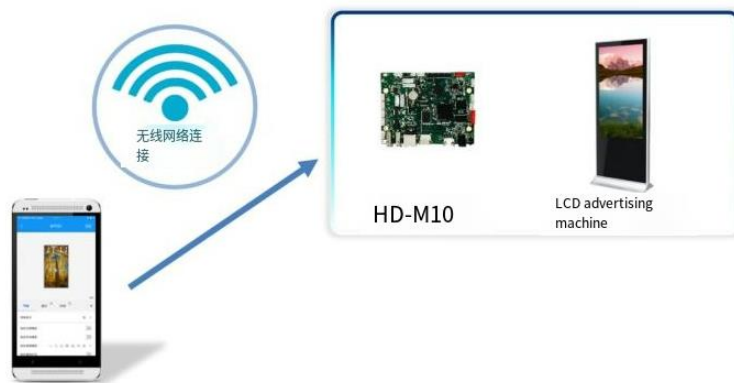


Method 2 : through the wireless router connected with the advertising terminal.

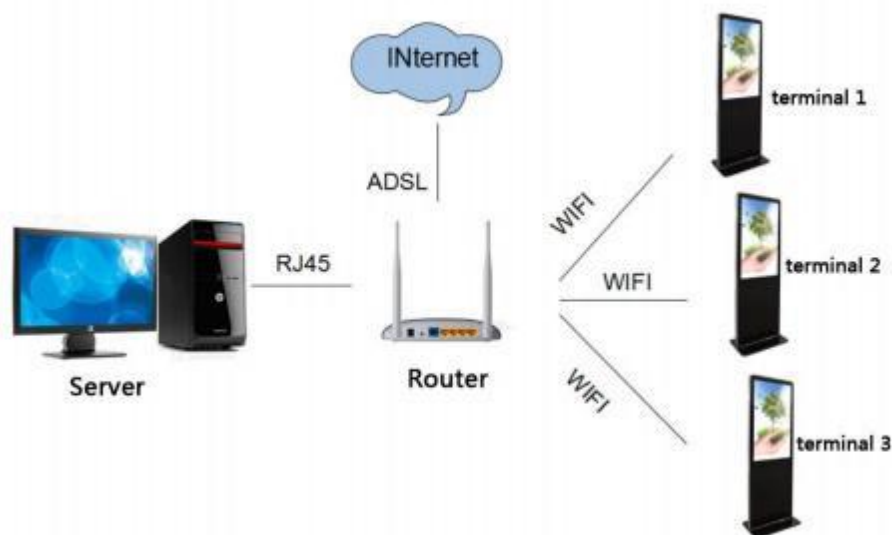


3、 Software Operation

3.1 Release program


After scanning the QR code on the screen and downloading the app, the phone can release the program directly to the machine

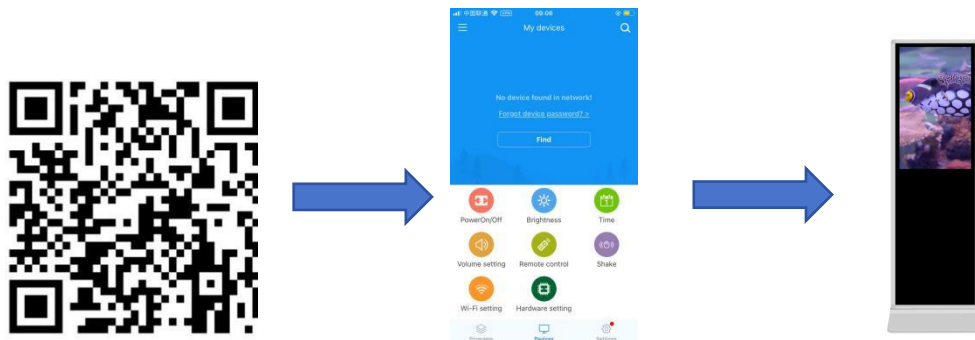

Flash drive release

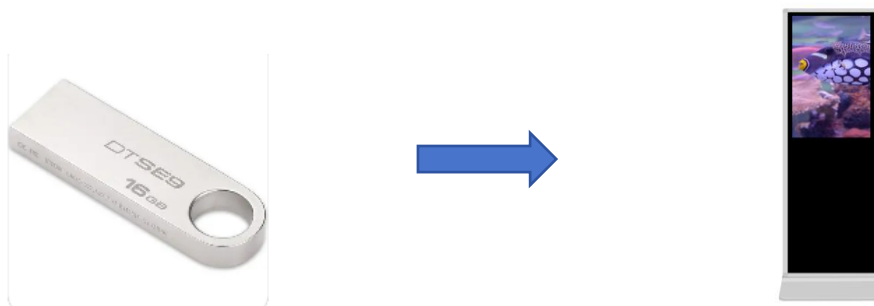

Cloud publishing

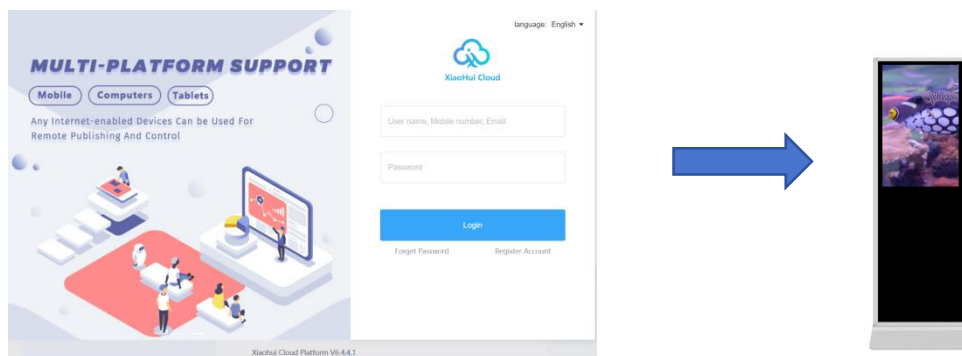

FCC Caution.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the

instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator & your body.