

# Smart Tag

## NLT-20



Works with

**Apple Find My**


# Introduction

The Smart Tag works with Apple Find My to help you keep track of your stuff even further away. This tag has a replaceable battery that lasts up to one year. The compact design makes it easy to attach to your important things such as keys, bags, and suitcases. A simple setup can pair this item tracker with the Find My app on your Apple devices to track down your nearby items by playing a sound. The anonymous and encrypted Find My network also ensures your privacy and safety.

## Included in the Box

| Item                             | Quantity |
|----------------------------------|----------|
| Smart Tag(CR2032 battery inside) | 1        |
| User Manual                      | 1        |
| lanyard                          | 1        |

**Note:** To use the Apple Find My app or the Find Items app on Apple Watch to locate this item, the latest version of iOS, iPadOS, macOS, or watchOS is recommended.



Battery Cover

## Controls and Status

| Battery Operation Steps                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Status    | Buzzer                             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|------------------------------------|
| Replace the battery                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Power On  | A beep will sound                  |
| <ol style="list-style-type: none"><li>1. Remove the battery.<br/>Replace the battery. A confirmation beep will sound.</li><li>2. Remove the battery again.<br/>Replace the battery again. Two confirmation beeps will sound.</li></ol>                                                                                                                                                                                                                                                                                                                                     | SN Lookup | Two confirmation beeps will sound. |
| Remove the battery.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Power Off |                                    |
| <ol style="list-style-type: none"><li>1. Remove the battery.<br/>Replace the battery. A confirmation beep will sound.</li><li>2. Remove the battery 2nd time.<br/>Replace the battery again. Two confirmation beeps will sound.</li><li>3. Remove the battery 3rd time.<br/>Replace the battery again. Three confirmation beeps will sound.</li><li>4. Remove the battery 4th time.<br/>Replace the battery again. Four confirmation beeps will sound.</li><li>5. Remove the battery 5th time.<br/>Replace the battery again. A "DingLingLing" beeps will sound.</li></ol> | Reset*    | A "DingLingLing" beeps will sound. |

\*This will restore the tag to factory settings and clear all the connection data. You must remove the item from the Find My app and add it back before using it again.

## Functions

### Locate your item nearby

You will be guided through “Items” page in Apple Find My App “Play Sound” by buzzer build-in smart tag.

### Long distance

Hundred millions of Apple device will help you to track/locate your items together if you lost your belongings over 60m bluetooth range. At same time, your privacy will be protected in every process.

### Left-behind Alerts


If your item is left behind and disconnects from the Bluetooth of your Apple device, the Apple Find My app will instantly send you notifications without additional fees.

## Discourage Unwanted Tracking


If someone's tag lands on your items, your Apple device will automatically detect that tag and send you an alert to prevent unwanted tracking. If you still can't find it, the tag will make a sound to let you know.

## Pair with Find My App


1. Remove the insulation sheet of the Tag to power up, and place it near to your iOS device.




2. Turn on your iOS device's Bluetooth. Make sure your iOS device is in the latest version.




3. Open Find My app, tap “Items” and then “Add Item” . Select “Other Supported Item” and follow the in-app instruction to complete pairing.





4. For subsequent pairing with other items, tap “+” and then “Add Other Item” to pair.

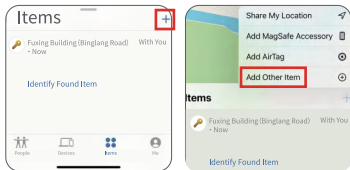

Note: To ensure the best user experience, please update the firmware whenever the update is available in Find My app.

## Battery Replacement

Smart Tag has a replaceable battery that lasts up to 1 year. If the battery runs down, you can replace it in 3 steps.

1. Press down on the battery cover of your NLT-20 and rotate counterclockwise until the cover stops rotating. Remove the cover and the battery.



2. Replace the battery.



3. Press down on the battery until you hear a sound. This sound means that the battery is connected.



4. Replace the cover by aligning the triangle on the cover with the triangle on the NLT-20. Press down on the cover.



5. Rotate the cover clockwise until it stops rotating.



## Warning:

| <b>⚠ WARNING</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                   |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>• <b>INGESTION HAZARD:</b> This product contains a button cell or coin battery.</li><li>• <b>DEATH</b> or serious injury can occur if ingested.</li><li>• A swallowed button cell or coin battery can cause <b>Internal Chemical Burns</b> in as little as <b>2 hours</b>.</li><li>• <b>KEEP</b> new and used batteries <b>OUT OF REACH</b> of <b>CHILDREN</b></li><li>• <b>Seek immediate medical attention</b> if a battery is suspected to be swallowed or inserted inside any part of the body.</li></ul> |  |

a) Remove and immediately recycle or dispose of used batteries according to local regulations and keep away from children. Do NOT dispose of batteries in household trash or incinerate.

b) Even used batteries may cause severe injury or death.

c) Call a local poison control center for treatment information.

d) Use the same type CR2032 3V coin battery for replacement. Otherwise, it might cause damage.

e) Non-rechargeable batteries are not to be recharged.

f) Do not force discharge, recharge, disassemble, heat or incinerate. Doing so may result in injury due to venting, leakage or explosion resulting in chemical burns.

- g) Ensure the batteries are installed correctly according to polarity(+ and-).
  - h) Do not mix old and new batteries, different brands or types of batteries, such as alkaline, carbon-zinc, or rechargeable batteries.
  - i) Remove and immediately recycle or dispose of batteries from equipment not used for an extended period of time according to local regulations.
  - j) Always completely secure the battery compartment. If the battery compartment does not close securely, stop using the product, remove the batteries, and keep them away from children
- Keep the battery out of reach of kids and pets. This tag contains a coin cell battery which can be dangerous if chewed on or swallowed.
  - If you must discard the tag, take the battery out first.

## NOTICE

Use of the Works with Apple badge means that a product has been designed to work specifically with the technology identified in the badge and has been certified by the product manufacturer to meet Apple Find My network product specifications and requirements. Apple is not responsible for the operation of this device or use of this product or its compliance with safety and regulatory standards.

## Specifications

|                     |                                                                                                      |
|---------------------|------------------------------------------------------------------------------------------------------|
| Dimensions          | 31*8.9±0.1mm                                                                                         |
| Weight              | 7.2g                                                                                                 |
| Material            | ABS                                                                                                  |
| Battery             | CR2032 Coin Cell Battery, DC 3V                                                                      |
| Buzzer              | Built-in >75dB                                                                                       |
| Working Temperature | -20~60°C(23°F~104°F)                                                                                 |
| Compatibility       | Apple ID, iPhone and iPod touch models with iOS 14.5 or later, iPad models with iPadOS 14.5 or later |
| Connectivity        | BLE5.2                                                                                               |
| App                 | Apple Find My                                                                                        |
| Wireless range      | ≥40m(Line-of-sight)                                                                                  |

## Troubleshooting

1. Fail to add Smart tag to the Find My app.

- a. Make sure the tag is powered on and near to the device.
- b. Make sure your iOS device is in the latest version and the Bluetooth is on.
- c. Make sure the tag has not been paired with the Find My app on other iOS device.
- d. If you follow the previous steps and still fail to add, please reset and then try again.

## 2. Smart tag cannot work well.

- a. Check the battery level above the "Play Sound" menu if the battery level is low. If so, replace it with a new one of the same type (CR2032).

## Disclaimer

The information contained in this manual just for reference. The product described above may be subject to alteration owing to the manufacturer's continuing research and development plans, without making an announcement in advance.

We shall not make any statement or warranty about this manual.

**FCC ID: 2BRYI-TAG**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction