

Shenzhen Yuan Dongli Digital Technology Co., Ltd.

Address: 3F, Building A, Ruixing Science Park, No.6 Sanhe Road, Dalang Peak Community, Longhua District, Shenzhen
Phone: 86-755-8326-6570 Fax: 86-755-8325 5400

Bluetooth Antenna Sample Acknowledgement

BT Antenna Product Approval

Time: 2020-12-4

1. Introduction to Antennas


Our Bluetooth antenna is directly fabricated on a PCB board using a copper-soldered and tin-plated process. The copper foil thickness is H/HOZ, and the board is made of FR-4 material with a 1.0mm thickness.

Shenzhen Yuan Dongli Digital Technology Co., Ltd.

Address: 3F, Building A, Ruixing Science Park, No.6 Sanhe Road, Dalang Peak Community, Longhua District, Shenzhen
Phone: 86-755-8326-6570 Fax: 86-755-8325 5400

II. Antenna Shape

1. Dimension diagram: 18.4*4.2*0.5mm

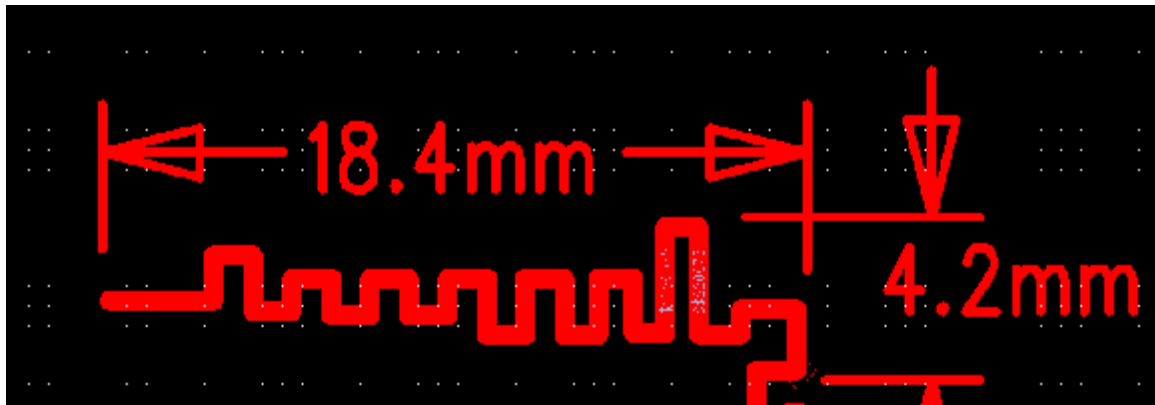

Shenzhen Yuan Dongli Digital Technology Co., Ltd.

Address: 3F, Building A, Ruixing Science Park, No.6 Sanhe Road, Dalang Peak Community, Longhua District, Shenzhen

Phone: 86-755-8326-6570

Fax: 86-755-8325 5400

III. Antenna Parameters

Antenna center frequency: 433MHz; bandwidth: 420-446MHz; gain: 1.5dBi (omnidirectional), resonating in this frequency band. The table below lists the antenna's key parameters.

433M built-in antenna	
Frequency(MHz)	420 ~ 446 MHz
VSWR	≤ 1.92
Impedance	50 Ohm Nominal
Polarization	Vertical polarization
Power capacity	1W
Gain (Peak)	1.5dBi
Standing wave bandwidth	$\geq 26\text{MHz}$
Productiveness	$>25\%$