

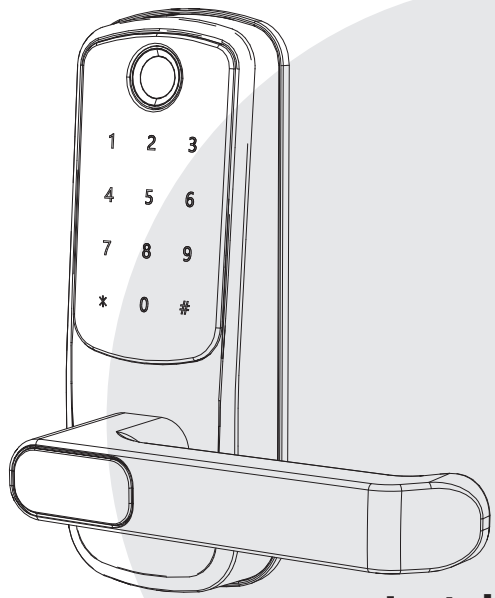


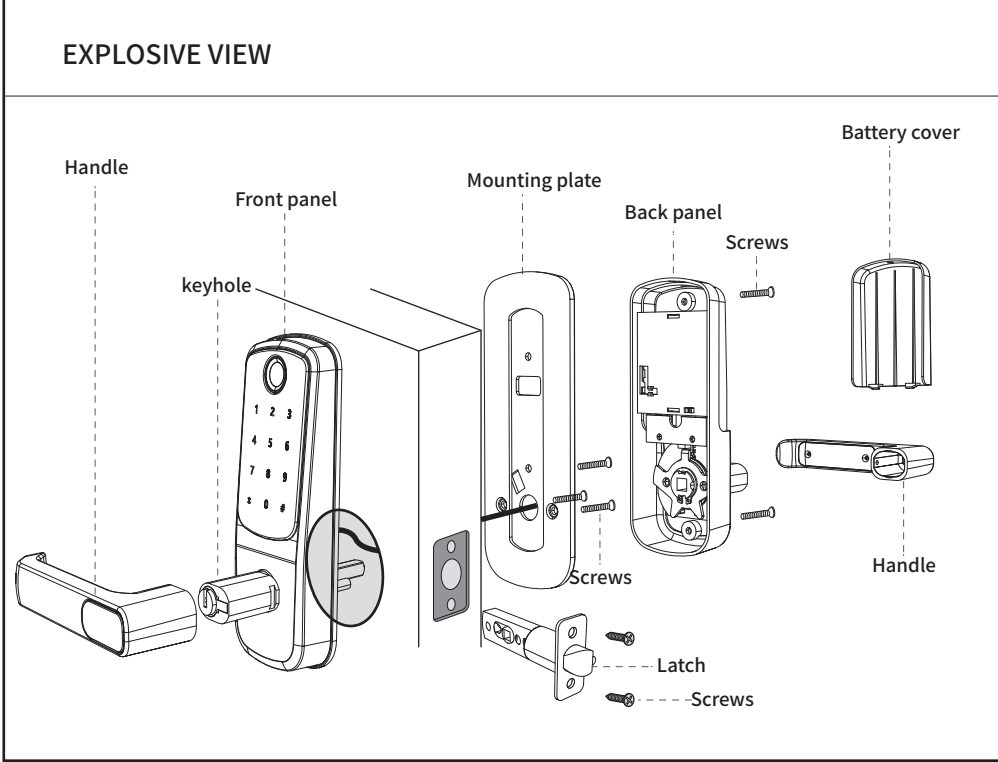

Installation Guide
Version 1.0

WHAT'S INCLUDED			
Latch and strike	Exterior Assembly	Interior Assembly	Screws
 Phillips head screw driver Note: No drill needed			

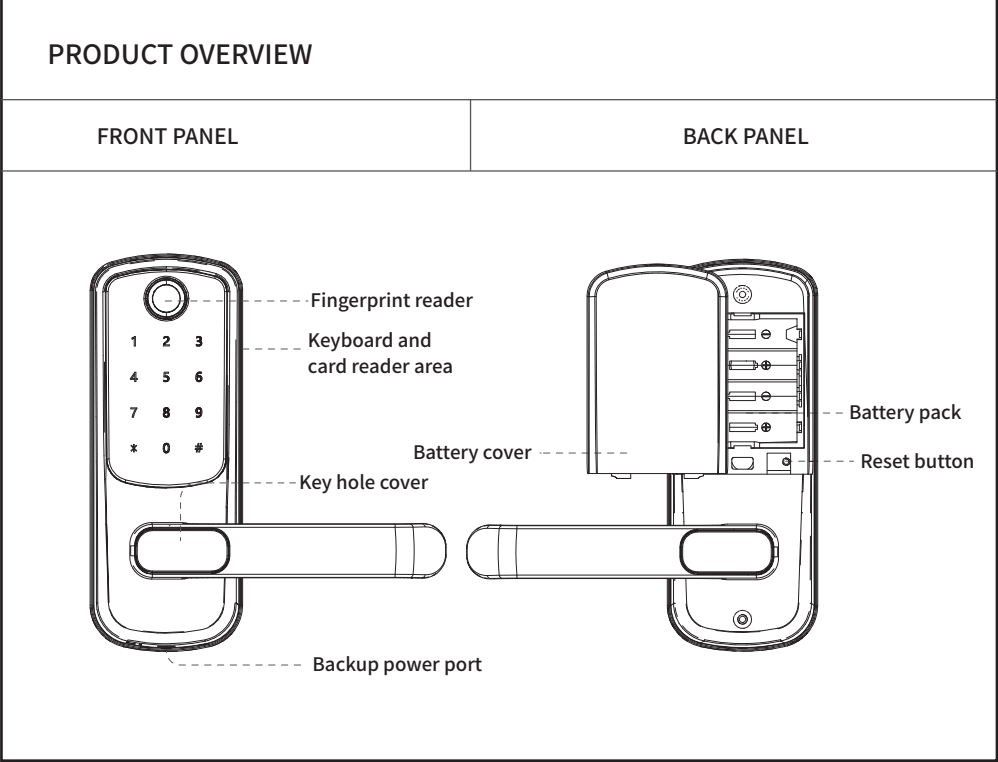

1

Adjust the back set of latch (if needed)

A

Hold the latch in front of the door hole, with the latch face flush against the door edge.

B

If the latch holes are centered in the door hole, no adjustment is required. Proceed to step 2. If the latch holes are NOT centered, adjust latch. See "Latch Adjustment".

C

Latch adjustment (only if needed)

2

Install latch

A

B

Note:

The square hole must be horizontal

3

Install front panel and interior mounting plate

A

B

Note:

Choose the screws that will fit the thickness of your door. Check labels on the screw bags.

4

Connect wire connector and install back panel

A

Note:

The wire connectors can only be connected in one way.

B

C

D

5

Install 4 AA batteries and battery cover

A

B

C

6

Install the door handles

A

B

C

A

B

C

7

Insert the key and test the installation(The door must be open)

A

B

Install our lock on top (only if needed)

Install our lock on top


If you have a deadbolt lock on top, please move the deadbolt lock to the bottom and install our lock on top to avoid installation issues.

FCC Caution:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

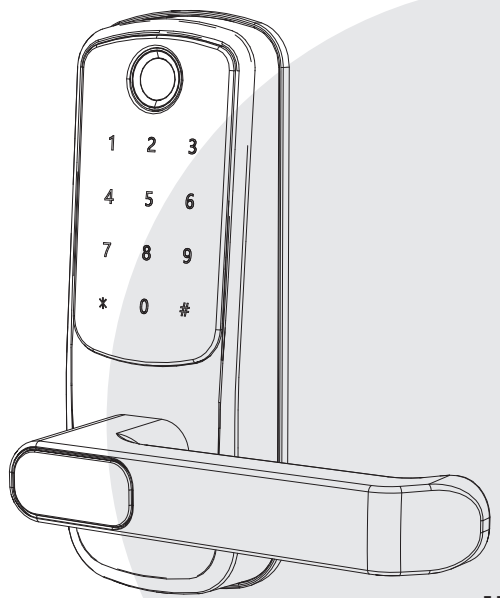


Installation Guide

Version 1.0


HOW TO REGISTER

Download the Smart Lock app from
Google Play or App Store
Search “TT Lock.”

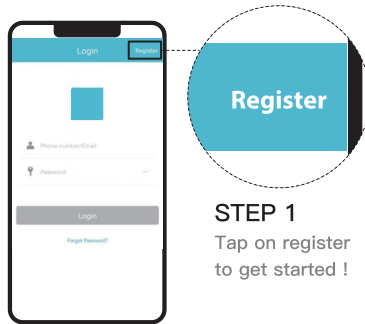

Register


STEP 1
Tap on register
to get started !

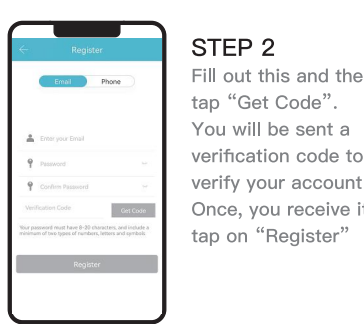


STEP 2
Fill out this and then
tap “Get Code”.
You will be sent a
verification code to
verify your account !
Once, you receive it,
tap on “Register”

Note: The Smart Lock app is needed to use this lock. If this lock was professionally installed (or installed by someone other than the homeowner), make sure this step is performed by the homeowner.

PAIRING YOUR LOCK

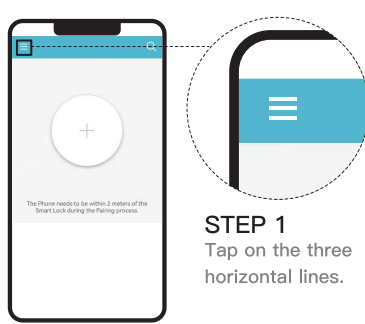


STEP 1
Tap on the three
horizontal lines.

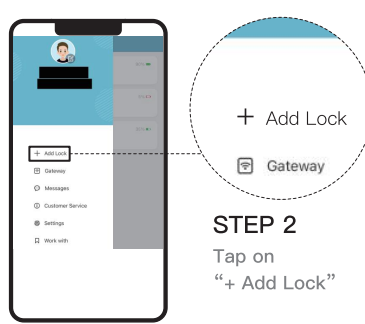

STEP 2
Tap on
“+ Add Lock”




STEP 3
Tap on “Next”

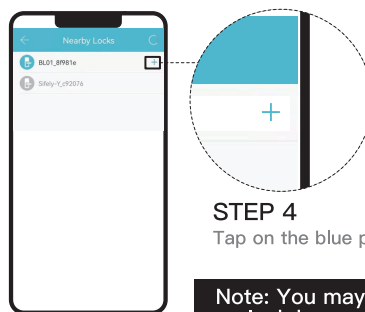

STEP 4
Tap on the blue plus sign.

Note: You may need to tap
on lock keypad.

LOCK PAGE OVERVIEW



- Unlock/Lock**
Unlock/Lock using phone’s bluetooth
- Generate Passcode Page**
Generate 6 different types of passcodes
- eKey Page**
View and modify current eKeys
- Remote Unlock**
Unlock remotely if Gateway is connected nearby
- Records Page**
View entry times, attempts and methods
- Settings Page**
View and modify settings
- Send eKey**
Set up and send eKeys
- Cards/Fobs Page**
Set up your fobs here
- Fingerprints Page**
Set up fingerprints
- Passcode Page**
View and modify passcode
- Authorized Admin Page**
Create and edit admins
- Wireless Key Fob Page**
Wireless Key Fob Page
- Unlock/Lock Status**
Check status of lock

Note: Some of these icons may not appear if the Gateway is not connected to the lock.


APP UNLOCK/LOCK



To unlock the lock, tap this icon once.
To lock the lock, press and hold on this icon.


Note: This will only work while you are within bluetooth range of the lock.
Refer to Gateway Guide page for remote unlock lock information.

PASSCODES

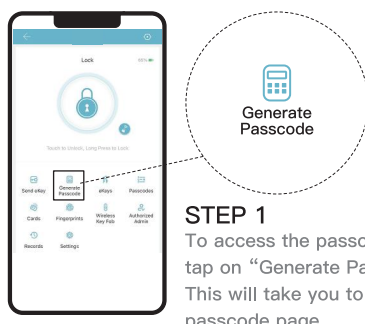

Generate Passcode

STEP 1
To access the passcode menu,
tap on “Generate Passcode”.
This will take you to the
passcode page.

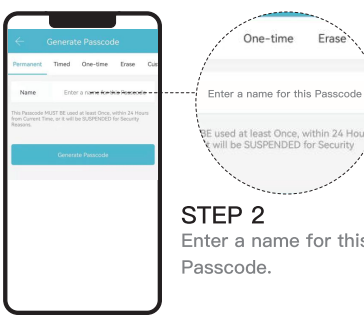


STEP 2
Enter a name for this
Passcode.

Here is a breakdown of the 6 different code types for different durations.

Permanent	Lasts permanently	Erase	Erases all codes on lock
Timed	Lasts between selected hours	Custom	Choose your own digits such as 4321 (permanent or timed)
One-time	Lasts for one use	Recurring	Lasts during scheduled hours weekly


PASSCODES

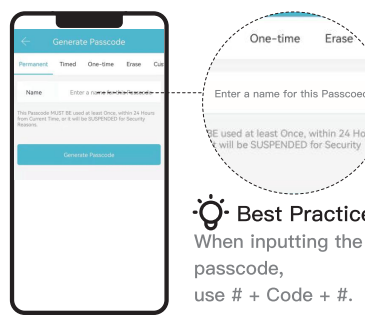


Best Practice:
When inputting the
passcode,
use # + Code + #.

Pay attention to this text when generating a code.
You may experience issues if these instructions are
not followed.

Note: To generate custom codes, you will need to
be within bluetooth range of the lock unless a
Gateway is connected.

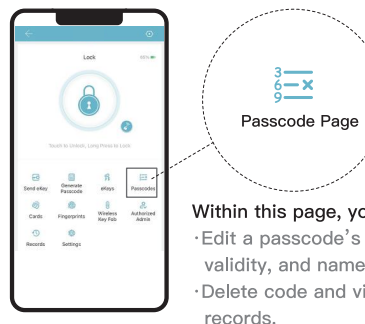


Within this page, you can
• Edit a passcode’s number,
validity, and name.
• Delete code and view
records.

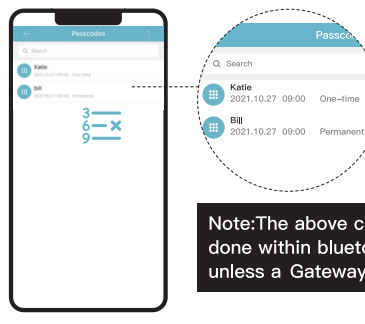

Note: The above can only be
done within bluetooth range
unless a Gateway is connected.

IC CARD / FOBS



Cards

To add a fob to your
lock.
Follow these steps.


1. Tap on “Cards”.
2. Tap on “Add Card”
3. Choose the validity period of the lock.
4. Once the lock says “Please swipe your card”,
place the fob against 5 on the keypad.
5. If you hear “input successful”, the fob can be used
to unlock your lock.



Easily add and
use up to 200 fobs!

FINGERPRINTS

To add a fingerprint follow these instructions:




Fingerprints

Step1
Tap on Fingerprints.



Step2
Tap on “Add Fingerprints”




Step3
Select Fingerprint type
depending on when you
would like it to be valid.



Step4
Follow instructions on app. You
will be asked to place your finger
on the sensor 4 times.

Experiencing issues with fingerprint
recognition?
• Ensure the sensor surface is clean.
• Try a different finger.
• Ensure your finger is moist enough.
• Take out batteries for a minute
and place back in.


eKEYS

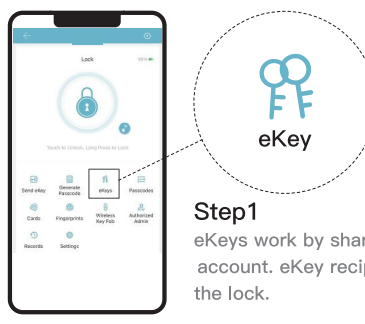

eKey


Best Practices:
It is strongly recommended that the recipient first
register for an account using the Smart Lock app.

Step1
eKeys work by sharing app access of your lock with another Smart Lock
account. eKey recipients will be able to use their phone to unlock/lock
the lock.

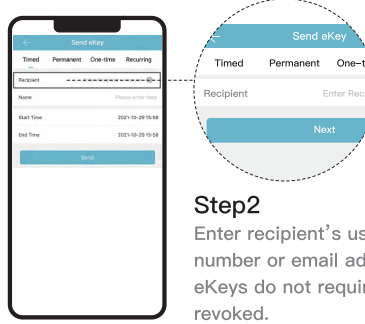


Step2
Enter recipient’s username. It will be the phone
number or email address used during registration.
eKeys do not require wifi or bluetooth to be sent or
revoked.

AUTHORIZED ADMIN

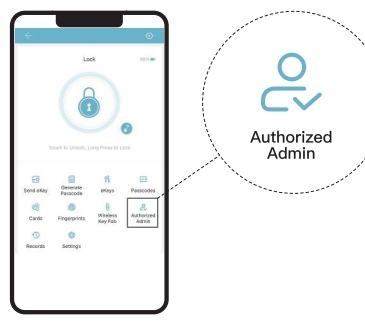


Authorized Admin

Step1
Authorized Admins are similar to eKeys;
however, an authorized admin can do the following:
1. Unlock/lock via the app.
2. Generate, Edit, Delete passcodes, IC cards, & fingerprints.
3. Adjust settings like passage mode, auto-lock timer, &
turn on/off the lock sound.

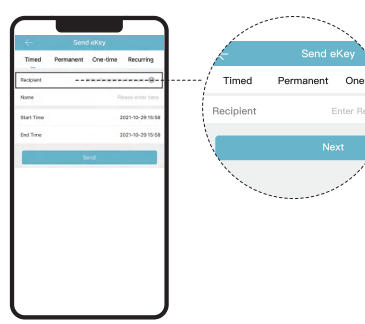


Step2
Enter recipient’s username. It will be the phone
number or email address used during registration.

PASSAGE MODE & AUTO-LOCK




Settings

Step1
Auto-lock will automatically lock the lock when it has
been opened after 5 second by default. This can be adjusted
with Passage Mode and Auto-lock timer. Outlined below
is how to adjust these settings related to auto-lock.





Step2
Select Passage Mode

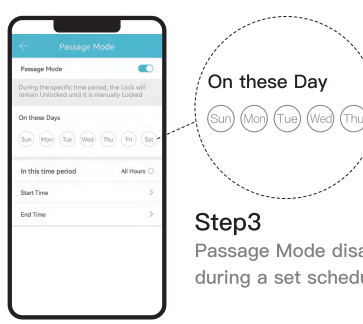

On these Day

Step3
Passage Mode disables auto-lock
during a set schedule.

LOCK SETTINGS

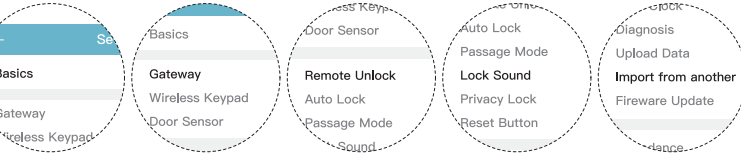

Here are some settings you should familiarize yourself with.

Under **Basics**, you can view and change information such as Lock Name.

Gateway shows signal strength if Gateway is connected.

With **Remote Unlock** on and a Gateway connected, you can remotely unlock/lock your lock.

Lock Sound adjusts the locks sound level.

Import from another lock allows for the transfer of passcodes and fobs from one lock to another.

Delete will remove the lock from your account and clear any settings on the lock. You must be near
the lock to do this.

WIRELESS KEY FOB



Wireless Key Fob

Do something similar
with “Wireless Key Fob”
Follow these steps.

1. Tap on “Wireless Key Fob”
2. Tap on “Add Key Fob”
3. Choose validity period.
4. Follow on app instructions to pair the wireless
key fob.
5. Use unlock and lock to interact with lock.

Note: A Wireless Key Fob can only connect to one
lock.



INTEGRATIONS

Our locks work with
the following software:



With more to come in the near future.

GATEWAY

The Gateway bridges any nearby locks to your
local wifi allowing for remote control.



With the Gateway connected.
• Receive unlock notifications wherever you are.
• Remote unlock/lock.
• Check access logs whenever you need them.
• Generate, edit, or delete custom codes for
your guests.
• Access the features of the webportal version of
our app for free!
• Check battery level remotely.

FAQ

Q: I entered a code or fingerprint incorrectly too many times and my lock will not accept any new inputs.
A: Unlock the lock once via the app or wait 5 minutes.

Q: How can I manually lock the lock?
A: Press and hold # to lock the lock.

Q: The batteries died before I could replace them.
What can I do?

A: Use the provided physical keys to open or plug
in a powerbank into the slot on the underside
of the keypad to power it up to be able to
enter and change the batteries.

**Q: How do I share access of the lock on 2
different phones?**

A: Refer to eKeys or Authorized Admin section
on how to do that is.

Not working like it should? Contact us with
the following information for quicker resolution.

- Which product you do have?
- Where are you in the setup process?
 - Installing the product.
 - Setting up the app and pairing the product.
 - Already set up app with the product.
- How long have you had our products for?