2605(V1S) User Manual

80G纸张过油，骑马订，55*75mm

V1S

Smart Health Band

User Manual



Product Introduction

This is a smart health bracelet which can monitor multiple body vital signs all the day and night.

24/7 Heart Rate Monitor
SpO2
Skin Temperature
HRV
Stress
Multi-sport Tracking
Sleep Tracking
Activity Tracking
IP68 Waterproof

Note: This is not a medical device and is not intended to diagnose or monitor any disease or medical condition.

What's Included in the Box

(1) Smart bracelet
(2) USB charger
(3) User manual

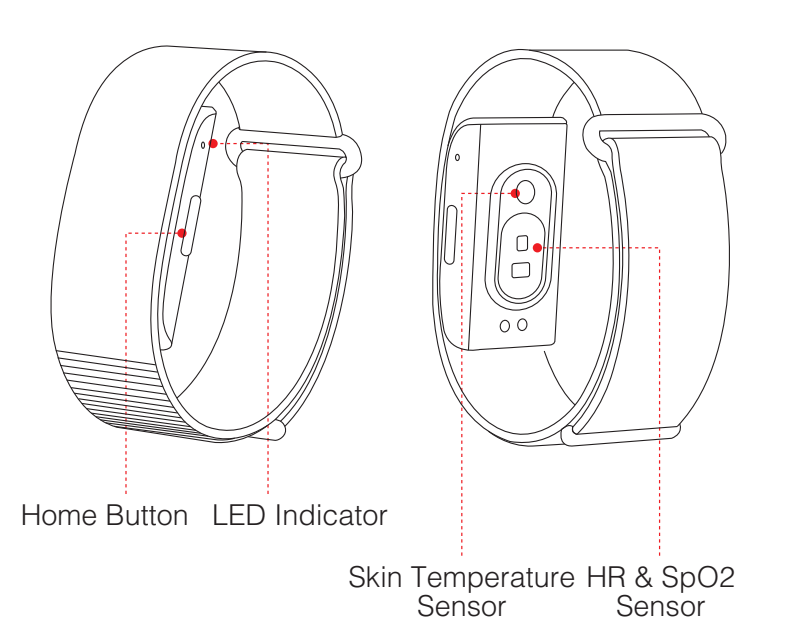

Instruction

1. Download the APP

- Scan the QR code below or search JCVitalPro on Google Play or iOS App Store to download our JCVitalPro App.
- Make sure the Bluetooth of your mobile device is on.
- Click the "+" sign in the upper right corner of the app to add the device button. Choose device identified in App and connect to your smart bracelet.

JCVitalPro

Note: Please ensure that your Android version is 5.0 or later, iOS version is 10.0 or later. The smart bracelet supports Bluetooth 5.0 connection.

2. Charge Before Use

- Please fully charge the device to activate for first use.
- If after factory reset on the App, please charge to power on.



Simply place your device on the provided USB charger and plug in the Type-C adapter to begin charging. The indicator light flashes red, blue and green alternately during charging, and the green light is always on when fully charged. After removing the device from the charger, the indicator lights up green for 2 seconds and then goes off.

Power Indicator

Short press the home button to wake up the device, the indicator lights up in different colors to indicate different power levels, as follows:

- Red light for 1 second, indicating that the current power is 0%~24%;
- Blue light for 1 second, indicating that the current power is 25%~49%;
- Green light for 1 second, indicating that the current power is 50%~100%.

When the power is lower than 5%, Bluetooth will be disconnected, please charge in time. It typically takes about 1.5 hours to fully charge, supports about 5-7 days for normal use and about 20 days for standby. Battery life changes depending on the activated features, type and frequency of device use.

Note: Please prevent the USB charger port from coming into contact with conductive materials, such as liquids, dust, metal powders and pencil leads.

3. App & Function Operation

Once the device is activated, please pair it with the "JCVitalPro" App for operation and use. It will light up white for 2 seconds when Bluetooth is connected, and then light up in different colors to indicate different power levels.

Home



View your detailed health data and report per day: steps, distance, calories, heart rate, SpO2, blood pressure, HRV, stress, skin temperature, sleep, women's health, exercise, etc.

You can make menstrual cycle management on App if required. It's convenient to make both manual and automatic health vital signs measurement on the device or App.

Manual Health Vital Signs Measurement

· SpO2

There are 2 manual SpO2 measurement methods in standby mode:

(1) turn on/off the measurement directly on App.
(2) short press home button twice to start measurement.

During the measurement, the blue light will flash; if your hand moves, the blue light will flash quickly to remind you to keep still; after the measurement is finished, the green light will be on for 2 seconds if the result is normal, and the red light will be on for 2 seconds if it is abnormal.

Note: if you press the button once during the measurement, it will return to the standby mode and end the measurement.

· Blood Pressure / HRV / Stress

Make manual blood pressure / HRV / stress measurement through App only.

During the measurement, the blue light will flash; if your hand moves, the blue light will flash quickly to remind you to keep still; the blue light will be on for 2 seconds after the measurement is finished.

· Skin Temperature

Make manual skin temperature measurement through App only.

After starting measurement, the device vibrates once, while the blue light will flash until it vibrates 3 times and the blue light will be on for 2 seconds, indicating the end of measurement.

Device



Check current device's basic information (battery level, MAC ID, firmware version) and make detailed settings.

· Set Auto Health Monitor Interval

Turn on/off automatic heart rate / SpO2 / blood pressure / HRV / stress / skin temperature monitor via the App. You can change the interval according to your needs, the shorter the interval is set, the faster the battery will drain.

* Blood Pressure Calibration: before measuring your blood pressure, you can calibrate it by entering your true value on the App to improve the accuracy to some extent.

· Goal Setting

Personalize your goals for steps, distance, calories and sleep hour per day.

· Alarm Clock

Click the small green dot in the upper right corner to enter my device and find the reminder function.

· Device Settings

It includes settings for Bluetooth disconnect reminder, sedentary alert, firmware update and factory reset.

*** Smart Notifications**

Different notifications have different lighting and vibrating indication, as follows:

Frequency of Purple Light Flashing and Vibrating	Indication	Whether Bluetooth Connection is Required
Once per Second	Incoming Call	Yes
Twice	SMS & 3rd Party App (WeChat, WhatsApp, Skype, etc.)	Yes
Twice	Sedentary Reminder	No
7 Times	Alarm Clock	No
Note: the above notifications can be stopped by pressing the home button once.		

*** Firmware Update (OTA)**

Click the small green dot in the upper right corner to enter my device. If there is a version update, there will be a prompt in the check for updates column. There is no indicator light during the update process, and when the update is finished, it will light up in different colors to indicate different power levels.

*** Factory Reset**

After factory reset, all device data will be deleted. Please charge to reboot.

· SOS

To enable SOS feature, firstly you need to set emergency contact info (name & phone number) on the App, up to 3 emergency contacts can be added. The SOS feature can only be effectively triggered when the device's Bluetooth is connected to the APP. An SOS message will be sent to the emergency contact, including your name and GPS location.

In standby mode, long press home button for 3 times to trigger SOS message alert. If the white light flashes quickly for 3 times, it indicates successful sending; if the red light flashes quickly for 3 times, it indicates Bluetooth is not connected, please connect Bluetooth first.

Exercise



You can turn on exercise mode on the device or App.

· Turn on from the device: first preset an exercise mode on the App. Short press the home button 3 times to start the exercise, the green light will be on for 2 seconds, then flashing, you can press the home button to pause or resume the exercise; if you pause the exercise, it will flash blue light; you can short press the home button 3 times to end the current exercise, the green light will be on for 2 seconds and then go off.

During exercise, different lights indicate different exercise heart rate zones: if you enter warm-up, fat burn and aerobic exercise, the green light will flash; if you enter anaerobic and intense exercise, the red light will flash, at the same time, the device will vibrate 3 times for high heart rate alert.

· Turn on from the APP

- The user activates the sports function of the APP.
- The user's phone turns on GPS and maintains a Bluetooth connection with the screenless wristband.
- During exercise, the user needs to wear the screenless wristband and carry the phone.

My



Check basic App settings: personal information, data share, login account management, App background, about us, feedback support, App version updates, etc.

Click on the "About" page, then click on the avatar in the upper left corner of the page to enter the personal information page.

Specifications

Warranty: 12 months
BT Version: BLE 5.0
BT Range: 10 meters
Size: 42*22*9.5mm
Battery: 95mAh rechargeable lithium polymer battery, non-replaceable
Data Memory: 30 days
Waterproof: IP68
Activity Time: Max 99h59min
Calories Burned: Max 9999.9kcal
Running & Walking Distance: Max 999.99km

Troubleshooting

If the device doesn't pair with your smartphone

1. Make sure your device is turned on.
2. Check your smartphone to ensure Bluetooth is on.
3. Check the app to make sure Bluetooth permissions are turned on. This should be in your Bluetooth settings.
4. Restart the app and go to the app home screen.
5. The device battery should display on your app device screen.

If the device isn't measuring any data

Please contact our support team.

If the device battery is draining too quickly

1. Calibrate your battery by charging it for at least three hours.
2. Start using your device again as you normally would.
3. Contact our support team if the problem persists.

If the device causes an allergic reaction

Please stop using the device right away. In the rare event of an anaphylactic reaction, seek medical attention immediately.

If the issue isn't mentioned in these tips

Please contact our support team and report the issue in detail.

Safety Notices

Failure to follow these safety instructions could result in fire, electric shock, injury, or damage to the device or other property. Read all the safety information below before using the device.

Not a Medical Device

It's not a medical device and should not be used as a substitute for professional medical judgment. It is not designed or intended for use in the diagnosis of disease or other conditions, or in the cure, mitigation, treatment, or prevention of any condition or disease. Please consult your healthcare professional prior to making any decisions related to your health.

Handling

Handle this device with care as it contains sensitive electronic components and can be damaged if dropped, burned, punctured, or crushed. Don't use a damaged Move Wearable as it may cause injury. Avoid heavy exposure to dust or sand. Children should not be allowed to play with the device without supervision.

Battery

Do not attempt to replace the device battery yourself, you may damage the battery, which could cause overheating and injury. The lithium-ion battery in the device should be serviced only by manufacturer or an authorized service provider. Batteries must be recycled or disposed of separately from household waste. Do not incinerate the battery. Do not dispose of the device in domestic waste. If you have any questions, please contact us.

Operating Temperature

This device is designed to work in ambient temperatures between -10°C and 45°C (14°F and 113°F) and be stored in temperatures between -20°C and 55°C (-4°F and 131°F). It can be damaged and battery life shortened if stored or operated outside of these temperature ranges. Avoid exposing this device to dramatic changes in temperature or humidity.

Prolonged Heat Exposure

Do not expose the device to extreme temperatures or extreme temperature fluctuations. Protect the device from direct sunlight. While this device is charging or the power plug is plugged into a power source, do not sleep on it or place it under a blanket, pillow, or your body. Take special care if you have a physical condition that affects your ability to detect heat against the body.

FCC Requirement

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-- Reorient or relocate the receiving antenna.
-- Increase the separation between the equipment and receiver.
-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-- Consult the dealer or an experienced radio/TV technician for help.

FCC RF exposure statement:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

产品介绍

本产品是一款智能健康手环，可全天候监测人体的多种健康体征。

心率
血氧
皮肤温度
心率变异性
压力
多运动模式
睡眠
活动追踪
IP68防水

温馨提示：本产品不是医疗设备，不用于诊断或监测任何疾病或医疗状况。

包装清单

(1) 手环设备
(2) USB 充电器
(3) 用户手册

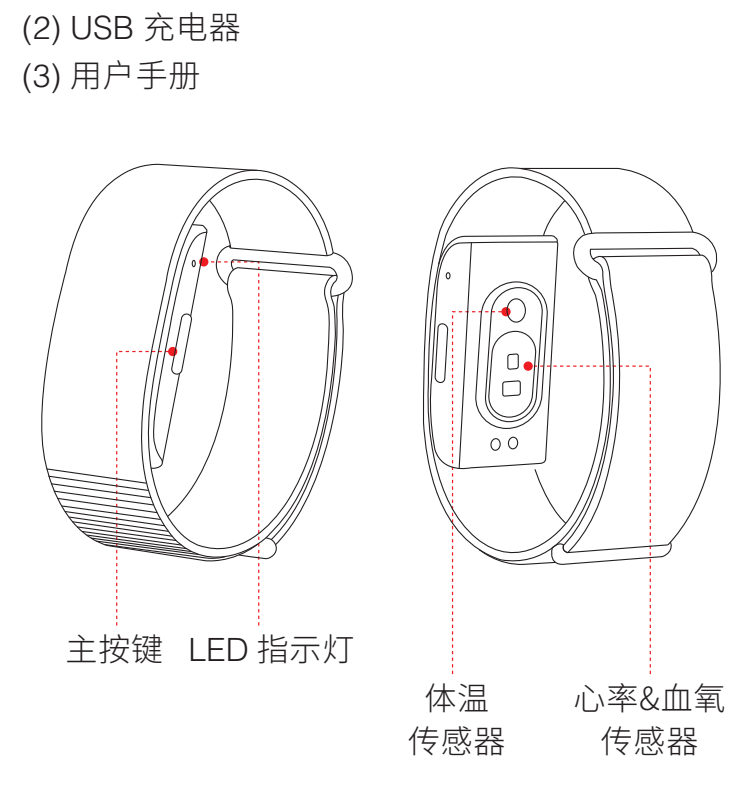

下载APP，开启健康之旅

- 扫描下方二维码，或在 Google Play 或 iOS App Store 中搜索 JCVitalPro 以下载我们的 JCVitalPro 应用。
- 确保您的移动设备已开启蓝牙功能。
- 点击应用右上角的"+"按钮，添加设备。选择应用中识别的设备，并连接到您的智能手环。

JCVitalPro

温馨提示：请确保您的手机系统为Android 5.0 及以上，iOS 10.0 及以上。

2. 首次使用前请充电

- 首次使用前，请先将设备充满电以激活设备。
- 如在 App 中执行恢复出厂设置，请重新充电后再开机使用。



请将设备放置于随机附带的 USB 充电器上，并连接 Type-C 电源适配器开始充电。充电过程中，指示灯将以红、蓝、绿三色循环闪烁；充满电后，绿色指示灯常亮。取下设备后，绿色指示灯亮起约 2 秒后熄灭。

电量指示灯

短按 Home 键唤醒设备，指示灯会以不同颜色显示当前电量：
红灯亮 1 秒：电量 0%～24%
蓝灯亮 1 秒：电量 25%～49%
绿灯亮 1 秒：电量 50%～100%

当设备电量低于 5% 时，蓝牙连接将自动断开，请及时充电。设备充满电约需 1.5 小时。

续航时间约为：
正常使用：约 5～7 天；待机时间：约 20 天
实际续航时间会因开启功能、使用环境及使用频率不同而有所差异。

3. App 与功能操作

设备激活后，请下载并连接 JCVitalPro App。
蓝牙连接成功时，设备将白灯常亮约 2 秒，随后根据不同电量状态显示对应颜色的指示灯。

首页 (Home)

在 App 首页可查看每日健康数据及分析报告，包括：步数、行走距离、卡路里消耗、心率、血氧、血压、心率变异性、压力指数、皮肤温度、睡眠监测、女性健康、运动记录等。如有需要，可在 App 中开启经期管理功能。



设备支持手动测量与自动测量生命体征数据，所有数据均可在设备及 App 中同步查看，为您的健康管理提供便捷支持。

手动健康指标测量

· 血氧 (SpO2)

待机状态下，支持以下两种手动血氧测量方式：在 App 中点击开始测量；连续短按 Home 键两次开始测量。

测量过程中，蓝色指示灯闪烁，表示设备正在测量；若手部发生移动，蓝色指示灯将快速闪烁，提醒请保持静止。测量结束后，绿色指示灯亮 2 秒，表示测量结果正常；红色指示灯亮 2 秒，表示测量结果异常。

注意：测量过程中，如短按 Home 键一次，设备将退出测量并返回待机状态。

· 血压 / HRV / 压力

血压、HRV（心率变异性）及压力值仅支持通过 App 发起手动测量。

测量过程中：蓝色指示灯持续闪烁；若手部发生移动，蓝色指示灯将快速闪烁，提醒保持静止。测量完成后，蓝色指示灯常亮约 2 秒后熄灭。

· 皮肤温度

皮肤温度仅支持通过 App 发起手动测量。

开始测量后，设备振动 1 次，同时蓝色指示灯开始闪烁；测量结束后，设备振动 3 次。蓝色指示灯常亮约 2 秒 后熄灭，表示测量完成。

设 备

查看当前设备的基本信息（电量、MAC地址、固件版本），并进行详细设置。

· 设置自动健康监测间隔

通过App开启/关闭自动心率/血氧/血压/心率变异性/压力/皮肤温度监测。您可根据需求调整监测间隔，间隔设置越短，耗电越快。



*** 血压校准：**测量血压前，您可在App中输入真实血压值进行校准，以一定程度上提升测量准确度。

· 目标设定

自定义每日步数、距离、卡路里及睡眠时长目标。

· 闹钟

点击右上角小绿点进入"我的设备"，即可找到提醒功能。

· 设备设置

包含蓝牙断连提醒、久坐提醒、固件升级及恢复出厂设置。

*** 智能通知**

不同通知对应不同的指示灯闪烁与振动提示，具体如下：

紫灯闪烁及振动频率	提示内容	是否需要蓝牙连接
每秒1次	来电	是
闪烁2次	短信及第三方应用（微信、WhatsApp、Skype等）	是
闪烁2次	久坐提醒	否
闪烁7次	闹钟	否
注：上述通知均可通过短按一次主按键停止。		

*** 固件升级 (OTA)**

点击右上角小绿点进入"我的设备"。如有新版本，"检查更新"栏将显示提示。升级过程中无指示灯，升级完成后将以不同颜色显示当前电量。

*** 恢复出厂设置**

恢复出厂后，所有设备数据将被清除。请充电后重启设备。

· SOS

启用SOS功能前，需先在App中设置紧急联系人信息（姓名及电话），最多可添加3位紧急联系人。SOS功能仅在设备蓝牙连接App时方可有效触发。触发后，系统将向紧急联系人发送包含您的姓名及GPS位置的求助信息。

待机状态下，连续长按主按键3次触发SOS消息警报。若白灯快速闪烁3次，表示发送成功；若红灯快速闪烁3次，表示蓝牙未连接，请先连接蓝牙。

运 动

您可在设备或App端开启运动模式。

· 设备端开启： 先在App预设运动模式。短按主按键3次开始运动，绿灯常亮2秒后进入闪烁状态；运动过程中短按主按键可暂停或继续，暂停时蓝灯闪烁；再次短按主按键3次结束当前运动，绿灯常亮2秒后熄灭。



运动过程中，不同心率区间对应不同指示灯：
热身、燃脂及有氧运动区间：绿灯闪烁；
无氧及高强度运动区间：红灯闪烁，同时设备振动3次进行高心率预警。

· App 端开启

- 用户在App端激活运动功能。
- 手机开启GPS并保持与无屏手环的蓝牙连接。
- 运动过程中，用户需佩戴无屏手环并随身携带手机。

我 的



查看App基础设置：个人信息、数据共享、登录账号管理、App背景、关于我们、反馈支持、App版本更新等。

点击"关于"页面，再点击页面左上角头像，即可进入个人信息页。

产品规格

保修期：12个月
蓝牙版本：BLE 5.0
蓝牙范围：10米
尺寸：42×22×9.5mm
电池：95mAh可充电锂聚合物电池，不可拆卸
数据存储：30天
防水等级：IP68
续航时间：最长99小时59分钟
卡路里记录：最大9999.9千卡
跑步及步行距离：最大999.99公里

故障排除

如果手环无法与手机配对

1. 确保设备为开机状态。
2. 检查手机蓝牙是否开启。
3. 检查应用程序中的蓝牙设置，确保蓝牙权限已打开。
4. 重新启动应用程序。
5. 应用程序界面应显示电池标志。

如果设备停止运行

请为您的手环充电30分钟。

如果电池耗电过快

1. 请至少充电3小时来校准电池。
2. 请像往常一样再次开始使用您的手环设备。
3. 如果问题未得到解决，请联系我们的售后团队。

如果可穿戴设备或手环引起过敏反应

请立即停止使用该设备。在极少数情况下出现过敏性休克反应时，请立即就医。

如遇其他问题

请联系我们的售后团队并报告详细问题。

安全须知

使用设备前，请阅读以下所有安全信息。不遵守这些安全说明可能会导致火灾、电击、受伤或设备或其他财产损坏。

非医疗器械

本表并非医疗器械，不应作为专业医疗判断的替代品。它并非设计用于或旨在用于诊断疾病或其他病症，或用于治愈、缓解、治疗或预防任何病症或疾病。在做出与您的健康相关的任何决定之前，请咨询您的医疗保健专业人员。

回收

请小心回收处理这款手环，因为它包含敏感的电子元件，如果掉落、燃烧、刺破或挤压可能会损坏。请勿使用损坏的移动穿戴设备，因为它可能会造成伤害。避免大量暴露在灰尘或沙子中。

电池

请勿尝试自行更换手环电池，否则可能会损坏电池，从而导致过热和受伤。设备中的锂离子电池只能由制造商或授权服务提供商。电池必须与生活垃圾分开回收或处理。请勿焚烧电池。 请勿将设备丢弃在生活垃圾中。 如果您有任何疑问，请与我们联系。

运行温度

这款手环的设计工作环境温度为 -10°C~45°C (14°F ~113°F)，储存温度为 -20°C~55°C（-4°F~131°F）。如果在这些温度范围之外存放或操作，它可能会损坏并缩短电池寿命。避免将设备暴露在温度或湿度急剧变化的环境中。

避免长时间过热

请勿将设备暴露在极端温度或极端温度波动中。保护设备免受阳光直射。当手环正在充电或电源插头插入电源时，请勿在手环上睡觉或将其放在毯子、枕头或身体下。如果您有身体不适，请特别注意影响您检测身体热量的能力的状况。如果穿戴设备变得不舒服，请将其取下。

防水防尘

经测试，该设备可在特定环境下防水防尘。
本产品符合IP68（GB/T4208）防护等级要求，并支持在泳池游泳、浅水游泳和其他浅水水上活动中佩戴。
防水功能并非永久有效，防水性能可能会因日常佩戴而下降。本产品不适用于潜水、跳水、洗热水澡、泡温泉、洗桑拿以及其他在高速水流下进行的涉水或深水活动。

儿童健康

本设备及其附件可能含有小部件，请将设备及其附件放在儿童接触不到的地方。
请将设备及其附件放在儿童接触不到的地方。儿童可能会无意中损坏本设备。儿童可能会不慎损坏本设备及其附件或吞食小部件，从而导致窒息或其他危险。本设备不是玩具，儿童应在成人监护下使用本设备。

附件要求

使用未经批准或不兼容的电源、充电器或电池可能导致火灾、爆炸或其他危险。
请勿在充电器表面长时间放置金属异物。否则可能导致设备故障或发热。请在 -10°C 至 45°C（14°F 至 113°F ）的温度范围内使用充电器为设备充电。如果外部环境温度过高，充电器将停止工作，请停止充电。为确保设备能够正常充电，请避免在车内充电。

维护和保养

如果长时间不使用设备，请在充满电后关闭设备并将其放置在阴凉、干燥的地方，并至少每 3 个月充电一次。
清洁和维护前，请停止使用设备，并断开与其他设备的所有连接或电缆。
保持设备及其附件干燥。请勿使用外部加热设备，如微波炉或吹风机来干燥。

请勿使设备及其附件受到强烈冲击或振动，否则可能会损坏设备及其附件并导致设备出现故障。
请勿将设备靠近热源或明火，如电热器、微波炉、烤箱、热水器、火炉、蜡烛或其他可能产生高温的地方。不要将设备放在阳光直射的地方。
请勿在磁场附近使用本设备，磁场可能会导致设备电路故障。
请勿在雷雨天气使用设备，否则可能会导致设备故障或电击危险。
请勿使用腐蚀性化学品、清洁剂或强洗涤剂清洁设备或其配件。请使用干净、干燥的软布擦拭设备或其配件。
请勿将磁条卡（如银行卡、电话卡等）与设备长时间接触，否则可能会导致设备损坏、磁条卡发生故障。
请勿擅自拆卸或改装设备及其附件，否则设备及其配件将不在保修范围内。
日常佩戴时，您可以稍微放松表带或腕带，以确保与设备接触的皮肤部分干燥透气。如果您在长时间连续佩戴时感到不适，请取下设备，让手腕休息一段时间，或换一只手佩戴。如果仍然感到不适，建议您停止佩戴并咨询医生。

环境保护

请勿将本设备及其附件作为普通家居垃圾处理。
请遵守当地有关处理本设备及其附件的法规，并支持回收活动。

环保使用说明

环保使用期限标识表示本产品环保使用期限为10年，即在10年内本产品含有的微量有毒有害物质或元素在正常使用的情况下，不会发生外泄或突变，不会对环境造成严重污染，不会对人身、财产造成严重损害。本产品符合中国RoHS环保要求。

本产品各部件含有的微量有毒有害物质或元素名称及含量：

部件名称	有害物质					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr6+)	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
外 壳	○	○	○	○	○	○
内 壳	○	○	○	○	○	○
电路板	○	○	○	○	○	○
电 池	×	○	○	○	○	○

○：表示该有害物质在该部件所有均质材料中的含量均在GB/T26572-2011《电子电气产品限用物质的限量要求》规定的限量要求以下。

×：表示该有害物质至少在该部件的某一均质材料中的含量超出 GB/T26572-2011《电子电气产品限用物质的限量要求》规定的限量要求。

售后服务政策

本产品严格按照《中华人民共和国消费者权益保护法》、《中华人民共和国产品质量法》实行三包服务。在三包有效期内，您可按照规定享受退货、换货或者修理的权利。退货、换货或者维修应当凭有效发票和三包凭证办理，请您妥善保管购机凭证。

保修说明：

1. 本产品在正常使用时，如果出现因制造，材料，设计等原因引起的产品质量问题，可享受三包服务。
2. 不在"三包"服务承诺范围内的情形（但不仅限于下列情形）：
   - 超出三包有效期的商品。
   - 无有效三包凭证及有效发货票的。
   - 擅自涂改三包凭证。
   - 非正常工作环境下使用，不正确的安装、使用、维护、保管所引起的损坏等。
   - 未经授权的拆卸、维修、滥用、改动。
   - 因不可抗力（如水灾、火灾、地震、雷击等）造成的损坏。
   - 产品标贴，产品序列号被撕毁、涂改。
   - 产品正常使用下因自然耗损及磨损（包括但不限于屏幕、按键、电池、包装或外壳等）。

产品保修卡

产品名称：智能健康手环
产品型号：V1S
购机日期：
购买渠道：
姓　　名：
联系电话：
地　　址：
问题简述：

合格证 CERTIFICATE 已检验

免责申明

本资料仅供参考，不构成任何形式的承诺。产品（包括但不限于颜色、大小、屏幕显示等）请以实物为准。说明书内的产品、配件、用户界面等插图均为说明参考示意图，与产品实物可能略有差异，请以实物为准。本产品非医疗器械，所提供的健康数据及建议仅供参考，不作为诊断和治疗的依据。产品说明书由广东友宏医疗科技有限公司出版，可能随时对说明书中的印刷错误、不准确信息进行必要更改，或对程序/设备进行改进，针对此类调整或变更，不做另行通知，但变更内容将更新到说明书的最新版本中。

生产企业：广东友宏医疗科技有限公司
生产地址：广东省深圳市宝安区广田路54号罗田华丰科技园6栋
联系电话：0755-3318 0892